

Objective

This code example demonstrates how to generate a square wave using the TCPWM resource on PSoC® 6 MCU.

Requirements

Tool: [ModusToolbox™ 1.0](#)

Programming Language: C

Associated Parts: All [PSoC 6 MCU](#) parts

Related Hardware: [PSoC 6 BLE Pioneer Kit](#), [PSoC 6 Wi-Fi-BT Pioneer Kit](#), [PSoC 6 Wi-Fi BT Prototyping Kit](#)

Overview

This code example generates a square wave using the TCPWM resource configured as a PWM. An LED connected to the PWM output pin blinks at 2 Hz.

Hardware Setup

This example uses the kit's default configuration. Refer to the kit guide to ensure that the kit is configured correctly.

Note: The PSoC 6 BLE Pioneer Kit and the PSoC 6 Wi-Fi-BT Pioneer Kit ship with KitProg2. ModusToolbox only works with KitProg3. Before using this code example, make sure that the kit is upgraded to KitProg3. See [ModusToolbox Help > ModusToolbox IDE Documentation > User Guide](#); section [PSoC 6 MCU KitProg Firmware Loader](#). If you do not upgrade, you will see an error like “unable to find CMSIS-DAP device” or “KitProg firmware is out of date”.

Operation

1. Connect the kit to your PC using the USB cable provided.
2. Import the project into a new workspace. If you aren't familiar with this process, see [KBA225201](#).
3. Program the PSoC 6 MCU device. In the project explorer, select the **mainapp** project. In the Quick Panel, scroll to the **Launches** section and click the **Program (KitProg3)** configuration.
4. Observe that the red LED blinks at half-second intervals (2 Hz).

Debugging

You can debug the example to step through the code. Use the **Debug (KitProg3)** configuration. If you are unfamiliar with how to start a debug session on the PSoC 6 MCU with ModusToolbox IDE, see [KBA224621](#).

Design and Implementation

The TCPWM resource is connected to a 10-kHz clock with its period set to 4999 to give a 2-Hz PWM output (Input Clock/Period). In this example, the PWM is left-aligned; therefore, the PWM starts counting from 0 to the period value. To count N cycles (5000 counts in this example), the period should be set to N-1. The compare value is set to 2500 so that the PWM output has a 50% duty cycle. The output of the PWM is connected to an LED that blinks at 500 ms (1/PWM output frequency).

Resources and Settings

This example uses the *EmptyPSoC6App* application available in the ModusToolbox IDE as base application and configures the resources used in this example. [Table 1](#) lists the ModusToolbox resources used in this example, how they are used in the design, and the non-default settings required so they function as intended. Open the *design.modus* file from the project and review the settings. See [ModusToolbox IDE Documentation](#) for details on how to create new application and configure the resources.

Table 1. ModusToolbox Resources

Resource	Alias	Purpose	Non-default Settings
Timer, Counter, and PWM (TCPWM[1] 16-bit Count 1)	PWM	Generate square wave and bring out the signal to GPIO	See Figure 1
Digital Output Pin (P13[7])	KIT_LED1	Drive the PWM signal to LED	See Figure 2
Peripheral Clock (16 bit Divider 1)	TCPWM_Clock	Drive the PWM at 10kHz	See Figure 3

Figure 1 through Figure 3 highlight the non-default settings for each resource in this example.

Figure 1. TCPWM Settings

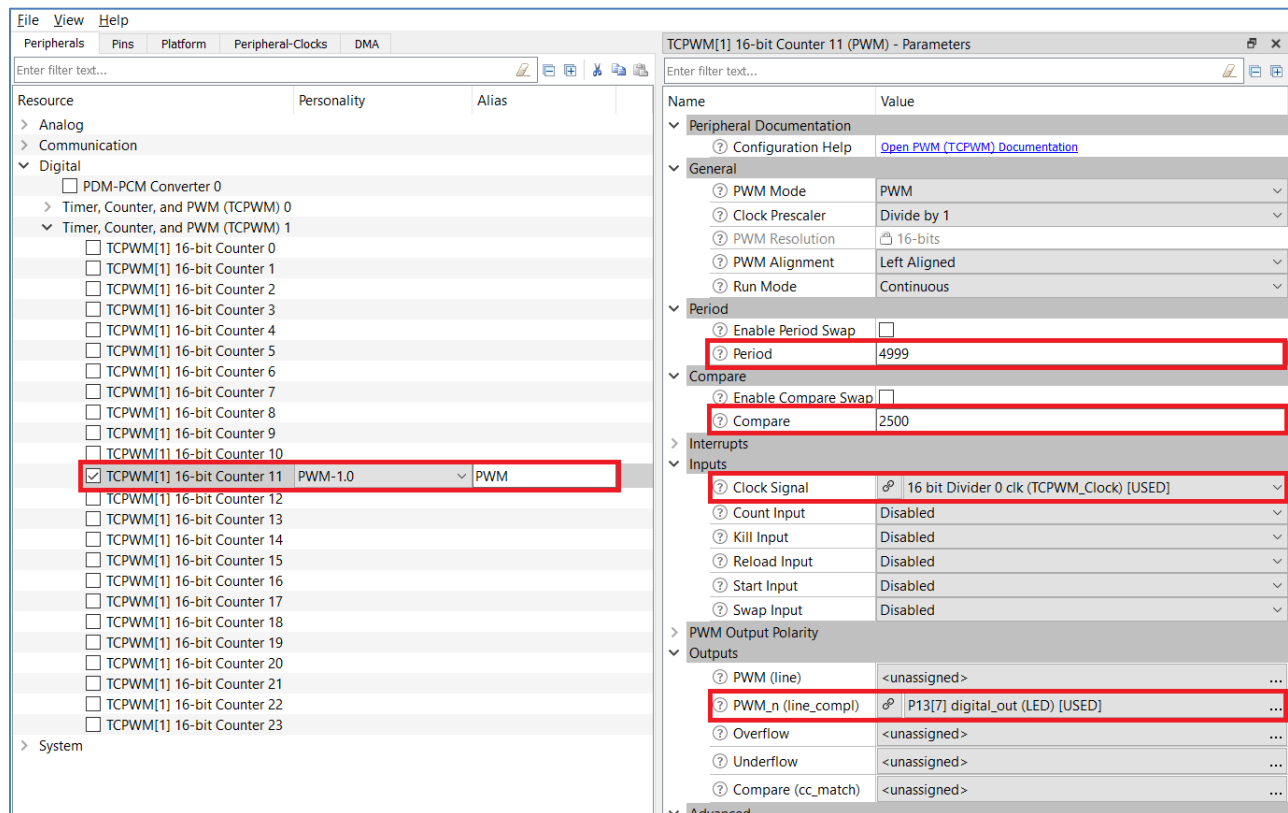


Figure 2. Pin Settings

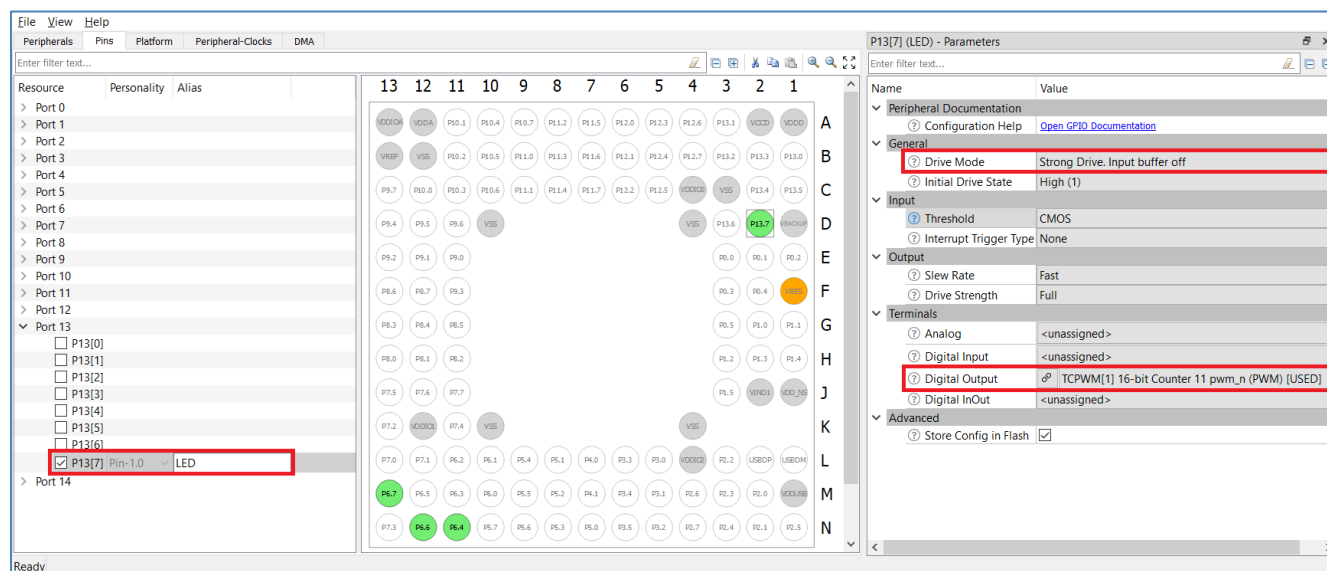


Figure 3. Peripheral-Clock Settings

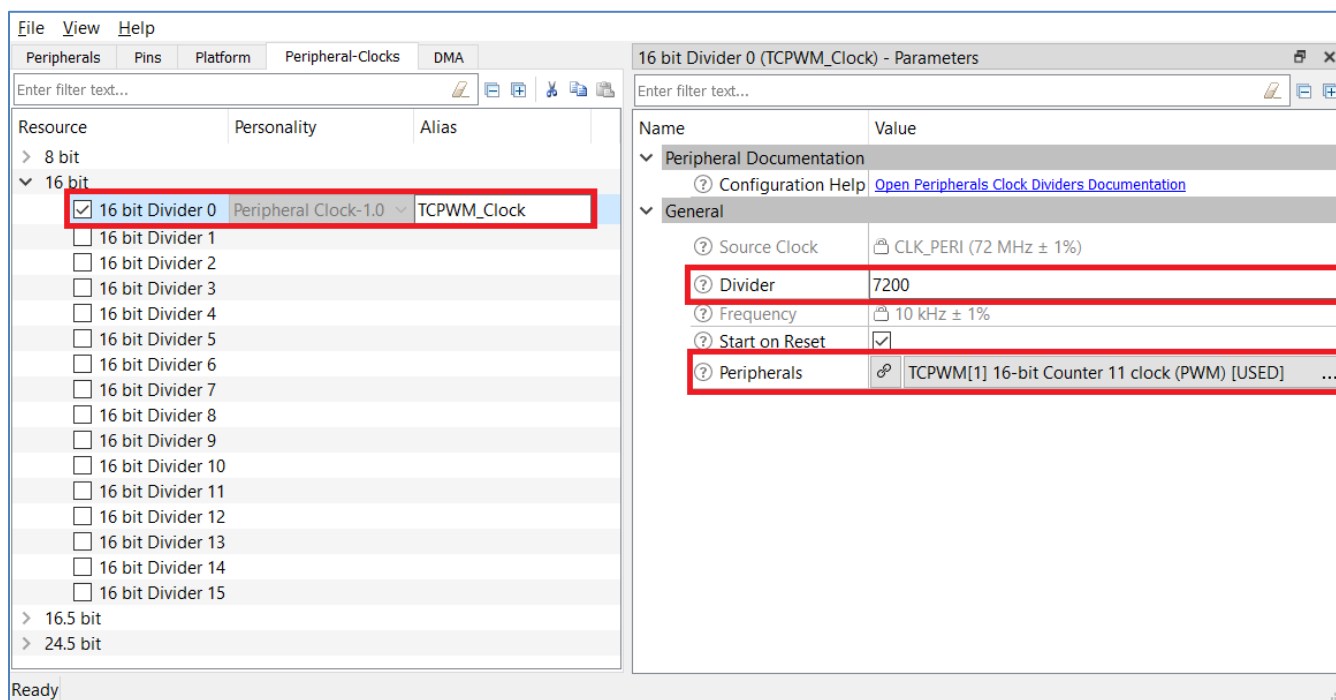


Table 2 shows the pin assignment for the project done through the **Pins** tab in the *design.modus* file.

Table 2. Pin Names and Location

Pin Name	Location
LED	P13[7]

Reusing This Example

This example is configured for the supported kits. To port the design to a different PSoC 6 MCU device, right-click an application project and choose **Change ModusToolbox Device**. If changing to a different kit, you may need to reassign pins.

Table 3. Device and Pin Mapping across PSoC 6 MCU Kits

Kit Name	Device Used	LED
CY8CKIT-062-WiFi-BT	CY8C6247BZI-D54	P13[7]
CY8CKIT-062-BLE	CY8C6347BZI-BLD53	P13[7]
CY8CPROTO-062-4343W	CY8C624ABZI-D44	P13[7]

In some cases, a resource used by a code example (for example, an IP block) is not supported on another device. In that case the example will not work. If you build the code targeted at such a device, you will get errors. See the device datasheet for information on which resources a device supports.

Related Documents

For a comprehensive list of PSoC 6 MCU resources, see [KBA223067](#) in Cypress Community.

Application Notes	
AN210781 – Getting Started with PSoC 6 MCU with Bluetooth Low Energy (BLE) Connectivity	Describes PSoC 6 MCU with BLE Connectivity devices and how to build your first PSoC Creator project
AN215656 – PSoC 6 MCU: Dual-CPU System Design	Describes the dual-CPU architecture in PSoC 6 MCU, and shows how to build a simple dual-CPU design
Code Examples	
Visit the Cypress GitHub repository for a comprehensive collection of code examples using ModusToolbox IDE	
Device Documentation	
PSoC 6 MCU: PSoC 62 Datasheet	PSoC 6 MCU: PSoC 62 Architecture Technical Reference Manual
PSoC 6 MCU: PSoC 63 with BLE Datasheet	PSoC 6 MCU: PSoC 63 with BLE Architecture Technical Reference Manual
Development Kits	
CY8CKIT-062-BLE PSoC 6 BLE Pioneer Kit	
CY8CKIT-062-WiFi-BT PSoC 6 WiFi-BT Pioneer Kit	
CY8CPROTO-062-4343W PSoC 6 Wi-Fi BT Pioneer Kit	
Tool Documentation	
ModusToolbox	The Cypress IDE for IoT designers

Cypress Resources

Cypress provides a wealth of data at www.cypress.com to help you to select the right device, and quickly and effectively integrate the device into your design.

For the PSoC 6 MCU devices, see [KBA223067](#) in the Cypress community for a comprehensive list of PSoC 6 MCU resources.

Document History

Document Title: CE220291 – PSoC 6 MCU: TCPWM Square Wave

Document Number: 002-25649

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	6288280	SRDS	11/21/2018	New code example

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

Arm® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

Cypress Developer Community

[Community](#) | [Projects](#) | [Videos](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

All other trademarks or registered trademarks referenced herein are the property of their respective owners.



Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.