

Objective

This code example demonstrates wakeup from Hibernate mode using the LPComp resource in PSoC® 6 MCU, using ModusToolbox™ IDE.

Requirements

Tool: ModusToolbox™ IDE 1.0

Programming Language: C

Associated Parts: All PSoC 6 MCU parts

Related Hardware: PSoC 6 BLE Pioneer Kit, PSoC 6 WiFi-BT Pioneer Kit, PSoC6 WiFi-Prototyping Kit

Overview

This code example demonstrates how to configure the LPComp internal reference voltage and how to set the external input from a GPIO using the LPComp driver. The code example uses one GPIO input to compare the input voltage and internal reference voltage to wake the PSoC 6 MCU from Hibernate mode. The LED indicates the current power mode.

Hardware Setup

This example uses the PSoC 6 BLE Pioneer Kit's default configuration. See the kit guide to ensure the kit is configured correctly.

Note: The PSoC 6 BLE Pioneer kit and the PSoC 6 WiFi-BT Pioneer kit ship with KitProg2. ModusToolbox only works with KitProg3. Before using this code example, make sure that the kit is upgraded to KitProg3. See ModusToolbox Help > ModusToolbox IDE Documentation > User Guide; section PSoC 6 MCU KitProg Firmware Loader. If you do not upgrade, you will see an error like "unable to find CMSIS-DAP device" or "KitProg firmware is out of date".

Software Setup

None.

Operation

Follow the instructions that came with your kit to make sure that your kit is connected to your PC.

1. On CY8CKIT-062-BLE, place a potentiometer on P5[6] to change the Vplus input voltage.
2. Import the code example into a new workspace. If you aren't familiar with this process, see [KBA225201](#).
3. Program the PSoC 6 MCU device. In the project explorer, select the **mainapp** project. In the Quick Panel, scroll to the **Launches** section and click the **Program (KitProg3)** configuration.
4. Turn the knob of the potentiometer until the Vplus voltage is greater than the internal Vref.
5. Confirm that the LED is toggling.
6. Turn the knob of the potentiometer until the Vplus voltage is less than the internal Vref.
7. Confirm that the LED is OFF during Hibernate mode.
8. Repeat operations 4 to 7 to wake up from and enter Hibernate mode.

Design and Implementation

PSoC 6 MCU is a dual-CPU architecture MCU with Arm CM0+ and Arm CM4 CPUs. The CM0+ CPU enables the CM4 CPU on device reset. This code example uses one Low-Power Comparator (LPComp) resource, one status LED, one GPIO for the wakeup input, and one potentiometer.

The main loop checks the output of LPComp channel 0 and toggles the LED when the output is high. Otherwise, the system goes into Hibernate mode. The system wakes up immediately if the LPComp channel 0 output goes high during Hibernate mode.

Note: The internal reference voltage can vary from 0.4 V to 0.75 V, so the Vplus input should be high enough to cause a wakeup. In Hibernate mode, the LPComp resource cannot use the AMUXBUS, so the Vplus input should be either P5[6] (LPComp Channel 0) or P6[2] (LPComp Channel 1). These pins are dedicated to the LPComp GPIO positive terminal.

Resources and Settings


Table 1 lists the ModusToolbox resources used in this example and how they are used in the design. For pin usage and configuration, open the **Pins** tab of the *design.modus* file.

Table 1. ModusToolbox Resources

Resource	Alias	Purpose	Non-default Settings
Low Power Comparator	LPComp	Provide low power voltage comparison	See Figure 1
Analog Input Pin	Vplus	Provide user input	See Figure 2
Digital Output Pin	USER_LED2	Provide visual feedback	See Figure 3

Figure 1 to Figure 3 show the non-default configuration settings for the ModusToolbox resources.

Figure 1. LPComp Configuration

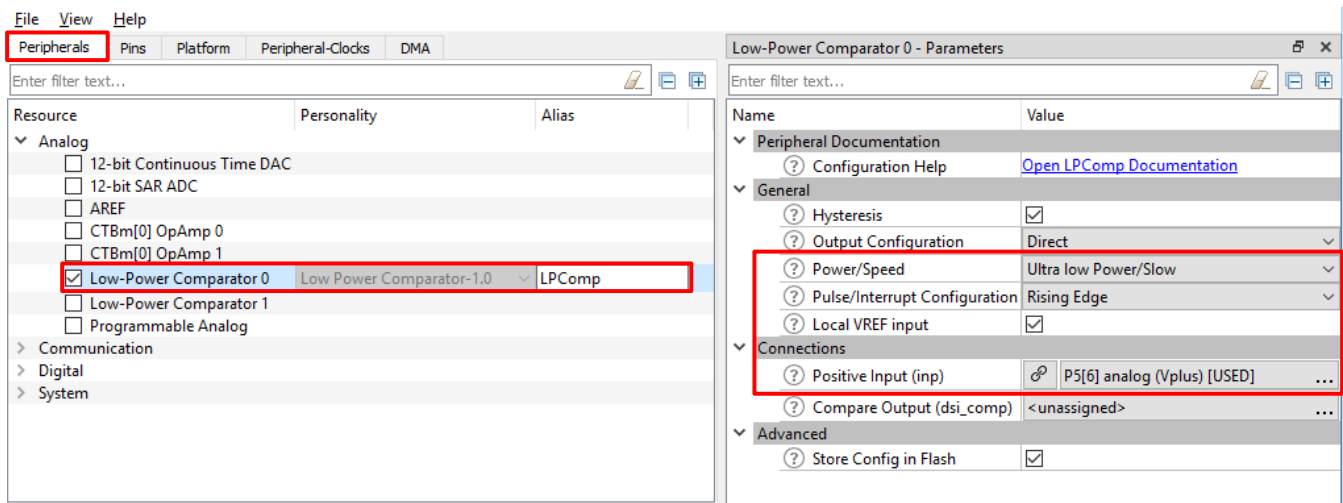

The screenshot shows the ModusToolbox interface with the 'Peripherals' tab selected. In the 'Resource' list, 'Low-Power Comparator 0' is highlighted. The 'Parameters' window for 'Low-Power Comparator 0' is open, showing the following settings:

- Peripheral Documentation:** Configuration Help (Open LPComp Documentation)
- General:**
 - Hysteresis: ☒
 - Output Configuration: Direct
 - Power/Speed: Ultra low Power/Slow
 - Pulse/Interrupt Configuration: Rising Edge
 - Local VREF input: ☒
- Connections:**
 - Positive Input (inp): P5[6] analog (Vplus) [USED]
 - Compare Output (dsi_comp): <unassigned>
- Advanced:**
 - Store Config in Flash: ☒

Figure 2. LPComp Vplus Pin Configuration


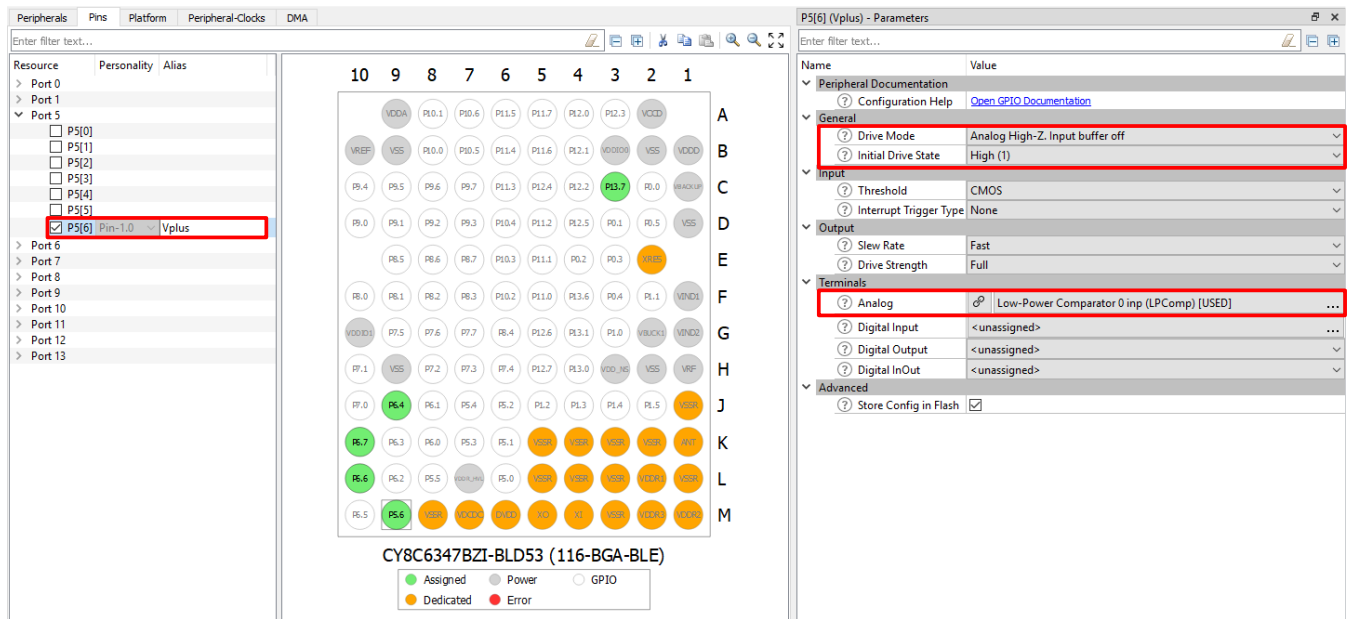


Figure 3. LED Pin Configuration

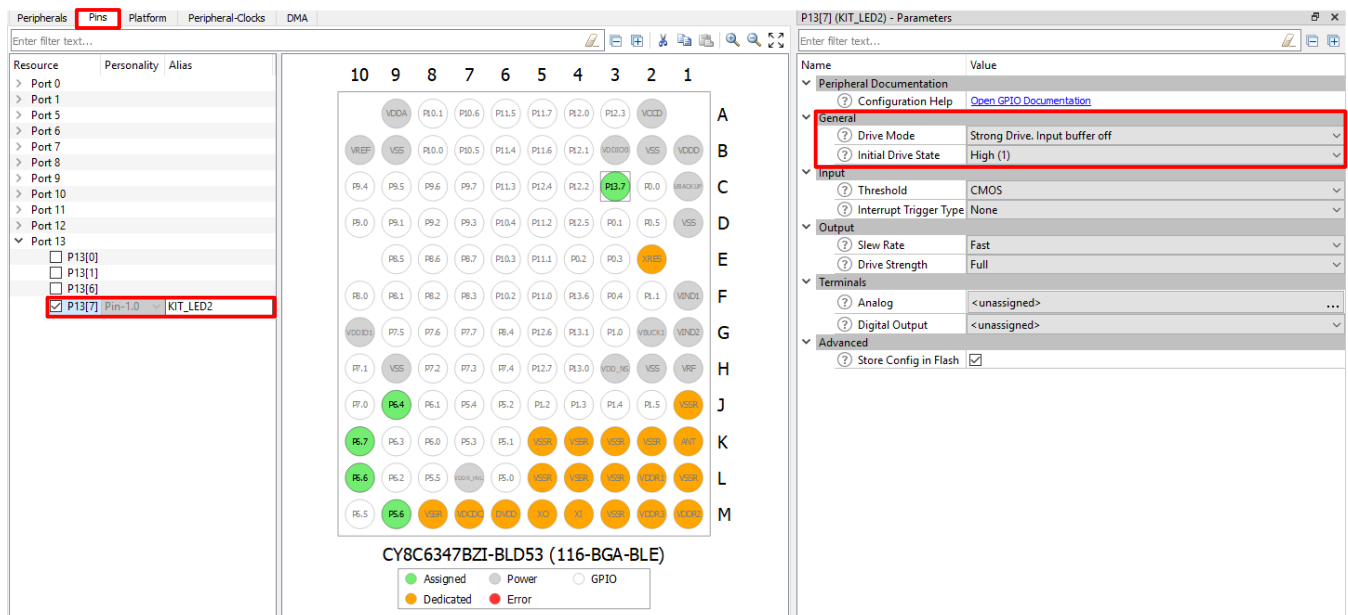

Reusing This Example

This example is designed for the supported kits. To port the design to a different PSoC 6 MCU device, right-click an application project and choose **Change Device**. If changing to a different kit, you may need to reassign pins.

Table 2. Device and Pin Mapping Table across PSoC 6 MCU Kits

Kit Name	Device Used	LED
CY8CKIT-062-WiFi-BT	CY8C6247BZI-D54	P13[7]
CY8CKIT-062-BLE	CY8C6347BZI-BLD53	P13[7]
CY8CPROTO-062-4343W	CY8C624ABZI-D44	P13[7]

In some cases, a resource used by a code example (for example, an IP block) is not supported on another device. In that case the example will not work. If you build the code targeted at such a device, you will get errors. See the device datasheet for information on what a particular device supports.

Related Documents

For a comprehensive list of PSoC 6 MCU resources, see [KBA223067](#) in the Cypress community.

Application Notes	
AN221774 – Getting Started with PSoC 6 MCU	Describes PSoC 6 MCU devices and how to build your first PSoC Creator project
AN210781 – Getting Started with PSoC 6 MCU with Bluetooth Low Energy (BLE) Connectivity	Describes PSoC 6 MCU with BLE Connectivity devices and shows how to build your first PSoC Creator project
AN215656 – PSoC 6 MCU: Dual-CPU System Design	Describes the dual-CPU architecture in PSoC 6 MCU and shows how to build a simple dual-CPU design
Code Examples	
CE218472 - PSoC 6 MCU Comparing External Voltages Using a Low-Power Comparator	
Visit the Cypress GitHub site for a comprehensive collection of code examples using ModusToolbox IDE	
Device Documentation	
PSoC 6 MCU: PSoC 63 with BLE Datasheet	PSoC 6 MCU: PSoC 63 with BLE Architecture Technical Reference Manual
Development Kit Documentation	
CY8CKIT-062-BLE PSoC 6 BLE Pioneer Kit	
CY8CKIT-062-WiFi-BT PSoC 6 WiFi-BT Pioneer Kit	
CY8CPROTO-062-4343W PSoC 6 Wi-Fi BT Prototyping Kit	
Tool Documentation	
ModusToolbox	The Cypress IDE for IoT designers

Cypress Resources

Cypress provides a wealth of data at www.cypress.com to help you to select the right device, and quickly and effectively integrate the device into your design.

For the PSoC 6 MCU devices, see [KBA223067](#) in the Cypress community for a comprehensive list of PSoC 6 MCU resources.

Document History

Document Title: CE218129 – PSoC 6 MCU Wakeup from Hibernate Using a Low-Power Comparator

Document Number: 002-24748

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	6366959	AJYA	11/21/2018	New code example

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

Arm® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

Cypress Developer Community

[Forums](#) | [Code Examples](#) | [Projects](#) | [Videos](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

All other trademarks or registered trademarks referenced herein are the property of their respective owners.



Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.