




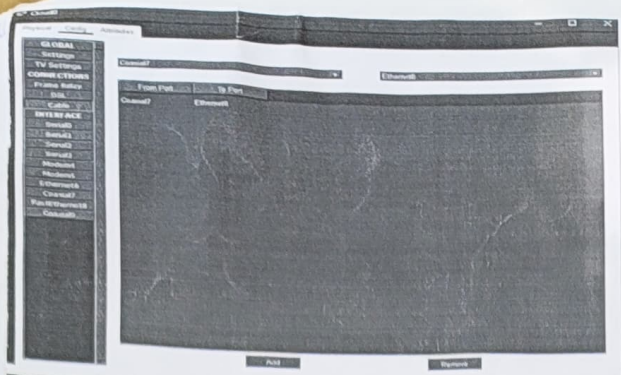


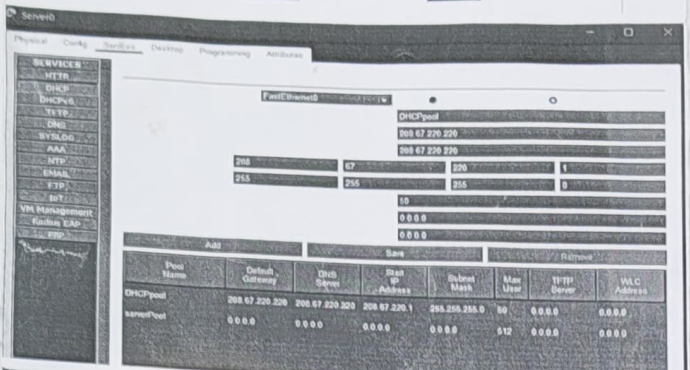


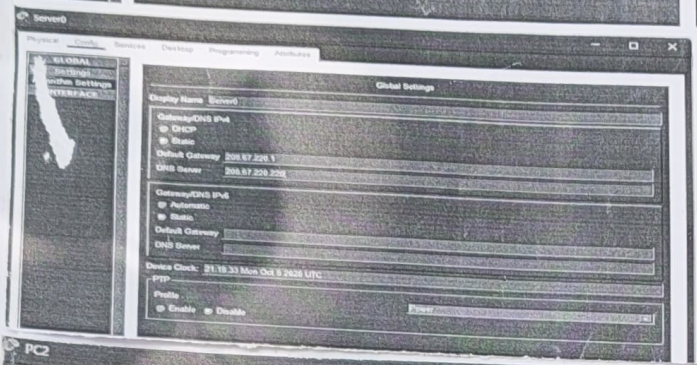

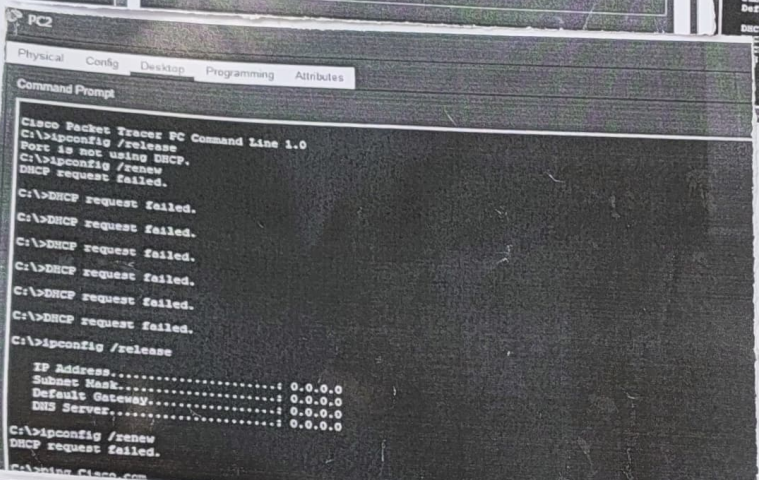

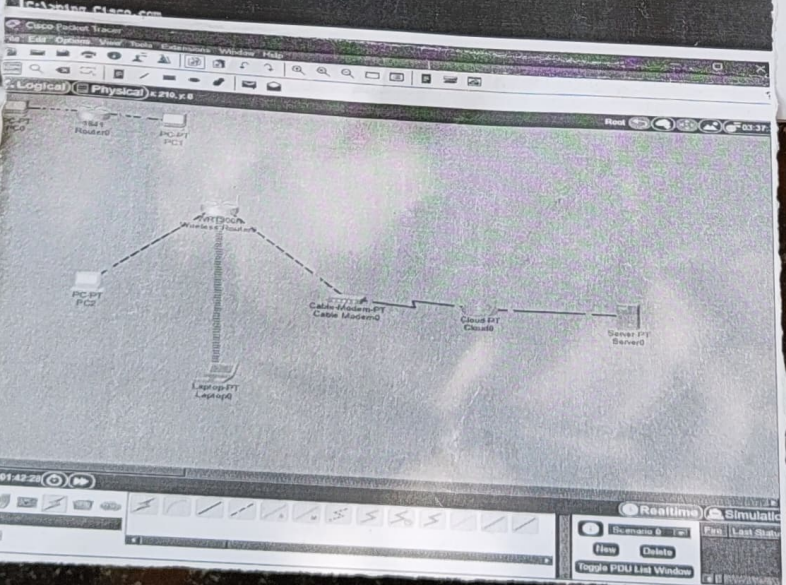

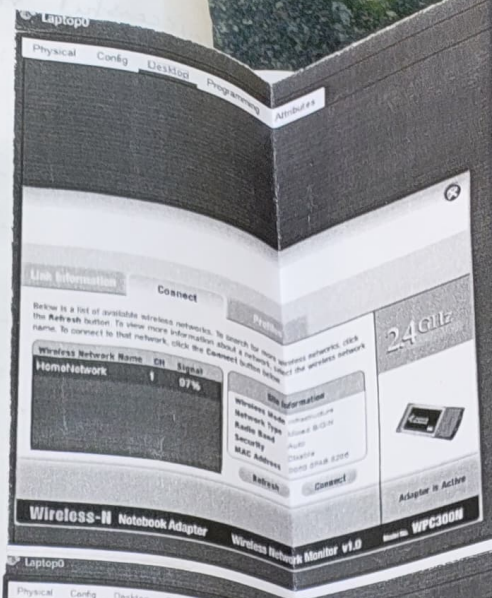

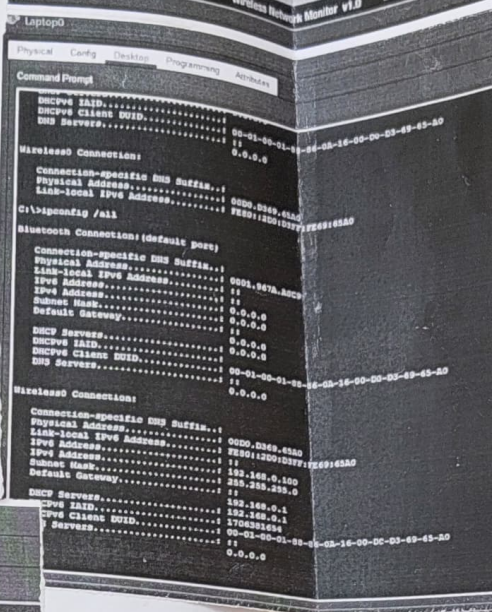

1. Configure Cis
mask 255.
2. Enable an
3. Verify
4. on the PC
5. verify assi
6. Successful
RESULT
and configure

10-b INTERNETWORK USING WIRELESS ROUTER, DHCP SERVER AND INTERNET CLOUD

AIM: To design and configure an Internetwork using a wireless router, DHCP server and Internet cloud in Cisco Packet Tracer and verify connectivity btw devices

PROCEDURE:

1. Build the topology
- Add PC, Wireless Router, Cable Modem, Internet cloud and Server
- Connect the devices using suitable copper & coaxiable cables
- Connect Laptop wirelessly to router

2. Configure Wireless Router
- Set wireless SSID as HomeNetwork.
- Configure LAN IP as 192.168.0.1 / 255.255.255.0
- Enable DHCP server for automatic IP allocation
- Set DNS server as 208.67.220.220

3. Configure the Laptop
- Replace Ethernet module with WPC300N wireless module
- Open PC Wireless & connect to HomeNetwork SSID
- Obtain the IP address automatically DHCP.

4. Configure PC
- Go to Desktop → IP configuration → DHCP
- Verify that PC receives an IP address in 192.168.0.x netw

5. Configure Internet Cloud & Server
- Configure Internet cloud for the required cable / Ethernet connection
- Configure Cisco.com server with IP 208.67.220.220 and subnet mask 255.255.255.0
- Enable and configure DNS service for cisco.com

6. Verify Connectivity.
- On the PC, use ipconfig / release followed by ipconfig / renew
- Verify assigned IP address, subnet mask, gateway & DNS server.
- Successful replies confirm connectivity

RESULT: Thus an internetwork was successfully designed and configured in Cisco Packet Tracer