


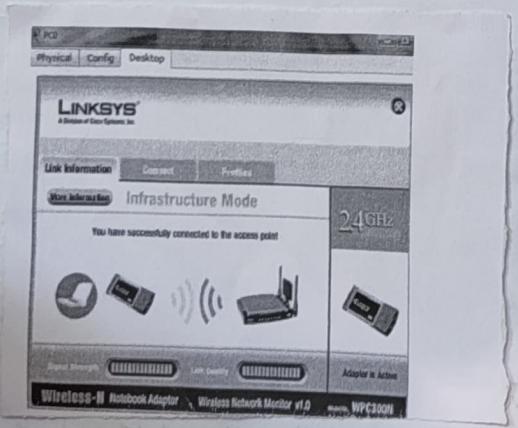


(b) AIM:


To configure a wireless LAN using Cisco Packet Tracer by connecting 3 PC's to a Linksys Wireless Router, assigning static IP address, configuring an SSID and securing the wireless network using a WEP key


PROCEDURE:


1. Create the topology
   - ↳ Open Cisco Packet Tracer
   - ↳ Place one Linksys Wireless router
   - ↳ Connect PCs to wireless
2. Configure the Wireless Router
   - ↳ Click on Wireless Router
   - ↳ Select Administration tab
   - ↳ Set username and password as
     - ⓐ username : admin
     - ⓑ password : admin
   - ↳ Click SAVE settings
3. Configure SSID
   - ↳ Go to wireless tab
   - ↳ Change default SSID to: Mother network
   - ↳ Save settings
4. Configure static IP address

PC → Desktop → IP configurations → Static

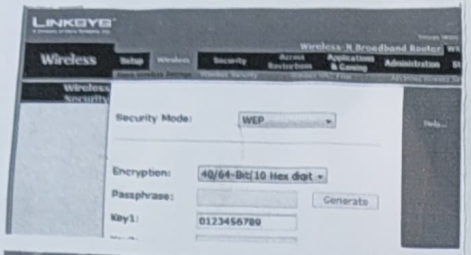

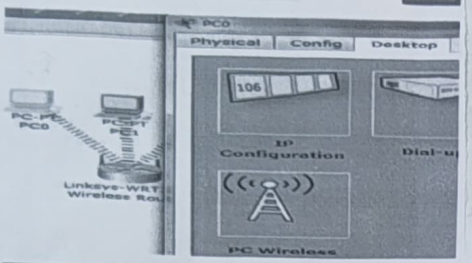

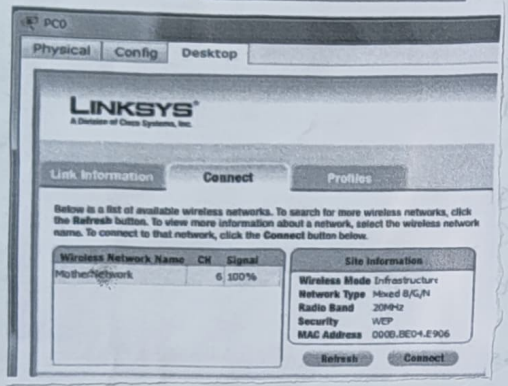

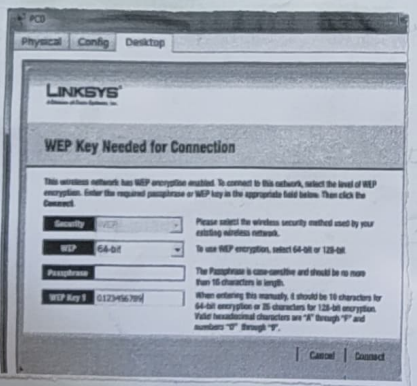

Device	IP Address	Subnet Network	Default Gat
Router	192.168.0.1	255.255.255.0	-
PC0	192.168.0.2	255.255.255.0	192.168.0.
PC1	192.168.0.3	255.255.255.0	192.168.0.
PC2	192.168.0.4	255.255.255.0	192.168.0.

5. Configure wireless security
   - ↳ select wireless security
   - ↳ set security mode to WEP
   - ↳ Set key1 as: 0122456789
   - ↳ Click save setting

6. Connect PC0 to wireless Network
   - ↳ Click PC0
   - ↳ select Desktop → PC wireless
   - ↳ select connect tab
   - ↳ Click refresh
   - ↳ select Mother network
   - ↳ click connect
   - ↳ when prompted for the security key: enter 0123456789
   - ↳ Click Connect

7. Verify connection
8. Connect PC1 and PC2
9. Verify wireless LAN after connecting all PCs

Result:

Thus a wireless LAN was successfully configured in Cisco Packet Tracer using a Linksys wireless Router. The SSID MotherNetwork, Static IP addresses and WEP security key configured and all PCs connected successfully