




---

Biorobotics laboratory

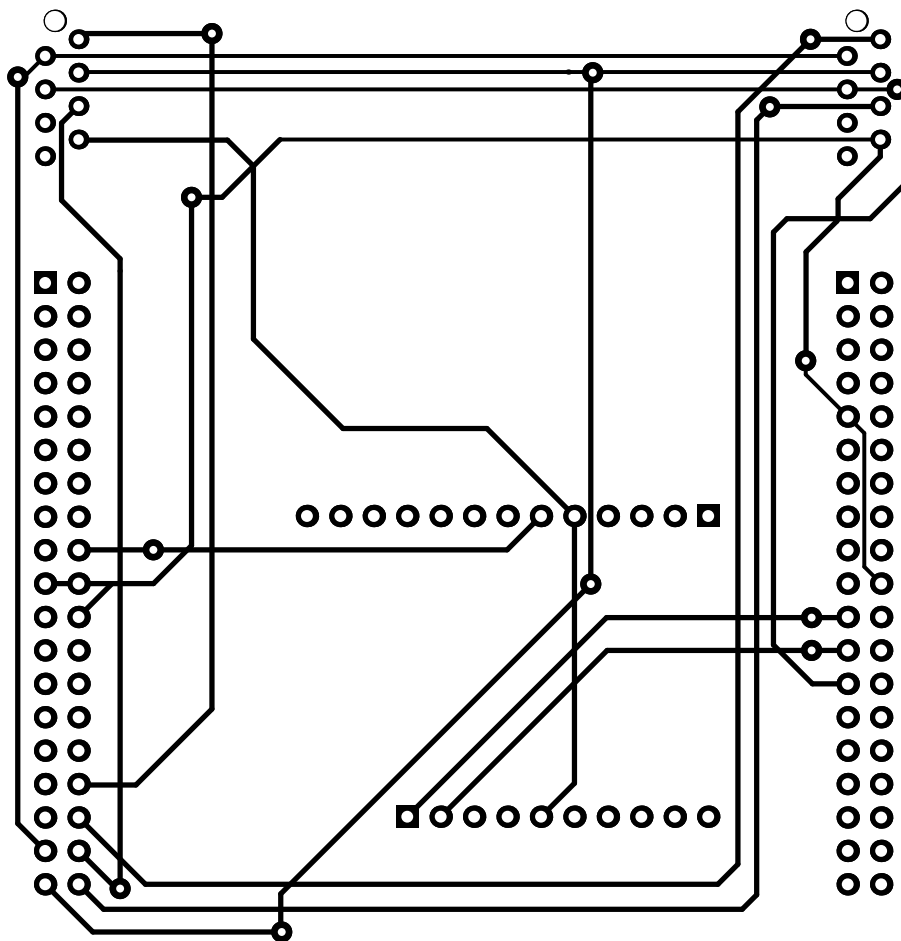

## MOUSE TREADMILL CONTROL

Tuesday 7<sup>th</sup> January, 2020

By **Didier Chérubin Negretto**

Professor: **Auke Ijspeert**

Assistant :**Shravan Tata Ramalingasetty**

## Semester project description

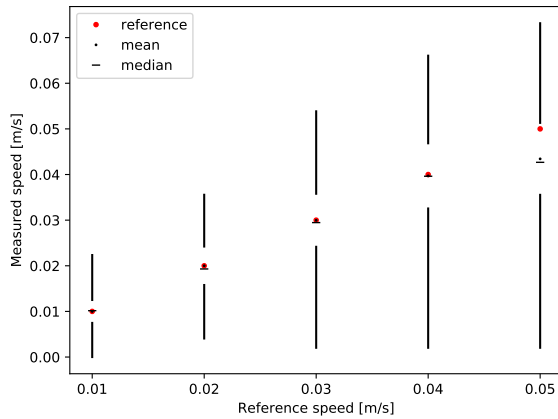


Figure 0.1 – Measured speed as a function of the reference one.

### Objectives and preliminary considerations

The project consists of designing and manufacturing the electronics and control for a mouse treadmill. After that the system's performances are characterized. This work starts from [1]: in this paper a cardboard maze is used to test the mouse behaviour. This setup is quite simple and comes with some drawbacks (i.e. it is not possible to analyse the mouse gait or control its speed and direction), which are addressed by the treadmill design. The new design features closed-loop speed control, a user interface (with real-time plotting), data logging, moreover the system can be expanded easily thanks to the use of MAVLink.

**System architecture** For the system architecture one  $\mu$ controller is used for the closed-loop control. This controller sends and receives data using a USB cable and the UART 232 protocol with the MAVLink messaging protocol. On the other side the PC can get the messages, log them and plot them. To measure the speed of the treadmill two optical sensors are used. These sensors are the same that can be found in gaming mouse. The sensors provide rich information which can be used not only to measure the speed of the surface of the treadmill, but also the estimate the quality of the measure itself. By using this information the control loop is aware of possible measuring problems and can therefore discard low quality

information.

Finally, to ease the user experience, a cross-platform graphical user interface as well as documentation, unit tests and a user manual are provided.

**Testing and results** Once the system is built the performances are verified, more precisely, the sensor noise is analysed as well as the speed of the control loop. To carry out an analysis of the total noise on the sensors (which is due to the sensor itself and the vibrations/imperfections of the machine), the machine is set to a constant speed setpoint, while data are logged. This procedure is repeated for different speeds. Figure 0.1 shows the reference speed as well as the mean, standard deviation (std), median and min/max values for all the setpoints tested. One can notice that it is not possible to reach the last setpoint due to saturation of the control signal. The minimum speed is always around 0  $[\frac{m}{s}]$  due to some imperfections in the moving part that causes it to get stuck periodically. On the other hand the maximum std is  $< 0.008 [\frac{m}{s}]$ , thus fulfilling the requirement of  $\leq 0.02 [\frac{m}{s}]$ . Finally the control loop is fast since it logs the speed measurements with a frequency of 200  $[Hz]$  97.3% of the time.

**Drawbacks and future improvements** As a proof of concept the treadmill seems to be a proper improvement of the previous design since it provides solutions to many of the drawbacks suffered by the cardboard maze. On the other hand not all the requirements are fulfilled yet (e.g. maximum speed), some improvements may include: new motors, which can provide the required speed and torque for better tracking and a camera to get information on the mouse position so that experiments with a free moving mouse can be performed as well. The main drawbacks of this design are the increased complexity, the higher cost and the need of a fixed-head mouse. No need to underline that the much richer information that can be retrieved using the new design as well as the possibility to solve the issues mentioned above in future iterations of this design outfaces all the drawbacks.


# Contents

<b>1</b>	<b>Introduction</b>	<b>4</b>
1.1	Motivation . . . . .	4
1.2	Requirements . . . . .	4
1.3	Structure of the report . . . . .	5
<b>2</b>	<b>System architecture</b>	<b>5</b>
<b>3</b>	<b>Design choices</b>	<b>6</b>
3.1	Board . . . . .	6
3.2	Communication . . . . .	7
3.3	Sensor . . . . .	8
3.4	Motor . . . . .	9
<b>4</b>	<b>Control</b>	<b>9</b>
4.1	Inputs/Outputs . . . . .	9
4.2	Controller . . . . .	10
4.3	Results . . . . .	11
4.3.1	Measure test . . . . .	11
4.3.2	Control test . . . . .	11
<b>5</b>	<b>Conclusion</b>	<b>11</b>
<b>6</b>	<b>User manual</b>	<b>12</b>
6.1	Installation of the PC software . . . . .	12
6.2	How to use the GUI . . . . .	13
6.3	How to write a routine . . . . .	16
6.4	How to extend the system . . . . .	16
<b>A</b>	<b>MAVLink dialect description file</b>	<b>19</b>
<b>B</b>	<b>Motor proposition</b>	<b>22</b>
<b>C</b>	<b>Code for STM32 NUCLEO 64 board</b>	<b>34</b>
C.1	Main . . . . .	34
C.2	Treadmill driver . . . . .	49
C.3	Sensor driver . . . . .	58
C.4	Code for unit tests . . . . .	63
C.5	Build script . . . . .	72
<b>D</b>	<b>Code for PC</b>	<b>72</b>
D.1	GUI . . . . .	72
D.2	Routine example . . . . .	78
<b>E</b>	<b>Data-sheets</b>	<b>78</b>
E.1	Sensor Data-sheet . . . . .	78

# 1 Introduction

In this section the main objectives and the state of the art for the project are presented as well as the overall structure of this report.

## 1.1 Motivation

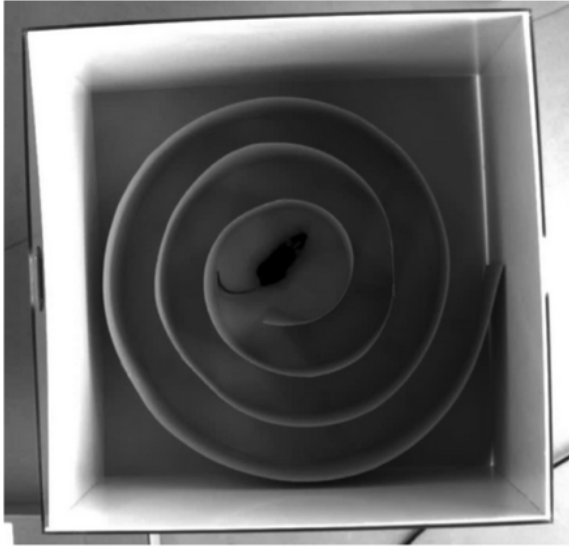

The studies on mammal locomotion have driven more and more attention over the years, and especially experiments on mice, such as [1], have enhanced our understanding of the neuronal circuits that enable locomotion. The experimental setup in [1], on the other hand, is quite rudimental. As shown in 1.2 it only consist in a spiral maze made out cardboard. This setup comes with some advantages such as:

- Low price
- Simple to implement and use
- Untrained mice can be employed
- Free moving mouse

As well as some disadvantages:

- Impossibility to analyse the mouse gait
- The mouse movements can't be imposed

To asses these issues a new design is needed for conducting such experiments. The new platform needs to allow the control on the walking surface on which the mouse is standing in such a way that a specific speed profile can be imposed to the mouse. Moreover it must be possible to analyse the mouse gait using cameras. For the new design inspiration is taken from some existing solutions on the market.

## 1.2 Requirements

First the mechanical requirements are discussed and stated. Table 1 summarizes them.

Description	Value	Unit
Dimensions of the moving surface	0.5	$[m^2]$
Course	$\infty$	$[m]$
Maximum speed	3	$[\frac{m}{s}]$
Maximum acceleration	2	$[\frac{m}{s^2}]$
Position resolution	0.01	$[m]$
Speed resolution	0.02	$[\frac{m}{s}]$
Maximum weight	0.1	$[kg]$
Mounting time for 1 person	30	$[min]$
Maximum weight of the mouse	40	$[g]$
Length of common experiment (distance, time)	(20, 600)	$([m],[s])$

Table 1 – Summary of the requirements for the mouse treadmill platform.

The functional requirements are listed as well:

- **Closed-loop control** Once a 2D speed setpoint is chosen the speed of the surface needs to be measured and the motor control signal need to be adjusted automatically to reach the desired setpoint.
- **Speed routines** The user can define a speed routine, which needs to be executed by the treadmill. The speed routine consist in a list of 2D speed setpoints and the time interval during which the machine should execute them.
- **User interface** The user can use a Graphical user interface (GUI) on a computer to be able to use the mouse treadmill. This interface informs the user if the sensors are correctly connected and initialized, and it should give a live update of the treadmill speed.
- **Data logging** The user can save the data sent by the treadmill during the experiment for future uses.
- **Expandability of the system** The user can easily expand the system with other controllers to have other features, than the ones listed above.

### 1.3 Structure of the report

This report is structured as follows: an introduction is given in section 1, the system architecture and communication are explained in 2. Section 3, describes the design decisions and the components choices made .Section 4 describes the control strategy and shows some preliminary responses. Finally in section 5 the conclusion of the project is given. The code, code documentation as well as the data-sheets of the components are annexed.

## 2 System architecture

In this section the architecture of the system is explained and detailed. One first overview of the system is given in figure 2.3.

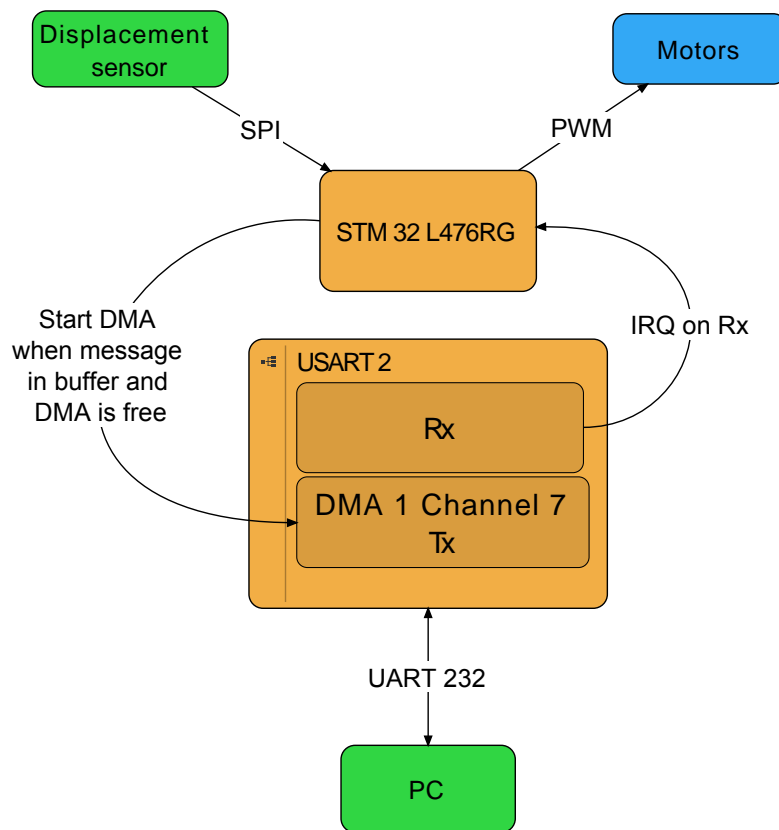


Figure 2.3 – Architecture for mouse treadmill project

The core of the system is the STM32L476RG, which can read from the sensors using the SPI interface and control the motors using the PWM. Moreover it can communicate with the computer and the GUI for data logging and to receive the inputs from the user. The communication with the computer uses the DMA capabilities of the microcontroller to free the processor from waiting for the communication to end before being able to take care of other tasks.

### 3 Design choices

In this section the design choices are explained and justified. First the choice of the board is analysed, then the sensors and finally the calculations for the motor dimensioning are shown.

#### 3.1 Board

For the board choice different types are taken into account:

- **Single board computer:** In this category the raspberry pi and the odroid are taken into consideration. These boards offer powerful computers, which can be running operating systems such as Linux or Windows, which makes them interesting. Unfortunately they can't provide any accurate timing, which is needed for the motor control and PWM generation.
- **Evaluation boards:** In this category the STM32 nucleo boards as well as the arduino boards can be found. These boards allow proper timing of the signals and accurate PWM generation, but on the other hand a computer is needed for plotting and storing the data, which can't be done locally on the board due to memory restrictions and limited resources on the board.

Due to the constraints in the system the second category is considered for implementation, the STM32L476RG board is taken for the system. Table 2 summarizes the features of the board.

Description	Value	Unit
Architecture	ARM-Cortex 32-bit with FPU	—
Clock frequency	80	[MHz]
Flash memory	1	[MB]
RAM memory	128	[KB]
I2C interfaces	3	—
USART interfaces	5	—
SPI interfaces	3	—
DMA controller	14	—
Cost	20.58	[CHF]

Table 2 – STM32L476RG main features.

One of the most important feature of the board is the DMA, which enhances the performances of the CPU. The DMA is used for the UART communication with the computer. This technique frees the CPU from waiting for the UART communication to be finished, so that it can spend more time on other activities. This same solution can be, in principle, adopted for the SPI communication if a standard SPI is used. Unfortunately the timing diagrams for the sensors are not standard, thus some time needs to be "wasted" by the processor so that the sensors can keep up with the communication. Other interesting features are: the big flash memory, the good RAM memory and the low cost. One drawback is that dynamic memory allocation is not possible in such a small system to prevent stack overflow and problems during run time. This is why the size of the speed routine is limited to a given number of points. Finally the multiple serial interfaces allow the possibility to expand the system to a bigger one with more controllers involved.

### 3.2 Communication

For the communication with the computer the UART protocol is chosen. This choice is almost mandatory since most boards are provided with an UART to USB interface and a mini-USB connector. The STM32L476RG is no exception to this rule. The main settings for the UART protocol are reported in table 3.



Figure 3.4 – MAVLink logo

Parameter	Value	Unit
Baud rate	230400	[ $\frac{Bits}{s}$ ]
Word length	8	[Bits]
Parity	None	—
Stop bits	1	[Bits]
MSB first	Disable	—

Table 3 – Table describing the main parameters of the UART communication protocol.

Since the system needs to be expanded for future more complex experiments some thought is put in the choice of the messaging protocol to allow this key feature. The best solution found is MAVLink. "MAVLink is a very lightweight messaging protocol for communicating with drones"[2], one can say

that the mouse treadmill is not meant to fly around, but this messaging protocol is flexible enough to be adapted to the mouse treadmill. More precisely a dialect is described in A, and summarized in table 4. Thanks to the description file it is possible to generate libraries in different programming languages (C, Python, Java, ...) and if in the future a new message is required a additional definition can be added to the file and the libraries can be regenerated.

Despite the light weight MAVLink comes with some interesting features, such is high reliability (detects packets drops and corruption), high efficiency (only 14-bits of overhead), it can also allow up to 255 concurrent systems on the network.

Name	Description	Sender	Receiver	Type
HEARTBEAT	Verifies communication	STM32	PC	Status
SPEED_INFO	Measured speed	STM32	PC	Info
SPEED_SETPOINT	Speed setpoint	PC/STM32	STM32/PC	Status
MODE_SELECTION	Changes mode	PC	STM32	—
MOTOR_SETPOINT	Up time of PWM duty cycle	STM32	PC	Info
POINT_LOADED	Acknowledge for routine point loaded	STM32	PC	—
POINT	Information for one point of the routine	PC	STM32	—
ERROR	Error message	STM32	PC	—
RAW_SENSOR	Raw sensor values	STM32	PC	Status

Table 4 – List and description of the MAVLink messages. The Type indicates whatever the message is high frequency (Info), low frequency (Status) or none of the previous ones (—)

### 3.3 Sensor

For sensing the speed of the wheel a contactless solution is chosen. To achieve this goal a optical gaming mouse sensor is taken. Nevertheless the sensor need to come mounted on a PCB with a simple interface to reduce the time needed to design and manufacture the machine. Because of that the PMW3360 is chosen for the implmentation. The working principle of the sensor is quite simple. The sensor is equipped with a LED to light a given area and a camera. The camera takes picture of the moving surface with a frequency of up to 12000 [fps]. Using the integrated DSP module some features are extracted form the images and, by knowing the displacement of the features, it is possible to determine how much the surface has moved on the X and Y direction. Some other useful information can be retrieved from the sensor such as :

- **Lift status** This bit in the motion register gives information about the status of the sensor and especially if the sensor detects a surface or not. This information is used to determine if the read value is valid or not.
- **Surface quality (SQUAL)** This register gives an information about how many features are detected on the surface. This value is used to verify the quality of the measurement, which is considered valid only if the number of detected feature is above a given threshold.



- **SROM ID** This value is read after the power up of the sensor to verify that the SROM of the sensor is uploaded correctly using the SPI interface. If this value is not as expected it means that the sensor is not initialized correctly and thus might not work properly.

The performances of the sensor are summarized on table 5<sup>1</sup>. For more details refer to E.1.

Description	Value	Unit
High speed detection	6.3	$\left[\frac{m}{s}\right]$
High acceleration detection	490	$\left[\frac{m}{s^2}\right]$
Default resolution	5000	$[cpi]$
Resolution error of	1	$[\%]$
4 wires SPI interface	1	—
Cost	29.99	$[\$]$

Table 5 – PMW3660 main features.

### 3.4 Motor

In this section one motor proposition B<sup>2</sup> is shown with all the calculations used to justify such a choice. To properly dimension the motors these assumptions are taken:

1.  $\eta = 1$  No losses in wheel-sphere coupling
2. No slip of the wheel on the sphere
3. Hollow sphere
4. Flat disk
5. Negligible rotor and gearbox inertia

The data given are:

- $m_s = 2 [kg]$  mass of the sphere
- $r_s = 0.2 [m]$  radius of the sphere
- $m_w = 0.0114 [kg]$  mass of the wheel
- $r_w = 0.03 [m]$  radius of the wheel
- $M_{max} = 0.11 [Nm]$  maximum torque provided by the motor-gearbox
- $\omega_{max} = 1000 [rpm]$  maximum angular speed of the motor-gearbox

It is therefore possible to estimate the maximum continuous acceleration and speed of the sphere.

## 4 Control

In this section the main aspect of the control are discussed as well as some results. For the closed-loop control a simple PI controller is used (see 4.2). This can be improved in future works to allow for faster and better performance control. The implementation of the controller is done in CodeSTM32/mouseDrive.c in the function void mouseDriver\_control\_idle(void).

### 4.1 Inputs/Outputs

In this section the signal definitions are described. The control diagram is shown in figure 4.5. The signals are defined as follow:

<sup>1</sup> $[cpi]$  stands for counts per inch.

<sup>2</sup>This motor are not used in the actual version of the treadmill, but might be used for a future iteration.

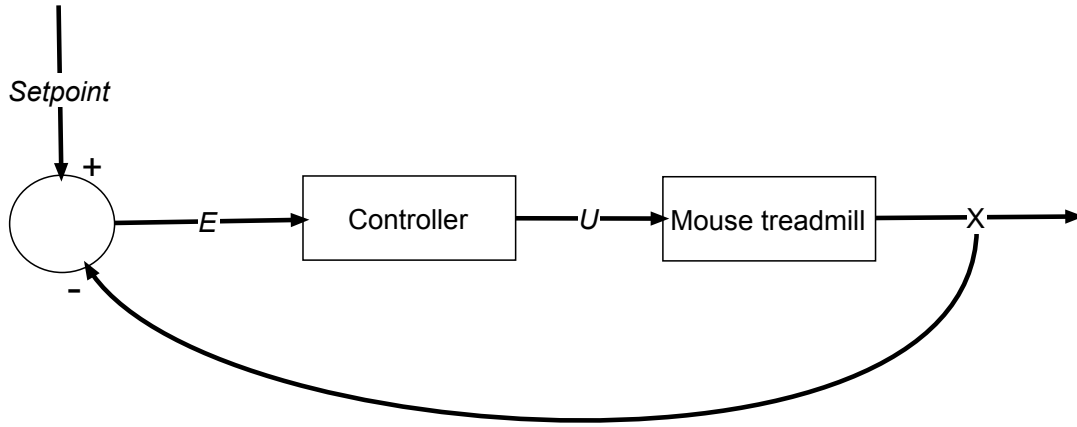


Figure 4.5 – Control diagram

- $X = \begin{bmatrix} v_x \\ v_y \end{bmatrix}$  : is the measured  $v_x$  and  $v_y$  speeds. This measure is done using the optical sensors, which means that the raw values are as defined in the datasheet of the sensors (see E.1). In short words the sensor runs a navigation program, which does the correlation between two images as fast as possible and finds out of how many counts the two images are displaced in the  $x$  and  $y$  direction of the sensor, those values are then integrated up to when the motion burst is performed. Since two sensors are used, only one axis of each sensor is meaningful for the control (since the other one is always fixed). The information that can be retrieved from one sensor is the number of counts along one axis that the ball has done since the last read. This can then be translated in to meters by knowing the resolution of the sensor (which is given in counts per inch) and the relation between inches and meters. Furthermore the speed can be computed by keeping track of when the last measure is taken, and the actual time, thus knowing the  $dt$  between two measures.
- $E = \begin{bmatrix} e_x \\ e_y \end{bmatrix}$  : is the error id est the difference between the setpoint and the measured speed
- $U = \begin{bmatrix} u_x \\ u_y \end{bmatrix}$  : is the control signal, which is the up time of the duty cycle of the PWM signal controlling the X and Y directions. The parameters of this signal can be modified by using the PRESCALER\_PWM and COUNTER\_PERIOD\_PWM. This two values allow for defining the frequency and number of possible values of the PWM signal.

## 4.2 Controller

In this section the internal structure of the controller is described. The inputs in the controller are the errors on the speed setpoint in X and Y. The control signal is defined as in equation 1.

$$U = \begin{bmatrix} u_x \\ u_y \end{bmatrix} = K * \begin{bmatrix} e_x \\ e_y \end{bmatrix} + I * \begin{bmatrix} i_x \\ i_y \end{bmatrix} \quad (1)$$

Where  $K$  and  $I$  are constant scalar values and  $\begin{bmatrix} i_x \\ i_y \end{bmatrix}$  is a vector containing the sum of the errors over all the past measures where the motor signal  $U$  is not the maximum allowed. This condition is taken to avoid wind up and overshoot in the controller.

Moreover the control is done only if the measures taken are valid. Which means that the SQUAL measure is bigger than SQUAL\_THRESH, the sensors are not lifted, and the PRODUCT\_ID is

equal 66. If those conditions are met it means that the surface quality is good, the sensor "sees" correctly the surface and the communication is done correctly. If the measures are not valid for more than MAX\_MISSING\_MEASURES the motors are stopped and the mode goes to STOP mode to avoid damage to the machine.

## 4.3 Results

In this section the results of the control are shown as well as the achieved performances in terms measures 4.3.1 and control 4.3.2.

### 4.3.1 Measure test

In this section a simple experiment is described and the results are shown. First the zero speed noise is measured in the sensors, then the same measure is repeated while spinning the ball at constant speed. This let us characterize the noise in the sensors and decide whatever some filtering is required.

### 4.3.2 Control test

In this section the  $I$  and  $K$  parameters in equation 1 are tuned, then the step responses are measured. Finally a 2D routine is described and the tracking error is analysed to see whatever the machine is able to follow such a routine and with which performances.

## 5 Conclusion

## 6 User manual for mouse treadmill software

The software is well documented in the docs folder, nevertheless some important things are pointed out in this report so that the user can more easily install and start using the mouse treadmill. The installation guide for the PC software, a user manual for the GUI, a explanation on how to write a speed routine as well as a guide on how to expand the system with new messages is provided. Note that all the provided commands and instructions are tested for MAC, mavlink is available also for LINUX and WINDOWS, the user can adapt these command to be able to install and successfully use the software on his machine.

### 6.1 Installation of the PC software

First python 3 needs to be installed, for that see [3]. GIT needs to be install as well. Some other python packages needs to be installed, they can be obtained using PiP. The required ones are:

- pyserial
- numpy
- json
- os
- appjar
- sys
- tqdm
- matplotlib

Make sure that pymavlink is not install. This is important since the dialect used is not a standard one, but it is custom. Do not install pymavlink using PiP.

To install the software the sequent steps have to be accomplished:

1. Clone the git repository of the project using

```
$ git clone https://github.com/DidierNegretto/3DMouseTreadmill.git
```

2. Move inside the repository

```
$ cd 3DMouseTreadmill/
```

3. Make sure no previous version of pymavlink is installed

```
$ pip uninstall pymavlink
```

4. Remove the mavlink directory

```
$ rm -r -f mavlink/
```

5. Clone the mavlink repository

```
$ git clone https://github.com/mavlink/mavlink.git
```

6. Update the submodule

```
$ git submodule update --init --recursive
```

7. Copy mouse.xml file and the mouse.py files into mavlink/pymavlink/dialects/v20

8. Change directory to mavlink/

```
$ cd mavlink
```

9. Export the path to the repository so that python will find all the code it needs to run

```
$ export PYTHONPATH='path_to_repository/3DMouseTreadmill/'
```

10. Change directory to pymavlink

```
$ cd pymavlink
```

11. Setup everything using the setup.py provided

```
$ python3 setup.py install --user
```

## 6.2 How to use the GUI

In this section the use of the GUI and its functionalities are described. First of all the GUI provided can be expanded using the functions in the mouse.py generated using mavlink, and thus can be improved for future versions of the project. One screenshot of the GUI is shown in figure 6.6. Figure 6.6 is taken on a MAC, the GUI have the same functionalities on other platforms, but it might look different. The library used to design the GUI is Appjar, which is compatible with MAC, LINUX and Windows.

- **A** In this region the content of the HEARTBEAT message are presented. Time is the time from boot of the system in milliseconds. Modes is the mode in which the stm32 is. The mode can be STOP, SPEED AUTO or RUNNING.
- **B** In this region the real-time data are plotted. The top plot shows the X and Y motor signals, the middle one shows the X and Y speed setpoints and the bottom one shows the motor signal. By using the top left buttons it is possible to save the plots and navigate them, it is advisable to store the data and plot them afterwards using another script for better analysis due to the fast update of the plots.
- **C** In this region data from the sensors are displayed. ID is the product ID of the sensor and is used to verify that the communication between the sensor and the board is working correctly. LIFT is 0 if the sensor detects correctly the surface and 1 if it does not. SQUAL is the surface quality information. This value should be greater than 20 for the measure to be good. ROM is the SROM ID of the sensor. This value is used to verify that the SROM is flashed correctly during initialization. If everything is working correctly you should see something like table 6

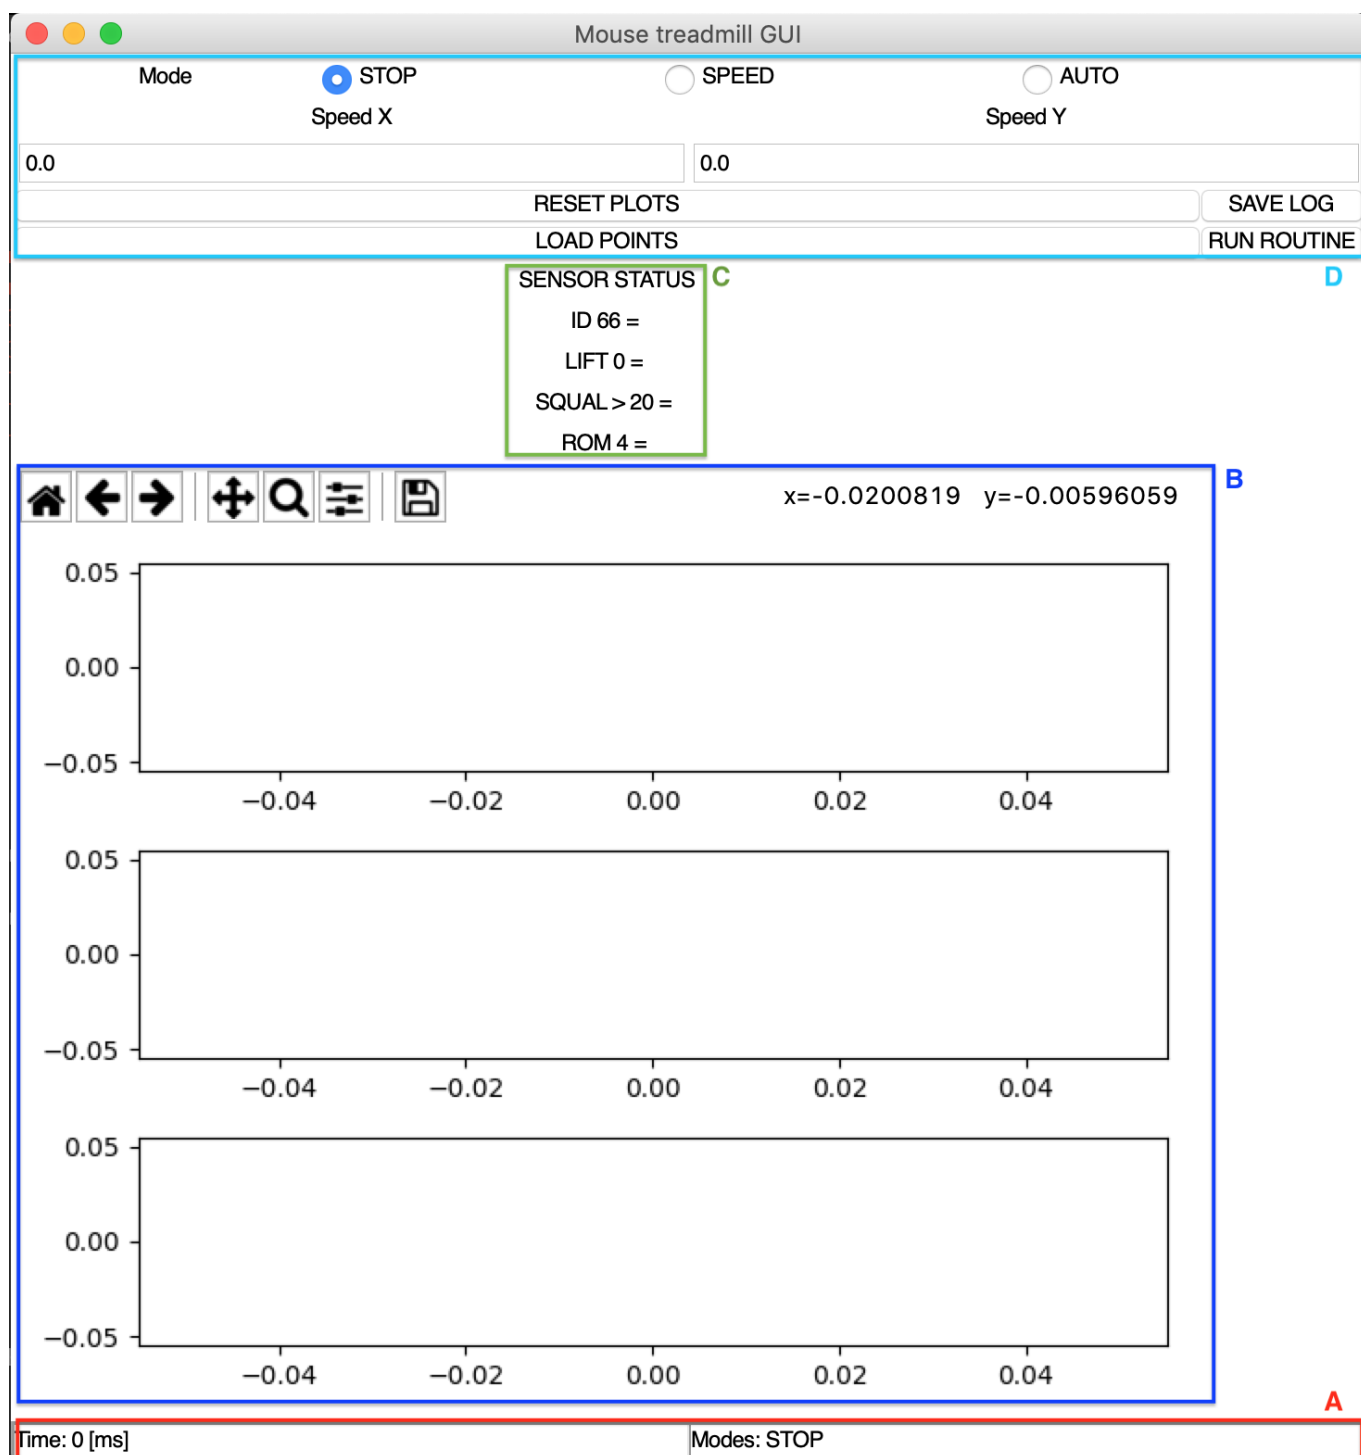


Figure 6.6 – GUI screenshot on a MAC.

SENSOR STATUS	
ID 66 = 66   66	
LIFT 0 = 0   0	
SQUAL > 20 = 34   43	
ROM 4 = 4   4	

Table 6 – Example of GUI output for sensor initialized and connected correctly and detecting a good quality surface. Before = the name of the information and its correct value are shown, after the sensor x | sensor y readings are displayed.

- **D** In this region the input from the user are taken. In the first line the user can select the mode to be used:
  - **STOP**: When this mode is selected the motor are stopped.
  - **SPEED**: When this mode is selected the motor setpoints can be typed in the two entries under the Speed X and Speed Y labels.
  - **AUTO**: When this mode is selected the user can load the points of the routine on the board (Modes: LOAD) and then run the routine (Modes: RUNNING).

Finally the RESET PLOTS button is used to reset the plot in case of reset on the board, the SAVE LOG button stores all the data received in a file in /log/log.txt. This file is overwritten every time so if you need the data please copy them in a safe place. The LOAD POINTS sends the points defined in routine.py to the board. This will work only if the mode is set to AUTO (should see LOAD in Modes in **A** and the time should not be updated). Finally the RUN ROUTINE button starts the routine on the board (the board goes in mode RUNNING).

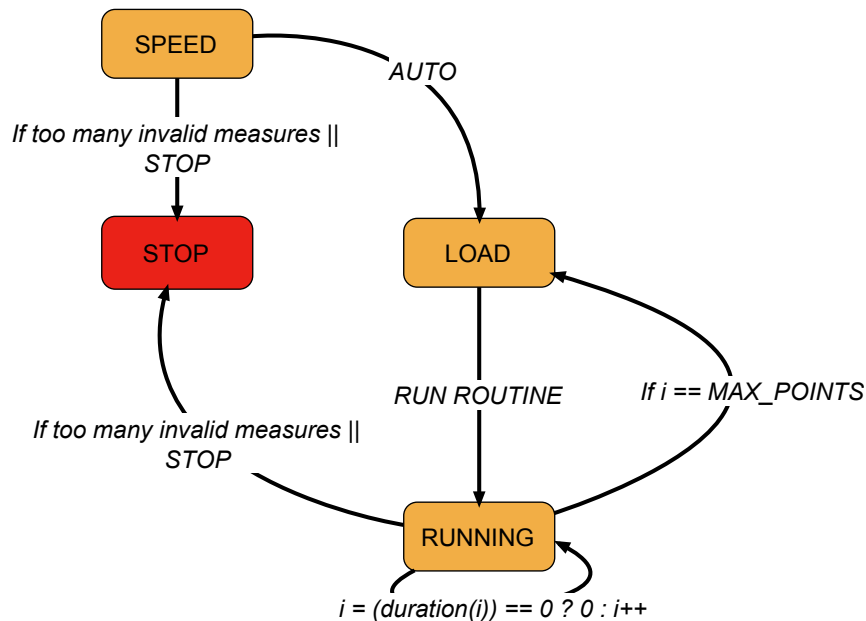


Figure 6.7 – Finite state machine of the mouse treadmill.

The finite state machine of the machine is shown in figure 6.7. All the capital letters conditions (except for MAX\_POINTS) are widgets on the GUI that can be pressed by the user while using the machine.

## 6.3 How to write a routine

In this section the way to properly define a routine is described. An example routine is provided in `MouseTreadmillPC/python/routine.py`. The routine is a python dictionary containing a list of durations, `setpoint_x` and `setpoint_y`. The two setpoints define the desired speed along x and y, while the duration is the time span during which the two setpoints are applied. One should notice that the system time is discrete and increased every millisecond, moreover one should take into account the settling time for the control and the maximum acceleration provided by the motors to do a proper discretization of the desired speed profile.

A duration of 0 means that the end of the routine is reached and the routine is started again at the first point defined. A maximum of 255 points can be defined, if more points are needed the id of the point have to be changed from type `uint8_t` to `uint16_t` to allow for IDs above 255. A memory limitation is still present, but for a number of points above 1'000.

## 6.4 How to extend the system

To extend the system with new messages and features the main operation consist in modifying A. This files describes all the messages and constants used in the communication protocol, thus it possible to add/modify them. If you need to create a new message or constant, please have a look at the already defined ones and use them as a template. To extend the system please follow the following steps:

1. Get the basic system installed correctly, for that see 6.1.
2. Modify A (`mouse.xml`) as needed.
3. Generate the C libraries for the STM32, for that you need:

```
$ cd 3DMouseTreadmill/mavlink
$ python 3 mavgenerate.py
```

Now a GUI asking you information appear, this must be filled as follow:

- **XML** there you indicate the `mouse.xml` file that was previously modified
- **Out** there you indicate the 3DMouseTreadmill/MAVLink Library/
- **Language** Choose C
- **Protocol** Choose 2.0
- **Validate** Choose Yes
- **Validate Units** Choose Yes

Now you can press on generate. The GUI should be similar to figure 6.8a. If some errors are shown, correct them and try again.

4. Adapt the code in the STM32 project if needed.
5. Generate the python libraries for the PC, for that you need:
  - (a) Run `mavgenerate.py` (if not still running)

```
$ python 3 mavgenerate.py
```

Now a GUI asking you information appear, this must be filled as follow:



- **XML** there you indicate the mouse.xml file that was previously modified
- **Out** there you indicate the 3DMouseTreadmill/mouse.py
- **Language** Choose Python
- **Protocol** Choose 2.0
- **Validate** Choose Yes
- **Validate Units** Choose Yes

Now you can press on generate. The GUI should be similar to figure 6.8b. If some errors are shown, correct them and try again.

(b) Change directory to the parent one

```
$ cd ../
```

(c) repeat the installation guide (see 6.1) from point 3.

6. Adapt the python code if necessary.

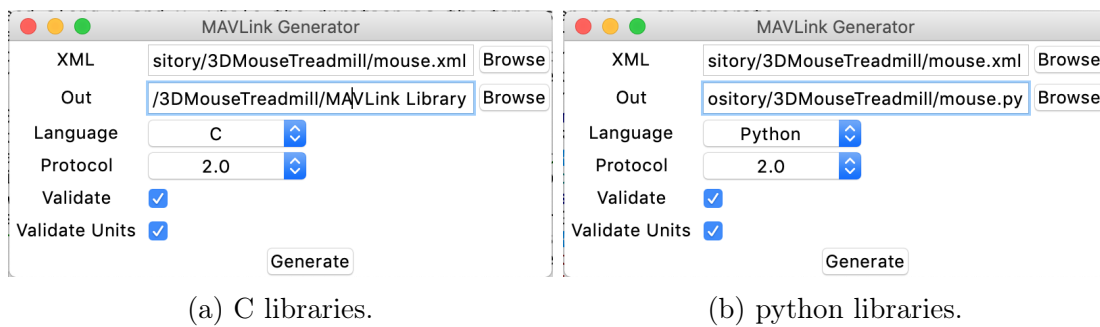


Figure 6.8 – mavgenerate GUI screenshots properly setup for generating python and C libraries.

## References

- [1] Jared M. Cregg, Roberto Leiras, Alexia Montalant, Ian R. Wickersham, and Ole Kiehn, *Brain-stem Neurons that Command Left/Right Locomotor Asymmetries*
- [2] MAVLink Developer Guide, <https://mavlink.io/en/>
- [3] Python website, <https://www.python.org/downloads/>
- [4] Robin R. Murphy, Eric Steimle et al. *Cooperative Use of Unmanned Sea Surface and Micro Aerial Vehicles at Hurricane Wilma*, Journal of Field Robotics, 2008
- [5] Kenzo Nonami, Farid Kendoul, Satoshi Suzuki, Wei Wang, Daisuke Nakazawa, *Autonomous Flying Robots*, Springer, 2010.
- [6] G. Sachs, *What Can Be Learned from Unique Lateral-Directional Dynamics Properties of Birds for Mini-Aircraft*, Atmospheric Flight Mechanics Conference and Exhibit, 2007
- [7] R. Pecora, F. Amoroso, and L. Lecce, *Effectiveness of Wing Twist Morphing in Roll Control*, Journal of aircraft Vol. 49, No. 6, November–December 2012
- [8] Osgar John Ohanian III, Christopher Hickling, Brandon Stiltner, Etan D. Karni, *Piezoelectric Morphing versus Servo-Actuated MAV Control Surfaces*, 53rd AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference, 2012
- [9] Helen M. Garcia, Mujahid Abdulrahim and Rick Lind, *Roll control for a micro air vehicle using active wing morphing*, AIAA Guidance, Navigation, and Control Conference and Exhibit, 2003
- [10] Mujahid Abdulrahim, Helen Garcia, and Rick Lind, *Flight Characteristics of Shaping the Membrane Wing of a Micro Air Vehicle*, Journal of aircraft Vol. 42, No. 1, January–February 2005
- [11] M. Di Luca, S. Mintchev, G. Heitz, F. Noca and D. Floreano, *Bioinspired morphing wings for extended flight envelope and roll control of small drones*, Interface Focus 7, 2017
- [12] William E. Green and Paul Y. Oh, *A Hybrid MAV for Ingress and Egress of Urban Environments*, IEEE transactions on robotics, 2009
- [13] Bret Stanford, Mujahid Abdulrahim, Rick Lind, and Peter Ifju, *Actuation for Roll Control of a Micro Air Vehicle*, Journal of aircraft, 2007
- [14] Juan Carlos Gomez and Ephrahim Garcia, *Morphing unmanned aerial vehicles*, Smart materials and structures, 2011.
- [15] E.L. Houghton, P.W. Carpenter, Steven H. Collicott and Daniel T. Valentine, *Aerodynamics for engineering students*, Seventh edition.
- [16] Pero Skorput, Sadko Mandzuka, Hrvoje Vojvodic, *The Use of Unmanned Aerial Vehicles for Forest Fire Monitoring*, 58th International Symposium ELMAR, 2016
- [17] David Gallacher, *Drone Applications for Environmental Management in Urban Spaces: A Review*, International Journal of Sustainable Land Use and Urban Planning, 2016
- [18] Ludovic Apvrille, Tullio Tanzi, and Jean-Luc Dugelay *Autonomous Drones for Assisting Rescue Services within the context of Natural Disasters*, XXXIth URSI General Assembly and Scientific Symposium, 2014

## List of Figures

0.1	Measured speed as a function of the reference one. . . . .	2
1.2	The experimental setup used in [1]. . . . .	4
2.3	Architecture for mouse treadmill project . . . . .	6
3.4	MAVLink logo . . . . .	7
4.5	Control diagram . . . . .	10
6.6	GUI screenshot on a MAC. . . . .	14
6.7	Finite state machine of the mouse treadmill. . . . .	15
6.8	mavgenerate GUI screenshots properly setup for generating python and C libraries. . . . .	17

## List of Tables

1	Summary of the requirements for the mouse treadmill platform. . . . .	4
2	STM32L476RG main features. . . . .	7
3	Table describing the main parameters of the UART communication protocol. . . . .	7
4	List and description of the MAVLink messages. The Type indicates whatever the message is high frequency (Info), low frequency (Status) or none of the previous ones (–) . . . . .	8
5	PMW3660 main features. . . . .	9
6	Example of GUI output for sensor initialized and connected correctly and detecting a good quality surface. Before = the name of the information and its correct value are shown, after the sensor x   sensor y readings are displayed. . . . .	15

## A MAVLink dialect description file

```

1 <?xml version="1.0"?>
2 <mavlink>
3   <version>3</version>
4   <dialect>2</dialect>
5   <enums>
6     <enum name="MOUSE_MODE">
7       <description>This enum defines the mode to be used</description>
8       <entry value="0" name="MOUSE_MODE_STOP">
9         <description>All motion of mouse treadmill is stopped</description>
10      </entry>
11      <entry value="1" name="MOUSE_MODE_SPEED">
12        <description>Constant speed is applied. Speed selected by PC
13          message SPEED_SETPOINT.</description>
14      </entry>
15      <entry value="2" name="MOUSE_MODE_AUTO_LOAD">
16        <description>Predefined speed profile is loaded</description>
17      </entry>
18      <entry value="3" name="MOUSE_MODE_AUTO_RUN">
19        <description>Predefined speed profile is applied</description>
20      </entry>
21    </enum>
22    <enum name="MOUSE_ERROR">
23      <description>This enum defines the possible errors</description>

```

```

23     <entry value="0" name="MOTOR_ERROR">
24         <description>The motor driver flaged an error, this might be due to
                many sources, see datasheet of motor driver.</description>
25     </entry>
26     <entry value="1" name="MOTOR_LOW_SPEED">
27         <description>The speed setpoint chosen is too low to be achieved.</
                description>
28     </entry>
29     <entry value="2" name="MOTOR_HIGH_SPEED">
30         <description>The speed setpoint chosen is too high to be achieved.</
                description>
31     </entry>
32     <entry value="3" name="MOUSE_ROUTINE_TOO_LONG">
33         <description>More than 255 points have been defined in the mouse
                routine.</description>
34     </entry>
35     <entry value="4" name="SENSOR_NOT_RESPONDING">
36         <description>One sensor is not responding correctly.</description>
37     </entry>
38 </enum>
39 <enum name="SENSOR_ID">
40     <description>This enum defines the sensors directions</description>
41     <entry value="0" name="SENSOR_X">
42         <description>Sensor ID for X direction.</description>
43     </entry>
44     <entry value="1" name="SENSOR_Y">
45         <description>Sensor ID for Y direction.</description>
46     </entry>
47 </enum>
48 </enums>
49 <messages>
50     <message id="0" name="HEARTBEAT">
51         <description>The heartbeat message shows that a system or component is
                present and responding. Sender = STM32 Receiver = PC
52     </description>
53     <field type="uint8_t" name="mode" enum="MOUSE_MODE">Actual operating
                mode</field>
54     <field type="uint32_t" name="time">Time from boot of system</field>
55 </message>
56 <message id="1" name="SPEED_INFO">
57     <description>The message giving the actual speed of the motor. Sender =
                STM32 Receiver = PC
58     </description>
59     <field type="uint32_t" name="time_x">Time from boot of system for
                speed_x measure</field>
60     <field type="uint32_t" name="time_y">Time from boot of system for
                speed_y measure</field>
61     <field type="float" name="speed_x">Speed in x direction</field>
62     <field type="float" name="speed_y">Speed in y direction</field>
63     <field type="uint8_t" name="valid">0 if data are not valid, 1 if data

```

---

```

        are valid </field>
64 </message>
65 <message id="2" name="SPEED_SETPOINT">
66     <description>The message is sent to send and validate the setpoint sent
        from computer. Sender = PC/STM32 Receiver = STM32/PC
67     </description>
68     <field type="float" name="setpoint_x">Speed setpoint in x direction</
        field>
69     <field type="float" name="setpoint_y">Speed setpoint in y direction</
        field>
70 </message>
71 <message id="3" name="MODE_SELECTION">
72     <description>This message is used to select the mode of the STM32 Sender
        = PC Receiver = STM32
73     </description>
74     <field type="uint8_t" name="mode" enum="MOUSE_MODE">Actual operating
        mode</field>
75 </message>
76 <message id="4" name="MOTOR_SETPOINT">
77     <description>This message defines the raw motor input values. This
        values defines the Duty_Cycle up time for PWM signals. Sender =
        STM32 Receiver = PC
78     </description>
79     <field type="uint32_t" name="time">Time from boot of system</field>
80     <field type="float" name="motor_x">Speed setpoint in x direction</field>
81     <field type="float" name="motor_y">Speed setpoint in y direction</field>
82 </message>
83 <message id="5" name="POINT_LOADED">
84     <description>This message is used to acknowledge the receipt of one
        point for auto mode Sender = STM32 Receiver = PC
85     </description>
86     <field type="uint16_t" name="point_id">Last ID of point loaded</field>
87 </message>
88 <message id="6" name="POINT">
89     <description>This message is used to send one point for auto mode.
        Sender = PC Receiver = STM32
90     </description>
91     <field type="uint32_t" name="duration">Time during which the setpoint
        need to be kept</field>
92     <field type="uint16_t" name="point_id">point ID</field>
93     <field type="float" name="setpoint_x">Speed setpoint in x direction</
        field>
94     <field type="float" name="setpoint_y">Speed setpoint in y direction</
        field>
95 </message>
96 <message id="7" name="ERROR">
97     <description>This message is used to send errors Sender = STM32 Receiver
        = PC
98     </description>
99     <field type="uint32_t" name="time">Time from boot of system</field>

```

```

100     <field type="uint8_t" name="error" enum="MOUSE_ERROR">error ID</field>
101 </message>
102 <message id="8" name="RAW_SENSOR">
103     <description>This message contains raw sensor values Sender = STM32
        Receiver = PC
104     </description>
105     <field type="uint32_t" name="time">Time from boot of system</field>
106     <field type="uint8_t" name="sensor_id">0 for X, 1 for Y.</field>
107     <field type="int16_t" name="delta_x">Displacement along sensor's x
        in counts per inch.</field>
108         <field type="int16_t" name="delta_y">Displacement along
            sensor's y in counts per inch.</field>
109         <field type="uint8_t" name="squal">Quality of the surface.
            For white paper is around 30.</field>
110         <field type="uint8_t" name="lift">1 if the sensor is lifted (
            not measuring). 0 otherwise</field>
111     <field type="uint8_t" name="product_id">0x42 if the serial
        communication with the sensor works correctly.</field>
112     <field type="uint8_t" name="srom_id">0x00 if initialisation is not done.
        Other value if done correctly.</field>
113 </message>
114 </messages>
115 </mavlink>

```

## B Motor proposition

## Configured drive

Motor - ECXSP16M BL KL A STD 24V  
Gearhead - GPX16 SP STE 44:1

**Part number: B7A31C479448** Revision number 2



Orders are processed and shipped from Switzerland within 11 working days.

General Terms and Conditions: [https://www.maxongroup.ch/maxon/view/content/terms\\_and\\_conditions\\_page](https://www.maxongroup.ch/maxon/view/content/terms_and_conditions_page)

To open the integrated CAD file, please save this document and open it in Acrobat Reader. The STEP file is available after a double-click on the pin icon.

B7A31C479448.stp (STP AP 214)

Open configuration: <https://www.maxongroup.com/maxon/view/configurator/?ConfigID=B7A31C479448>

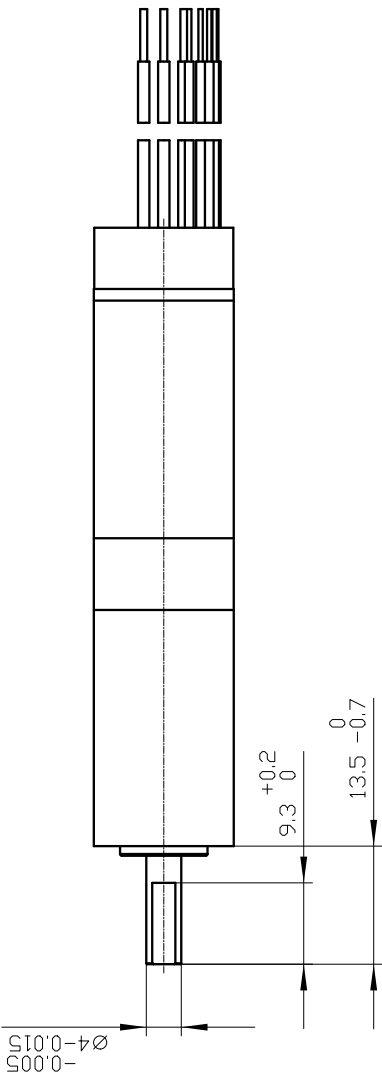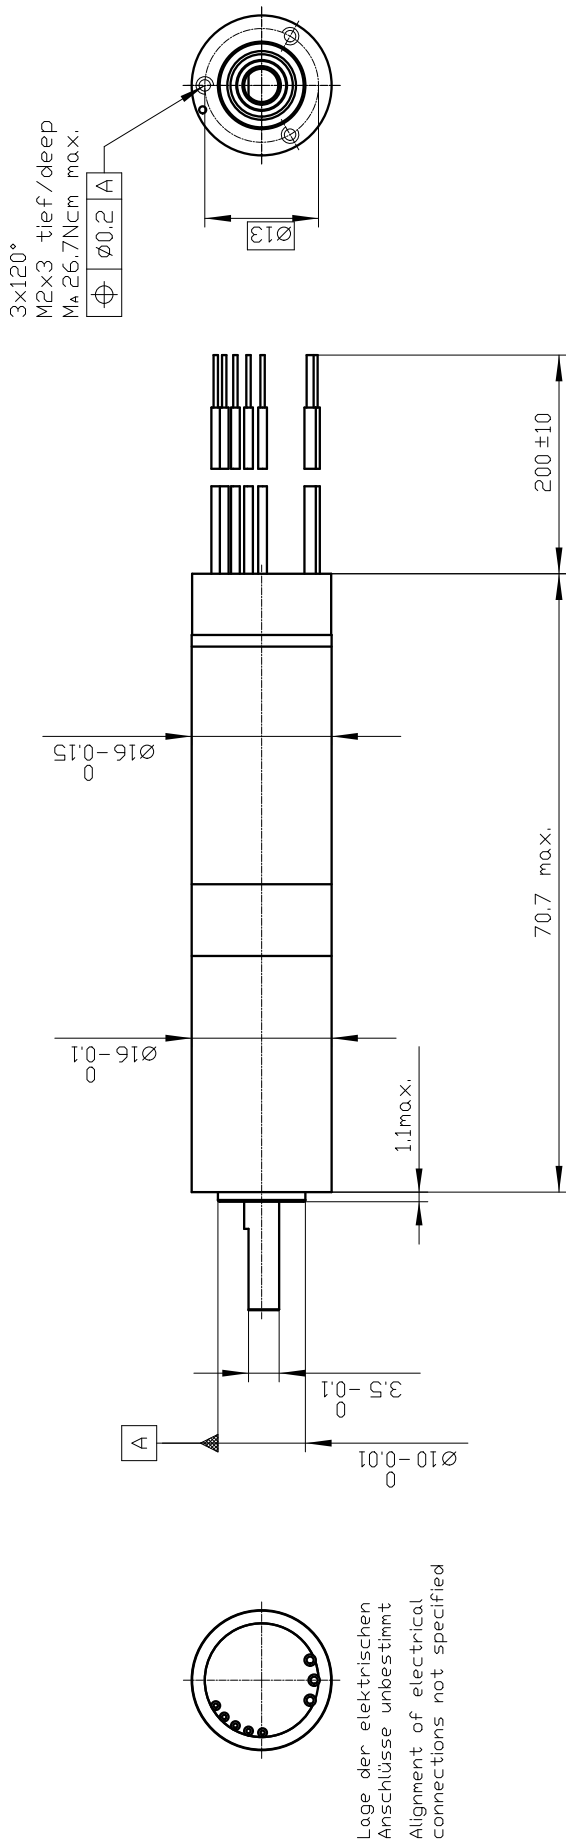



## Motor (Cable type: AWG22)

Red	Motor 1
Black	Motor 2
White	Motor 3

## Hall-Sensor (Cable type: AWG26)

Orange	$V_{\text{hall}}$ 3...24V
Blue	GND
Yellow	Hall-Sensor 1
Brown	Hall-Sensor 2
Gray	Hall-Sensor 3

## Summary of your selected configuration

Total weight of the drive: 105.6 g

### ECXSP16M BL KL A STD 24V

#### Product detail

Commutation	With Hall sensors
Nominal voltage	24 V
Motor bearings	Preloaded ball bearing
Version	Standard

### GPX16 SP STE 44:1


#### Product detail

Reduction	44
Number of stages	2

## Legend for part designation

EB	Precious metal brushes	GB	Graphite brushes	CLL	Spark suppression	BL	Brushless
A	Hall sensors	B	Sensorless	KL	Ball bearings	SL	Sintered bearings
GPX	Planetary gearhead	ENX	Encoder	ENC	Encoder	IMP	Pulses
ST	Number of stages	HP	High Power	S/M/L	Short/medium/long	HS	High Speed
STE	Sterilizable	INT	Integ.	STD	Standard	SP	Speed
ABS	Absolute	LN	Reduced noise level	A	Standard	LZ	Reduced backlash
C	Ceramic bearing			STEC	Sterilizable, Ceramic bearing		

Selected operating point

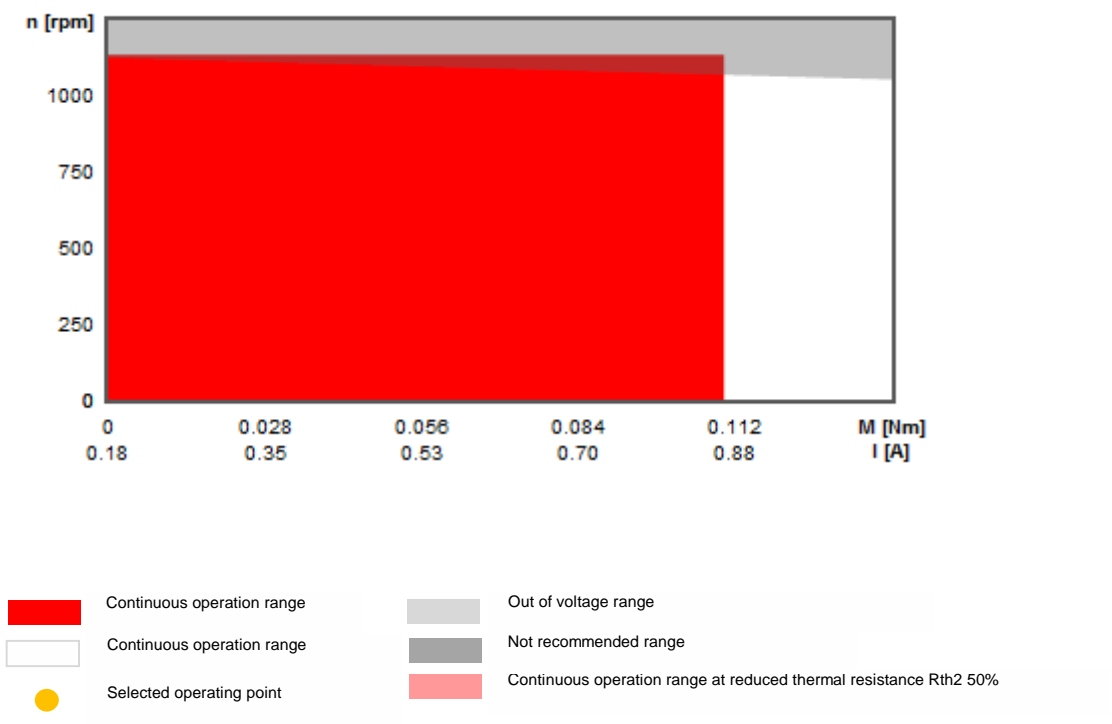

## ECXSP16M BL KL A STD 24V



### Product specification

#### Values at nominal voltage

Nominal voltage	24 V
No load speed	49600 min <sup>-1</sup>
No load current	177 mA
Nominal speed	45300 min <sup>-1</sup>
Nominal torque (max. continuous torque)	4.93 mNm
Nominal current (max. continuous current)	1.24 A
Stall torque	63.2 mNm
Stall current	13.9 A
Max. efficiency	79.1 %

#### Characteristics

Max. output power continuous	23.5 W
Terminal resistance phase-to-phase	1.73 Ω
Terminal inductance phase-to-phase	0.0893 mH
Torque constant	4.55 mNm A <sup>-1</sup>
Speed constant	2100 min <sup>-1</sup> V <sup>-1</sup>
Speed/torque gradient	797 min <sup>-1</sup> mNm <sup>-1</sup>
Mechanical time constant	6.73 ms
Rotor inertia	0.806 gcm <sup>2</sup>

#### Thermal data

Thermal resistance housing-ambient	20.3 KW <sup>-1</sup>
Thermal resistance winding-housing	1.52 KW <sup>-1</sup>
Thermal time constant of the winding	1.83 s
Thermal time constant of the motor	508 s
Ambient temperature	-20...100 °C
Max. winding temperature	125 °C

#### Mechanical data

Max. permissible speed	55000 min <sup>-1</sup>
Axial play	0...0.29 mm
Preload	1.5 N
Direction of force	Zug
Radial backlash	0 mm
Max. axial load (dynamic)	1.5 N

Max. force for press fits (static)	60 N
Static, supported shaft	2500 N
Max. radial load 5 mm from flange	10 N
Measurement from the flange	5 mm

## Further specifications

Number of pole pairs	1
Number of phases	3
Typical noise level	50 dBA (50000 min <sup>-1</sup> )
Typical noise level at reference speed	50000 min <sup>-1</sup>
Number of autoclave cycles	0

Information about motor data. [https://www.maxongroup.com/medias/CMS\\_Downloads/DIVERSES/12\\_137\\_EN.pdf](https://www.maxongroup.com/medias/CMS_Downloads/DIVERSES/12_137_EN.pdf)

## GPX16 SP STE 44:1



### Product specification

#### Gearhead data

Reduction	44:1
Absolute reduction	4356/100
Number of stages	2
Max. continuous torque	0.11 Nm
Max. intermittent torque	0.14 Nm
Direction of rotation, drive to output	=
Max. efficiency	80 %
Average backlash no-load	1.6 °
Mass inertia	0.014 gmc <sup>2</sup>
Max. transmittable power (continuous)	21 W
Max. short-time transferable output	25 W

#### Technical data

Output shaft bearing	Wälzlager
Max. radial play, 5 mm from flange	max. 0.1 mm
Axial play	0...0.1 mm
Max. permissible radial load, 5 mm from flange	35 N
Max. permissible axial load	30 N
Max. permissible force for press fits	100 N
Max. continuous input speed	50000 min <sup>-1</sup>
Max. intermittent input speed	70000 min <sup>-1</sup>
Recommended temperature range	-10..135 °C

Information about gearhead data: [https://www.maxongroup.com/medias/CMS\\_Downloads/DIVERSES/12\\_203\\_EN.pdf](https://www.maxongroup.com/medias/CMS_Downloads/DIVERSES/12_203_EN.pdf)

## ESCON Module 24/2



### Product specification

#### Motor

DC motors up to	48 W
EC motors up to	48 W

#### Sensor

Without sensor (DC motors)	Yes
Sensorless (EC motors)	
Digital incremental encoder (2-channel, single-ended)	Yes
Digital incremental encoder (2-channel, differential)	Yes
Digital incremental encoder (3-channel, differential)	Yes
Digital Hall sensors (EC motors)	Yes
SSI absolute encoder	
Analog incremental encoder (2-channel, differential)	

#### Operating modes

Current controller	Yes
Speed controller (open loop)	Yes
Speed controller (closed loop)	Yes
Positioning controller	

#### Electrical data

Operating voltage VCC	10..24 VDC
Logic supply voltage VC optional	.. VDC
Max. output voltage (factor * VCC)	0.98 *
Max. output current I <sub>max</sub>	6 A
Max. duration of peak output current I <sub>max</sub>	4 s
Continuous output current I <sub>cont</sub>	2 A
Switching frequency of the power stage	53.6 kHz
Sampling rate, PI current controller	53.6 kHz
Sampling rate, PI speed controller (closed loop)	5.36 kHz
Sampling rate, PID positioning controller	kHz
Max. efficiency	92 %
Max. speed (DC motors)	150000 min <sup>-1</sup>
Max. speed (1 pole pair), block commutation	150000 min <sup>-1</sup>
Max. speed (1 pole pair), sinusoidal commutation	min <sup>-1</sup>
Built-in motor choke per phase	μH

#### Inputs

Hall sensor signals	H1, H2, H3
Encoder signals	A, A\, B, B\
Max. encoder input frequency	1 MHz
Digitale Eingänge	2



Functionality of digital inputs	Enable, enable CW, enable CCW, enable CW+CCW, enable + direction of rotation, stop, PWM set value, RC Servo set value, fixed set value
Analog inputs	2
Resolution, range, circuit	12-bit, -10...+10V, differential
Functionality of inputs	Set value, current limit, offset, speed ramp
Potentiometers	
Functionality of the potentiometers	
DIP switch	
Functionality of the DIP switch	
<b>Outputs</b>	
Digital outputs	2
Functionality of digital outputs	ready, speed comparator, current comparator, commutation frequency
Analog outputs	2
Resolution, range	12-bit, -4...+4V
Functionality of analog outputs	current monitor, speed monitor, temperature, fixed value
<b>Voltage outputs</b>	
Hall sensor supply voltage	+5 VDC, max. 30 mA
Encoder supply voltage	+5 VDC, max. 70 mA
Auxiliary output voltage	+5 VDC, max. 10 mA
Output voltage (reference)	
<b>Ambient conditions</b>	
Temperature – operation	-30.. 60 °C
Temperature – storage	-40 .. 85 °C
Temperature – extended range	+60...+80 °C, Derating: -0.1 A/°C
Humidity (non-condensing)	5 .. %
<b>Mechanical data</b>	
Weight	7 g
Dimensions (L x W x H)	35.6 x 26.7 x 12.7 mm
Mounting	mountable on socket terminal strips pitch 2.54 mm

# C Code for STM32 NUCLEO 64 board

## C.1 Main

```

1  /* USER CODE BEGIN Header */
2  /**
3   * *****
4   * @file      : main.h
5   * @brief     : Header for main.c file.
6   *           : This file contains the common defines of the application.
7   * *****
8   * @attention
9   *
10 * <h2><center>&copy; Copyright (c) 2019 STMicroelectronics.
11 * All rights reserved.</center></h2>
12 *
13 * This software component is licensed by ST under BSD 3–Clause license,
14 * the "License"; You may not use this file except in compliance with the
15 * License. You may obtain a copy of the License at:
16 *           : opensource.org/licenses/BSD-3–Clause
17 *
18 * *****
19 */
20 /* USER CODE END Header */
21
22 /* Define to prevent recursive inclusion ----- */
23 #ifndef __MAIN_H
24 #define __MAIN_H
25
26 #ifdef __cplusplus
27 extern "C" {
28 #endif
29
30 /* Includes
31 ----- */
32 #include "stm32l4xx_hal.h"
33
34 /* Private includes
35 ----- */
36 /* USER CODE BEGIN Includes */
37 #include "mouseDriver.h"
38 #include "mavlink.h"
39 /* USER CODE END Includes */
40
41 /* Exported types
42 ----- */
43
44 /* USER CODE BEGIN ET */
45 /**
46 * A structure to represent one sensor
47 */
48 typedef struct SENSOR{
49     /*@{*/
50     GPIO_TypeDef * cs_port; /**< the chip select port for the sensor */
51     uint8_t cs_pin; /**< the chip select pin for the sensor */
52     GPIO_TypeDef * pw_port; /**< the power port for the sensor */
53     uint8_t pw_pin; /**< the power pin for the sensor */
54     uint8_t status; /**< the sensor status. This is the SROM_ID after the upload of the
55     firmware. This value should not be 0 otherwise the upload of the SROM is failed. */
56     /*@}*/

```

```

53 } sensor_t;
54 /* USER CODE END ET */
55
56 /* Exported constants
   -----*/
57 /* USER CODE BEGIN EC */
58
59 /* USER CODE END EC */
60
61 /* Exported macro
   -----*/
62 /* USER CODE BEGIN EM */
63
64 /* USER CODE END EM */
65
66 void HAL_TIM_MspPostInit(TIM_HandleTypeDef *htim);
67
68 /* Exported functions prototypes -----*/
69 void Error_Handler(void);
70
71 /* USER CODE BEGIN EFP */
72 /*!
73 \fn main_transmit_buffer(uint8_t *outBuffer, uint16_t msg_size)
74 \param outBuffer buffer to be transmitted over UART
75 \param msg_size size of the buffer
76 \brief This function sends the buffer using UART.
77
78 \attention The transmission is done using a DMA. Before sending a message
79 it is important to check that the previous one has been sent. This can be done
80 using \ref main_get_huart_tx_state .
81 */
82 void main_transmit_buffer(uint8_t *outBuffer, uint16_t msg_size);
83 /*!
84 \fn main_stop_motors()
85 \brief This function stops the motors
86
87 The PWM duty cycle is set to 0% for the two motors
88 \note The PWM duty cycle is represented by a uint type.
89 The min/max of that value are defined by how the timer is
90 setup in the microcontroller. The max value can be limited
91 by limitations in the motors or in the mechanical build of the
92 machine
93 */
94 void main_stop_motors(void);
95 /*!
96 \fn main_set_motors_speed(mavlink_motor_setpoint_t motor )
97 \param motor PWM duty cycle for the two motors
98 \brief This sets the motor duty cycle to one specified in the
99 motor parameter
100
101 The PWM duty cycle is set to 0% for the two motors
102 \note The PWM duty cycle is represented by a uint type.
103 The min/max of that value are defined by how the timer is
104 setup in the microcontroller. The max value can be limited
105 by limitations in the motors or in the mechanical build of the
106 machine
107 */
108 void main_set_motors_speed(mavlink_motor_setpoint_t motor );
109 /*!
110 \fn main_get_huart_tx_state()

```

```

111 \return the HAL_state of UART transmit
112 \brief Function used to verify if the channel for writing the buffer is available or busy.
113 */
114 int main_get_huart_tx_state(void);
115 /*!
116 \fn main_write_sensor(sensor_t sensor, uint8_t adress, uint8_t data)
117 \param sensor sensor to which we want to write
118 \param adress address of the register to be modified
119 \param data data to written in the given sensor and register
120 \brief This function writes a byte in a given register of a given sensor.
121
122 \note The writing is done by generating proper signals in the pins. For more details
123 on the sensor register and timing diagrams see resources/sensorDatasheet.pdf
124 */
125 void main_write_sensor (sensor_t sensor, uint8_t adress, uint8_t data);
126 /*!
127 \fn main_read_sensor(sensor_t sensor, uint8_t adress)
128 \param sensor sensor from which we want to read
129 \param adress address of the register to be read
130 \return the value in the given register and sensor
131 \brief This function reads a byte in a given register of a given sensor.
132
133 \note The reading is done by generating proper signals in the pins. For more details
134 on the sensor register and timing diagrams see resources/sensorDatasheet.pdf
135 */
136 uint8_t main_read_sensor (sensor_t sensor, uint8_t adress );
137 /*!
138 \deprecated
139 \fn main_transmit_spi(uint8_t data)
140 \param data data to be transmitted on the spi2
141 \brief This function transmit one byte on the spi2
142 */
143 void main_transmit_spi(uint8_t data);
144 /*!
145 \fn main_wait_160us()
146 \brief function used to wait around 160 [us].
147 \note the wait is achieved by toggling the green LED.
148 */
149 void main_wait_160us(void);
150 /*!
151 \fn main_wait_20us()
152 \brief function used to wait around 20 [us].
153 \note the wait is achieved by toggling the green LED.
154 */
155 void main_wait_20us(void);
156 /*!
157 \fn main_write_sensor_burst(uint8_t data)
158 \param data by to be written during the burst
159 \brief function used during a write burst
160 \attention Use this function only during a burst write.
161 */
162 void main_write_sensor_burst(uint8_t data);
163 /*!
164 \fn main_read_sensor_motion_burst(uint8_t *data )
165 \param data pointer on a table of uint8_t used to store the
166 data read from a motion read burst
167 \brief function used to do a burst read for the motion read burst
168 as specified in resources/resources/sensorDatasheet.pdf
169
170 \attention Use this function only during a motion read burst.

```

```

171 \note The data received from the motion read burst are raw datas and have
172 to be treated to obtain meaningfull values and verify that the sensor is not
173 lifted and the surface quality is good enough to consider the measure as valid.
174 */
175 void main_read_sensor_motion_burst(uint8_t *data );
176 /*
177  * PW_0 is power pin for sensor X (PB_0)
178  * PW_1 is the power pin for sensor Y (PA_4)
179  * CS_0 is the chip select for sensor X (PC_0)
180  * CS_1 is the chip select for sensor Y (PC_1)
181  */
182
183 /* USER CODE END EFP */
184
185 /* Private defines
186  -----*/
187 #define DT_HEART 200
188 #define PRESCALER_HEART 1000
189 #define CLOCK_FREQ 8000000
190 #define COUNTER_PERIOD_HEART ((CLOCK_FREQ/(PRESCALER_HEART))*0.001*DT_HEART)
191 #define PRESCALER_PWM 1000
192 #define COUNTER_PERIOD_PWM 255
193 #define PULSE_PWM 10
194 #define B1_Pin GPIO_PIN_13
195 #define B1_GPIO_Port GPIOC
196 #define CS_0_Pin GPIO_PIN_0
197 #define CS_0_GPIO_Port GPIOC
198 #define CS_1_Pin GPIO_PIN_1
199 #define CS_1_GPIO_Port GPIOC
200 #define USART_TX_Pin GPIO_PIN_2
201 #define USART_TX_GPIO_Port GPIOA
202 #define USART_RX_Pin GPIO_PIN_3
203 #define USART_RX_GPIO_Port GPIOA
204 #define PW_1_Pin GPIO_PIN_4
205 #define PW_1_GPIO_Port GPIOA
206 #define LD2_Pin GPIO_PIN_5
207 #define LD2_GPIO_Port GPIOA
208 #define PW_0_Pin GPIO_PIN_0
209 #define PW_0_GPIO_Port GPIOB
210 #define TMS_Pin GPIO_PIN_13
211 #define TMS_GPIO_Port GPIOA
212 #define TCK_Pin GPIO_PIN_14
213 #define TCK_GPIO_Port GPIOA
214 #define SWO_Pin GPIO_PIN_3
215 #define SWO_GPIO_Port GPIOB
216
217 /* USER CODE END Private defines */
218
219 #ifdef __cplusplus
220 }
221 #endif
222
223 #endif /* __MAIN_H */
224
225 /***** (C) COPYRIGHT STMicroelectronics *****/
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

```

```

5  * @brief      : Main program body
6  ****
7  * @attention
8  *
9  * <h2><center>&copy; Copyright (c) 2019 STMicroelectronics.
10 * All rights reserved.</center></h2>
11 *
12 * This software component is licensed by ST under BSD 3–Clause license,
13 * the "License"; You may not use this file except in compliance with the
14 * License. You may obtain a copy of the License at:
15 *      opensource.org/licenses/BSD-3–Clause
16 *
17 ****
18 */
19 /* USER CODE END Header */
20
21 /* Includes
   -----
   */
22 #include "main.h"
23
24 /* Private includes
   -----*/
25 /* USER CODE BEGIN Includes */
26
27 /* USER CODE END Includes */
28
29 /* Private typedef
   -----*/
30 /* USER CODE BEGIN PTD */
31
32 /* USER CODE END PTD */
33
34 /* Private define
   -----*/
35 /* USER CODE BEGIN PD */
36 /*!
37 \def TIMEOUT
38 \brief Constant used as timeout in ms.
39 \deprecated Using DMA makes the transfer free from the processor, thus the
40 TIMEOUT never appens.
41 */
42 #define TIMEOUT 2
43 /* USER CODE END PD */
44
45 /* Private macro
   -----*/
46 /* USER CODE BEGIN PM */
47
48 /* USER CODE END PM */
49
50 /* Private variables
   -----*/
51 SPI_HandleTypeDef hspi2;
52
53 TIM_HandleTypeDef htim1;
54 TIM_HandleTypeDef htim7;
55
56 UART_HandleTypeDef huart2;
57 DMA_HandleTypeDef hdma_usart2_tx;

```

```

58
59 /* USER CODE BEGIN PV */
60 /*!
61 \var inByte
62 \brief Buffer for one byte.
63
64 This is the buffer used to copy data form UART. When one byte is available it is stored in
65 inByte and then parsed using the mavlink_parse_char function. Everytime one
66 byte arrives the inByte variable is overwritten.
67 */
68 static uint8_t inByte = 0;
69 /* USER CODE END PV */
70
71 /* Private function prototypes -----
72 */
73 void SystemClock_Config(void);
74 static void MX_GPIO_Init(void);
75 static void MX_USART2_UART_Init(void);
76 static void MX_TIM7_Init(void);
77 static void MX_TIM1_Init(void);
78 static void MX_DMA_Init(void);
79 static void MX_SPI2_Init(void);
80 /* USER CODE BEGIN PFP */
81 void main_wait_160us(void){
82     int i = 0;
83     i = 0;
84     while(i<900){
85         HAL_GPIO_TogglePin(GPIOA, GPIO_PIN_5);
86         i++;
87     }
88 }
89 void main_wait_20us(void){
90     int i = 0;
91     i = 0;
92     while(i<185){
93         HAL_GPIO_TogglePin(GPIOA, GPIO_PIN_5);
94         i++;
95     }
96 }
97 /*!
98 \fn main_wait_1us(void)
99 \brief Function for waiting approximately one microsecond
100 */
101 void main_wait_1us(void){
102     int i = 0;
103     i = 0;
104     while(i<25){
105         HAL_GPIO_TogglePin(GPIOA, GPIO_PIN_5);
106         i++;
107     }
108 }
109 int main_get_huart_tx_state(void){
110     return (HAL_DMA_GetState(&hdma_usart2_tx));
111 }
112 void main_transmit_buffer(uint8_t *outBuffer, uint16_t msg_size){
113     HAL_UART_Transmit_DMA(&huart2, outBuffer,msg_size);
114 }
115 void main_stop_motors(void)
116 {
117     HAL_TIM_PWM_Stop(&htim1, TIM_CHANNEL_1);

```

```

117 HAL_TIM_PWM_Stop(&htim1, TIM_CHANNEL_2);
118 }
119 void main_set_motors_speed(mavlink_motor_setpoint_t motor )
120 {
121
122     htim1.Instance->CCR1 = motor.motor_x;
123     htim1.Instance->CCR2 = motor.motor_y;
124
125     if (motor.motor_x == 0)
126         HAL_TIM_PWM_Stop(&htim1, TIM_CHANNEL_1);
127     else
128         HAL_TIM_PWM_Start(&htim1, TIM_CHANNEL_1);
129
130     if (motor.motor_y == 0)
131         HAL_TIM_PWM_Stop(&htim1, TIM_CHANNEL_2);
132     else
133         HAL_TIM_PWM_Start(&htim1, TIM_CHANNEL_2);
134 }
135
136 uint8_t main_read_sensor (const sensor_t sensor, uint8_t address ){
137     uint8_t value = 0;
138     uint8_t address_read = address & 0x7F;
139
140     HAL_GPIO_WritePin(sensor.cs_port, sensor.cs_pin, GPIO_PIN_RESET);
141     HAL_SPI_Transmit(&hspi2, &address_read, 1, 100);
142     main_wait_160us();
143     HAL_SPI_Receive(&hspi2, &value, 1, 100);
144     main_wait_1us();
145     HAL_GPIO_WritePin(sensor.cs_port, sensor.cs_pin, GPIO_PIN_SET);
146     main_wait_20us();
147     return (value);
148 }
149
150 void main_write_sensor (const sensor_t sensor, uint8_t address, uint8_t data){
151     uint8_t value = data;
152     uint8_t address_write = address | 0x80;
153     uint8_t pack[2];
154     pack[0] = address_write;
155     pack[1] = value;
156
157     HAL_GPIO_WritePin(sensor.cs_port, sensor.cs_pin, GPIO_PIN_RESET);
158     HAL_SPI_Transmit(&hspi2, pack, 2, 10);
159     main_wait_20us();
160     HAL_GPIO_WritePin(sensor.cs_port, sensor.cs_pin, GPIO_PIN_SET);
161     main_wait_160us();
162     main_wait_20us();
163 }
164 void main_write_sensor_burst(uint8_t data){
165     HAL_SPI_Transmit(&hspi2, &data, 1, 10);
166     main_wait_20us();
167 }
168 void main_read_sensor_motion_burst(uint8_t *data ){
169     HAL_SPI_Receive(&hspi2, data, 12, 100);
170     main_wait_1us();
171 }
172 void main_transmit_spi(uint8_t data){
173     uint8_t data_out = data;
174     HAL_SPI_Transmit(&hspi2, &data_out, 1, 10);
175 }
176 /* USER CODE END PFP */

```



```

177
178 /* Private user code
    -----*/
179 /* USER CODE BEGIN 0 */
180 /*!
181 \fn TM7_IRQHandler(void)
182 \brief Handle for IRQ of Timer 7
183
184 Timer 7 is used to generate a periodic interrupt to send status messages.
185 Those messages give information about the status of the system and are sent periodically.
186 The messages giving more important information such as the speed of the ball are sent
187 as fast as possible, which means faster than the status messages.
188 */
189 void TM7_IRQHandler(void){
190     HAL_TIM_IRQHandler(&htim7);
191 }
192
193 /*!
194 \fn HAL_UART_RxCpltCallback(UART_HandleTypeDef *huart)
195 \param huart pointer on huart structure (as defined in the HAL library)
196 \brief Function called everytime a new byte is available from UART communication
197
198 This function is used to receive data from UART communication. Everytime one byte is
199 received by the STM32 it is copied in the \ref inByte and then passed to the mavlink_parse_char
200 function. Once enough byte are taken and one message is received the function
201 \ref mouseDriver_readMsg is called and a subsequent action is taken.
202 */
203 void HAL_UART_RxCpltCallback(UART_HandleTypeDef *huart){
204     HAL_NVIC_DisableIRQ(USART2_IRQn);
205     mavlink_message_t inmsg;
206     mavlink_status_t msgStatus;
207     if (huart->Instance == USART2){
208         /* Receive one byte in interrupt mode */
209         HAL_UART_Receive_IT(&huart2, &inByte, 1);
210         if(mavlink_parse_char(0, inByte, &inmsg, &msgStatus)){
211
212             mouseDriver_readMsg(inmsg);
213         }
214     }
215     HAL_NVIC_EnableIRQ(USART2_IRQn);
216 }
217
218 /*!
219 \fn HAL_TIM_PeriodElapsedCallback(TIM_HandleTypeDef *htim)
220 \param htim pointer on timer structure (as defined in the HAL library)
221 \brief Function called everytime a certain time is elapsed
222
223 This function is used to send periodically some status information to the PC.
224 */
225 void HAL_TIM_PeriodElapsedCallback(TIM_HandleTypeDef *htim){
226     if (htim->Instance==TIM7){
227         mouseDriver_send_status_msg();
228     }
229 }
230 /* USER CODE END 0 */
231
232 /**
233  * @brief The application entry point.
234  * @retval int
235  */

```

```

236 int main(void)
237 {
238     /* USER CODE BEGIN 1 */
239
240     /* USER CODE END 1 */
241
242
243     /* MCU Configuration
     -----*/
244
245     /* Reset of all peripherals, Initializes the Flash interface and the Systick. */
246     HAL_Init();
247
248     /* USER CODE BEGIN Init */
249
250     /* USER CODE END Init */
251
252     /* Configure the system clock */
253     SystemClock_Config();
254
255     /* USER CODE BEGIN SysInit */
256
257     /* USER CODE END SysInit */
258
259     /* Initialize all configured peripherals */
260     MX_GPIO_Init();
261     MX_USART2_UART_Init();
262     MX_TIM7_Init();
263     MX_TIM1_Init();
264     MX_DMA_Init();
265     MX_SPI2_Init();
266     /* USER CODE BEGIN 2 */
267     HAL_InitTick(0);
268     HAL_NVIC_SetPriority(USART2_IRQn,1,0);
269     HAL_NVIC_EnableIRQ(USART2_IRQn);
270     HAL_NVIC_SetPriority(TIM7_IRQn,2,0);
271     HAL_NVIC_EnableIRQ(TIM7_IRQn);
272     HAL_GPIO_WritePin(GPIOC, CS_0_Pin|CS_1_Pin, GPIO_PIN_SET);
273
274     HAL_UART_Receive_IT(&huart2, &inByte, 1);
275     HAL_TIM_Base_Start_IT(&htim7);
276     HAL_GPIO_WritePin(GPIOC, GPIO_PIN_0, GPIO_PIN_SET);
277
278     mouseDriver_init();
279
280     /* USER CODE END 2 */
281
282     /* Infinite loop */
283     /* USER CODE BEGIN WHILE */
284
285     while (1)
286     {
287         mouseDriver_idle();
288         /* USER CODE END WHILE */
289
290         /* USER CODE BEGIN 3 */
291     }
292     /* USER CODE END 3 */
293 }
294

```

```

295 /**
296  * @brief System Clock Configuration
297  * @retval None
298  */
299 void SystemClock_Config(void)
300 {
301     RCC_OscInitTypeDef RCC_OscInitStruct = {0};
302     RCC_ClkInitTypeDef RCC_ClkInitStruct = {0};
303     RCC_PeriphCLKInitTypeDef PeriphClkInit = {0};
304
305     /** Initializes the CPU, AHB and APB busses clocks
306     */
307     RCC_OscInitStruct.OscillatorType = RCC_OSCILLATORTYPE_HSI;
308     RCC_OscInitStruct.HSISState = RCC_HSI_ON;
309     RCC_OscInitStruct.HSICalibrationValue = RCC_HSICALIBRATION_DEFAULT;
310     RCC_OscInitStruct.PLL.PLLState = RCC_PLL_ON;
311     RCC_OscInitStruct.PLL.PLLSource = RCC_PLLSOURCE_HSI;
312     RCC_OscInitStruct.PLL.PLLM = 1;
313     RCC_OscInitStruct.PLL.PLLN = 10;
314     RCC_OscInitStruct.PLL.PLLP = RCC_PLLP_DIV7;
315     RCC_OscInitStruct.PLL.PLLQ = RCC_PLLQ_DIV2;
316     RCC_OscInitStruct.PLL.PLLR = RCC_PLLR_DIV2;
317     if (HAL_RCC_OscConfig(&RCC_OscInitStruct) != HAL_OK)
318     {
319         Error_Handler();
320     }
321     /** Initializes the CPU, AHB and APB busses clocks
322     */
323     RCC_ClkInitStruct.ClockType = RCC_CLOCKTYPE_HCLK|RCC_CLOCKTYPE_SYSCLK
324                                   |RCC_CLOCKTYPE_PCLK1|RCC_CLOCKTYPE_PCLK2;
325     RCC_ClkInitStruct.SYSCLKSource = RCC_SYSCLKSOURCE_PLLCLK;
326     RCC_ClkInitStruct.AHBCLKDivider = RCC_SYSCLK_DIV1;
327     RCC_ClkInitStruct.APB1CLKDivider = RCC_HCLK_DIV1;
328     RCC_ClkInitStruct.APB2CLKDivider = RCC_HCLK_DIV1;
329
330     if (HAL_RCC_ClockConfig(&RCC_ClkInitStruct, FLASH_LATENCY_4) != HAL_OK)
331     {
332         Error_Handler();
333     }
334     PeriphClkInit.PeriphClockSelection = RCC_PERIPHCLK_USART2;
335     PeriphClkInit.Usart2ClockSelection = RCC_USART2CLKSOURCE_PCLK1;
336     if (HAL_RCCEx_PeriphCLKConfig(&PeriphClkInit) != HAL_OK)
337     {
338         Error_Handler();
339     }
340     /** Configure the main internal regulator output voltage
341     */
342     if (HAL_PWREx_ControlVoltageScaling(PWR_REGULATOR_VOLTAGE_SCALE1) != HAL_OK)
343     {
344         Error_Handler();
345     }
346 }
347
348 /**
349  * @brief SPI2 Initialization Function
350  * @param None
351  * @retval None
352  */
353 static void MX_SPI2_Init(void)
354 {

```

```

355
356 /* USER CODE BEGIN SPI2_Init 0 */
357 HAL_GPIO_DeInit(GPIOC, GPIO_PIN_3);
358
359 /*GPIO_InitTypeDef pin;
360 pin.Pin = GPIO_PIN_3;
361 pin.Mode = GPIO_MODE_OUTPUT_PP;
362 pin.Pull = GPIO_PULLDOWN;
363 pin.Speed = GPIO_SPEED_MEDIUM;
364 HAL_GPIO_Init(GPIOC, &pin);
365 HAL_GPIO_WritePin(GPIOC,GPIO_PIN_3, GPIO_PIN_RESET);*/
366
367 __HAL_RCC_SPI2_CLK_ENABLE();
368 __SPI2_CLK_ENABLE();
369 /* USER CODE END SPI2_Init 0 */
370
371 /* USER CODE BEGIN SPI2_Init 1 */
372
373 /* USER CODE END SPI2_Init 1 */
374 /* SPI2 parameter configuration*/
375 hspi2.Instance = SPI2;
376 hspi2.Init.Mode = SPI_MODE_MASTER;
377 hspi2.Init.Direction = SPI_DIRECTION_2LINES;
378 hspi2.Init.DataSize = SPI_DATASIZE_8BIT;
379 hspi2.Init.CLKPolarity = SPI_POLARITY_HIGH;
380 hspi2.Init.CLKPhase = SPI_PHASE_2EDGE;
381 hspi2.Init.NSS = SPI_NSS_SOFT;
382 hspi2.Init.BaudRatePrescaler = SPI_BAUDRATEPRESCALER_256;
383 hspi2.Init.FirstBit = SPI_FIRSTBIT_MSB;
384 hspi2.Init.TIMode = SPI_TIMODE_DISABLE;
385 hspi2.Init.CRCCalculation = SPI_CRCCALCULATION_DISABLE;
386 hspi2.Init.CRCPolynomial = 7;
387 hspi2.Init.CRCLength = SPI_CRC_LENGTH_DATASIZE;
388 hspi2.Init.NSSPMode = SPI_NSS_PULSE_DISABLE;
389 if (HAL_SPI_Init(&hspi2) != HAL_OK)
390 {
391     Error_Handler();
392 }
393 /* USER CODE BEGIN SPI2_Init 2 */
394
395
396 /* USER CODE END SPI2_Init 2 */
397
398 }
399
400 /**
401  * @brief TIM1 Initialization Function
402  * @param None
403  * @retval None
404  */
405 static void MX_TIM1_Init(void)
406 {
407
408     /* USER CODE BEGIN TIM1_Init 0 */
409
410     /* USER CODE END TIM1_Init 0 */
411
412     TIM_ClockConfigTypeDef sClockSourceConfig = {0};
413     TIM_MasterConfigTypeDef sMasterConfig = {0};
414     TIM_OC_InitTypeDef sConfigOC = {0};

```

```

415 TIM_BreakDeadTimeConfigTypeDef sBreakDeadTimeConfig = {0};
416
417 /* USER CODE BEGIN TIM1_Init 1 */
418
419 /* USER CODE END TIM1_Init 1 */
420 htim1.Instance = TIM1;
421 htim1.Init.Prescaler = PRESCALER_PWM;
422 htim1.Init.CounterMode = TIM_COUNTERMODE_UP;
423 htim1.Init.Period = COUNTER_PERIOD_PWM;
424 htim1.Init.ClockDivision = TIM_CLOCKDIVISION_DIV1;
425 htim1.Init.RepetitionCounter = 0;
426 htim1.Init.AutoReloadPreload = TIM_AUTORELOAD_PRELOAD_DISABLE;
427 if (HAL_TIM_Base_Init(&htim1) != HAL_OK)
428 {
429     Error_Handler();
430 }
431 sClockSourceConfig.ClockSource = TIM_CLOCKSOURCE_INTERNAL;
432 if (HAL_TIM_ConfigClockSource(&htim1, &sClockSourceConfig) != HAL_OK)
433 {
434     Error_Handler();
435 }
436 if (HAL_TIM_PWM_Init(&htim1) != HAL_OK)
437 {
438     Error_Handler();
439 }
440 sMasterConfig.MasterOutputTrigger = TIM_TRGO_RESET;
441 sMasterConfig.MasterOutputTrigger2 = TIM_TRGO2_RESET;
442 sMasterConfig.MasterSlaveMode = TIM_MASTERSLAVEMODE_DISABLE;
443 if (HAL_TIMEx_MasterConfigSynchronization(&htim1, &sMasterConfig) != HAL_OK)
444 {
445     Error_Handler();
446 }
447 sConfigOC.OCMode = TIM_OCMODE_PWM1;
448 sConfigOC.Pulse = PULSE_PWM;
449 sConfigOC.OCpolarity = TIM_OCPOLARITY_HIGH;
450 sConfigOC.OCNPolarity = TIM_OCNPOLARITY_HIGH;
451 sConfigOC.OCFastMode = TIM_OCFAST_DISABLE;
452 sConfigOC.OCIdleState = TIM_OCIDLESTATE_RESET;
453 sConfigOC.OCNIdleState = TIM_OCNIDLESTATE_RESET;
454 if (HAL_TIM_PWM_ConfigChannel(&htim1, &sConfigOC, TIM_CHANNEL_1) != HAL_OK)
455 {
456     Error_Handler();
457 }
458 if (HAL_TIM_PWM_ConfigChannel(&htim1, &sConfigOC, TIM_CHANNEL_2) != HAL_OK)
459 {
460     Error_Handler();
461 }
462 sBreakDeadTimeConfig.OffStateRunMode = TIM_OSSR_DISABLE;
463 sBreakDeadTimeConfig.OffStateIDLEMode = TIM_OSSI_DISABLE;
464 sBreakDeadTimeConfig.LockLevel = TIM_LOCKLEVEL_OFF;
465 sBreakDeadTimeConfig.DeadTime = 0;
466 sBreakDeadTimeConfig.BreakState = TIM_BREAK_DISABLE;
467 sBreakDeadTimeConfig.BreakPolarity = TIM_BREAKPOLARITY_HIGH;
468 sBreakDeadTimeConfig.BreakFilter = 0;
469 sBreakDeadTimeConfig.Break2State = TIM_BREAK2_DISABLE;
470 sBreakDeadTimeConfig.Break2Polarity = TIM_BREAK2POLARITY_HIGH;
471 sBreakDeadTimeConfig.Break2Filter = 0;
472 sBreakDeadTimeConfigAutomaticOutput = TIM_AUTOMATICOUTPUT_DISABLE;
473 if (HAL_TIMEx_ConfigBreakDeadTime(&htim1, &sBreakDeadTimeConfig) != HAL_OK)
474 {

```

```

475     Error_Handler();
476 }
477 /* USER CODE BEGIN TIM1_Init 2 */
478
479 /* USER CODE END TIM1_Init 2 */
480 HAL_TIM_MspPostInit(&htim1);
481
482 }
483
484 /**
485  * @brief TIM7 Initialization Function
486  * @param None
487  * @retval None
488  */
489 static void MX_TIM7_Init(void)
490 {
491
492     /* USER CODE BEGIN TIM7_Init 0 */
493
494     /* USER CODE END TIM7_Init 0 */
495
496     TIM_MasterConfigTypeDef sMasterConfig = {0};
497
498     /* USER CODE BEGIN TIM7_Init 1 */
499
500     /* USER CODE END TIM7_Init 1 */
501     htim7.Instance = TIM7;
502     htim7.Init.Prescaler = PRESCALER_HEART;
503     htim7.Init.CounterMode = TIM_COUNTERMODE_UP;
504     htim7.Init.Period = COUNTER_PERIOD_HEART;
505     htim7.Init.AutoReloadPreload = TIM_AUTORELOAD_PRELOAD_DISABLE;
506     if (HAL_TIM_Base_Init(&htim7) != HAL_OK)
507     {
508         Error_Handler();
509     }
510     sMasterConfig.MasterOutputTrigger = TIM_TRGO_RESET;
511     sMasterConfig.MasterSlaveMode = TIM_MASTERSLAVEMODE_DISABLE;
512     if (HAL_TIMEx_MasterConfigSynchronization(&htim7, &sMasterConfig) != HAL_OK)
513     {
514         Error_Handler();
515     }
516     /* USER CODE BEGIN TIM7_Init 2 */
517
518     /* USER CODE END TIM7_Init 2 */
519
520 }
521
522 /**
523  * @brief USART2 Initialization Function
524  * @param None
525  * @retval None
526  */
527 static void MX_USART2_UART_Init(void)
528 {
529
530     /* USER CODE BEGIN USART2_Init 0 */
531     /* DMA controller clock enable */
532     __DMA1_CLK_ENABLE();
533
534     /* Peripheral DMA init*/

```

```

535 hdma_usart2_tx.Init.Direction = DMA_MEMORY_TO_PERIPH;
536 hdma_usart2_tx.Init.PeriphInc = DMA_PINC_DISABLE;
537 hdma_usart2_tx.Init.MemInc = DMA_MINC_ENABLE;
538 hdma_usart2_tx.Init.PeriphDataAlignment = DMA_MDATAALIGN_BYTE;
539 hdma_usart2_tx.Init.MemDataAlignment = DMA_MDATAALIGN_BYTE;
540 hdma_usart2_tx.Init.Mode = DMA_NORMAL;
541 hdma_usart2_tx.Init.Priority = DMA_PRIORITY_LOW;
542 HAL_DMA_Init(&hdma_usart2_tx);
543
544 __HAL_LINKDMA(&huart2,hdmatx,hdma_usart2_tx);
545 /* USER CODE END USART2_Init 0 */
546
547 /* USER CODE BEGIN USART2_Init 1 */
548
549 /* USER CODE END USART2_Init 1 */
550 huart2.Instance = USART2;
551 huart2.Init.BaudRate = 230400;
552 huart2.Init.WordLength = UART_WORDLENGTH_8B;
553 huart2.Init.StopBits = UART_STOPBITS_1;
554 huart2.Init.Parity = UART_PARITY_NONE;
555 huart2.Init.Mode = UART_MODE_TX_RX;
556 huart2.Init.HwFlowCtl = UART_HWCONTROL_NONE;
557 huart2.Init.OverSampling = UART_OVERSAMPLING_16;
558 huart2.Init.OneBitSampling = UART_ONE_BIT_SAMPLE_DISABLE;
559 huart2.AdvancedInit.AdvFeatureInit = UART_ADVFEATURE_NO_INIT;
560 if (HAL_UART_Init(&huart2) != HAL_OK)
561 {
562     Error_Handler();
563 }
564 /* USER CODE BEGIN USART2_Init 2 */
565
566 /* USER CODE END USART2_Init 2 */
567
568 }
569
570 /**
571  * Enable DMA controller clock
572  */
573 static void MX_DMA_Init(void)
574 {
575
576     /* DMA controller clock enable */
577     __HAL_RCC_DMA1_CLK_ENABLE();
578
579     /* DMA interrupt init */
580     /* DMA1_Channel7_IRQn interrupt configuration */
581     HAL_NVIC_SetPriority(DMA1_Channel7_IRQn, 0, 0);
582     HAL_NVIC_EnableIRQ(DMA1_Channel7_IRQn);
583
584 }
585
586 /**
587  * @brief GPIO Initialization Function
588  * @param None
589  * @retval None
590  */
591 static void MX_GPIO_Init(void)
592 {
593     GPIO_InitTypeDef GPIO_InitStruct = {0};
594

```

```

595  /* GPIO Ports Clock Enable */
596  __HAL_RCC_GPIOC_CLK_ENABLE();
597  __HAL_RCC_GPIOH_CLK_ENABLE();
598  __HAL_RCC_GPIOA_CLK_ENABLE();
599  __HAL_RCC_GPIOB_CLK_ENABLE();
600
601  /*Configure GPIO pin Output Level */
602  HAL_GPIO_WritePin(GPIOC, CS_0_Pin|CS_1_Pin, GPIO_PIN_RESET);
603
604  /*Configure GPIO pin Output Level */
605  HAL_GPIO_WritePin(GPIOA, PW_1_Pin|LD2_Pin, GPIO_PIN_RESET);
606
607  /*Configure GPIO pin Output Level */
608  HAL_GPIO_WritePin(PW_0_GPIO_Port, PW_0_Pin, GPIO_PIN_RESET);
609
610  /*Configure GPIO pin : B1_Pin */
611  GPIO_InitStruct.Pin = B1_Pin;
612  GPIO_InitStruct.Mode = GPIO_MODE_IT_FALLING;
613  GPIO_InitStruct.Pull = GPIO_NOPULL;
614  HAL_GPIO_Init(B1_GPIO_Port, &GPIO_InitStruct);
615
616  /*Configure GPIO pins : CS_0_Pin CS_1_Pin */
617  GPIO_InitStruct.Pin = CS_0_Pin|CS_1_Pin;
618  GPIO_InitStruct.Mode = GPIO_MODE_OUTPUT_PP;
619  GPIO_InitStruct.Pull = GPIO_NOPULL;
620  GPIO_InitStruct.Speed = GPIO_SPEED_FREQ_LOW;
621  HAL_GPIO_Init(GPIOC, &GPIO_InitStruct);
622
623  /*Configure GPIO pins : PW_1_Pin LD2_Pin */
624  GPIO_InitStruct.Pin = PW_1_Pin|LD2_Pin;
625  GPIO_InitStruct.Mode = GPIO_MODE_OUTPUT_PP;
626  GPIO_InitStruct.Pull = GPIO_NOPULL;
627  GPIO_InitStruct.Speed = GPIO_SPEED_FREQ_LOW;
628  HAL_GPIO_Init(GPIOA, &GPIO_InitStruct);
629
630  /*Configure GPIO pin : PW_0_Pin */
631  GPIO_InitStruct.Pin = PW_0_Pin;
632  GPIO_InitStruct.Mode = GPIO_MODE_OUTPUT_PP;
633  GPIO_InitStruct.Pull = GPIO_NOPULL;
634  GPIO_InitStruct.Speed = GPIO_SPEED_FREQ_LOW;
635  HAL_GPIO_Init(PW_0_GPIO_Port, &GPIO_InitStruct);
636
637  }
638
639  /* USER CODE BEGIN 4 */
640
641  /* USER CODE END 4 */
642
643  /**
644   * @brief This function is executed in case of error occurrence.
645   * @retval None
646   */
647  void Error_Handler(void)
648  {
649      /* USER CODE BEGIN Error_Handler_Debug */
650      /* User can add his own implementation to report the HAL error return state */
651
652      /* USER CODE END Error_Handler_Debug */
653  }
654

```



```

655 #ifdef USE_FULL_ASSERT
656 /**
657  * @brief Reports the name of the source file and the source line number
658  *       where the assert_param error has occurred.
659  * @param file: pointer to the source file name
660  * @param line: assert_param error line source number
661  * @retval None
662  */
663 void assert_failed(char *file, uint32_t line)
664 {
665     /* USER CODE BEGIN 6 */
666     /* User can add his own implementation to report the file name and line number,
667        tex: printf("Wrong parameters value: file %s on line %d\r\n", file, line) */
668     /* USER CODE END 6 */
669 }
670 #endif /* USE_FULL_ASSERT */
671
672 /***** (C) COPYRIGHT STMicroelectronics *****END OF FILE*****/

```

## C.2 Treadmill driver

```

1  /*! \file mouseDriver.c
2  \brief Implementation of the driver for the mouse treadmill project.
3
4  \author Didier Negretto
5  */
6  #ifndef MOUSEDRIVER_C_
7  #define MOUSEDRIVER_C_
8
9  #ifndef TEST
10 #include "mouseDriver.h"
11 #else
12 #include "../test/test_mouseDriver.h"
13 #endif
14 /*!
15 \def K
16 \brief Proportional coefficient for motor control.
17 */
18 #define K 10
19 /*!
20 \def K
21 \brief Proportional coefficient for motor control.
22 */
23 #define I 10
24 /*!
25 \def I
26 \brief Integral coefficient for motor control.
27 */
28 #define MAX_MOTOR_SIGNAL 255
29 /*!
30 \def MAX_MOTOR_SIGNAL
31 \brief Max value for the motor signal
32 \attention This value is used to limit the motor speed. If this is changed the motors might break !!
33
34 This value limits the motor speed and thus is used to avoid spinning the motor too fast and break it.
35 If this value is changed the motor might spin too fast and destroy itself or the gear box. Extreme caution
36 needs to be taken if this value is modified.
37 */
38 #define MIN_MOTOR_SIGNAL 10
39 /*!
40 \def MIN_MOTOR_SIGNAL

```

```

41 \brief Min value for the motor signal. Any value lower than that will cause the motor to stop
42 */
43 #define MAX_MISSING_MEASURES 15
44 /*!
45 \def MAX_MISSING_MEASURES
46 \brief After MAX_MISSING_MEASURES non valid measures from sensors the motors are stopped and mode goes
47 to stop.
48 */
49 #ifndef TEST
50 /*!
51 \var actual_mode
52 \brief Global variable defining the mode of the machine
53
54 This value is updated based on the received messages. When a routine is running it is
55 only possible to stop the machine.
56 */
57 static uint8_t actual_mode = MOUSE_MODE_STOP;
58 /*!
59 \var actual_speed_measure
60 \brief Global variable for the measured speed
61
62 This value is updated based on sensor.
63 */
64 static mavlink_speed_info_t actual_speed_measure;
65 /*!
66 \var actual_speed_setpoint
67 \brief Global variable for the speed setpoint
68
69 This value is updated based on messages when the mode is set to SPEED.
70 */
71 static mavlink_speed_setpoint_t actual_speed_setpoint;
72 /*!
73 \var actual_motor_signal
74 \brief Global variable for the speed motor signal
75
76 This value is updated based on closed-loop control and the value provided in
77 \ref actual_speed_setpoint and \ref actual_speed_measure.
78 It is also possible to overwrite it by sending a mavlink_motor_setpoint_t message if the
79 mode is set to SPEED.
80 */
81 static mavlink_motor_setpoint_t actual_motor_signal;
82 /*!
83 \var points
84 \brief Global variable for storing the points to be followed in AUTO mode
85
86 The maximum amount of points is defined by \ref MAX_POINTS. This array is emptied after
87 every reset of the system. If not all the points are defined the routine is interrupted as
88 soon as a point with duration == 0 is detected.
89 */
90 static mavlink_point_t points[255];
91 /*!
92 \var actual_point
93 \brief Global variable for keeping track of the index in the \ref points array.
94 */
95 static uint8_t actual_point = 0;
96 /*!
97 \var actual_point_start_time
98 \brief Global variable for keeping track of the time when the last point in \ref points array started.
99 */
100 static uint32_t actual_point_start_time = 0;

```

```

101  /*!
102  \var actual_error
103  \brief Global variable to store and send the last error occurred
104  */
105  static mavlink_error_t actual_error;
106  /*!
107  \var actual_raw_sensor
108  \brief Global variable to store and send the row sensor values from X and Y sensors
109  */
110  static mavlink_raw_sensor_t actual_raw_sensor[2];
111  /*!
112  \var send_msg
113  \brief Flag for sending status messages. Those messages are sent with lower frequency.
114  */
115  static int send_msg = 1;
116  /*!
117  \fn mouseDriver_initSetpoint
118  \brief Function that initializes the setpoint to 0
119
120  This function modifies \ref actual_speed_setpoint by setting it to 0.
121  */
122  #endif
123  /*!
124  \fn mouseDriver_sendMsg(uint32_t msgid)
125  \param msgid is the ID of the message to be sent.
126  \brief Function that sends a message given its ID.
127  \attention This function can be called in interrupts with a priority lower than 0 (1,2,3,...),
128  otherwise the HAL_Delay() function stall and the STM32 crashes.
129
130  This function access global variables to send information to the computer.
131  Given one message ID the functions reads the information from a global variable and
132  sends it using the DMA as soon as the previous messages are sent.
133  */
134  void mouseDriver_sendMsg(uint32_t msgid);
135  /*!
136  \fn mouseDriver_initSetpoint
137  \brief Function that initializes the motor setpoint to 0.
138
139  This function initializes \ref actual_speed_setpoint.
140  */
141  void mouseDriver_initSetpoint(void);
142  /*!
143  \fn mouseDriver_initMode
144  \brief Function that initializes the mode to MOUSE_MODE_STOP
145
146  This function modifies \ref actual_mode by setting it to MOUSE_MODE_STOP.
147  */
148  void mouseDriver_initMode(void);
149  /*!
150  \fn mouseDriver_initPoints
151  \brief Function that initializes the routine points for AUTO mode to 0.
152
153  This function modifies \ref points by setting all their fields to 0.
154  */
155  void mouseDriver_initPoints(void); /*!
156  \fn mouseDriver_setMode(uint8_t mode)
157  \param mode is the mode in which the driver should be set.
158  \brief Function that sets the mode of the machine.
159
160  This functions modifies the mode of the machine. Not all transitions are possible,

```

```

161 this functions verifies that the transitions are lawful.
162 */
163 void mouseDriver_setMode(uint8_t mode);
164
165 /*!
166 \fn mouseDriver_initMotorSignal
167 \brief Function that initializes the motor signals to 0.
168
169 This function modifies \ref actual_motor_signal by setting all their fields to 0.
170 */
171 void mouseDriver_initMotorSignal(void);
172
173 void mouseDriver_initSetpoint(void){
174     actual_speed_setpoint.setpoint_x = 0;
175     actual_speed_setpoint.setpoint_y = 0;
176 }
177 void mouseDriver_initMode(void){
178     actual_mode = MOUSE_MODE_STOP;
179 }
180 void mouseDriver_initPoints(void){
181     for(int i=0; i<MAX_POINTS; i++){
182         points[i].duration = 0;
183         points[i].setpoint_x = 0;
184         points[i].setpoint_y = 0;
185         points[i].point_id = 0;
186     }
187     actual_point = 0;
188     actual_point_start_time = 0;
189 }
190 void mouseDriver_initMotorSignal(void){
191     actual_motor_signal.motor_x = 0;
192     actual_motor_signal.motor_y = 0;
193 }
194 void mouseDriver_init(void){
195     mouseDriver_initMode();
196     mouseDriver_initSetpoint();
197     mouseDriver_initPoints();
198     mouseDriver_initMotorSignal();
199
200     /* Init sensor as well */
201     sensorDriver_init();
202     main_stop_motors();
203 }
204 uint32_t mouseDriver_getTime(void){
205     return (HAL_GetTick());
206 }
207 void mouseDriver_send_status_msg(void){
208     send_msg = 1;
209 }
210 void mouseDriver_control_idle(void){
211     static int count = 0;
212     static float integral_x = 0;
213     static float integral_y = 0;
214     float error_x = 0;
215     float error_y = 0;
216     if (actual_speed_measure.valid == 0){
217         count ++;
218         if(count >= MAX_MISSING_MEASURES){
219             main_stop_motors();
220             mouseDriver_setMode(MOUSE_MODE_STOP);

```

```

221     integral_x = 0;
222     integral_y = 0;
223 }
224 return;
225 }
226 if (actual_mode == MOUSE_MODE_SPEED || actual_mode == MOUSE_MODE_AUTO_RUN){
227     actual_motor_signal.time = mouseDriver_getTime();
228     error_x = actual_speed_setpoint.setpoint_x - actual_speed_measure.speed_x;
229     error_y = actual_speed_setpoint.setpoint_y - actual_speed_measure.speed_y;
230     actual_motor_signal.motor_x = (float)K*(error_x) + (float)I*integral_x;
231     actual_motor_signal.motor_y = (float)K*(error_y) + (float)I*integral_y;
232
233     if (actual_motor_signal.motor_x > MAX_MOTOR_SIGNAL){
234         actual_motor_signal.motor_x = MAX_MOTOR_SIGNAL;
235     }
236     if (actual_motor_signal.motor_y > MAX_MOTOR_SIGNAL){
237         actual_motor_signal.motor_y = MAX_MOTOR_SIGNAL;
238     }
239
240     main_set_motors_speed(actual_motor_signal);
241     integral_x += (actual_motor_signal.motor_x < MAX_MOTOR_SIGNAL)? error_x : 0;
242     integral_y += (actual_motor_signal.motor_y < MAX_MOTOR_SIGNAL)? error_y : 0;
243     count = 0;
244 }
245 else{
246     actual_motor_signal.motor_x = 0;
247     actual_motor_signal.motor_y = 0;
248     main_stop_motors();
249     integral_x = 0;
250     integral_y = 0;
251 }
252 }
253
254 void mouseDriver_setMode(uint8_t mode){
255     if (mode == MOUSE_MODE_STOP){
256         main_stop_motors();
257         actual_point = 0;
258         actual_mode = MOUSE_MODE_STOP;
259         mouseDriver_initMotorSignal();
260     }
261     if (mode == MOUSE_MODE_AUTO_LOAD){
262         actual_mode = mode;
263         mouseDriver_sendMsg(MAVLINK_MSG_ID_HEARTBEAT);
264     }
265     if (actual_mode == MOUSE_MODE_AUTO_LOAD && mode == MOUSE_MODE_AUTO_RUN){
266         actual_point = 0;
267         actual_point_start_time = mouseDriver_getTime();
268         actual_speed_setpoint.setpoint_x = points[0].setpoint_x;
269         actual_speed_setpoint.setpoint_y = points[0].setpoint_y;
270         actual_mode = mode;
271     }
272
273     if (actual_mode != MOUSE_MODE_AUTO_RUN)
274         actual_mode = mode;
275 }
276 void mouseDriver_sendMsg(uint32_t msgid){
277     mavlink_message_t msg;
278     static uint8_t outBuffer[MAX_BYTE_BUFFER_SIZE];
279     static uint16_t msg_size = 0;
280

```

```

281 while (main_get_huart_tx_state() == HAL_BUSY){
282     /*Wait for other messages to be sent*/
283     HAL_Delay(1);
284 }
285
286 switch(msgid){
287     case MAVLINK_MSG_ID_HEARTBEAT:
288         mavlink_msg_heartbeat_pack(SYS_ID,COMP_ID, &msg, actual_mode, mouseDriver_getTime());
289         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
290         main_transmit_buffer(outBuffer, msg_size);
291         break;
292     case MAVLINK_MSG_ID_SPEED_SETPOINT:
293         mavlink_msg_speed_setpoint_encode(SYS_ID,COMP_ID, &msg, &actual_speed_setpoint);
294         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
295         main_transmit_buffer(outBuffer, msg_size);
296         break;
297     case MAVLINK_MSG_ID_MOTOR_SETPOINT:
298         mavlink_msg_motor_setpoint_encode(SYS_ID,COMP_ID, &msg, &actual_motor_signal);
299         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
300         main_transmit_buffer(outBuffer, msg_size);
301         break;
302     case MAVLINK_MSG_ID_SPEED_INFO:
303         mavlink_msg_speed_info_encode(SYS_ID,COMP_ID, &msg, &actual_speed_measure);
304         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
305         main_transmit_buffer(outBuffer, msg_size);
306         break;
307     case MAVLINK_MSG_ID_ERROR:
308         mavlink_msg_error_encode(SYS_ID,COMP_ID,&msg,&actual_error);
309         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
310         main_transmit_buffer(outBuffer, msg_size);
311         break;
312     case MAVLINK_MSG_ID_POINT_LOADED:
313         mavlink_msg_point_loaded_pack(SYS_ID,COMP_ID,&msg,actual_point);
314         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
315         main_transmit_buffer(outBuffer, msg_size);
316         break;
317     case MAVLINK_MSG_ID_POINT:
318         mavlink_msg_point_encode(SYS_ID,COMP_ID,&msg,&points[actual_point]);
319         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
320         main_transmit_buffer(outBuffer, msg_size);
321         break;
322     case MAVLINK_MSG_ID_RAW_SENSOR:
323         mavlink_msg_raw_sensor_encode(SYS_ID,COMP_ID,&msg,&actual_raw_sensor[0]);
324         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
325         main_transmit_buffer(outBuffer, msg_size);
326         while (main_get_huart_tx_state() == HAL_BUSY){
327             /*Wait for other messages to be sent*/
328             HAL_Delay(1);
329         }
330         mavlink_msg_raw_sensor_encode(SYS_ID,COMP_ID,&msg,&actual_raw_sensor[1]);
331         msg_size = mavlink_msg_to_send_buffer(outBuffer, &msg);
332         main_transmit_buffer(outBuffer, msg_size);
333         break;
334     default:
335         break;
336 }
337 }
338 void mouseDriver_idle (void){
339     uint64_t difference = 0;
340     sensorDriver_motion_read_speed(actual_raw_sensor, &actual_speed_measure);

```

```

341 switch(actual_mode){
342 case MOUSE_MODE_STOP:
343     mouseDriver_initSetpoint();
344     mouseDriver_initMotorSignal();
345     actual_motor_signal.time = mouseDriver_getTime();
346     main_stop_motors();
347     mouseDriver_control_idle();
348     mouseDriver_sendMsg(MAVLINK_MSG_ID_SPEED_INFO);
349
350     break;
351 case MOUSE_MODE_SPEED:
352     mouseDriver_control_idle();
353     mouseDriver_sendMsg(MAVLINK_MSG_ID_SPEED_INFO);
354     mouseDriver_sendMsg(MAVLINK_MSG_ID_MOTOR_SETPOINT);
355
356     break;
357 case MOUSE_MODE_AUTO_LOAD:
358     if (actual_point == 255){
359         actual_error.error = MOUSE_ROUTINE_TOO_LONG;
360         actual_error.time = mouseDriver_getTime();
361         mouseDriver_control_idle();
362         mouseDriver_sendMsg(MAVLINK_MSG_ID_ERROR);
363     }
364     break;
365 case MOUSE_MODE_AUTO_RUN:
366     difference = mouseDriver_getTime() - actual_point_start_time;
367     if (difference >= points[actual_point].duration){
368         if (actual_point < MAX_POINTS-1){
369             actual_point++;
370
371             if(points[actual_point].duration == 0){
372                 actual_point = 0;
373             }
374             actual_speed_setpoint.setpoint_x = points[actual_point].setpoint_x;
375             actual_speed_setpoint.setpoint_y = points[actual_point].setpoint_y;
376             actual_point_start_time = mouseDriver_getTime();
377         }
378     }
379     if (actual_point == MAX_POINTS){
380         mouseDriver_setMode(MOUSE_MODE_AUTO_LOAD);
381     }
382     mouseDriver_sendMsg(MAVLINK_MSG_ID_SPEED_INFO);
383     mouseDriver_sendMsg(MAVLINK_MSG_ID_MOTOR_SETPOINT);
384     mouseDriver_control_idle();
385     break;
386 default:
387     break;
388 }
389 if (send_msg == 1){
390     send_msg = 0;
391     if(actual_mode != MOUSE_MODE_AUTO_LOAD){
392         mouseDriver_sendMsg(MAVLINK_MSG_ID_HEARTBEAT);
393         mouseDriver_sendMsg(MAVLINK_MSG_ID_SPEED_SETPOINT);
394         mouseDriver_sendMsg(MAVLINK_MSG_ID_RAW_SENSOR);
395         mouseDriver_sendMsg(MAVLINK_MSG_ID_MOTOR_SETPOINT);
396     }
397 }
398
399 }
400 void mouseDriver_readMsg(const mavlink_message_t msg){

```

```

401
402 switch(msg.msgid){
403
404 case MAVLINK_MSG_ID_MODE_SELECTION:
405     mouseDriver_setMode( mavlink_msg_mode_selection_get_mode(&msg));
406     break;
407
408 case MAVLINK_MSG_ID_SPEED_SETPOINT:
409     if (actual_mode == MOUSE_MODE_SPEED)
410         mavlink_msg_speed_setpoint_decode(&msg, &actual_speed_setpoint);
411     break;
412
413 case MAVLINK_MSG_ID_MOTOR_SETPOINT:
414     if (actual_mode == MOUSE_MODE_SPEED)
415         mavlink_msg_speed_setpoint_decode(&msg, &actual_speed_setpoint);
416     break;
417 case MAVLINK_MSG_ID_POINT:
418     if(actual_mode == MOUSE_MODE_AUTO_LOAD){
419         mavlink_msg_point_decode(&msg, &points[actual_point]);
420         if (actual_point == 255){
421             actual_error.error = MOUSE_ROUTINE_TOO_LONG;
422             actual_error.time = mouseDriver_getTime();
423             mouseDriver_sendMsg(MAVLINK_MSG_ID_ERROR);
424         }
425         mouseDriver_sendMsg(MAVLINK_MSG_ID_POINT_LOADED);
426         actual_point ++;
427     }
428 }
429 break;
430 default:
431     break;
432 };
433 }
434 #endif

```

```

1  /*! \file mouseDriver.h
2  \brief Header of the driver for the mouse treadmill project.
3
4  \author Didier Negretto
5  */
6
7  /*
8   * Code used for driving the 3D mouse treadmill
9   * Author: Didier Negretto
10  *
11  */
12
13 #pragma once
14 #ifndef MOUSEDRIVER_N_H
15 /*!
16 \def MOUSEDRIVER_N_H
17 \brief To avoid double includes
18 */
19 #define MOUSEDRIVER_N_H
20
21 #ifndef TEST
22 #include "mavlink.h"
23 #include "utils.h"
24 #include "sensorDriver.h"
25 #endif
26

```



```

27 #include <math.h>
28 /* Constants for MALINK functions*/
29
30 /*!
31 \def SYS_ID
32 \brief System ID for MAVLink
33 */
34 #define SYS_ID 0
35
36 /*!
37 \def COMP_ID
38 \brief Component ID for MAVLink
39 */
40 #define COMP_ID 0
41
42 /* maximum size of the trasmit buffer */
43 /*!
44 \def MAX_BYTE_BUFFER_SIZE
45 \brief MAX size of transmit buffer in bytes
46 */
47 #define MAX_BYTE_BUFFER_SIZE 500
48
49 /*!
50 \def MAX_POINTS
51 \brief MAX amount of points that can be defined in AUTO mode
52 */
53 #define MAX_POINTS 255
54
55 /*!
56 \fn mouseDriver_init
57 \brief Function that initializes the driver of the mouse treadmill.
58
59 This functions initialites the mouse treadmill driver. It initializes the sensors as well.
60 */
61 void mouseDriver_init(void);
62
63 /*!
64 \fn mouseDriver_control_idle
65 \brief Function doing the control on the motors.
66 \attention This function is in charge of generating the control signals for the
67 motors. If it is modified, make sure to respect the specifications of the motor
68 to avoid damaging or destroying them !!
69
70 This function is called periodially to update the control signal for the motors.
71 */
72 void mouseDriver_control_idle(void);
73
74 /*!
75 \fn mouseDriver_send_status_msg
76 \brief Function generating the signal for sending messages.
77
78 This function is called periodially to set the flag for sending status messages.
79 */
80 void mouseDriver_send_status_msg(void);
81
82 /*!
83 \fn mouseDriver_readMsg(const mavlink_message_t msg)
84 \param msg MAVLink message to be decoded
85 \brief Function that reads one message.
86

```

```

87 This function is called in main.c. Depending on the received message different actions are taken.
88 */
89 void mouseDriver_readMsg(const mavlink_message_t msg);
90
91 /*!
92 \fn mouseDriver_getTime
93 \return The actual time in ms from boot of the system.
94 \brief Function that gets the time of the system from boot.
95 */
96 uint32_t mouseDriver_getTime (void);
97
98 /*!
99 \fn mouseDriver_idle
100 \brief Idle function for the mouse treadmill driver.
101 \note This function needs to be called periodically to ensure a correct behaviour.
102
103 This is the idle function of the mouse treadmill. It reads values from the sensors,
104 calls \ref mouseDriver_control_idle, and sends high frequency messages (not the status ones).
105 */
106 void mouseDriver_idle (void);
107
108
109 #endif

```

### C.3 Sensor driver

```

1  /*! \file sensorDriver.c
2  \brief Implementation of the sensor driver for the mouse treadmill project.
3
4  \author Didier Negretto
5  */
6  #include "sensorDriver.h"
7
8  /*!
9  \var sensor_x
10 \brief variable for storing data for the x sensor.
11 */
12 static sensor_t sensor_x = {CS_0_GPIO_Port,CS_0_Pin,PW_0_GPIO_Port,PW_0_Pin,0};
13
14 /*!
15 \var sensor_y
16 \brief variable for storing data for the y sensor.
17 */
18 static sensor_t sensor_y = {CS_1_GPIO_Port,CS_1_Pin,PW_1_GPIO_Port,PW_1_Pin,0};
19
20 /*!
21 \fn sensorDriver_powerup(sensor_t *sensor)
22 \param sensor sensor structure of the sensor to be powered up
23 \brief This function turns off and the on the sensor. It then performs the power up routine
24 \note This routine is time consuming and done only at start up.
25
26 After Flashing the SROM the SROM_ID register is read to confirm that the
27 SROM have been flashed correctly.
28 */
29 void sensorDriver_powerup(sensor_t * sensor);
30
31 /*!
32 \fn sensorDriver_motion_read_raw(uint8_t sensor_id, mavlink_raw_sensor_t * sensor_data)
33 \param sensor_id 0 for sensor x, 1 for sensor y
34 \param sensor_data pointer to a structure for storing the raw sensor value
35 \brief This function reads raw data from the sensor given its ID and puts the result in the pointer.

```

```

36  */
37 void sensorDriver_motion_read_raw(uint8_t sensor_id, mavlink_raw_sensor_t * sensor_data);
38
39 void sensorDriver_powerup(sensor_t * sensor){
40     /* Disable the sensor */
41     HAL_GPIO_WritePin(sensor->cs_port, sensor->cs_pin, GPIO_PIN_SET);
42
43     /* Make sure all sensor is switched off */
44     HAL_GPIO_WritePin(sensor->pw_port, sensor->pw_pin, GPIO_PIN_RESET);
45     main_write_sensor(*sensor, 0x00, 0x00);
46     HAL_Delay(100);
47
48     /* Gives voltage to sensors */
49     HAL_GPIO_WritePin(sensor->pw_port, sensor->pw_pin , GPIO_PIN_SET);
50     HAL_Delay(300);
51
52     /* Reset SPI port */
53     HAL_GPIO_WritePin(sensor->cs_port, sensor->cs_pin, GPIO_PIN_SET);
54     HAL_Delay(5);
55     HAL_GPIO_WritePin(sensor->cs_port, sensor->cs_pin, GPIO_PIN_RESET);
56     HAL_Delay(5);
57     HAL_GPIO_WritePin(sensor->cs_port, sensor->cs_pin, GPIO_PIN_SET);
58     HAL_Delay(5);
59
60     /* Write to Power_up_Reset register */
61     main_write_sensor(*sensor, Power_Up_Reset, 0x5A);
62
63     /* Wait at least 50 ms */
64     HAL_Delay(50);
65
66     /* Read from data registers */
67     main_read_sensor(*sensor, 0x02);
68     main_read_sensor(*sensor, 0x03);
69     main_read_sensor(*sensor, 0x04);
70     main_read_sensor(*sensor, 0x05);
71     main_read_sensor(*sensor, 0x06);
72
73     /* Start ROM Download */
74     main_write_sensor(*sensor, Config2, 0x20);
75     main_write_sensor(*sensor, SROM_Enable, 0x1d);
76     HAL_Delay(10);
77     main_write_sensor(*sensor, SROM_Enable, 0x18);
78     main_wait_160us();
79     main_wait_20us();
80
81     /* Burst start with adress */
82     HAL_GPIO_WritePin(sensor->cs_port, sensor->cs_pin, GPIO_PIN_RESET);
83     main_write_sensor_burst(SROM_Load_Burst|0x80);
84     for (int i = 0; i < firmware_length; i++) {
85         main_write_sensor_burst(firmware_data[i]);
86     }
87     HAL_GPIO_WritePin(sensor->cs_port, sensor->cs_pin, GPIO_PIN_SET);
88     main_wait_160us();
89     main_wait_20us();
90     main_wait_20us();
91
92     /* Read SROM_ID for verification */
93     sensor->status = main_read_sensor(*sensor, SROM_ID);
94
95     /* Write to Config2 for wired mouse */

```

```

96  main_write_sensor(*sensor, Config2, 0x00);
97  }
98  void sensorDriver_init(void){
99      sensorDriver_powerup(&sensor_x);
100     sensorDriver_powerup(&sensor_y);
101 }
102 void sensorDriver_motion_read_raw(uint8_t sensor_id, mavlink_raw_sensor_t * sensor_data){
103     uint8_t data[12];
104     int16_t temp = 0;
105     sensor_t sensor;
106
107     if (sensor_id == SENSOR_X) sensor = sensor_x;
108     else if (sensor_id == SENSOR_Y) sensor = sensor_y;
109     else return;
110     sensor_data->sensor_id = sensor_id;
111
112     /* write to motion burst address */
113     main_write_sensor(sensor, Motion_Burst, 0xbb);
114
115     /* Prepare for burst */
116     HAL_GPIO_WritePin(sensor.cs_port, sensor.cs_pin, GPIO_PIN_RESET);
117     sensor_data->time = mouseDriver_getTime();
118     main_write_sensor_burst(Motion_Burst);
119     /* Start burst */
120     main_read_sensor_motion_burst(data);
121     HAL_GPIO_WritePin(sensor.cs_port, sensor.cs_pin, GPIO_PIN_SET);
122     /* END of burst */
123     main_wait_20us();
124
125     /* Read other register for stopping burst mode */
126     sensor_data->product_id = main_read_sensor(sensor, Product_ID);
127
128     /* TWO's Complement */
129     temp = (data[DELTA_X_H]<<8) | (data[DELTA_X_L]);
130     temp = ~temp + 1;
131     sensor_data->delta_x = temp;
132     temp = (data[DELTA_Y_H]<<8) | (data[DELTA_Y_L]);
133     temp = ~temp + 1;
134     sensor_data->delta_y = temp;
135
136     sensor_data->squal = data[SQUAL_READ];
137     sensor_data->lift = (data[MOTION] & 0x08) >> 3;
138     sensor_data->srom_id = sensor.status;
139 }
140 void sensorDriver_motion_read_speed(mavlink_raw_sensor_t sensor_data[2], mavlink_speed_info_t *
    speed_info){
141     mavlink_raw_sensor_t raw_values[2];
142     uint32_t old_time[2];
143
144     speed_info->valid = 0;
145     old_time[0] = speed_info->time_x;
146     old_time[1] = speed_info->time_y;
147
148     sensorDriver_motion_read_raw(SENSOR_X, &raw_values[0]);
149     sensorDriver_motion_read_raw(SENSOR_Y, &raw_values[1]);
150
151     speed_info->speed_x = -(float)raw_values[0].delta_y*(float)INCH2METER/(float)RESOLUTION;
152     speed_info->speed_x /= (float)(raw_values[0].time-old_time[0])/(float)1000;
153     speed_info->time_x = raw_values[0].time;
154     speed_info->speed_y = -(float)raw_values[1].delta_y*(float)INCH2METER/(float)RESOLUTION;

```

```

155 speed_info->speed_y /= (float)(raw_values[1].time-old_time[1])/(float)1000;
156 speed_info->time_y = raw_values[1].time;
157 sensor_data[0] = raw_values[0];
158 sensor_data[1] = raw_values[1];
159
160 if((raw_values[0].lift == 0) && (raw_values[1].lift == 0) &&
161    (raw_values[0].squal >= SQUAL_THRESH) && (raw_values[0].squal >= SQUAL_THRESH) &&
162    (raw_values[0].product_id == 66) && (raw_values[1].product_id == 66)){
163     speed_info->valid = 1;
164 }
165 else{
166     speed_info->valid = 0;
167 }
168 }

```

```

1  /*! \file sensorDriver.h
2  \brief Header of the sensor driver for the mouse treadmill project.
3
4  \author Didier Negretto
5  */
6  #pragma once
7
8  #ifndef SENSORDRIVER_H_
9  #define SENSORDRIVER_H_
10
11 #ifndef TEST
12 #include "main.h"
13 #include "mavlink.h"
14 #include "sensorSROM.h"
15 #endif
16
17 /* BEGIN DEFINES FOR SENSOR INTERNAL REGISTERS */
18 #define Product_ID 0x00
19 #define Revision_ID 0x01
20 #define Motion 0x02
21 #define Delta_X_L 0x03
22 #define Delta_X_H 0x04
23 #define Delta_Y_L 0x05
24 #define Delta_Y_H 0x06
25 #define SQUAL 0x07
26 #define Raw_Data_Sum 0x08
27 #define Maximum_Raw_data 0x09
28 #define Minimum_Raw_data 0x0A
29 #define Shutter_Lower 0x0B
30 #define Shutter_Upper 0x0C
31 #define Control 0x0D
32 #define Config1 0x0F
33 #define Config2 0x10
34 #define Angle_Tune 0x11
35 #define Frame_Capture 0x12
36 #define SROM_Enable 0x13
37 #define Run_Downshift 0x14
38 #define Rest1_Rate_Lower 0x15
39 #define Rest1_Rate_Upper 0x16
40 #define Rest1_Downshift 0x17
41 #define Rest2_Rate_Lower 0x18
42 #define Rest2_Rate_Upper 0x19
43 #define Rest2_Downshift 0x1A
44 #define Rest3_Rate_Lower 0x1B
45 #define Rest3_Rate_Upper 0x1C
46 #define Observation 0x24

```

```

47 #define Data_Out_Lower 0x25
48 #define Data_Out_Upper 0x26
49 #define Raw_Data_Dump 0x29
50 #define SROM_ID 0x2A
51 #define Min_SQ_Run 0x2B
52 #define Raw_Data_Threshold 0x2C
53 #define Config5 0x2F
54 #define Power_Up_Reset 0x3A
55 #define Shutdown 0x3B
56 #define Inverse_Product_ID 0x3F
57 #define LiftCutoff_Tune3 0x41
58 #define Angle_Snap 0x42
59 #define LiftCutoff_Tune1 0x4A
60 #define Motion_Burst 0x50
61 #define LiftCutoff_Tune_Timeout 0x58
62 #define LiftCutoff_Tune_Min_Length 0x5A
63 #define SROM_Load_Burst 0x62
64 #define Lift_Config 0x63
65 #define Raw_Data_Burst 0x64
66 #define LiftCutoff_Tune2 0x65
67 /* END DEFINES FOR SENSOR INTERNAL REGISTERS */
68
69 #include <mavlink_msg_raw_sensor.h>
70 #include <stdint.h>
71
72 /* DEFINES FOR BURST READ (only usefull data) */
73 #define MOTION 0
74 #define OBSERVATION 1
75 #define DELTA_X_L 2
76 #define DELTA_X_H 3
77 #define DELTA_Y_L 4
78 #define DELTA_Y_H 5
79 #define SQUAL_READ 6
80
81 /*!
82 \def SQUAL_THRESH
83 \brief Threshold value on SQUAL to consider the measure valid.
84 */
85 #define SQUAL_THRESH 16
86
87 /*!
88 \def RESOLUTION
89 \brief Resolution of the sensor in Count per Inch (CPI)
90 \note This value needs to be updated if the resolution of the sensors is changed,
91
92 This value is used to convert the raw sensor value in counts to meter per second.
93 */
94 #define RESOLUTION 5000
95
96 /*!
97 \def INCH2METER
98 \brief Conversion factor to convert inches in meters.
99 */
100 #define INCH2METER 0.0254
101
102 /*!
103 \fn sensorDriver_init
104 \brief Initializes all sensors.
105
106 This functions powers down the sensor and does the powering up routine.

```

```

107 \note This routine takes a long time, so it is done only at start up.
108 */
109 void sensorDriver_init(void);
110
111 /*!
112 \fn sensorDriver_motion_read_speed(mavlink_raw_sensor_t sensor_data[2], mavlink_speed_info_t *
    speed_info)
113 \param sensor_data[2] array for the raw values of the 2 sensors
114 \param speed_info pointer to a mavlink_speed_info_t
115 \brief Function for reading the raw data and speed measures from the sensors.
116 \attention The speed_info.time_x/y is used to compute speed. This value should NOT BE MODIFIED by
117 the caller function
118
119 This function reads values from the sensors and puts them in the given pointers.
120 It also flags invalid readings, so that \ref mouseDriver_control_idle do not use them.
121 */
122 void sensorDriver_motion_read_speed(mavlink_raw_sensor_t sensor_data[2], mavlink_speed_info_t *
    speed_info);
123
124 #endif

```

## C.4 Code for unit tests

```

1 /*! \file display.h
2 \brief Header and implementation of display function for unit tests
3
4 \author Didier Negretto
5 */
6
7 #ifndef DISPLAY_H_
8 #define DISPLAY_H_
9
10 /* DEFINES COLORS FOR DISPLAY IN TERMINAL */
11 /*!
12 \def RED
13 \brief Prints text between RED and \ref END in red color
14 */
15 #define RED    "\x1b[31m"
16 /*!
17 \def GREEN
18 \brief Prints text between GREEN and \ref END in green color
19 */
20 #define GREEN  "\x1b[32m"
21 /*!
22 \def END
23 \brief stops printin using color.
24 */
25 #define END    "\x1b[0m"
26
27 #include <stdio.h>
28 #include <stdbool.h>
29 #include <stdlib.h>
30
31 #ifdef COLOR
32 static inline bool display (bool correct, const char *name){
33     if(correct == 1){
34         printf("    ["GREEN "OK" END"] ");
35         printf(name);
36         printf(GREEN " DONE SUCCESSFULY\n" END);
37         return 1;
38     }

```

```

39     else{
40         printf("[RED "NO" END"   ");
41         printf(name);
42         printf(RED " PERFORMED INCORRECTLY OR NOT AT ALL\n" END);
43         return 0;
44     }
45     return 0;
46 }
47 #else
48 /*!
49 \fn static inline bool display (bool correct, const char *name)
50 \param correct 1 if the test is successfull 0 if it is not
51 \param name pointer to string with the name of the test that is run
52 \return The result of the test (1 if correct == 1, 0 if correct == 0).
53 \brief This function prints on the terminal is the test is passed successfully
54 or not
55 */
56 static inline bool display (bool correct, const char *name){
57     if(correct == 1){
58         printf("   [OK] ");
59         printf("%s", name);
60         printf(" DONE SUCCESSFULLY\n");
61         return 1;
62     }
63     else{
64         printf("[NO]   ");
65         printf("%s", name);
66         printf(" PERFORMED INCORRECTLY OR NOT AT ALL\n");
67         return 0;
68     }
69     return 0;
70 }
71 #endif
72 #endif /* DISPLAY_H_ */

1  /*! \file main.c
2  \brief Main for unit testss
3  \author Didier Negretto
4
5  This main is compiled and run after the compilation of the stm32 project
6  This main runs the unit tests and prints which tests are passed and which are not
7  \attention The bash script for the automatic unit testing after compilation
8  was written for MAC and may not work on LINUX or Windows. To solve this issue
9  modify CodeSTM32/src/build.sh
10 */
11
12 #include "test_mouseDriver.h"
13 #include "test_sensorDriver.h"
14
15 int main(void){
16
17     bool test = 1;
18
19     printf("=====\n");
20     printf("*****TESTING CODE FOR MOUSE TREADMILL *****\n");
21     printf("=====\n\n");
22     printf("-----\n");
23     printf("TESTING mouseDriver.c\n");
24     printf("TESTING mouseDriver_init()\n");
25     test &= test_mouseDriver_init();
26     printf("TESTING mouseDriver_idle()\n");

```



```

27 test &= test_mouseDriver_idle();
28 printf("TESTING mouseDriver_getTime()\n");
29 test &= test_mouseDriver_getTime();
30 printf("TESTING mouseDriver_send_status_msg()\n");
31 test &= test_mouseDriver_send_status_msg();
32 printf("TESTING mouseDriver_control_idle()\n");
33 test &= test_mouseDriver_control_idle();
34 /*printf("-----\n");
35 printf("TESTING mouseDriver.c\n");
36 if (! test_mouseDriver_init()) printf(RED"ERRORS IN mouseDriver_init\n"END);*/
37
38
39 if (test == 1){
40     printf("ALL TEST PASSED SUCCESSFULLY\n");
41 }
42 else{
43     printf("=====\n");
44     printf("!!!!!!!!!!!! SOME TESTS NOT PASSED !!!!!!!!!!!!!\n");
45     printf("=====\n\n");
46 }
47
48 return test;
49 }

```

```

1 /*
2  * mock_mouseDriver.h
3  *
4  * Created on: Nov 24, 2019
5  * Author: Didier
6  */
7
8 #ifndef MOCK_MOUSEDRIVER_H_
9 #define MOCK_MOUSEDRIVER_H_
10
11 #define HAL_BUSY 0
12 #define SYS_ID 0
13 #define COMP_ID 0
14 #define MAX_BYTE_BUFFER_SIZE 500
15 #define MAX_POINTS 255
16
17
18 static int stop_motor = 0;
19 static int sensor_init = 0;
20 static int sensor_read_x = 0;
21 static int sensor_read_y = 0;
22
23 /* Define mock variables for testing */
24 static int send_msg = 1;
25 static uint8_t actual_mode = MOUSE_MODE_STOP;
26 static mavlink_speed_setpoint_t actual_speed_setpoint;
27 static mavlink_speed_info_t actual_speed_measure;
28 static mavlink_motor_setpoint_t actual_motor_signal;
29 static mavlink_point_t points[255];
30 static uint8_t actual_point = 0;
31 static uint32_t actual_point_start_time = 0;
32 static mavlink_error_t actual_error;
33 static mavlink_raw_sensor_t actual_raw_sensor[2];
34
35 /* Define mock functions */
36 static inline void sensorDriver_init(void){sensor_init = 1; };
37 static inline uint32_t HAL_GetTick(void){

```

```

38     static uint32_t i = 0;
39     i++;
40     return i;
41 };
42 static inline void main_set_motors_speed(mavlink_motor_setpoint_t actual_motor_signal){stop_motor = 0;};
43 static inline void main_stop_motors(void){stop_motor = 1;};
44 static inline int main_get_huart_tx_state(void){return 1;};
45 static inline void HAL_Delay(int delay){};
46 static inline void main_transmit_buffer(uint8_t * outbuffer, int msg_size){};
47
48 static inline void sensorDriver_motion_read_speed(mavlink_raw_sensor_t actual_raw_sensor[2],
49     mavlink_speed_info_t * actual_speed_measure){
50     sensor_read_x = 1;
51     sensor_read_y = 1;
52     actual_raw_sensor[0].delta_x = 0;
53     actual_raw_sensor[1].delta_y = 0;
54     actual_speed_measure->speed_x = 0;
55     actual_speed_measure->speed_y = 0;
56 };
57 #endif /* MOCK_MOUSEDRIVER_H_ */

```

```

1  /*! \file mock_sensorDriver.h
2  \brief In this file mock functions are defined for the sensor driver unit tests
3
4  \author Didier Negretto
5  */
6
7
8  #ifndef MOCK_SENSORDRIVER_H_
9  #define MOCK_SENSORDRIVER_H_
10
11 /**
12  * A mock structure to represent one sensor
13  */
14 typedef struct SENSOR{
15     /*@{*/
16     int cs_port; /*< the chip select port for the sensor */
17     uint8_t cs_pin; /*< the chip select pin for the sensor */
18     int pw_port; /*< the power port for the sensor */
19     uint8_t pw_pin; /*< the power pin for the sensor */
20     uint8_t status; /*< the sensor status. This is the SROM_ID after the upload of the
21     firmware. This value should not be 0 otherwise the upload of the SROM is failed. */
22     /*@}*/
23 } sensor_t;
24
25 #define CS_0_GPIO_Port 0
26 #define CS_0_Pin 0
27 #define PW_0_GPIO_Port 0
28 #define PW_0_Pin 0
29
30 #define CS_1_GPIO_Port 1
31 #define CS_1_Pin 1
32 #define PW_1_GPIO_Port 1
33 #define PW_1_Pin 1
34
35 #define GPIO_PIN_SET 1
36 #define GPIO_PIN_RESET 0
37
38 static int firmware_length = 3;
39 static int firmware_data[3] = {1,2,3};

```

```

40
41 static inline void main_wait_160us(void){};
42 static inline void main_wait_20us(void){};
43 static inline uint8_t main_read_sensor(sensor_t sensor, uint8_t adress ){return adress;};
44 static inline void main_write_sensor(sensor_t sensor, uint8_t adress, uint8_t value){};
45 static inline void main_read_sensor_motion_burst(uint8_t* buffer){};
46 static inline void main_write_sensor_burst(uint8_t adress){};
47 static inline void HAL_Delay(int delay){};
48 static inline void HAL_GPIO_WritePin(int port, int pin, int state){};
49 static inline uint32_t mouseDriver_getTime(void){
50     static uint32_t i = 0;
51     i++;
52     return i;
53 }
54
55 #endif /* MOCK_SENSORDRIVER_H_ */

```

```

1 /*
2  * test.h
3  *
4  * Created on: Nov 24, 2019
5  * Author: Didier
6  */
7
8 #ifndef TEST_MOUSEDRIVER_H_
9 #define TEST_MOUSEDRIVER_H_
10
11 #include <stdio.h>
12 #include <stdlib.h>
13 #include <stdbool.h>
14 #include <math.h>
15 #include "mavlink.h"
16
17 /* Define testing functions*/
18 bool test_mouseDriver_init(void);
19 bool test_mouseDriver_idle(void);
20 bool test_mouseDriver_getTime(void);
21 bool test_mouseDriver_send_status_msg(void);
22 bool test_mouseDriver_control_idle(void);
23
24 #endif /* TEST_MOUSEDRIVER_H_ */

```

```

1 /*
2  * test_sensorDriver.h
3  *
4  * Created on: Nov 25, 2019
5  * Author: Didier
6  */
7
8 #ifndef TEST_SENSORDRIVER_H_
9 #define TEST_SENSORDRIVER_H_
10
11 #include <stdio.h>
12 #include <stdlib.h>
13 #include <stdbool.h>
14 #include <math.h>
15 #include "mavlink.h"
16
17 /* Define test functions */
18 bool test_sensorDriver_init(void);
19

```

```

20 #endif /* TEST_SENSORDRIVER_H_ */

1 /*
2  * test_mouseDriver.c
3  *
4  * Created on: Nov 24, 2019
5  * Author: Didier
6  */
7 #include "test_mouseDriver.h"
8 #include "mock_mouseDriver.h"
9 #include "display.h"
10 #include "mouseDriver.c"
11
12
13 bool test_mouseDriver_init(void){
14
15     bool test = 1;
16
17     actual_mode = 5;
18     for(int i = 0; i < MAX_POINTS; i++){
19         points[i].duration = i;
20         points[i].setpoint_x = i;
21         points[i].setpoint_y = i;
22         points[i].point_id = i;
23     }
24     actual_point = 10;
25     actual_point_start_time = 10;
26     actual_speed_setpoint.setpoint_x = 10;
27     actual_speed_setpoint.setpoint_y = 10;
28     actual_motor_signal.motor_x = 10;
29     actual_motor_signal.motor_y = 10;
30
31     sensor_init = 0;
32     stop_motor = 0;
33
34     mouseDriver_init();
35
36     test &= display(actual_mode == 0, "actual_mode initialization");
37     test &= display(actual_point == 0, "actual_point initialization");
38     test &= display(actual_point_start_time == 0, "actual_point_start_time initialization");
39     test &= display((actual_speed_setpoint.setpoint_y == 0)&& (actual_speed_setpoint.setpoint_x == 0), "
        actual_speed_setpoint initialization");
40     bool test_sub = 1;
41     for(int i = 0; i < MAX_POINTS; i++){
42         test_sub &= ((points[i].duration == 0) && (points[i].setpoint_x == 0) &&
43             (points[i].setpoint_y == 0) && (points[i].point_id == 0));
44     }
45     test &= display(test_sub, "points initialized correctly");
46     test &= display(sensor_init == 1, "sensor_init initialization");
47     test &= display(stop_motor == 1, "stop_motor initialization");
48     test &= display((actual_motor_signal.motor_x == 0)&& (actual_motor_signal.motor_y == 0), "
        actual_motor_signal initialization");
49
50     return test;
51 }
52
53 bool test_mouseDriver_idle(void){
54     bool test = false;
55     actual_speed_measure.speed_x = -10;
56     actual_speed_measure.speed_y = -10;
57     actual_speed_measure.valid = 1;

```

```

58  actual_speed_setpoint.setpoint_x = MAX_MOTOR_SIGNAL * 1000;
59  actual_speed_setpoint.setpoint_y = MAX_MOTOR_SIGNAL * 1000;
60  actual_point_start_time = 0;
61  actual_point = 0;
62  points[0].duration = 100;
63  points[0].setpoint_x = 10;
64  points[0].setpoint_y = 10;
65  points[0].point_id = 0;
66
67  /* Test reading of sensors in SPEED mode */
68  actual_mode = MOUSE_MODE_SPEED;
69  sensor_read_x = 0;
70  sensor_read_y = 0;
71  stop_motor = 1;
72  mouseDriver_idle();
73  test = display(sensor_read_x == 1, "read sensor x in MOUSE_MODE_SPEED");
74  test &= display(sensor_read_y == 1, "read sensor y in MOUSE_MODE_SPEED");
75  test &= display(stop_motor == 0, "motor started in MOUSE_MODE_SPEED");
76
77  /* Test reading of sensors in MOUSE_MODE_AUTO_RUN mode */
78  actual_mode = MOUSE_MODE_AUTO_RUN;
79  sensor_read_x = 0;
80  sensor_read_y = 0;
81  stop_motor = 1;
82  mouseDriver_idle();
83  test &= display(sensor_read_x == 1, "read sensor x in MOUSE_MODE_AUTO_RUN");
84  test &= display(sensor_read_y == 1, "read sensor y in MOUSE_MODE_AUTO_RUN");
85  test &= display(stop_motor == 0, "motor started in MOUSE_MODE_AUTO_RUN");
86  return test;
87 }
88 bool test_mouseDriver_getTime(void){
89     bool test = 1;
90     uint32_t start = HAL_GetTick();
91     test &= mouseDriver_getTime() == start+1;
92     test &= mouseDriver_getTime() == start+2;
93     test &= mouseDriver_getTime() == start+3;
94     test &= mouseDriver_getTime() == start+4;
95     test &= mouseDriver_getTime() == start+5;
96     display(test, "time update");
97
98     return test;
99 }
100 bool test_mouseDriver_send_status_msg(void){
101     bool test = false;
102     send_msg = 0;
103
104     mouseDriver_send_status_msg();
105
106     test = send_msg;
107     display(test, "status message send request");
108     return test;
109 }
110 bool test_mouseDriver_control_idle(void){
111     bool test = 1;
112     stop_motor = 0;
113     actual_speed_measure.speed_x = -10;
114     actual_speed_measure.speed_y = -10;
115     actual_motor_signal.motor_x = 10;
116     actual_motor_signal.motor_y = 10;
117     actual_mode = MOUSE_MODE_STOP;

```

```

118
119 /* Case actual mode == STOP */
120 printf("if (actual_mode == MOUSE_MODE_STOP)\n");
121 mouseDriver_control_idle();
122 test &= display((actual_motor_signal.motor_x == 0)&& (actual_motor_signal.motor_y == 0), "
    actual_motor_signal reset");
123 test &= display(stop_motor == 1, "motor stop");
124
125 /* Case actual mode == SPEED */
126 actual_mode = MOUSE_MODE_SPEED;
127 stop_motor = 1;
128 actual_speed_setpoint.setpoint_y = 0;
129 actual_speed_setpoint.setpoint_x = MAX_MOTOR_SIGNAL * 1000;
130 actual_motor_signal.motor_x = MAX_MOTOR_SIGNAL * 1000;
131 actual_motor_signal.motor_y = MAX_MOTOR_SIGNAL * 1000;
132 printf("if (actual_mode == MOUSE_MODE_SPEED)\n");
133 mouseDriver_control_idle();
134 test &= display(stop_motor == 0, "motor_x speed changed");
135 for(int i = 0; i < 100; i++)
136     mouseDriver_control_idle();
137 test &= display(actual_motor_signal.motor_x <= MAX_MOTOR_SIGNAL, "motor_x with
    MAX_MOTOR_SIGNAL limit");
138
139 stop_motor = 1;
140 actual_speed_setpoint.setpoint_x = 0;
141 actual_speed_setpoint.setpoint_y = MAX_MOTOR_SIGNAL * 1000;
142 actual_motor_signal.motor_x = MAX_MOTOR_SIGNAL * 1000;
143 actual_motor_signal.motor_y = MAX_MOTOR_SIGNAL * 1000;
144 mouseDriver_control_idle();
145 test &= display(stop_motor == 0, "motor_y speed changed");
146 for(int i = 0; i < 100; i++)
147     mouseDriver_control_idle();
148 test &= display(actual_motor_signal.motor_y <= MAX_MOTOR_SIGNAL, "motor_y with
    MAX_MOTOR_SIGNAL limit");
149
150 actual_speed_setpoint.setpoint_x = MAX_MOTOR_SIGNAL * 1000;
151 actual_speed_setpoint.setpoint_y = MAX_MOTOR_SIGNAL * 1000;
152 actual_motor_signal.motor_x = MAX_MOTOR_SIGNAL * 1000;
153 actual_motor_signal.motor_y = MAX_MOTOR_SIGNAL * 1000;
154 mouseDriver_control_idle();
155 test &= display(stop_motor == 0, "motor_y and motor_x speed changed");
156 for(int i = 0; i < 100; i++)
157     mouseDriver_control_idle();
158 test &= display((actual_motor_signal.motor_y <= MAX_MOTOR_SIGNAL) && (actual_motor_signal.
    motor_x <= MAX_MOTOR_SIGNAL), "motor_y and motor_x with MAX_MOTOR_SIGNAL limit");
159
160 /* Reaction to invalid measures */
161 actual_speed_setpoint.setpoint_x = 0;
162 actual_speed_setpoint.setpoint_y = 0;
163 actual_speed_measure.speed_x = 1000;
164 actual_speed_measure.speed_y = 1000;
165 actual_motor_signal.motor_x = 10;
166 actual_motor_signal.motor_y = 10;
167 bool test_stop = true;
168 actual_speed_measure.valid = 0;
169 for(int i = 0; i < MAX_MISSING_MEASURES-1; i++) {
170     test_stop &= (actual_motor_signal.motor_x == 10);
171     test_stop &= (actual_motor_signal.motor_y == 10);
172     mouseDriver_control_idle();
173 }

```

```

174 mouseDriver_control_idle();
175 test &= display(test_stop, "constant motor signal if invalid measure");
176 test &= display(actual_mode == MOUSE_MODE_STOP, "stop motor after too many invalid measures");
177
178
179
180 /* Case actual mode == SPEED */
181 actual_mode = MOUSE_MODE_AUTO_RUN;
182 stop_motor = 1;
183 actual_speed_setpoint.setpoint_y = 0;
184 actual_speed_setpoint.setpoint_x = MAX_MOTOR_SIGNAL * 1000;
185 actual_motor_signal.motor_x = MAX_MOTOR_SIGNAL * 1000;
186 actual_motor_signal.motor_y = MAX_MOTOR_SIGNAL * 1000;
187 actual_speed_measure.valid = 1;
188 printf("if (actual_mode == MOUSE_MODE_AUTO_RUN)\n");
189 mouseDriver_control_idle();
190 test &= display(stop_motor == 0, "motor_x speed changed");
191 for(int i = 0; i < 100; i++)
192     mouseDriver_control_idle();
193 test &= display(actual_motor_signal.motor_x <= MAX_MOTOR_SIGNAL, "motor_x with
    MAX_MOTOR_SIGNAL limit");
194
195 stop_motor = 1;
196 actual_speed_setpoint.setpoint_x = 0;
197 actual_speed_setpoint.setpoint_y = MAX_MOTOR_SIGNAL * 1000;
198 actual_motor_signal.motor_x = MAX_MOTOR_SIGNAL * 1000;
199 actual_motor_signal.motor_y = MAX_MOTOR_SIGNAL * 1000;
200 mouseDriver_control_idle();
201 test &= display(stop_motor == 0, "motor_y speed changed");
202 for(int i = 0; i < 100; i++)
203     mouseDriver_control_idle();
204 test &= display(actual_motor_signal.motor_y <= MAX_MOTOR_SIGNAL, "motor_y with
    MAX_MOTOR_SIGNAL limit");
205
206 actual_speed_setpoint.setpoint_x = MAX_MOTOR_SIGNAL * 1000;
207 actual_speed_setpoint.setpoint_y = MAX_MOTOR_SIGNAL * 1000;
208 actual_motor_signal.motor_x = MAX_MOTOR_SIGNAL * 1000;
209 actual_motor_signal.motor_y = MAX_MOTOR_SIGNAL * 1000;
210 mouseDriver_control_idle();
211 test &= display(stop_motor == 0, "motor_y and motor_x speed changed");
212 for(int i = 0; i < 100; i++)
213     mouseDriver_control_idle();
214 test &= display((actual_motor_signal.motor_y <= MAX_MOTOR_SIGNAL) && (actual_motor_signal.
    motor_x <= MAX_MOTOR_SIGNAL), "motor_y and motor_x with MAX_MOTOR_SIGNAL limit");
215
216 test_stop = true;
217 actual_speed_measure.valid = 0;
218 actual_motor_signal.motor_x = 10;
219 actual_motor_signal.motor_y = 10;
220 for(int i = 0; i < MAX_MISSING_MEASURES-1; i++){
221     test_stop &= (actual_motor_signal.motor_x == 10);
222     test_stop &= (actual_motor_signal.motor_y == 10);
223     mouseDriver_control_idle();
224 }
225 mouseDriver_control_idle();
226 test &= display(test_stop, "constant motor signal if invalid measure");
227 test &= display(actual_mode == MOUSE_MODE_STOP, "stop motor after too many invalid measures");
228
229 return test;
230 }

```

```

1  /*
2  * test_sensorDriver.c
3  *
4  * Created on: Nov 25, 2019
5  * Author: Didier
6  */
7
8  #include "test_sensorDriver.h"
9  #include "mock_sensorDriver.h"
10 #include "display.h"
11 #include "sensorDriver.c"
12
13 bool test_sensorDriver_init(void){
14     return display(0,"TEST SENSOR DRIVER");
15 }

```

## C.5 Build script

```

1  #!/bin/bash
2  # Script for compiling and running test before compilation
3  # of the STM32 code and upload.
4  echo PRE-BUILD STEPS
5  echo CLEANING TESTS
6  make clean -C ../../CodeSTM32/test/Debug/
7  echo COMPILING TESTS
8  make all -C ../../CodeSTM32/test/Debug/
9  echo RUNNING TESTS
10 ../../CodeSTM32/test/Debug/test

```

## D Code for PC

### D.1 GUI

```

1
2  import serial
3  import os
4  import sys
5  import numpy as np
6  #import matplotlib as plt
7  from appJar import gui
8  import time
9  import json
10 from tqdm import tqdm
11 import routine_sin as mouseRoutine
12 from pymavlink.dialects.v20 import mouse as mouseController
13
14 SENSOR_STATUS_MSG = ["SENSOR STATUS", "ID 66 = ", "LIFT 0 = ", "SQUAL > 20 = ", "ROM 4 = "]
15 MODES = ["STOP", "SPEED", "AUTO", "RUNNING"]
16 MODES_NUM = {"STOP": int(0), "SPEED": int(1), "AUTO": int(2), "RUNNING": int(3) }
17 DATA = { "HEARTBEAT": {"time": [], "mode": []},
18           "SPEED_SETPOINT": {"time": [], "setpoint_x": [], "setpoint_y": [], "start": 0},
19           "SPEED_INFO": {"time": [], "speed_x": [], "speed_y": [], "start": 0},
20           "MOTOR_SETPOINT": {"time": [], "motor_x": [], "motor_y": [], "start": 0}
21         }
22
23 MAX_SAMPLES_ON_SCREEN = 200
24 #print(mouseController.MAVLink_speed_info_message.fieldnames)
25 port = "/dev/cu.usbmodem14102"
26 #port = "/dev/stdout"
27

```



```

28 class MyApplication():
29     LOG = []
30     actualMode = 0
31     actualTime = 0
32     actualSpeedSetpoint = [None, None]
33     actualMotorSetpoint = [None, None]
34     actualSpeedInfo = [None, None]
35     connection = serial.Serial(port, baudrate = 230400, timeout = 50)
36     mavlink = mouseController.MAVLink(file = connection )
37     setpointX = 0.0
38     setpointY = 0.0
39
40     def commSTM32 (self):
41         # Init variables
42         m = None
43         while(self.connection.in_waiting>0):
44             # Recive messages
45             try:
46                 m = self.mavlink.parse_char(self.connection.read())
47             except:
48                 pass
49             if m:
50                 self.LOG.append(m)
51                 if m.name == "HEARTBEAT":
52                     self.actualTime = m.time
53                     self.actualMode = m.mode
54                     DATA["HEARTBEAT"]["time"].append(self.actualTime)
55                     DATA["HEARTBEAT"]["mode"].append(self.actualMode)
56                 elif m.name == "SPEED_SETPOINT":
57                     self.actualSpeedSetpoint[0] = m.setpoint_x
58                     self.actualSpeedSetpoint[1] = m.setpoint_y
59                     DATA["SPEED_SETPOINT"]["time"].append(self.actualTime)
60                     DATA["SPEED_SETPOINT"]["setpoint_x"].append(self.actualSpeedSetpoint[0])
61                     DATA["SPEED_SETPOINT"]["setpoint_y"].append(self.actualSpeedSetpoint[1])
62                     #DATA["SPEED_SETPOINT"]["setpoint_z"].append(self.actualSpeedSetpoint[2])
63                 elif m.name == "MOTOR_SETPOINT":
64                     self.actualMotorSetpoint[0] = m.motor_x
65                     self.actualMotorSetpoint[1] = m.motor_y
66                     DATA["MOTOR_SETPOINT"]["time"].append(m.time)
67                     DATA["MOTOR_SETPOINT"]["motor_x"].append(self.actualMotorSetpoint[0])
68                     DATA["MOTOR_SETPOINT"]["motor_y"].append(self.actualMotorSetpoint[1])
69                     #DATA["SPEED_SETPOINT"]["motor_z"].append(self.actualMotorSetpoint[2])
70                 elif m.name == "SPEED_INFO":
71                     #print(m)
72                     DATA["SPEED_INFO"]["time"].append(m.time_x)
73                     DATA["SPEED_INFO"]["speed_x"].append(m.speed_x)
74                     DATA["SPEED_INFO"]["speed_y"].append(m.speed_y)
75                 elif m.name == "RAW_SENSOR":
76                     if m.sensor_id == 0:
77                         status_x = []
78                         status_x.append(m.product_id)
79                         status_x.append(m.lift)
80                         status_x.append(m.squal)
81                         status_x.append(m.srom_id)
82                     elif m.sensor_id == 1:
83                         status_y = []
84                         status_y.append(m.product_id)
85                         status_y.append(m.lift)
86                         status_y.append(m.squal)
87                         status_y.append(m.srom_id)

```

```

88         try:
89             if (len(status_x) == 4) and (len(status_y) == 4):
90                 self.app.setLabel("sensorStatus1",SENSOR_STATUS_MSG[1]+str(status_x[0])+"|"+str(
status_y[0]))
91                 self.app.setLabel("sensorStatus2",SENSOR_STATUS_MSG[2]+str(status_x[1])+"|"+str(
status_y[1]))
92                 self.app.setLabel("sensorStatus3",SENSOR_STATUS_MSG[3]+str(status_x[2])+"|"+str(
status_y[2]))
93                 self.app.setLabel("sensorStatus4",SENSOR_STATUS_MSG[4]+str(status_x[3])+"|"+str(
status_y[3]))
94             except:
95                 pass
96
97
98         elif m.name == "POINT":
99             print(m)
100        else:
101            pass
102        m = None
103    def refreshPlot(self):
104
105        # Clear plot
106        for i in range(3):
107            self.ax[i].clear()
108
109        # Define labels
110        """
111        self.ax[2].set_xlabel("Time")
112        self.ax[2].set_ylabel("Measured speed [m/s]")
113        self.ax[1].set_ylabel("Speed setpoint [m/s]")
114        self.ax[0].set_ylabel("Motor signal [ ]")
115        """
116
117        # Limit max amout of points on one graph
118        if len(DATA["SPEED_INFO"]["time"][DATA["SPEED_INFO"]["start":]-1>
MAX_SAMPLES_ON_SCREEN:
119            DATA["SPEED_INFO"]["start"] = -MAX_SAMPLES_ON_SCREEN
120            DATA["SPEED_SETPOINT"]["start"] = -MAX_SAMPLES_ON_SCREEN
121            DATA["MOTOR_SETPOINT"]["start"] = -MAX_SAMPLES_ON_SCREEN
122
123        # Re-plot all graphs
124        self.ax[2].plot(DATA["SPEED_INFO"]["time"][DATA["SPEED_INFO"]["start":], DATA["SPEED_INFO"]["
speed_x"][DATA["SPEED_INFO"]["start":], 'b.')
125        self.ax[2].plot(DATA["SPEED_INFO"]["time"][DATA["SPEED_INFO"]["start":], DATA["SPEED_INFO"]["
speed_y"][DATA["SPEED_INFO"]["start":], 'r.')
126        self.ax[1].plot(DATA["SPEED_SETPOINT"]["time"][DATA["SPEED_SETPOINT"]["start":], DATA["
SPEED_SETPOINT"]["setpoint_x"][DATA["SPEED_SETPOINT"]["start":], 'b.')
127        self.ax[1].plot(DATA["SPEED_SETPOINT"]["time"][DATA["SPEED_SETPOINT"]["start":], DATA["
SPEED_SETPOINT"]["setpoint_y"][DATA["SPEED_SETPOINT"]["start":], 'r.')
128        self.ax[0].plot(DATA["MOTOR_SETPOINT"]["time"][DATA["MOTOR_SETPOINT"]["start":], DATA["
MOTOR_SETPOINT"]["motor_x"][DATA["MOTOR_SETPOINT"]["start":], 'b.')
129        self.ax[0].plot(DATA["MOTOR_SETPOINT"]["time"][DATA["MOTOR_SETPOINT"]["start":], DATA["
MOTOR_SETPOINT"]["motor_y"][DATA["MOTOR_SETPOINT"]["start":], 'r.')
130        self.ax[0].set_adjustable('box',True)
131        self.app.refreshPlot("plot")
132
133    def resetPlot(self):
134        DATA["SPEED_INFO"]["start"] = len(DATA["SPEED_INFO"]["time"])-3
135        DATA["SPEED_SETPOINT"]["start"] = len(DATA["SPEED_SETPOINT"]["time"])-3
136        DATA["MOTOR_SETPOINT"]["start"] = len(DATA["MOTOR_SETPOINT"]["time"])-3

```

```

137
138 def refreshGUI(self):
139     self.commSTM32()
140
141     # Refresh status bar
142     self.app.setStatusbar("Time: "+str(self.actualTime)+" [ms]", 0)
143     self.app.setStatusbar("Modes: "+str(MODES[self.actualMode]), 1)
144     self.refreshPlot()
145     """
146     self.app.setLabel("speedSetpointX", str(self.actualSpeedSetpoint[0]))
147     self.app.setLabel("speedSetpointY", str(self.actualSpeedSetpoint[1]))
148     self.app.setLabel("motorSetpointX", str(self.actualMotorSetpoint[0]))
149     self.app.setLabel("motorSetpointY", str(self.actualMotorSetpoint[1]))
150     """
151
152 def setMode(self):
153     self.mavlink.mode_selection_send(MODES_NUM[self.app.getRadioButton("optionMode")])
154     while(self.connection.out_waiting > 0):
155         time.sleep(0.001)
156     time.sleep(0.001)
157     if self.actualMode == mouseController.MOUSE_MODE_STOP:
158         self.setpointX = 0
159         self.setpointY = 0
160
161
162 def setSpeedX(self):
163     if self.actualMode == mouseController.MOUSE_MODE_SPEED:
164         self.setpointX = self.app.getEntry("speedX")
165         if self.setpointX is None or self.setpointY is None :
166             pass
167         else:
168             self.mavlink.speed_setpoint_send(float(self.setpointX), float(self.setpointY))
169             while(self.connection.out_waiting > 0):
170                 time.sleep(0.001)
171             time.sleep(0.001)
172
173 def setSpeedY(self):
174     if self.actualMode == mouseController.MOUSE_MODE_SPEED:
175         self.setpointY = self.app.getEntry("speedY")
176         if self.setpointX is None or self.setpointY is None :
177             pass
178         else:
179             self.mavlink.speed_setpoint_send(float(self.setpointX), float(self.setpointY))
180             while(self.connection.out_waiting > 0):
181                 time.sleep(0.001)
182             time.sleep(0.001)
183
184 def loadRoutine(self):
185     if (len(mouseRoutine.ROUTINE["duration"])>254 or len(mouseRoutine.ROUTINE["setpoint_x"])>254 or len(
186         (mouseRoutine.ROUTINE["setpoint_y"])>254):
187         raise ValueError("mouseRoutine too long")
188     if not (len(mouseRoutine.ROUTINE["duration"]) == len(mouseRoutine.ROUTINE["setpoint_x"]) == len(
189         mouseRoutine.ROUTINE["setpoint_y"])):
190         raise ValueError("not all components of mouseRoutine have the same lenght")
191
192     # TODO add verification on max speed and min speed
193
194     for i in tqdm(range(len(mouseRoutine.ROUTINE["duration"]))):

```

```

195     self.mavlink.point_send(mouseRoutine.ROUTINE["duration"][i],mouseRoutine.ROUTINE["setpoint_x"][i
], mouseRoutine.ROUTINE["setpoint_y"][i])
196     stop = True
197     while(self.connection.in_waiting>0 or stop):
198         # Recive messages
199         try:
200             m = self.mavlink.parse_char(self.connection.read())
201         except:
202             pass
203         if m:
204             #print(m)
205             if m.name == "POINT_LOADED":
206                 if m.point_id == i:
207                     stop = False
208             else:
209                 print ("ERROR LOADING DATA, wrong msg_id received, STOP MODE instead.")
210                 self.mavlink.mode_selection_send(MODES_NUM[0])
211                 while(self.connection.out_waiting > 0):
212                     time.sleep(0.001)
213                 time.sleep(0.001)
214                 stop = False
215 def saveLog(self):
216     log_name = "log/log_"+str(time.time_ns())+".txt"
217     with open(log_name, 'w+') as f:
218         for item in self.LOG:
219             f.write("%s\n" % item)
220     self.LOG = []
221
222 def runRoutine(self):
223     if self.actualMode == mouseController.MOUSE_MODE_AUTO_LOAD:
224         self.mavlink.mode_selection_send(mouseController.MOUSE_MODE_AUTO_RUN)
225         while(self.connection.out_waiting > 0):
226             time.sleep(0.001)
227         time.sleep(0.001)
228
229 def Prepare(self, app):
230     self.ax = []
231
232     app.setTitle("Mouse treadmill GUI")
233     app.setFont(12)
234     row = 0
235     column = 0
236
237     # Mode Selection
238     app.startFrame("modeSelection",row = row, column = column, colspan=4, rowspan = 1)
239     app.addLabel("optionModeLabel","Mode",0,0,1,1)
240     app.addRadioButton("optionMode",MODES[0],0,1,1,1)
241     app.addRadioButton("optionMode",MODES[1],0,2,1,1)
242     app.addRadioButton("optionMode",MODES[2],0,3,1,1)
243     app.setRadioButtonChangeFunction("optionMode",self.setMode)
244     app.stopFrame()
245     row = row+1
246
247     # Speed entry
248     app.startFrame("speedEntry",row = row, column = column, colspan=4, rowspan=2)
249     app.addLabel("speedXLabel", "Speed X", 0,0,2,1)
250     app.addNumericEntry("speedX",1,0,2,2)
251     app.setEntry("speedX", 0.0)
252     app.setEntryChangeFunction("speedX", self.setSpeedX)
253     app.addLabel("speedYLabel", "Speed Y",0,2,2,1)

```

```

254 app.addNumericEntry("speedY",1,2,2,2)
255 app.setEntry("speedY", 0.0)
256 app.setEntryChangeFunction("speedY", self.setSpeedY)
257 app.stopFrame()
258 row = row+2
259
260 # Reset plot button
261 app.startFrame("GUIButtons", row = row, column = column, colspan=2, rowspan=2)
262 self.app.addButton("RESET PLOTS", self.resetPlot, 0,0,1,1)
263 self.app.addButton("LOAD POINTS", self.loadRoutine, 1,0,1,1)
264 self.app.addButton("RUN ROUTINE", self.runRoutine,1,1,1,1 )
265 self.app.addButton("SAVE LOG",self.saveLog,0,1,1,1)
266 row = row+1
267
268 # Sensor Status
269 app.startFrame("sensorStatus", row = row, column = 0)
270 self.app.addLabel("sensorStatus0",SENSOR_STATUS_MSG[0], 0,0,1,1)
271 self.app.addLabel("sensorStatus1",SENSOR_STATUS_MSG[1], 1,0,3,1)
272 self.app.addLabel("sensorStatus2",SENSOR_STATUS_MSG[2], 2,0,3,1)
273 self.app.addLabel("sensorStatus3",SENSOR_STATUS_MSG[3], 3,0,3,1)
274 self.app.addLabel("sensorStatus4",SENSOR_STATUS_MSG[4], 4,0,3,1)
275 row = row+4
276
277 # Real-time data plotting
278 app.startFrame("realTimePlot", row = row, column = column, colspan = 4, rowspan = 4)
279 self.fig = app.addPlotFig("plot",0,0,4,4, showNav = True )
280 self.ax.append(self.fig.add_subplot(311))
281 self.ax.append(self.fig.add_subplot(312))
282 self.ax.append(self.fig.add_subplot(313))
283 app.stopFrame()
284 row = row+4
285
286
287 # Add status bar
288 app.addStatusbar(fields = 2, side=None)
289 app.setStatusbar("Time: 0", 0)
290 app.setStatusbar("Mode: "+MODES[0], 1)
291
292 # refresh funciton
293 app.setPollTime(100)
294 app.registerEvent(self.refreshGUI)
295
296 # Window for sensor status
297 app.startSubWindow("sensorStatus")
298 app.addLabel("status", "SENSOR_X")
299 app.stopSubWindow()
300 app.openSubWindow("sensorStatus")
301
302 return app
303 # Build and Start your application
304 def Start(self):
305     app = gui()
306
307     self.app = app
308
309     # Run the prebuild method that adds items to the UI
310     self.app = self.Prepare(self.app)
311     self.app.showAllSubWindow()
312     # Start appJar
313     self.app.go()

```

```

314
315 if __name__ == '__main__':
316     print("=====
        ")
317     print("Running GUI for mouse treadmill")
318     print("=====
        ")
319
320     # Create an instance of your application
321     App = MyApplication()
322
323     # Start your app !
324     App.Start()

```

## D.2 Routine example

```

1 ROUTINE = {
2     "duration": [500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100, 500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100, 500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100],
3     "setpoint_x": [500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100, 500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100, 500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100],
4     "setpoint_y": [500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100, 500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100,500, 500, 500, 100, 500, 500, 500, 100,500,
        500, 500, 100,500, 500, 500, 100,500, 500, 500, 100],
5 }

```

## E Data-sheets

### E.1 Sensor Data-sheet

## PMW3360DM-T2QU: Optical Gaming Navigation Chip

### General Description:

PMW3360DM-T2QU is PixArt Imaging's high end gaming integrated chip which comprises of navigation chip and IR LED integrated in a 16pin molded lead-frame DIP package. It provides best in class gaming experience with the enhanced features of high speed, high resolution, high accuracy and selectable lift detection height to fulfill professional gamers' need. The chip comes with self-adjusting variable frame rate algorithm to enable wireless gaming application. It is designed to be used with LM19-LSI lens to achieve optimum performance.

### Key Features:

- Integrated 16 pin molded lead-frame DIP package with IR LED
- Operating Voltage: 1.8V - 2.1V
- Lift detection options
  - Manual lift cut off calibration
  - 2mm
  - 3mm
- High speed motion detection 250ips (typical) and acceleration 50g (max).
- Selectable resolutions up to 12000dpi with 100dpi step size
- Resolution error of 1% (typical)
- Four wire serial port interface (SPI)
- External interrupt output for motion detection
- Internal oscillator — no clock input needed
- Self-adjusting variable frame rate for optimum power performance in wireless application
- Customizable response time and downshift time for rest modes
- Enhanced programmability
  - Angle snapping
  - Angle tunability

### Applications:


- Wired and Wireless Optical gaming mice
- Integrated input devices
- Battery-powered input devices

### Key Chip Parameters:

Parameter	Value
Power supply Range	1.8V - 2.1V
Optical Lens	1:1
Interface	4 wire Serial Port Interface (SPI)
System Clock	70MHz
Frame Rate	Up to 12000 fps
Speed	250ips (typical)
Resolution	12000 dpi
Package Type	16 pin molded lead-frame DIP package with integrated IR LED

### Ordering Information:

Part Number	Package Type
PMW3360DM-T2QU	16pin-DIP
LM19-LSI	Lens



Contents

1.0 System Level Description .....3

1.1 Pin Configuration.....3

1.2 Package Outline Drawing .....4

1.3 Assembly Drawings .....5

1.4 PCB Assembly Recommendation .....11

1.5 Reference Schematics .....12

2.0 Electrical Specifications.....14

2.1 Absolute Maximum Ratings .....14

2.2 Recommended Operating Conditions .....14

2.3 AC Electrical Specifications .....15

2.4 DC Electrical Specifications .....16

3.0 Serial Peripheral Interface (SPI) .....18

4.0 Burst mode operation .....22

5.0 SROM Download .....23

6.0 Frame Capture.....24

7.0 Power Up.....26

8.0 Shutdown .....27

9.0 Lift cut off calibration .....28

10.0 Registers Table .....29

11.0 Registers Description .....30


12.0 Document Revision History.....57



## 1.0 System Level Description

This section covers PMW3360’s guidelines and recommendations in term of chip, lens & PCB assemblies.

### 1.1 Pin Configuration

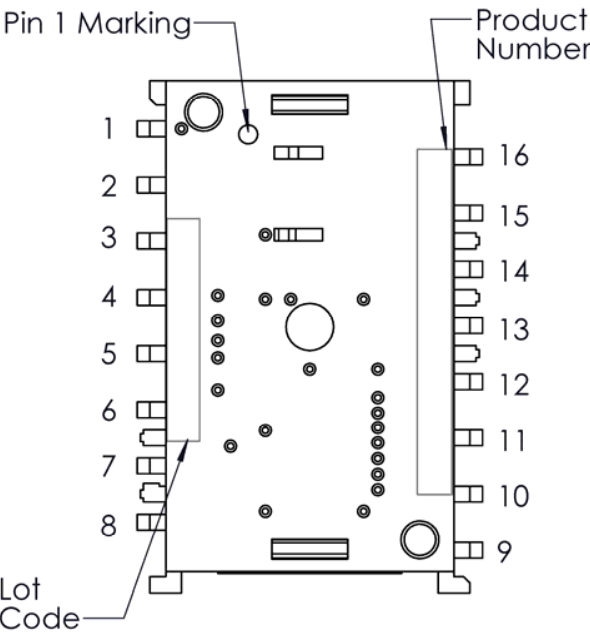

Pin No.	Function	Symbol	Type	Description
1	NA	NC	NC	(Float)
2	NA	NC	NC	(Float)
3	Supply Voltage and I/O Voltage	VDDPIX	Power	LDO output for selective analog circuit
4		VDD	Power	Input power supply
5		VDDIO	Power	I/O reference voltage
6	NA	NC	NC	(Float)
7	Reset control	NRESET	Input	Chip reset(active low)
8	Ground	GND	GND	Ground
9	Motion Output	MOTION	Output	Motion detect
10	4-wire spi communication	SCLK	Input	Serial data clock
11		MOSI	Input	Serial data input
12		MISO	Output	Serial data output
13		NCS	Input	Chip select(active low)
14	NA	NC	NC	(Float)
15	LED	LED_P	Input	LED Anode
16	NA	NC	NC	(Float)

Figure 1. Device output pins

Table 1. PMW3360DM-T2QU Pin Description

Items	Marking	Remark
Product Number	PMW3360DM-T2QU	
Lot Code	AYWWXXXXX	A : Assembly house Y: Year WW: Week XXXXX: PixArt reference

## 1.2 Package Outline Drawing

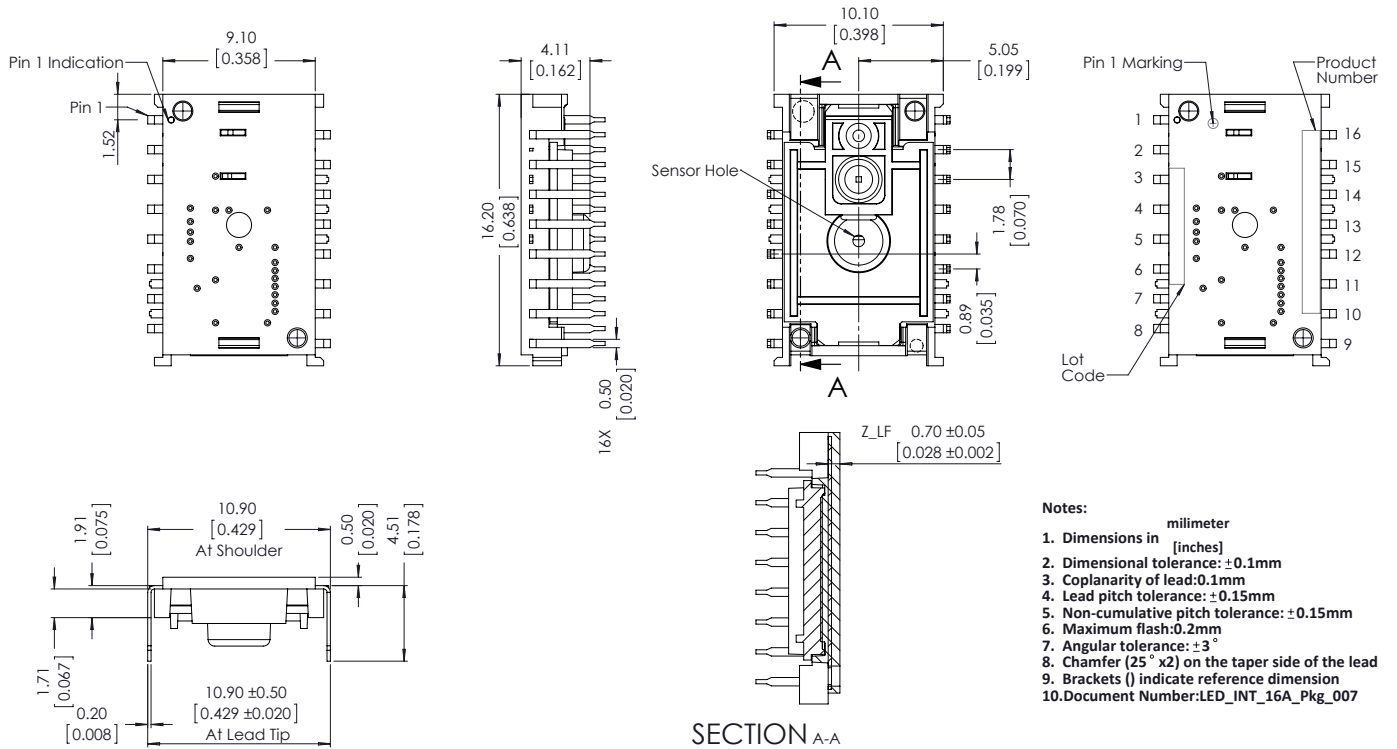
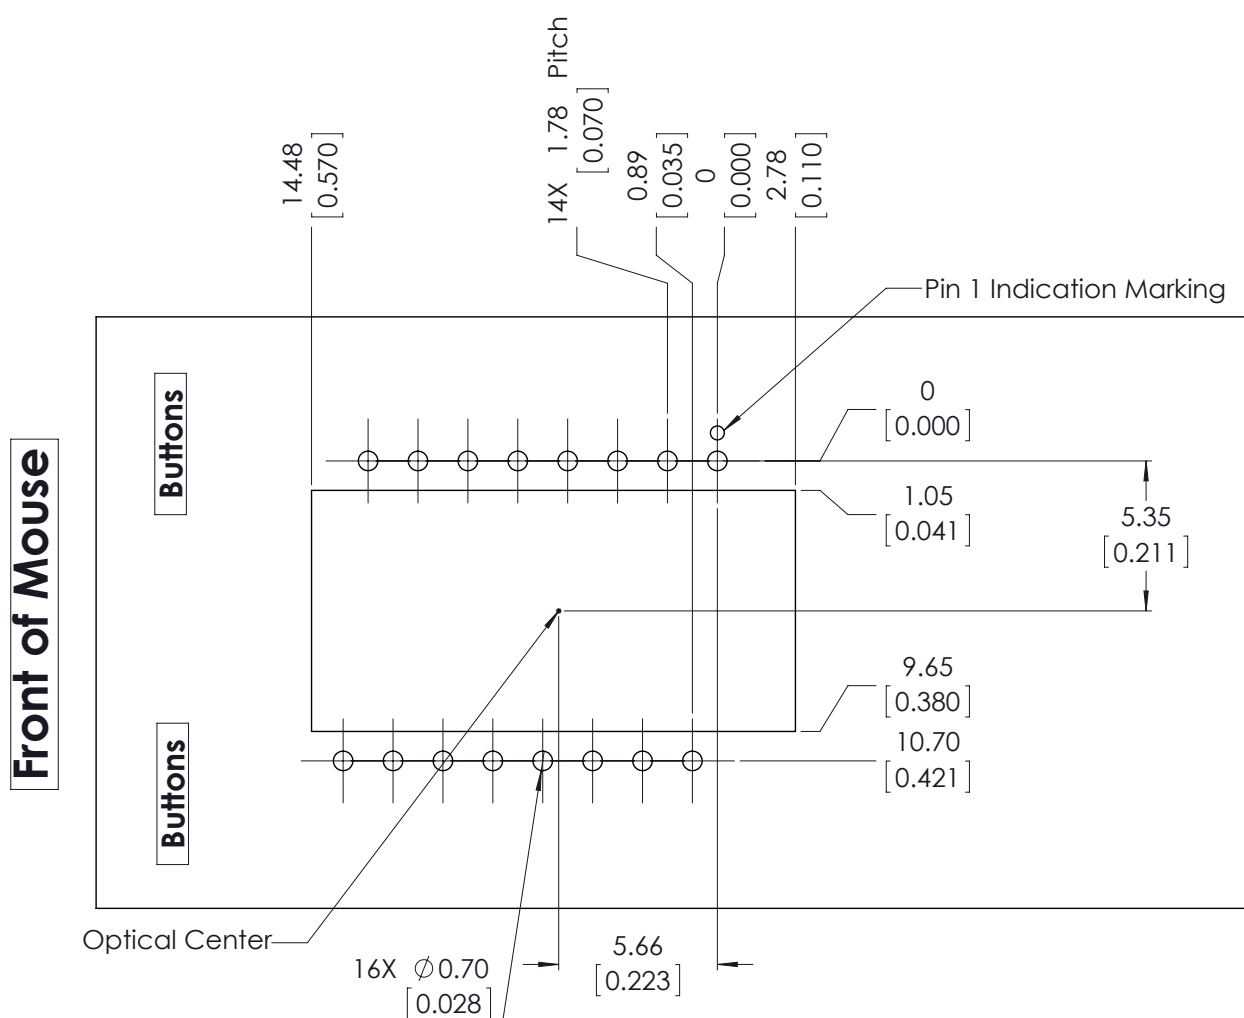


Figure 2. Package Outline Drawing

**CAUTION:** It is advised that normal static discharge precautions be taken in handling and assembling of this component to prevent damage and/or degradation which may be induced by ESD.



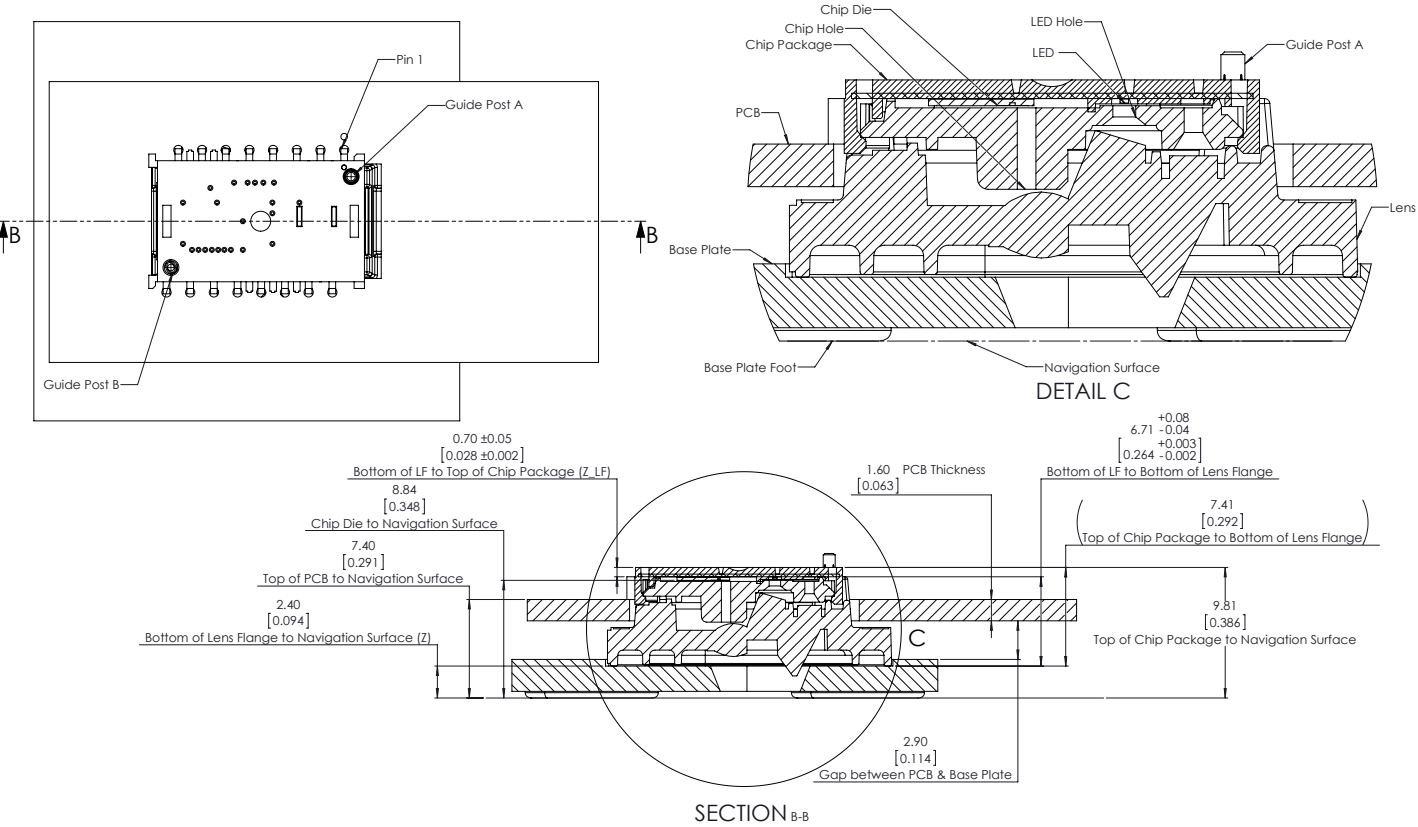


Figure 4. Assembly drawing of PMW3360DM-T2QU and distance from lens reference plane to tracking surface (Z)


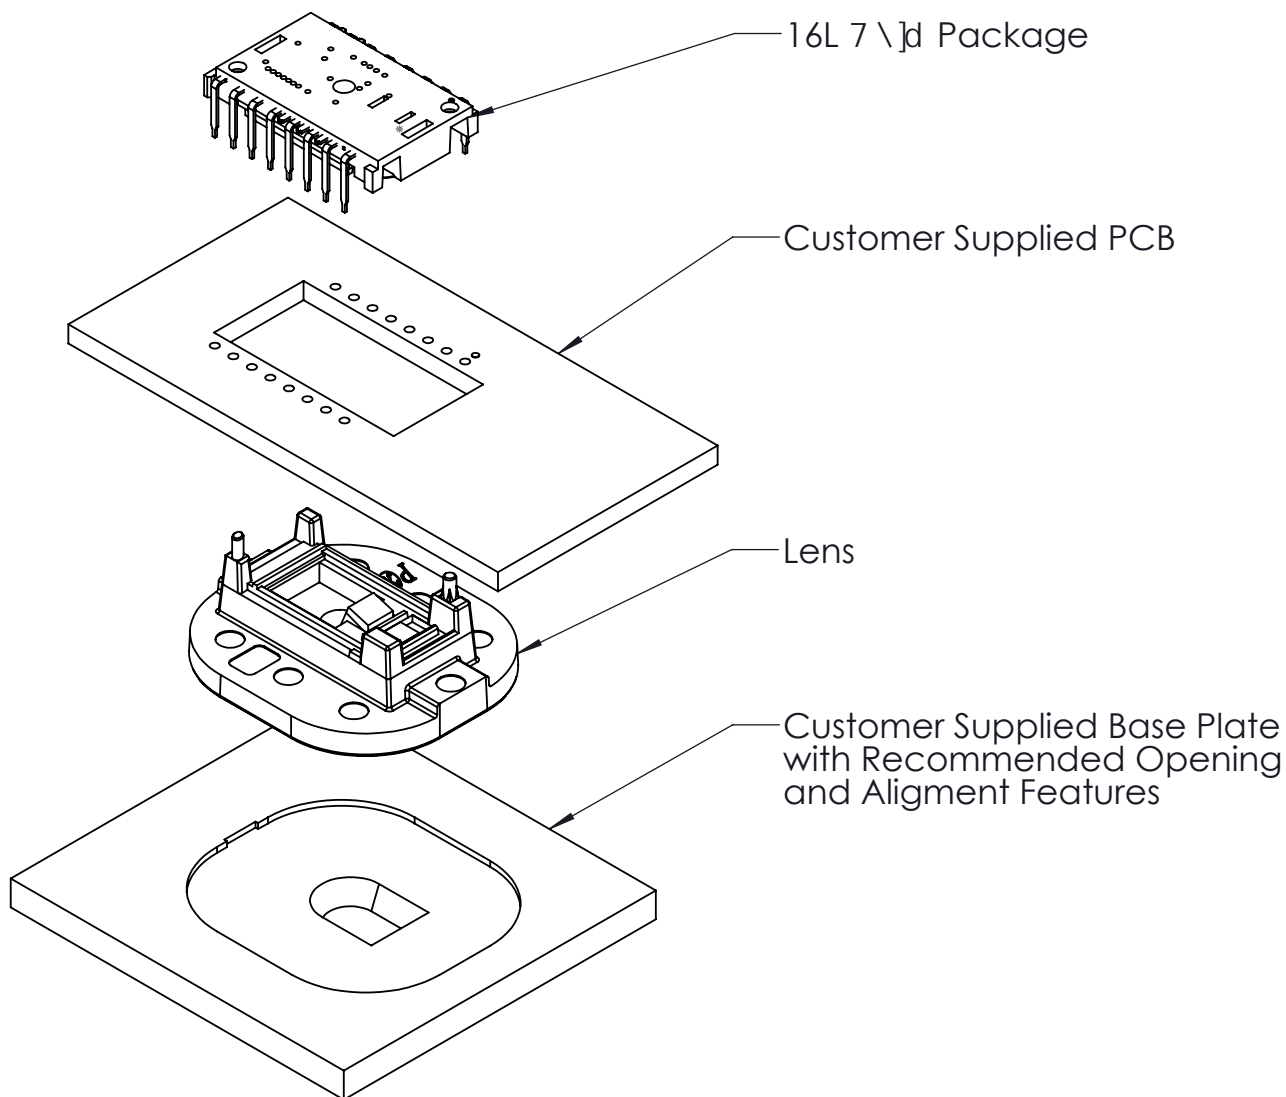


Figure 5. Exploded Assembly View

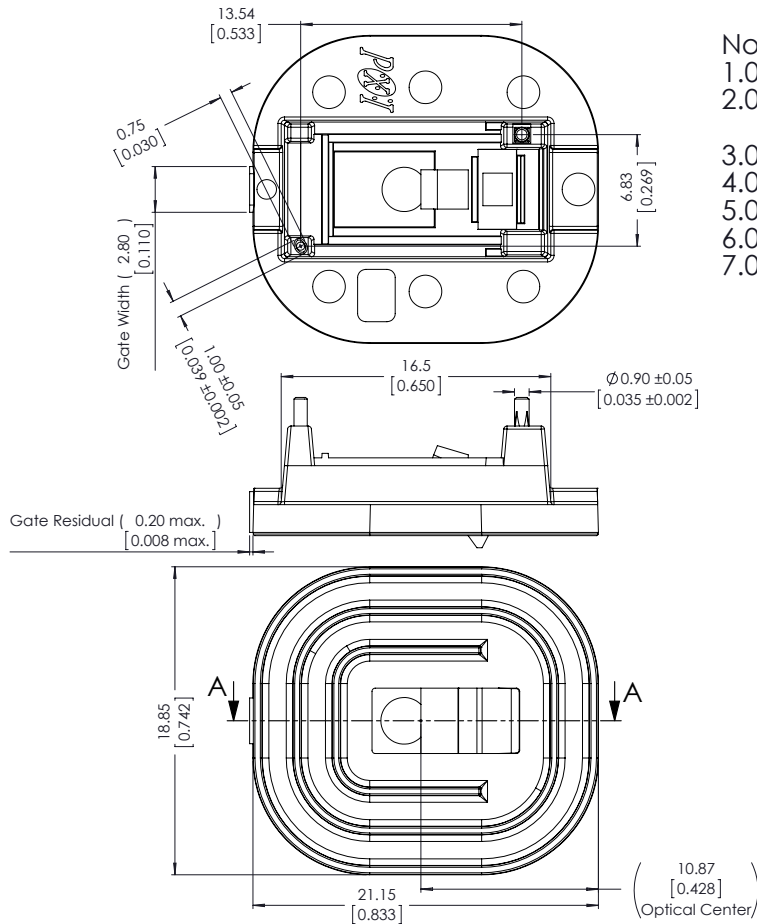

Notes:

- 1.0 Dimension in millimeters / [inches]
- 2.0 General dimension tolerance:  $\pm 0.10\text{mm}$  unless specified otherwise
- 3.0 Angular tolerance:  $\pm 3.0^\circ$
- 4.0 Maximum flash: 0.20mm
- 5.0 Bracket ( ) indicates reference dimension
- 6.0 Optical details removed
- 7.0 Document Number: PNLR-019-LSI-G8\_011

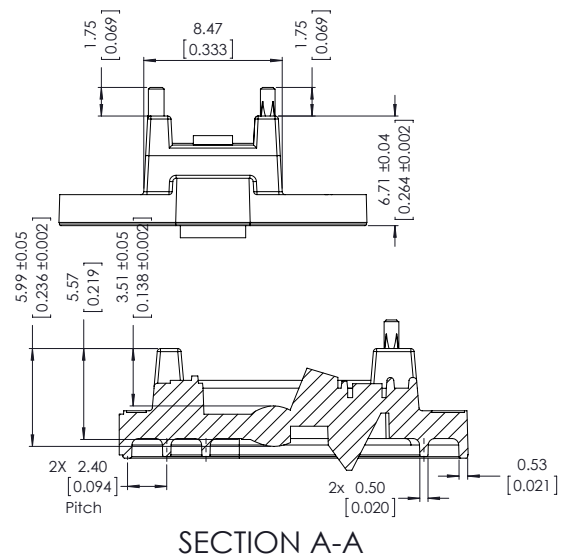


Figure 6. Lens Outline Drawing

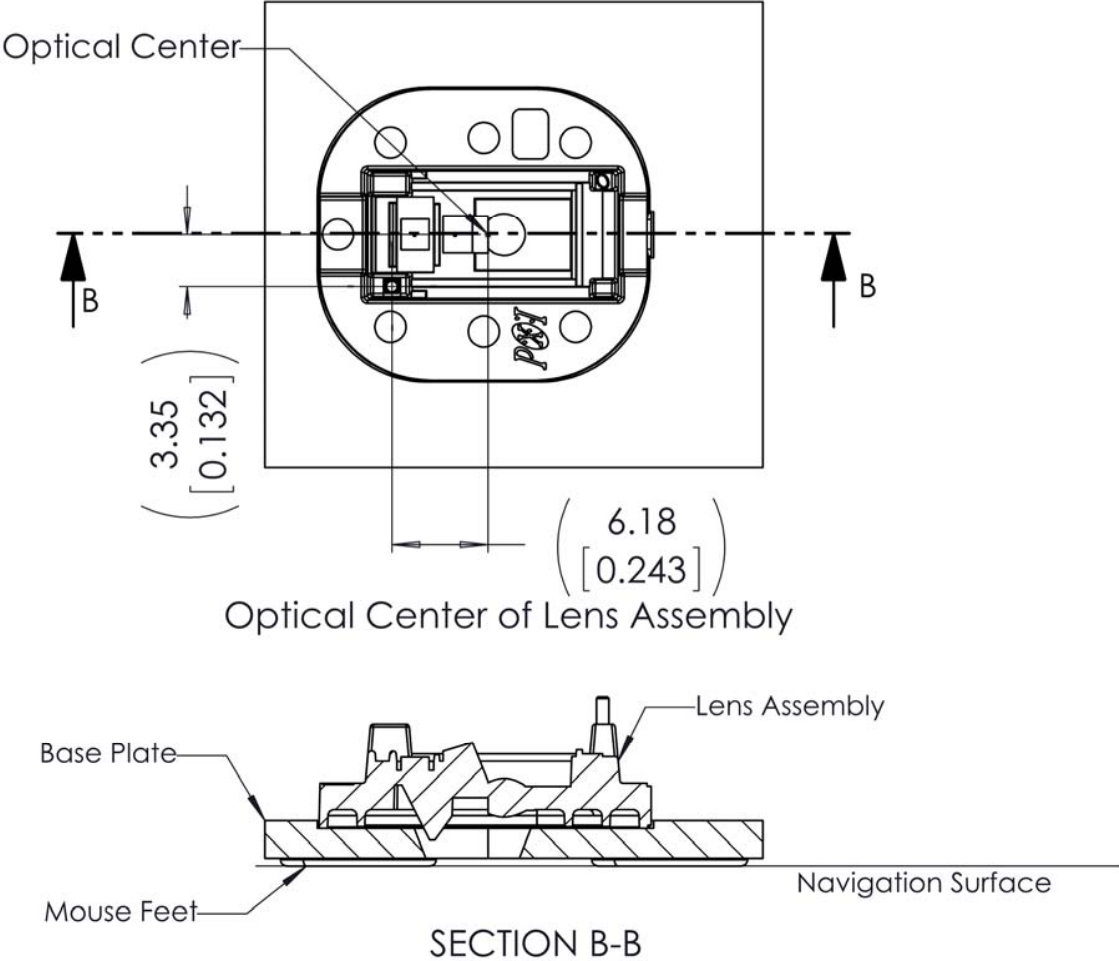


Figure 7. Cross section view of lens assembly

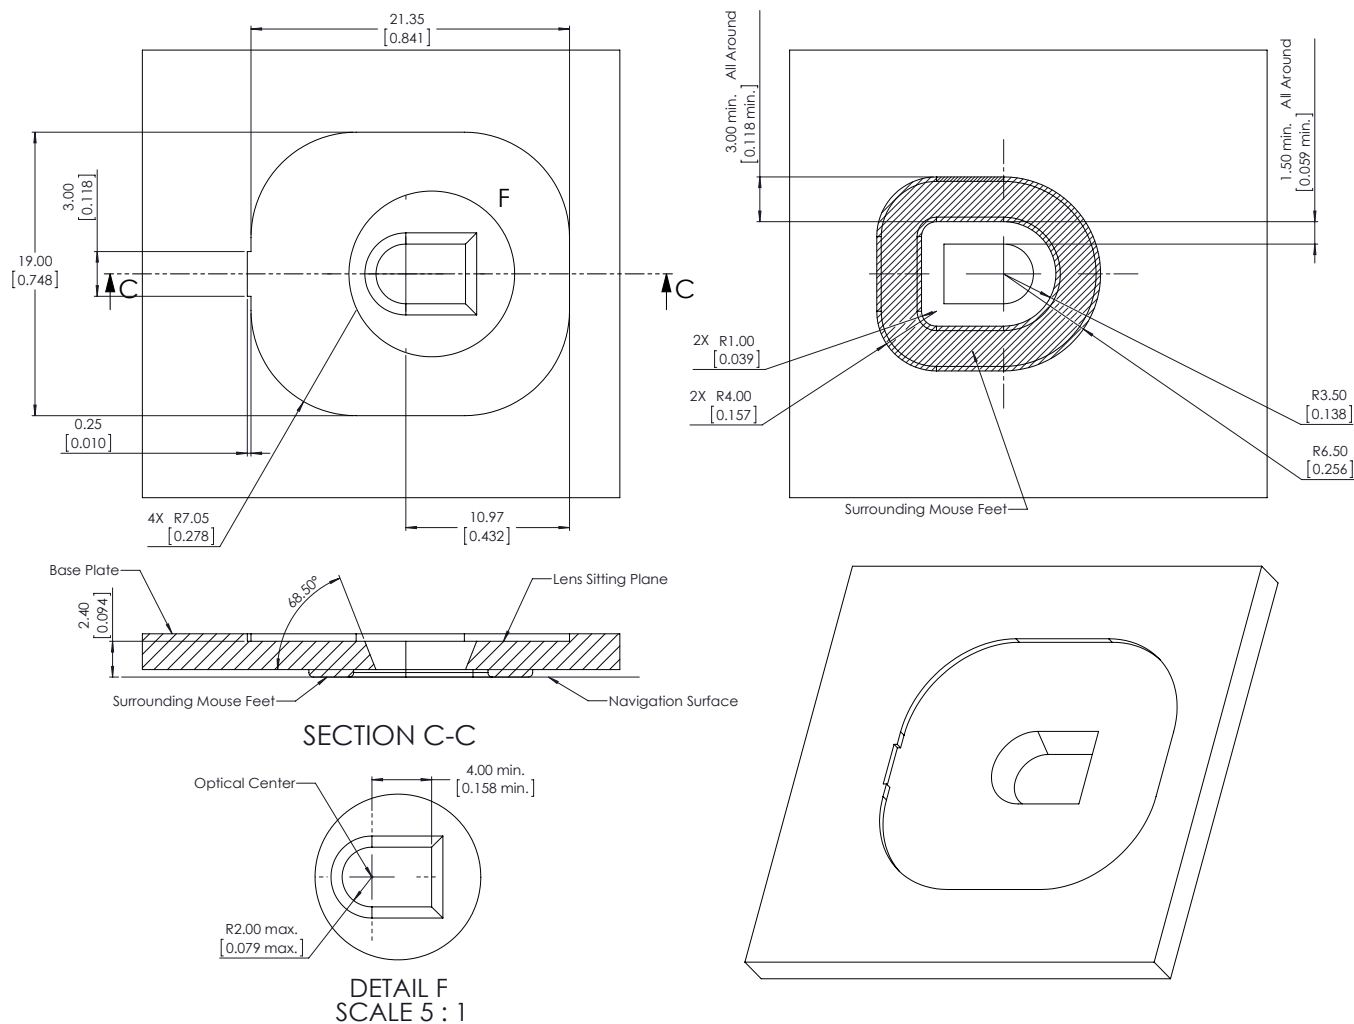


Figure 8. Recommended Base Plate Opening

**Note:** Mouse feet should be placed close to the opening to stabilize the surface within the FOV of the chip.



## 1.4 PCB Assembly Recommendation

- 1) Insert the integrated chip and all other electrical components into PCB.
- 2) Wave-solder the entire assembly in a no-wash solder process utilizing solder-fixture. A solder-fixture is required to protect the chip from flux spray and wave solder.
- 3) Avoid getting any solder flux onto the chip body as there is potential for flux to seep into the chip package, the solder fixture should be designed to expose only the chip leads to flux spray & molten solder while shielding the chip body and optical apertures. The fixture should also set the chip at the correct position and height on the PCB.
- 4) Place the lens onto the base plate. Care must be taken to avoid contamination on the optical surfaces.
- 5) Remove the protective kapton tapes from optical apertures of the chip. Care must be taken to prevent Contaminants from entering the apertures. Do not place the PCB with the chip facing up during the entire mouse assembly process. Hold the PCB vertically when removing kapton tape.
- 6) Insert PCB assembly over the lens onto the base plate aligning post to retain PCB assembly. The chip package will self-align to the lens via the guide posts. The optical position reference for the PCB is set by the base plate and lens. Note that the PCB motion due to button presses must be minimized to maintain optical alignment.
- 7) **Recommendation:** The lens can be permanently secured to the chip package by melting the lens' guide posts over the chip with heat staking process. Please refer to the application note PMS0122-LM19-LSI-AN for more details.
- 8) Install mouse top case. There must be a feature in the top case to press down onto the PCB assembly to ensure all components are stacked or interlocked to the correct vertical height.

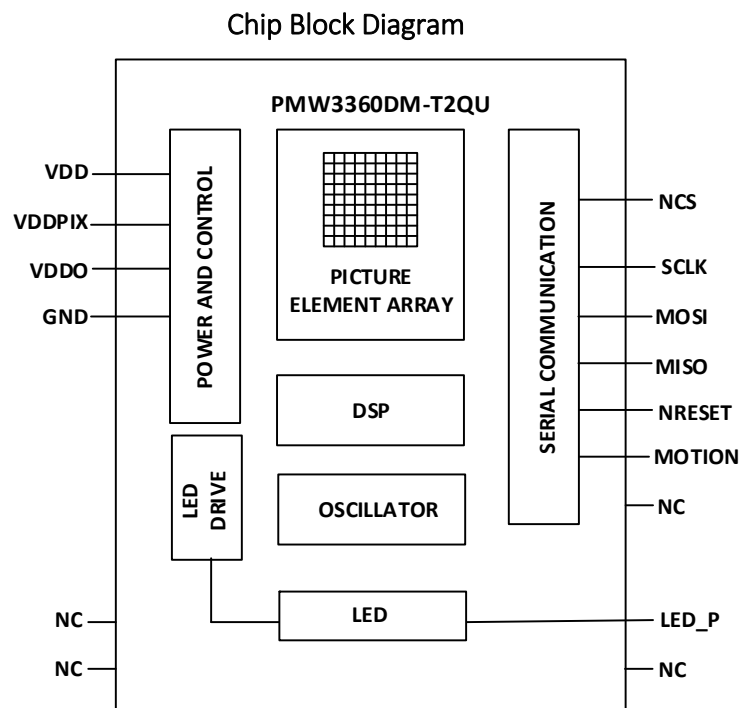


Figure 9. Block diagram of PMW3360DM-T2QU

1.5 Reference Schematics

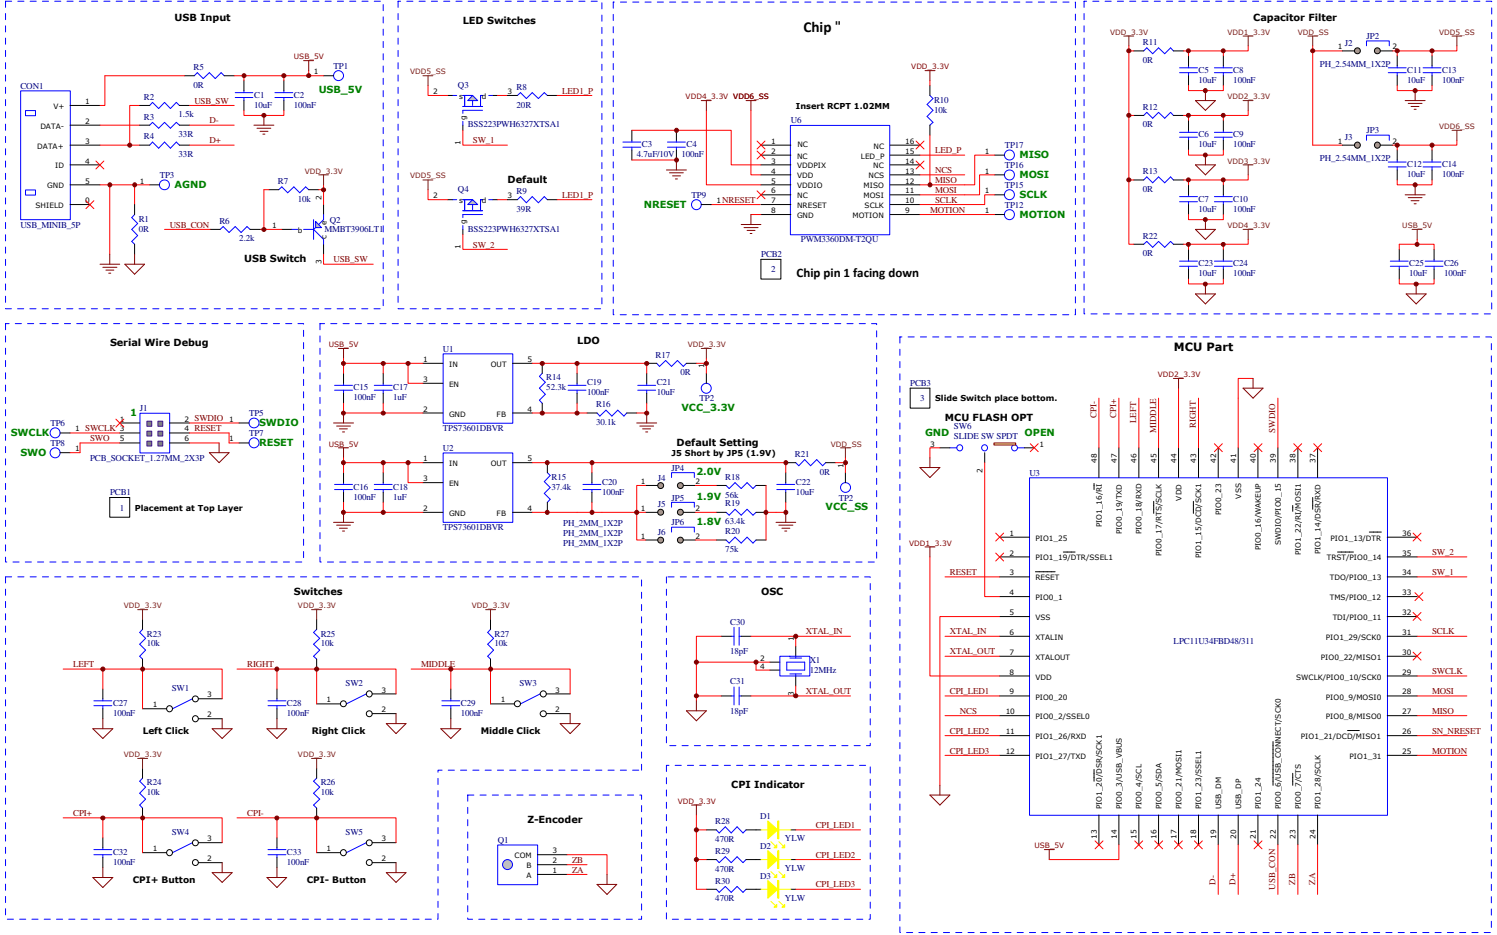


Figure 10. Schematic diagram for interface between PMW3360DM-T2QU and microcontroller on a wired solution

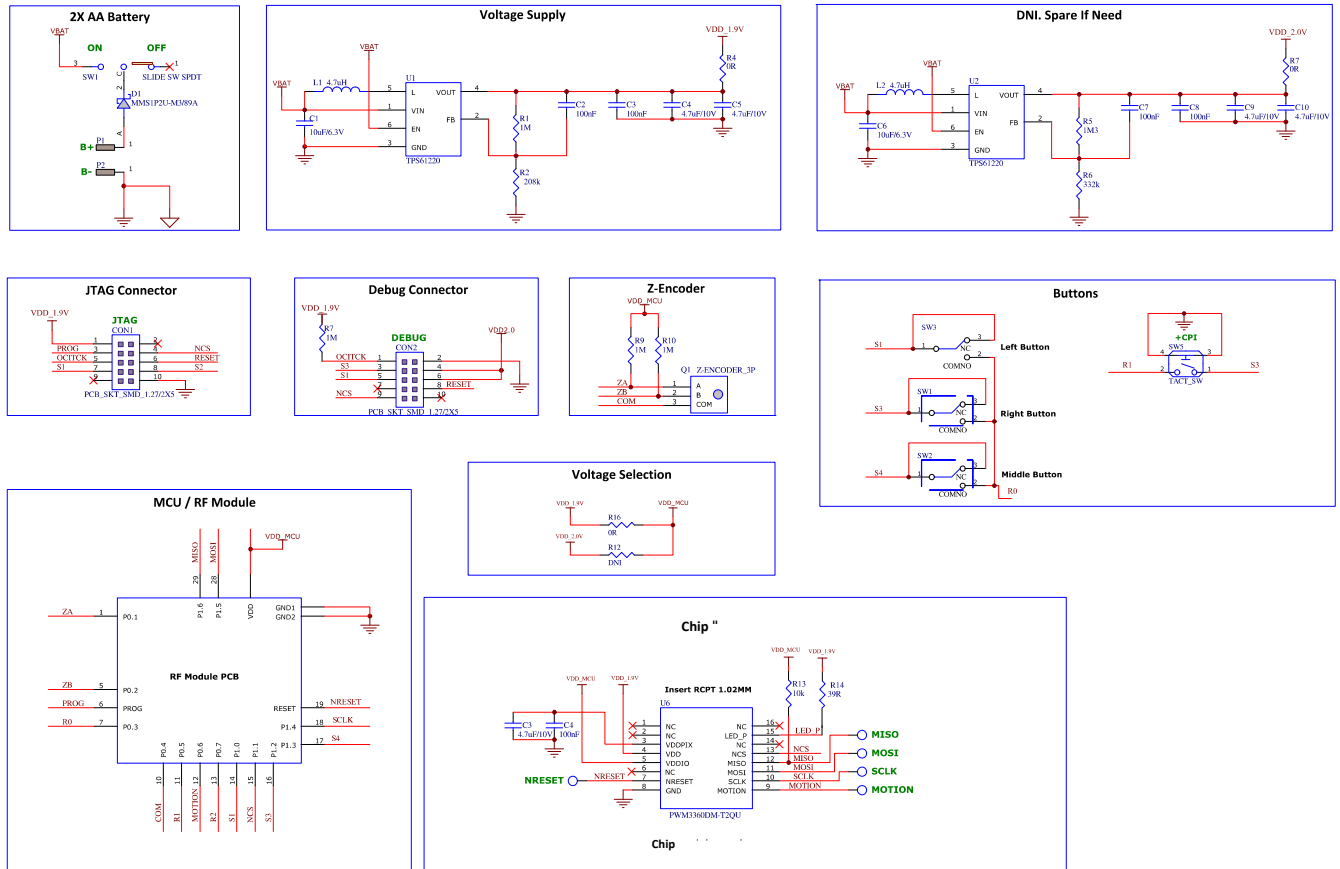


Figure 11. Schematic diagram for interface between PMW3360DM-T2QU and microcontroller on a wireless solution

## 2.0 Electrical Specifications

### Regulatory Requirements

- Passes FCC “Part15, Subpart B, Class B”, “CISPR 22 1997 Class B” and worldwide analogous emission limits when assembled into a mouse with shielded cable and following PixArt Imaging’s recommendations.
- Passes IEC 62471: 2006 Photo biological safety of lamps and lamp systems

### 2.1 Absolute Maximum Ratings

Table 2: Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units	Notes
Storage Temperature	$T_S$	-40	85	°C	
Lead Solder Temperature	$T_{SOLDER}$		260	°C	For 7 seconds, 1.6mm below seating plane.
Supply Voltage	$V_{DD}$	-0.5	2.10	V	
	$V_{DDIO}$	-0.5	3.60	V	
ESD (Human Body Model)			2	kV	All pins
Input Voltage	$V_{IN}$	-0.5	3.6	V	All I/O pins.

### 2.2 Recommended Operating Conditions

Table 3: Recommended Operating Condition

Parameter	Symbol	Min	Typ.	Max	Units	Notes
Operating Temperature	$T_A$	0		40	°C	
Power Supply Voltage	$V_{DD}$	1.80	1.90	2.10	V	excluding supply noise
	$V_{DDIO}$	1.80	1.90	3.60	V	excluding supply noise. (VDDIO must be same or greater than VDD)
Power Supply Rise Time	$t_{RT}$	0.15		20	ms	0 to VDD min
Supply Noise (Sinusoidal)	$V_{NA}$			100	mVp-p	10 kHz — 75 MHz
Serial Port Clock Frequency	$f_{SCLK}$			2.0	MHz	50% duty cycle
Distance from Lens Reference Plane to Tracking Surface	Z	2.2	2.4	2.6	mm	
Speed	S		250		ips	300ips on QCK, Vespula Speed, Vespula Control and FUNC 1030 surfaces
Resolution error	$R_{resErr}$		1		%	Up to 200ips on QCK with 5000 cpi
Acceleration	A			50	g	In run mode

## 2.3 AC Electrical Specifications

**Table 4. AC Electrical Specifications**

Electrical characteristics over recommended operating conditions. Typical values at 25 °C,  $V_{DD} = 1.9\text{ V}$ ,  $V_{DDIO} = 1.9\text{ V}$ .

Parameter	Symbol	Minimum	Typical	Maximum	Units	Notes
Motion Delay After Reset	$t_{\text{MOT-RST}}$	50			ms	From reset to valid motion, assuming motion is present
Shutdown	$t_{\text{STDWN}}$			500	$\mu\text{s}$	From Shutdown mode active to low current
Wake From Shutdown	$t_{\text{WAKEUP}}$	50			ms	From Shutdown mode inactive to valid motion. Notes: A RESET must be asserted after a shutdown. Refer to section “Notes on Shutdown”, also note $t_{\text{MOT-RST}}$
MISO Rise Time	$t_{\text{r-MISO}}$		50		ns	$C_L = 100\text{pF}$
MISO Fall Time	$t_{\text{f-MISO}}$		50		ns	$C_L = 100\text{pF}$
MISO Delay After SCLK	$t_{\text{DLY-MISO}}$			90	ns	From SCLK falling edge to MISO data valid, no load conditions
MISO Hold Time	$t_{\text{hold-MISO}}$	200			ns	Data held until next falling SCLK edge
MOSI Hold Time	$t_{\text{hold-MOSI}}$	200			ns	Amount of time data is valid after SCLK rising edge
MOSI Setup Time	$t_{\text{setup-MOSI}}$	120			ns	From data valid to SCLK rising edge
SPI Time Between Write Commands	$t_{\text{SWW}}$	180			$\mu\text{s}$	From rising SCLK for last bit of the first data byte, to rising SCLK for last bit of the second data byte.
SPI Time Between Write And Read Commands	$t_{\text{SWR}}$	180			$\mu\text{s}$	From rising SCLK for last bit of the first data byte, to rising SCLK for last bit of the second address byte.
SPI Time Between Read And Subsequent Commands	$t_{\text{SRW}}$ $t_{\text{SRR}}$	20			$\mu\text{s}$	From rising SCLK for last bit of the first data byte, to falling SCLK for the first bit of the address byte of the next command.
SPI Read Address-Data Delay	$t_{\text{SRAD}}$	160			$\mu\text{s}$	From rising SCLK for last bit of the address byte, to falling SCLK for first bit of data being read.
SPI Read Address-Data Delay for Burst Mode Motion Read	$t_{\text{SRAD\_MOTBR}}$	35			$\mu\text{s}$	From rising SCLK for last bit of the address byte, to falling SCLK for first bit of data being read. Applicable for Burst Mode Motion Read only.
NCS Inactive After Motion Burst	$t_{\text{BEXIT}}$	500			ns	Minimum NCS inactive time after motion burst before next SPI usage
NCS To SCLK Active	$t_{\text{NCS-SCLK}}$	120			ns	From last NCS falling edge to first SCLK rising edge

Parameter	Symbol	Minimum	Typical	Maximum	Units	Notes
SCLK To NCS Inactive (For Read Operation)	$t_{\text{SCLK-NCS}}$	120			ns	From last SCLK rising edge to NCS rising edge, for valid MISO data transfer
SCLK To NCS Inactive (For Write Operation)	$t_{\text{SCLK-NCS}}$	35			$\mu\text{s}$	From last SCLK rising edge to NCS rising edge, for valid MOSI data transfer
NCS To MISO High-Z	$t_{\text{NCS-MISO}}$			500	ns	From NCS rising edge to MISO high-Z state
MOTION Rise Time	$t_{\text{r-MOTION}}$		50		ns	$C_L = 100\text{pF}$
MOTION Fall Time	$t_{\text{f-MOTION}}$		50		ns	$C_L = 100\text{pF}$
Input Capacitance	$C_{\text{in}}$		50		pF	SCLK, MOSI, NCS
Load Capacitance	$C_L$			100	pF	MISO, MOTION
Transient Supply Current	$I_{\text{DDT}}$			70	mA	Max supply current during the supply ramp from 0V to $V_{\text{DD}}$ with min 150 $\mu\text{s}$ and max 20ms rise time. (Does not include charging currents for bypass capacitors)
	$I_{\text{DDTIO}}$			60	mA	Max supply current during the supply ramp from 0V to $V_{\text{DDIO}}$ with min 150 $\mu\text{s}$ and max 20ms rise time. (Does not include charging currents for bypass capacitors)

## 2.4 DC Electrical Specifications

Table 5. DC Electrical Specifications

Electrical characteristics, over recommended operating conditions. Typical values at 25 °C,  $V_{\text{DD}} = 1.9\text{V}$ ,  $V_{\text{DDIO}} = 1.9\text{V}$ , LED current at 12mA, 70MHz (internal), and 1.1kHz (slow clock).

Parameter	Symbol	Min	Typ.	Max	Units	Notes
DC Supply Current	$I_{\text{DD\_RUN1}}$		16.3		mA	Average current consumption, including LED current with 1ms polling.
	$I_{\text{DD\_RUN2}}$		18.6		mA	
	$I_{\text{DD\_RUN3}}$		21.6		mA	
	$I_{\text{DD\_RUN4}}$		37.0		mA	
	$I_{\text{DD\_REST1}}$		2.8		mA	
	$I_{\text{DD\_REST2}}$		61.0		$\mu\text{A}$	
	$I_{\text{DD\_REST3}}$		32.0		$\mu\text{A}$	
Power Down Current	$I_{\text{PD}}$		10		$\mu\text{A}$	
Input Low Voltage	$V_{\text{IL}}$			$0.3 \times V_{\text{DDIO}}$	V	SCLK, MOSI, NCS
Input High Voltage	$V_{\text{IH}}$	$0.7 \times V_{\text{DDIO}}$			V	SCLK, MOSI, NCS
Input Hysteresis	$V_{\text{I\_HYS}}$		100		mV	SCLK, MOSI, NCS
Input Leakage Current	$I_{\text{leak}}$		$\pm 1$	$\pm 10$	$\mu\text{A}$	$V_{\text{in}} = V_{\text{DDIO}}$ or 0V, SCLK, MOSI, NCS
Output Low Voltage	$V_{\text{OL}}$			0.45	V	$I_{\text{out}} = 1\text{mA}$ , MISO, MOTION
Output High Voltage	$V_{\text{OH}}$	$V_{\text{DDIO}} - 0.45$			V	$I_{\text{out}} = -1\text{mA}$ , MISO, MOTION

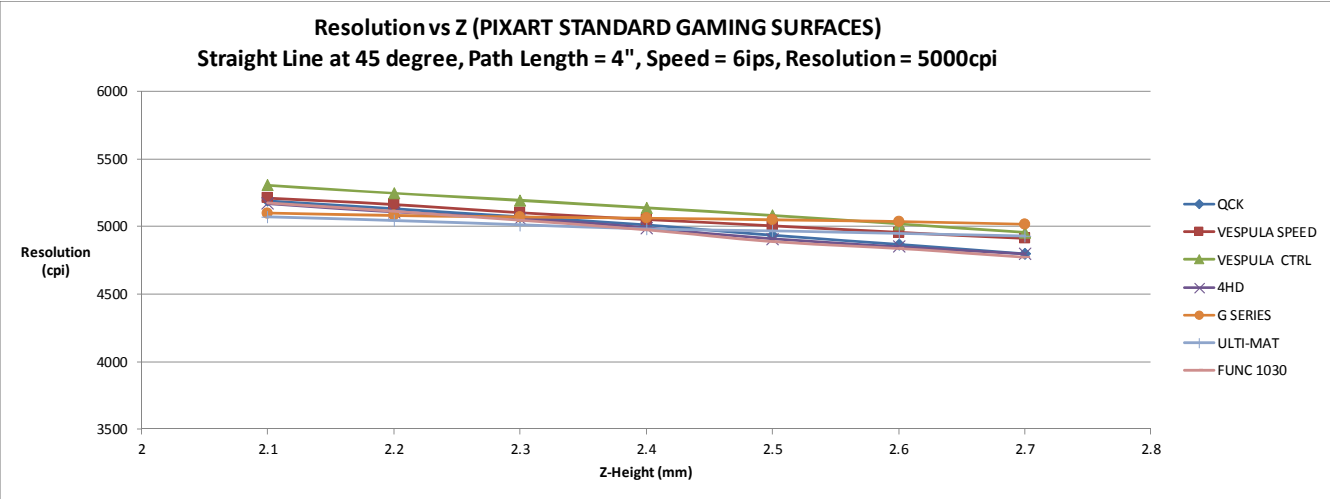


Figure 12 Mean Resolution vs. Z at default resolution at 5000cpi

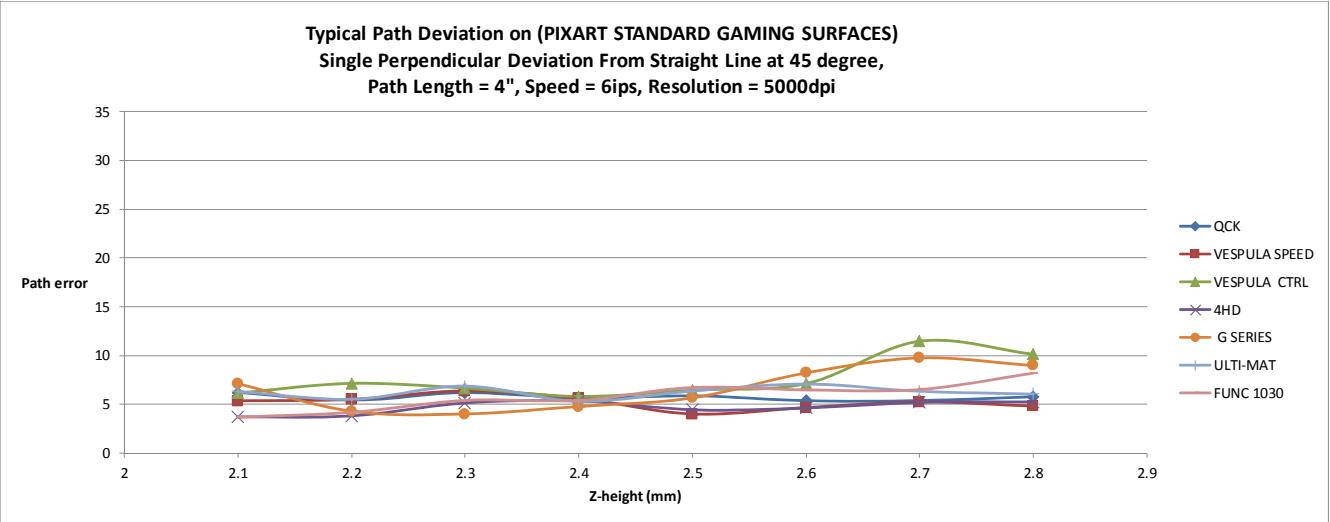


Figure 13 Path error vs. Z-height at default resolution at 5000cpi (mm)

### 3.0 Serial Peripheral Interface (SPI)

The synchronous serial port is used to set and read parameters in PMW3360DM-T2QU chip, and to read out the motion information. The serial port is also used to load SROM data into PMW3360DM-T2QU chip.

The port is a four wire port. The host microcontroller always initiates communication; PMW3360DM-T2QU chip never initiates data transfers. SCLK, MOSI, and NCS may be driven directly by a microcontroller. The port pins may be shared with other SPI slave devices. When the NCS pin is high, the inputs are ignored and the output is tri-stated.

The lines that comprise the SPI port are:

<b>SCLK</b>	Clock input, generated by the master (microcontroller).
<b>MOSI</b>	Input data. (Master Out/Slave In)
<b>MISO</b>	Output data. (Master In/Slave Out)
<b>NCS</b>	Chip select input (active low). <b>NCS</b> needs to be low to activate the serial port; otherwise, <b>MISO</b> will be high Z, and <b>MOSI</b> & <b>SCLK</b> will be ignored. <b>NCS</b> can also be used to reset the serial port in case of an error.

#### Motion Pin Timing

The motion pin is an active low output that signals the micro-controller when motion has occurred. The motion pin is lowered whenever the motion bit is set; in other words, whenever there is non-zero data in the Delta\_X\_L, Delta\_X\_H, Delta\_Y\_L or Delta\_Y\_H registers. Clearing the motion bit (by reading Delta\_X\_L, Delta\_X\_H, Delta\_Y\_L or Delta\_Y\_H registers) will put the motion pin high.

#### Chip Select Operation

The serial port is activated after NCS goes low. If NCS is raised during a transaction, the entire transaction is aborted and the serial port will be reset. This is true for all transactions including SROM download. After a transaction is aborted, the normal address-to-data or transaction-to-transaction delay is still required before beginning the next transaction. To improve communication reliability, all serial transactions should be framed by NCS. In other words, the port should not remain enabled during periods of non-use because ESD and EFT/B events could be interpreted as serial communication and put the chip into an unknown state. In addition, NCS must be raised after each burst-mode transaction is complete to terminate burst-mode. The port is not available for further use until burst-mode is terminated.



Write Operation

Write operation, defined as data going from the micro-controller to PMW3360DM-T2QU chip, is always initiated by the micro-controller and consists of two bytes. The first byte contains the address (seven bits) and has a “1” as its MSB to indicate data direction. The second byte contains the data. PMW3360DM-T2QU chip reads MOSI on rising edges of SCLK.

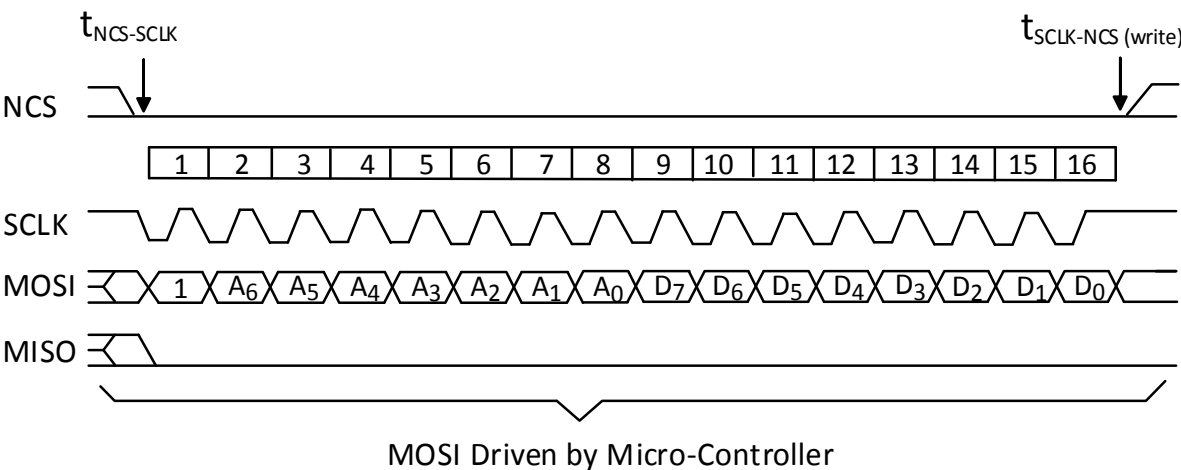


Figure 14. Write operation

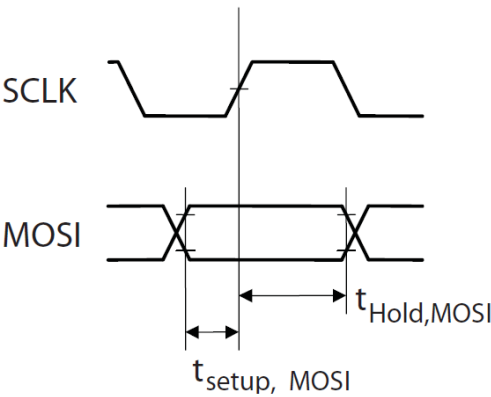


Figure 15. MOSI setup and hold time

Read Operation

A read operation, defined as data going from PMW3360DM-T2QU chip to the micro-controller, is always initiated by the micro-controller and consists of two bytes. The first byte contains the address, is sent by the micro-controller over MOSI, and has a “0” as its MSB to indicate data direction. The second byte contains the data and is driven by PMW3360DM-T2QU chip over MISO. The chip outputs MISO bits on falling edges of SCLK and samples MOSI bits on every rising edge of SCLK.

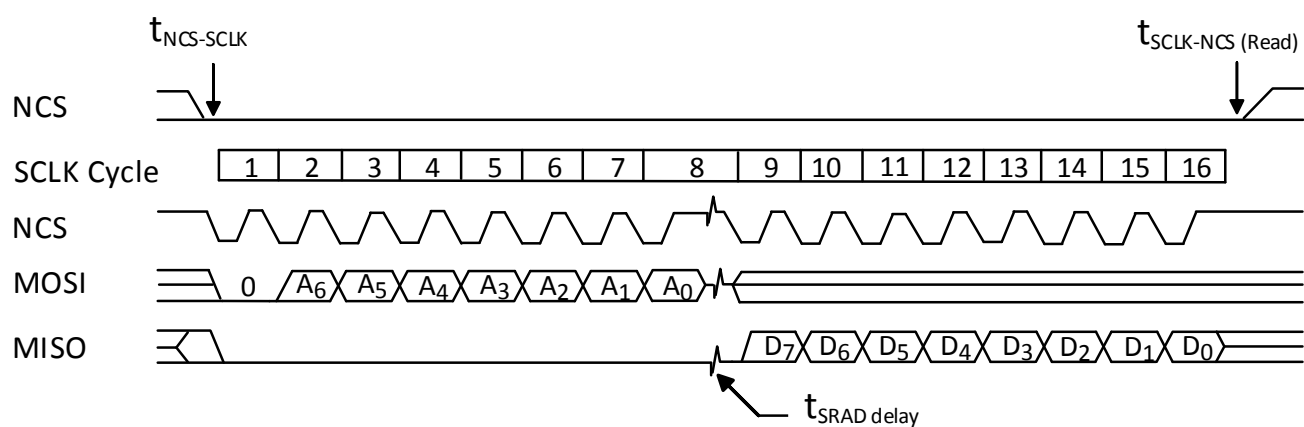


Figure 16. Read operation

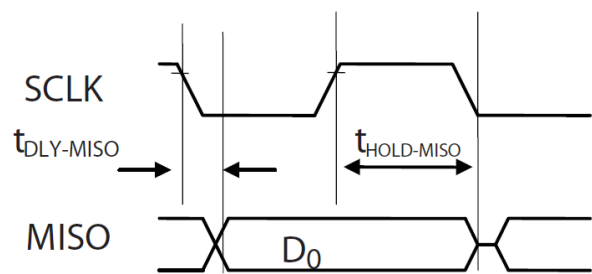


Figure 17. MISO Delay and hold time

**Note:** The minimum high state of SCLK is also the minimum MISO data hold time of PMW3360DM-T2QU chip. Since the falling edge of SCLK is actually the start of the next read or write command, PMW3360DM-T2QU chip will hold the state of data on MISO until the falling edge of SCLK.

### Required timing between Read and Write Commands ( $t_{sxx}$ )

There are minimum timing requirements between read and write commands on the serial port.

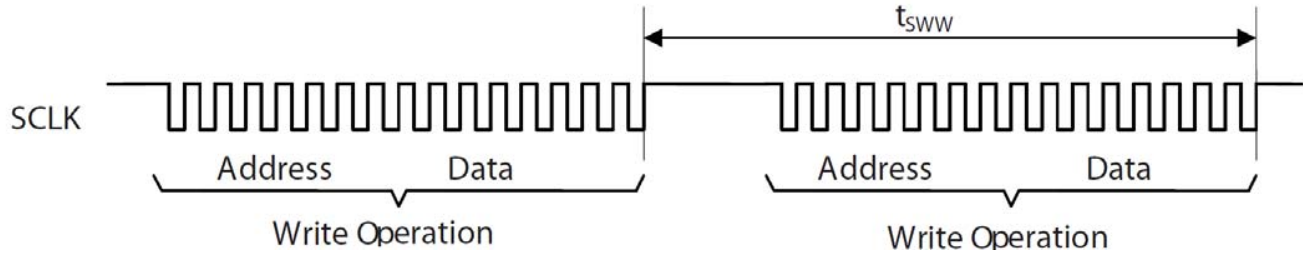


Figure 18. Timing between two write commands

If the rising edge of the SCLK for the last data bit of the second write command occurs before the  $t_{SWW}$  delay, then the first write command may not complete correctly.

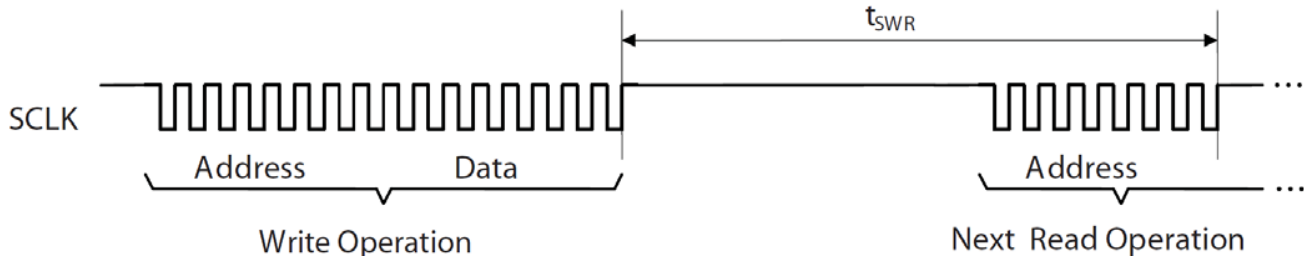


Figure 19. Timing between write and either write or subsequent read commands

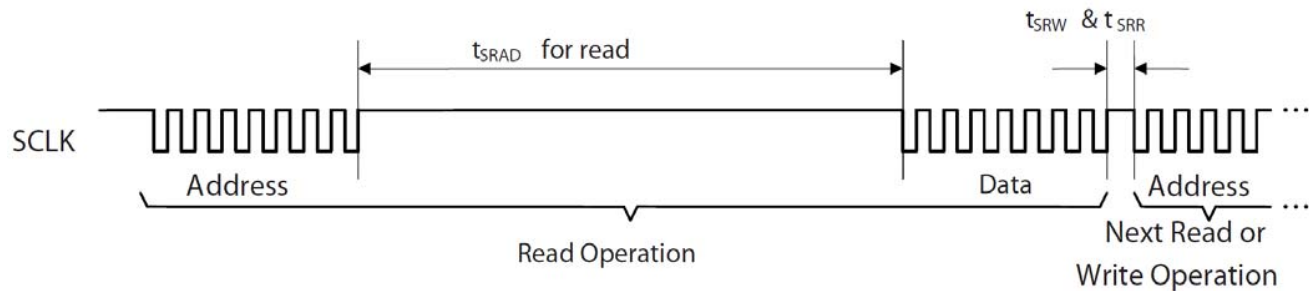


Figure 20. Timing between read and either write or subsequent read commands

If the rising edge of SCLK for the last address bit of the read command occurs before the  $t_{SWR}$  required delay, the write command may not complete correctly. During a read operation SCLK should be delayed at least  $t_{SRAD}$  after the last address data bit to ensure that the Chip has time to prepare the requested data.

The falling edge of SCLK for the first address bit of either the read or write command must be at least  $t_{SRR}$  or  $t_{SRW}$  after the last SCLK rising edge of the last data bit of the previous read operation. In addition, during a read operation SCLK should be delayed after the last address data bit to ensure that PMW3360DM-T2QU chip has time to prepare the requested data.

## 4.0 Burst mode operation

### Burst Mode Operation

Burst mode is a special serial port operation mode which may be used to reduce the serial transaction time for three predefined operations: motion read and SROM download and frame capture. The speed improvement is achieved by continuous data clocking to or from multiple registers without the need to specify the register address, and by not requiring the normal delay period between data bytes.

#### Motion Read

Reading the Motion\_Burst register activates this mode. PMW3360DM-T2QU chip will respond with the following motion burst report in order. Motion burst report:

BYTE[00] = Motion  
 BYTE[01] = Observation  
 BYTE[02] = Delta\_X\_L  
 BYTE[03] = Delta\_X\_H  
 BYTE[04] = Delta\_Y\_L  
 BYTE[05] = Delta\_Y\_H  
 BYTE[06] = SQUAL  
 BYTE[07] = Raw\_Data\_Sum  
 BYTE[08] = Maximum\_Raw\_Data  
 BYTE[09] = Minimum\_Raw\_Data  
 BYTE[10] = Shutter\_Upper  
 BYTE[11] = Shutter\_Lower

After sending the register address, the microcontroller must wait for  $t_{SRAD\_MOTBR}$ , and then begin reading data. All data bits can be read with no delay between bytes by driving SCLK at the normal rate. The data are latched into the output buffer after the last address bit is received. After the burst transmission is complete, the microcontroller must raise the NCS line for at least  $t_{BEXIT}$  to terminate burst mode. The serial port is not available for use until it is reset with NCS, even for a second burst transmission.

Procedure to start motion burst:

1. Write any value to Motion\_Burst register.
2. Lower NCS
3. Send Motion\_Burst address (0x50).
4. Wait for  $t_{SRAD\_MOTBR}$
5. Start reading SPI Data continuously up to 12 bytes. Motion burst may be terminated by pulling NCS high for at least  $t_{BEXIT}$ .
6. To read new motion burst data, repeat from step 2.
7. If a non-burst register read operation was executed; then, to read new burst data, start from step 1 instead.

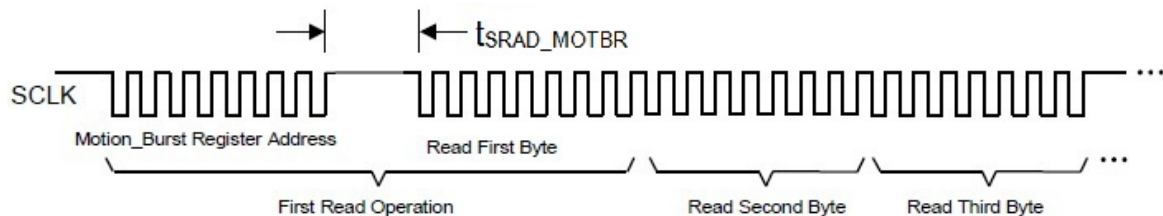


Figure 21. Motion Read sequence for step 3 to 5

**Note:** Motion burst data can be read from the Motion\_Burst registers even in run or rest mode.

## 5.0 SROM Download

This function is used to load the supplied firmware file contents into PMW3360DM-T2QU after chip power up sequence. The firmware file is an ASCII text file.

SROM download procedure:

1. Perform the Power-Up sequence (steps 1 to 8)
2. Write 0 to Rest\_En bit of Config2 register to disable Rest mode.
3. Write 0x1d to SROM\_Enable register for initializing
4. Wait for 10 ms
5. Write 0x18 to SROM\_Enable register again to start SROM Download
6. Write SROM file into SROM\_Load\_Burst register, 1<sup>st</sup> data must start with SROM\_Load\_Burst address. All the SROM data must be downloaded before SROM starts running.
7. Read the SROM\_ID register to verify the ID before any other register reads or writes.
8. Write 0x00 to Config2 register for wired mouse **or** 0x20 for wireless mouse design.

The SROM download success may be verified in two ways. Once execution from SROM space begins, the SROM\_ID register will report the firmware version. At any time, a self-test may be executed which performs a CRC on the SROM contents and reports the results in a register. Take note that the self-test does disrupt tracking performance and also reset registers to default value. The test is initiated by writing 0x15 to the SROM\_Enable register and the result is placed in the Data\_Out\_Lower and Data\_Out\_Upper registers. See register description for more details.

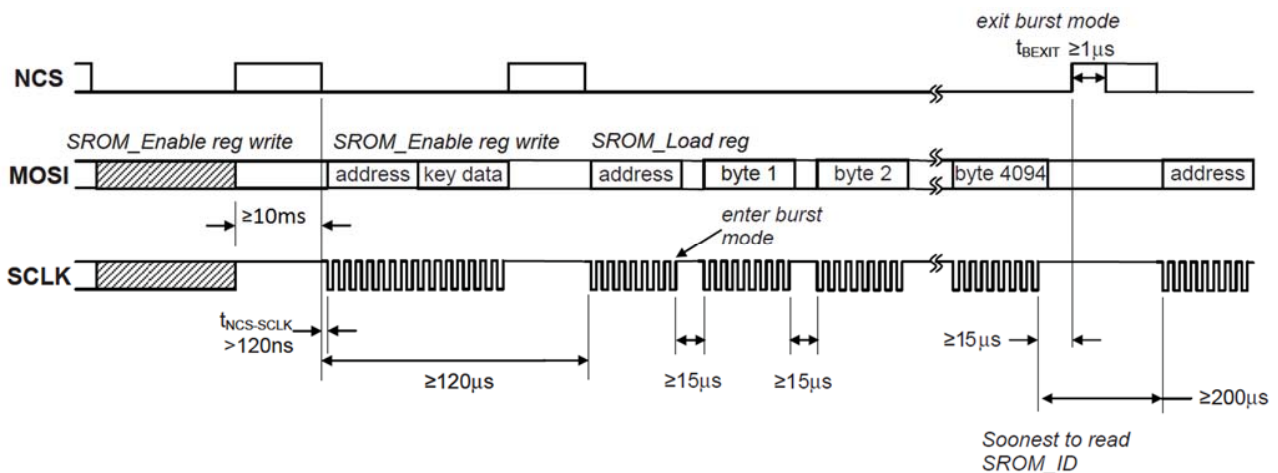


Figure 22. SROM Download Burst Mode

## 6.0 Frame Capture

This is a fast way to download a full array of raw data values from a single frame. This mode disables navigation and overwrites any downloaded firmware. A hardware reset is required to restore navigation, and the firmware must be reloaded.

To trigger the capture, write to the Frame\_Capture register. The next available complete 1 frame image will be stored to memory. The data is retrieved by reading the Raw\_Data\_Burst register using burst read method per the waveform below. If the Raw\_Data\_Burst register is read before the data is ready (step 6 below), it will return all zeros.

Frame Capture procedure:

1. The chip should be powered up and reset correctly (SROM download should be part of this powered up and reset sequence - refer to Power Up sequence in data sheet for more information).
2. Wait for 250ms.
3. Write 0 to Rest\_En bit of Config2 register to disable Rest mode.
4. Write 0x83 to Frame\_Capture register.
5. Write 0xC5 to Frame\_Capture register.
6. Wait for 20ms.
7. Continue burst read from Raw\_data\_Burst register until all 1296 raw data are transferred.
8. Continue step 1-8 to capture another frame.

**Note:** Manual reset and SROM download are needed after frame capture to restore navigation.

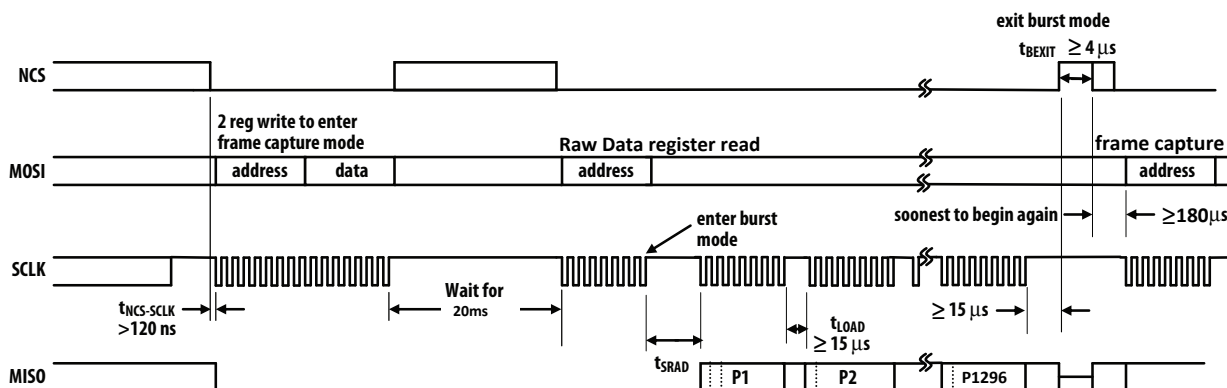


Figure 23. Frame Capture Burst Mode

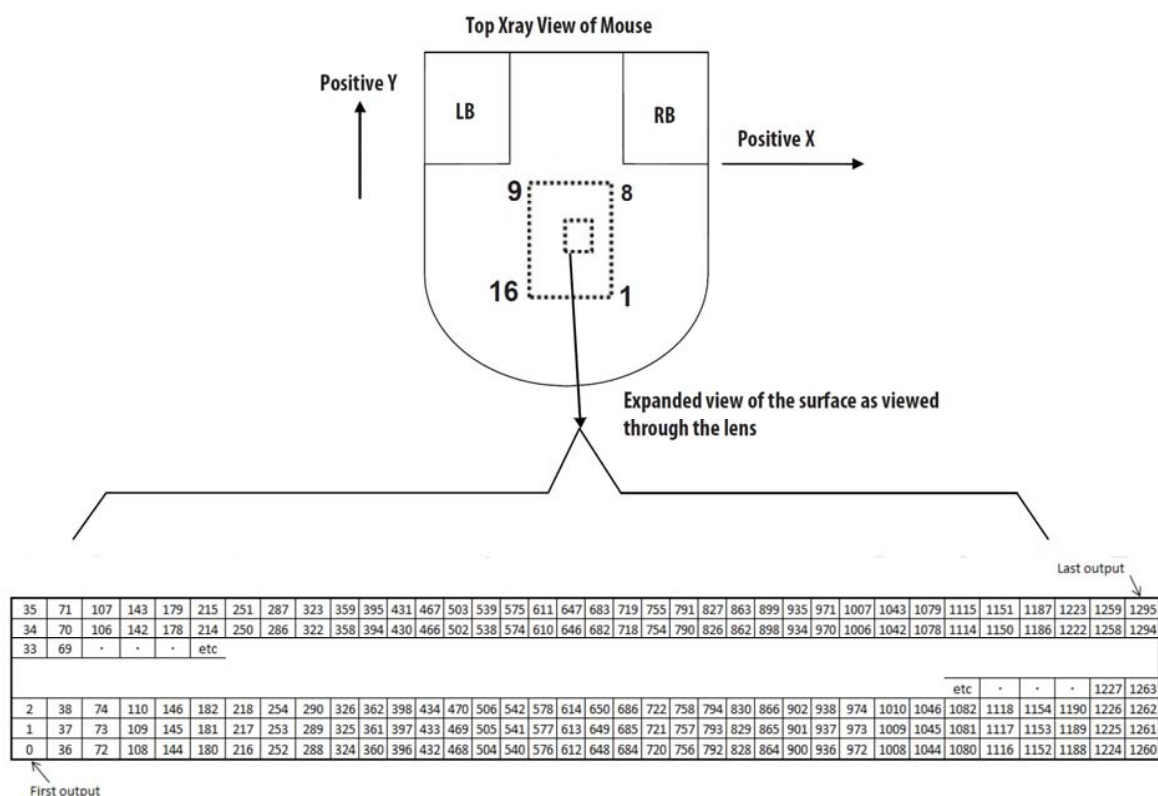


Figure 24. Raw data Map (Surface referenced)

## 7.0 Power Up

Although the chip performs an internal power up self reset, it is still recommend that the Power\_Up\_Reset register is written every time power is applied. The appropriate sequence is as follows:

1. Apply power to VDD and VDDIO in any order, with a delay of no more than 100ms in between each supply. Ensure all supplies are stable.
2. Drive NCS high, and then low to reset the SPI port.
3. Write 0x5A to Power\_Up\_Reset register (or, alternatively toggle the NRESET pin).
4. Wait for at least 50ms.
5. Read from registers 0x02, 0x03, 0x04, 0x05 and 0x06 one time regardless of the motion pin state.
6. Perform SROM download.
7. Load configuration for other registers.

During power-up there will be a period of time after the power supply is high but before normal operation. The table below shows the state of the various pins during power-up and reset.

State of Signal Pins After VDD is Valid		
Pin	During Reset	After Reset
NRESET	Functional	Functional
NCS	Ignored	Functional
MISO	Undefined	Depends on NCS
SCLK	Ignored	Depends on NCS
MOSI	Ignored	Depends on NCS
MOTION	Undefined	Functional

### NRESET

The NRESET pin can be used to perform a full chip reset. When asserted, it performs the same reset function as the Power\_Up\_Reset\_Register. The NRESET pin needs to be asserted (held to logic 0) for at least 100 ns.

*Note:- NRESET pin has a built in weak pull up circuit. During active low reset phase, it can draw a static current of up to 600uA.*



## 8.0 Shutdown

PMW3360DM-T2QU can be set in Shutdown mode by writing to Shutdown register. The SPI port should not be accessed when Shutdown mode is asserted, except the power-up command (writing 0x5a to register 0x3a). Other ICs on the same SPI bus can be accessed, as long as the chip's NCS pin is not asserted. The SROM download is required when wake up from Shutdown mode.

To de-assert Shutdown mode:

1. Drive NCS high, and then low to reset the SPI port.
2. Write 0x5A to Power\_Up\_Reset register (or, alternatively toggle the NRESET pin).
3. Wait for at least 50ms.
4. Read from registers 0x02, 0x03, 0x04, 0x05 and 0x06 one time regardless of the motion pin state.
5. Perform SROM download.
6. Load configuration for other registers.

Pin	Status when Shutdown Mode
NRESET	High
NCS	High <sup>*1</sup>
MISO	Hi-Z <sup>*2</sup>
SCLK	Ignore if NCS = 1 <sup>*3</sup>
MOSI	Ignore if NCS = 1 <sup>*4</sup>
MOTION	Output High

\*1. NCS pin must be held to 1 (high) if SPI bus is shared with other devices. It is recommended to hold to 1 (high) during Shutdown unless powering up the chip. It must be held to 0 (low) if the chip is to be re-powered up from shutdown (writing 0x5a to register 0x3a).

\*2. MISO should be either pull up or down during shutdown in order to meet the low power consumption specification in the datasheet.

\*3. SCLK is ignored if NCS is 1 (high). It is functional if NCS is 0 (low).

\*4. MOSI is ignored if NCS is 1 (high). If NCS is 0 (low), any command present on the MOSI pin will be ignored except power-up command (writing 0x5a to register 0x3a).

*Note:- There are long wakeup times from shutdown. These features should not be used for power management during normal mouse motion.*

## 9.0 Lift cut off calibration

This chip has the capability to optimize its lift performance by tuning internal parameters to the surface. This “Lift cut off calibration” feature involves user interaction.

Take note that the Lift cut off calibration procedure that follows references registers of seven Lift cut off calibration related registers: (i) LiftCutoff\_Tune1, (ii) LiftCutoff\_Tune2, (iii) LiftCutoff\_Tune3, (iv) LiftCutoff\_Tune\_Timeout, (v) LiftCutoff\_Tune\_Min\_Length, (vi) Raw\_data\_Threshold and (vii) Min\_SQ\_Run.

1. Ensure that the chip is powered up according to the Power Up Sequence.
2. Ensure that Lift cut off calibration SROM\*<sup>1</sup> is downloaded.
3. Delay for 30ms.
4. Prompt the user that the "Lift cut off calibration" procedure is about to begin to ensure that the mouse is placed nominally on the surface (mouse is not lifted).
5. Start the calibration procedure by setting RUN\_CAL register bit to 1. The calibration procedure can be started by a SW prompt to the user or user-initiated through a mouse-click event.
6. Poll CAL\_STAT[2:0] to check the status of the calibration procedure. There are three ways to successfully stop the calibration procedure: set RUN\_CAL register bit to 0 if either:
  - o CAL\_STAT[2:0] = 0x02,
  - o CAL\_STAT[2:0] = 0x02 and user initiates a stop through a mouse-click event, or,
  - o CAL\_STAT[2:0] = 0x03.
 If CAL\_STAT[2:0] = 0x04, the calibration procedure needs to be re-started.
7. Stop the calibration procedure by ensuring that the RUN\_CAL register bit is 0, then wait 1msec before reading the recommended “Raw data Threshold” register value, RPTH[6:0] (lower 7 bits of LiftCutoff\_Tune2 register). RPTH[6:0] recommends a raw data threshold value that replaces the default value in the tracking SROM’s Raw\_data\_Threshold register to improve lift performance. The Raw\_data\_Threshold register requires the Tracking SROM\*<sup>2</sup> to be loaded.
8. Read the recommended “Min SQUAL Run” register value, RMSQ[7:0] (entire 8 bits of LiftCutoff\_Tune3 register). RMSQ[7:0] recommends a Min SQUAL Run value that replaces the default value in the tracking SROM’s Min\_SQ\_Run register to improve lift performance. The Min\_SQ\_Run register requires the Tracking SROM\*<sup>2</sup> to be downloaded.
9. The Lift cut off calibration procedure is complete.

*Note:*

\*<sup>1</sup> Lift cut off calibration SROM: SROM 0x81 or above (4KB).

\*<sup>2</sup> Tracking SROM: SROM 0x03 or above (4KB).

## 10.0 Registers Table

PMW3360DM-T2QU registers are accessible via the serial port. The registers are used to read motion data and status as well as to set the device configuration.

Address	Register	Access (R = Read / W = Write or Read/Write= RW)	Default Value
0x00	Product_ID	R	0x42
0x01	Revision_ID	R	0x01
0x02	Motion	RW	0x20
0x03	Delta_X_L	R	0x00
0x04	Delta_X_H	R	0x00
0x05	Delta_Y_L	R	0x00
0x06	Delta_Y_H	R	0x00
0x07	SQUAL	R	0x00
0x08	Raw_Data_Sum	R	0x00
0x09	Maximum_Raw_data	R	0x00
0x0A	Minimum_Raw_data	R	0x00
0x0B	Shutter_Lower	R	0x12
0x0C	Shutter_Upper	R	0x00
0x0D	Control	RW	0x02
0x0F	Config1	RW	0x31
0x10	Config2	RW	0x20
0x11	Angle_Tune	RW	0x00
0x12	Frame_Capture	RW	0x00
0x13	SROM_Enable	W	N/A
0x14	Run_Downshift	RW	0x32
0x15	Rest1_Rate_Lower	RW	0x00
0x16	Rest1_Rate_Upper	RW	0x00
0x17	Rest1_Downshift	RW	0x1F
0x18	Rest2_Rate_Lower	RW	0x63
0x19	Rest2_Rate_Upper	RW	0x00
0x1A	Rest2_Downshift	RW	0xBC
0x1B	Rest3_Rate_Lower	RW	0xF3
0x1C	Rest3_Rate_Upper	RW	0x01
0x24	Observation	RW	0x00
0x25	Data_Out_Lower	R	0x00
0x26	Data_Out_Upper	R	0x00
0x29	Raw_Data_Dump	RW	0x00
0x2A	SROM_ID	R	0x00
0x2B	Min_SQ_Run	RW	0x10
0x2C	Raw_Data_Threshold	RW	0x0A
0x2F	Config5	RW	0x31
0x3A	Power_Up_Reset	W	N/A
0x3B	Shutdown	W	N/A
0x3F	Inverse_Product_ID	R	0xBD
0x41	LiftCutoff_Tune3	RW	0x00
0x42	Angle_Snap	RW	0x00
0x4A	LiftCutoff_Tune1	RW	0x00
0x50	Motion_Burst	RW	0x00
0x58	LiftCutoff_Tune_Timeout	RW	0x27
0x5A	LiftCutoff_Tune_Min_Length	RW	0x09
0x62	SROM_Load_Burst	W	N/A
0x63	Lift_Config	RW	0x02
0x64	Raw_Data_Burst	R	0x00
0x65	LiftCutoff_Tune2	R	0x00

## 11.0 Registers Description

Register: 0x00								
Name: Product_ID								
Bit	7	6	5	4	3	2	1	0
Field	PID <sub>7</sub>	PID <sub>6</sub>	PID <sub>5</sub>	PID <sub>4</sub>	PID <sub>3</sub>	PID <sub>2</sub>	PID <sub>1</sub>	PID <sub>0</sub>
	Reset Value: 0x42							
Access: R/W	Read Only							
Data Type:	8-bit unsigned integer							
Usage	This value is a unique identification assigned to this model only. The value in this register does not change; it can be used to verify that the serial communications link is functional.							

Register: 0x01								
Name: Revision_ID								
Bit	7	6	5	4	3	2	1	0
Field	RID <sub>7</sub>	RID <sub>6</sub>	RID <sub>5</sub>	RID <sub>4</sub>	RID <sub>3</sub>	RID <sub>2</sub>	RID <sub>1</sub>	RID <sub>0</sub>
	Reset Value: 0x01							
Access: R/W	Read Only							
Data Type:	8-bit unsigned integer							
Usage	This register contains the current IC revision, the revision of the permanent internal firmware. It is subject to change when new IC versions are released.							

Register: 0x02								
Name: Motion								
Bit	7	6	5	4	3	2	1	0
Field	MOT	Reserved	1	RData_1st	Lift_Stat	OP_MODE <sub>1</sub>	OP_MODE <sub>2</sub>	FRAME_RData_1st
	Reset Value: 0x20							
Access: R/W	Read/ Write							
Data Type:	8-bit Field							
Usage	<p>This register allows the user to determine if motion has occurred since the last time it was read. The procedure to read the motion registers (Delta_X_L, Delta_X_H, Delta_Y_L and Delta_Y_H) is as follows:</p> <ol style="list-style-type: none"> <li>1. Write any value to the Motion register.</li> <li>2. Read the Motion register. This will freeze the Delta_X_L, Delta_X_H, Delta_Y_L and Delta_Y_H register values.</li> <li>3. If the MOT bit is set, Delta_X_L, Delta_X_H, Delta_Y_L and Delta_Y_H registers should be read in the given sequence to get the accumulated motion. Note: if Delta_X_L, Delta_X_H, Delta_Y_L and Delta_Y_H registers are not read before the motion register is read for the second time, the data in Delta_X_L, Delta_X_H, Delta_Y_L and Delta_Y_H will be lost.</li> <li>4. To read a new set of motion data (Delta_X_L, Delta_X_H, Delta_Y_L and Delta_Y_H), repeat from Step 2.</li> <li>5. If any other register was read i.e. any other register besides Motion, Delta_X_L, Delta_X_H, Delta_Y_L and Delta_Y_H, then, to read a new set of motion data, repeat from Step 1 instead.</li> </ol>							

Field Name	Description
MOT	Motion since last report or PD <b>0 = No motion</b> 1 = Motion occurred, data ready for reading in Delta_X_L, Delta_X_H, Delta_Y_L and Delta_Y_H registers
[6]	Reserved.
[5]	1
RData_1st	This bit is set when the Raw_Data_Grab register is written to or when a complete raw data array has been read, initiating an increment to raw data 0,0. <b>0 = Raw_Data_Grab data not from raw data 0,0</b> 1 = Raw_Data_Grab data is from raw data 0,0
Lift_Stat	Indicate the lift status of Chip, <b>0 = Chip on surface.</b> 1 = Chip lifted.
OP_Mode[1:0]	<b>00 – Run mode</b> 01 – Rest 1 10 – Rest 2 11 – Rest 3
FRAME_RData_1st	This bit is set to indicate first raw data in frame capture. <b>0 = Frame capture data not from raw data 0,0</b> 1 = Frame capture data is from raw data 0,0

Register: 0x03								
Name: Delta_X_L								
Bit	7	6	5	4	3	2	1	0
Field	X <sub>7</sub>	X <sub>6</sub>	X <sub>5</sub>	X <sub>4</sub>	X <sub>3</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read Only							
Data Type:	16 bits 2's complement number. Lower 8 bits of Delta_X.							
Usage	X movement is counts since last report. Absolute value is determined by resolution. Reading it clears the register.							

Register: 0x04								
Name: Delta_X_H								
Bit	7	6	5	4	3	2	1	0
Field	X <sub>15</sub>	X <sub>14</sub>	X <sub>13</sub>	X <sub>12</sub>	X <sub>11</sub>	X <sub>10</sub>	X <sub>9</sub>	X <sub>8</sub>
	Reset Value: 0x04							
Access: R/W	Read Only							
Data Type:	16 bits 2's complement number. Lower 8 bits of Delta_X.							
Usage	Delta_X_H must be read after Delta_X_L to have the full motion data. Reading it clears the register.							

Register: 0x05								
Name: Delta_Y_L								
Bit	7	6	5	4	3	2	1	0
Field	Y <sub>7</sub>	Y <sub>6</sub>	Y <sub>5</sub>	Y <sub>4</sub>	Y <sub>3</sub>	Y <sub>2</sub>	Y <sub>1</sub>	Y <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read Only							
Data Type:	16 bits 2's complement number. Lower 8 bits of Delta_Y.							
Usage	Y movement is counts since last report. Absolute value is determined by resolution. Reading it clears the register.							
	<div><div>Motion</div><div><div><div>-32768</div><div>-32767</div><div>-2</div><div>-1</div><div>0</div><div>+1</div><div>+2</div><div>+32766</div><div>+32767</div></div><div><div><div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div></div></div></div></div></div>							

Register: 0x06								
Name: Delta_Y_H								
Bit	7	6	Bit	7	6	Bit	7	6
Field	Y <sub>15</sub>	Y <sub>14</sub>	Y <sub>13</sub>	Y <sub>12</sub>	Y <sub>11</sub>	Y <sub>10</sub>	Y <sub>9</sub>	Y <sub>8</sub>
Reset Value: 0x00								
Access: R/W	Read Only							
Data Type:	16 bits 2's complement number. Upper 8 bits of Delta_Y							
Usage	Delta_Y_H must be read after Delta_Y_L to have the full motion data. Reading it clears the register							

Register: 0x07								
Name: SQUAL								
Bit	7	6	5	4	3	2	1	0
Field	SQ <sub>7</sub>	SQ <sub>6</sub>	SQ <sub>5</sub>	SQ <sub>4</sub>	SQ <sub>3</sub>	SQ <sub>2</sub>	SQ <sub>1</sub>	SQ <sub>0</sub>
Reset Value: 0x00								
Access: R/W	Read Only							
Data Type:	8-bit unsigned integer							
Usage	<p>The SQUAL (Surface quality) register is a measure of the number of valid features visible by the chip in the current frame. Use the following formula to find the total number of valid features.</p> $\text{Number of Features} = \text{SQUAL Register Value} * 8$ <p>The maximum SQUAL register value is 0x80. Since small changes in the current frame can result in changes in SQUAL, variations in SQUAL when looking at a surface are expected. The graph below shows 883 sequentially acquired SQUAL values, while a chip was moved slowly over white paper.</p> <p>SQUAL values are only valid in run mode. Disable Rest mode before measuring SQUAL.</p>							

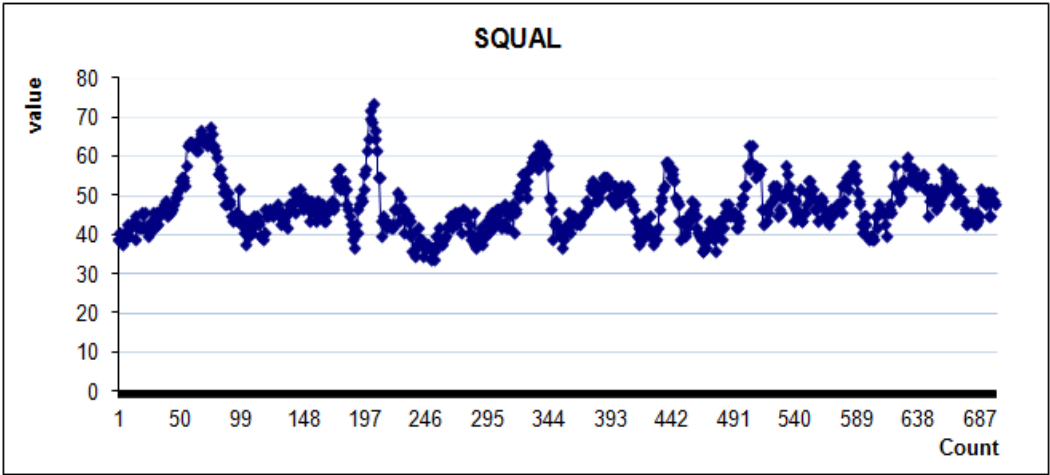


Figure 25. Average SQUAL on white paper

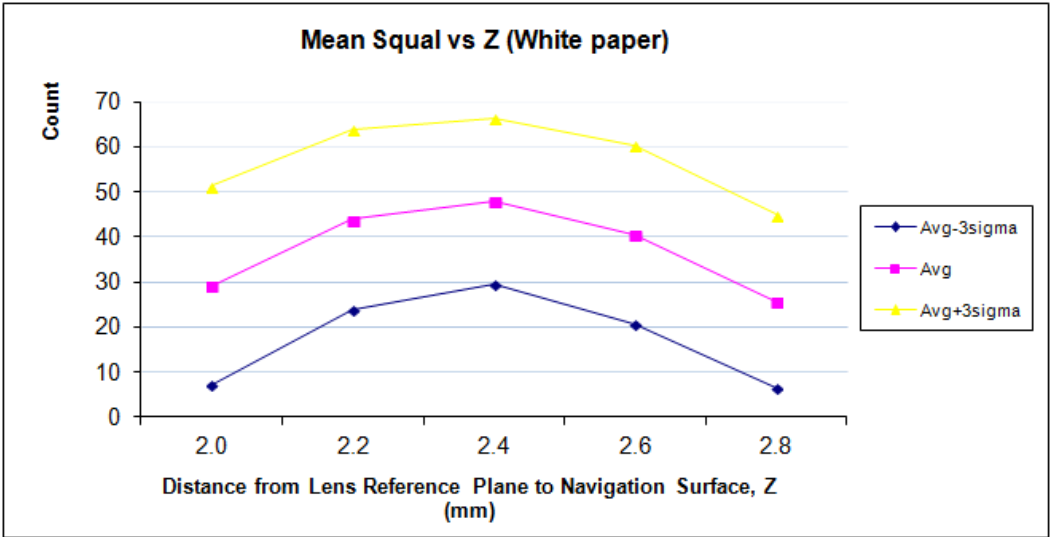


Figure 26. Mean SQUAL vs Z



Register: 0x08								
Name: Raw_Data_Sum								
Bit	7	6	5	4	3	2	1	0
Field	AP <sub>7</sub>	AP <sub>6</sub>	AP <sub>5</sub>	AP <sub>4</sub>	AP <sub>3</sub>	AP <sub>2</sub>	AP <sub>1</sub>	AP <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read Only							
Data Type:	8-bit unsigned integer							
Usage	<p>This register is used to find the average raw data value. It reports the upper byte of an 18-bit counter which sums all 1296 raw data in the current frame. To find the average raw data values follow the formula below.</p> $\text{Average Raw Data} = \text{Register Value} * 1024 / 1296$ <p>The maximum register value is 160(Dec) (0xA0) (127 * 1296 / 1024 truncated to an integer). The minimum register value is 0. The raw data sum value can change every frame</p>							

Register: 0x09								
Name: Maximum_Raw_Data								
Bit	7	6	5	4	3	2	1	0
Field	MRD <sub>7</sub>	MRD <sub>6</sub>	MRD <sub>5</sub>	MRD <sub>4</sub>	MRD <sub>3</sub>	MRD <sub>2</sub>	MRD <sub>1</sub>	MRD <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read Only							
Data Type:	8-bit unsigned integer							
Usage	Maximum Raw data value in current frame. Minimum value = 0, maximum value = 127. The maximum raw data value can change every frame							

Register: 0x0A								
Name: Minimum_Raw_Data								
Bit	7	6	5	4	3	2	1	0
Field	MinRD <sub>7</sub>	MinRD <sub>6</sub>	MinRD <sub>5</sub>	MinRD <sub>4</sub>	MinRD <sub>3</sub>	MinRD <sub>2</sub>	MinRD <sub>1</sub>	MinRD <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read Only							
Data Type:	8-bit unsigned integer							
Usage	Minimum Raw data value in current frame. Minimum value = 0, maximum value = 127. The minimum raw data value can change every frame							

Register: 0x0B								
Name: Shutter_Lower								
Bit	7	6	5	4	3	2	1	0
Field	S <sub>7</sub>	S <sub>6</sub>	S <sub>5</sub>	S <sub>4</sub>	S <sub>3</sub>	S <sub>2</sub>	S <sub>1</sub>	S <sub>0</sub>
	Reset Value: 0x12							
Access: R/W	Read Only							
Data Type:	16-bit unsigned number							
Usage	Lower byte of the 16bit Shutter register							

Register: 0x0C								
Name: Shutter_Upper								
Bit	7	6	5	4	3	2	1	0
Field	S <sub>15</sub>	S <sub>14</sub>	S <sub>13</sub>	S <sub>12</sub>	S <sub>11</sub>	S <sub>10</sub>	S <sub>9</sub>	S <sub>8</sub>
	Reset Value: 0x00							
Access: R/W	Read Only							
Data Type:	16-bit unsigned number							
Usage	Units are clock cycles of the internal oscillator. Read Shutter_Upper first, then Shutter_Lower. They should be read consecutively. The shutter is adjusted to keep the average raw data values within normal operating ranges. The shutter value is checked and automatically adjusted to a new value if needed on every frame when operating in default mode.							

Register: 0x0D														
Name: Control														
Bit	7	6	5	4	3	2	1	0						
Field	CTRL1 <sub>7</sub>	CTRL1 <sub>6</sub>	CTRL1 <sub>5</sub>	Reserved	Reserved	Reserved	Reserved	Reserved						
	Reset Value: 0x02													
Access: R/W	Read Write													
Data Type:	8-bit unsigned integer													
Usage	This register defines programmable invert able of XY register scheme.													
	<table><tr><th>Field Name</th><th>Description</th></tr><tr><td>CTRL1<sub>[7:5]</sub></td><td>000 - 0 degree 110 - 90 degree 011 – 180 degree 101 – 270 degree</td></tr><tr><td>Reserved<sub>[4:0]</sub></td><td>Reserved</td></tr></table>								Field Name	Description	CTRL1 <sub>[7:5]</sub>	000 - 0 degree 110 - 90 degree 011 – 180 degree 101 – 270 degree	Reserved <sub>[4:0]</sub>	Reserved
	Field Name	Description												
	CTRL1 <sub>[7:5]</sub>	000 - 0 degree 110 - 90 degree 011 – 180 degree 101 – 270 degree												
	Reserved <sub>[4:0]</sub>	Reserved												
Note: For CTRL1 <sub>[7:5]</sub> please use 0 degree for best performance														

Register: 0x0F												
Name: Config1												
Bit	7	6	5	4	3	2	1	0				
Field	RES <sub>7</sub>	RES 1 <sub>6</sub>	RES <sub>5</sub>	RES <sub>4</sub>	RES <sub>3</sub>	RES <sub>2</sub>	RES <sub>1</sub>	RES <sub>0</sub>				
	Reset Value: 0x31											
Access: R/W	Read/ Write											
Data Type:	Bit Field											
Usage	This register allows the user to change the X & Y or Y only resolution of the chip. Shown below are the bits, their default values, and optional values. The CPI of X & Y or Y only setting in this register depends on the Rpt_Mod register bit (refer to the description for Config2 register).											
	<table><tr><th>Field Name</th><th>Description</th></tr><tr><td>RES[7:0]</td><td>Set resolution with CPI step of 100 cpi 0x00: 100 cpi (Minimum cpi) 0x01: 200 cpi 0x02: 300 cpi : : <b>0x31: 5000 cpi (default cpi)</b> : : 0x77: 12000 cpi (maximum cpi )</td></tr></table>								Field Name	Description	RES[7:0]	Set resolution with CPI step of 100 cpi 0x00: 100 cpi (Minimum cpi) 0x01: 200 cpi 0x02: 300 cpi : : <b>0x31: 5000 cpi (default cpi)</b> : : 0x77: 12000 cpi (maximum cpi )
	Field Name	Description										
	RES[7:0]	Set resolution with CPI step of 100 cpi 0x00: 100 cpi (Minimum cpi) 0x01: 200 cpi 0x02: 300 cpi : : <b>0x31: 5000 cpi (default cpi)</b> : : 0x77: 12000 cpi (maximum cpi )										

Register: 0x10								
Name: Config2								
Bit	7	6	5	4	3	2	1	0
Field	Reserved	Reserved	Rest_En	Reserved	Reserved	Rpt_Mod	Reserved	0
	Reset Value: 0x20							
Access: R/W	Read/ Write							
Data Type:	Bit Field							
Usage	Field Name	Description						
	[7:6]	Reserved						
	Rest_En	0 = Normal operation without REST mode. 1 = REST mode enable.						
	[4:3]	Reserved						
	Rpt_Mod	Select the X and Y CPI reporting mode. = 0: Normal CPI setting affects both delta X and Y. = 1: CPI setting for delta Y is defined by Config1 (address 0x0F). CPI setting for delta X is defined by Config5 (address 0x2F)						
	1	Reserved						
	Bit[0]	Must be set to 0						

Register: 0x11								
Name: Angle_Tune								
Bit	7	6	5	4	3	2	1	0
Field	Angle <sub>7</sub>	Angle <sub>6</sub>	Angle <sub>5</sub>	Angle <sub>4</sub>	Angle <sub>3</sub>	Angle <sub>2</sub>	Angle <sub>1</sub>	Angle <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read/ Write							
Data Type:	Bit Field							
Usage	Field Name	Description						
	Angle[7:0]	0xE2 -30 degree 0xF6 -10 degree 0x00 0 degree (default) 0x0F +15 degree 0x1E +30 degree						

Register: 0x12								
Name: Frame_Capture								
Bit	7	6	5	4	3	2	1	0
Field	FC <sub>7</sub>	FC <sub>6</sub>	FC <sub>5</sub>	FC <sub>4</sub>	FC <sub>3</sub>	FC <sub>2</sub>	FC <sub>1</sub>	FC <sub>0</sub>
	Reset Value: 0x12							
Access: R/W	Read Only							
Data Type:	8-bit unsigned integer							
Usage	Used to capture the next available complete 1 frame of raw data values to be stored to RAM. Writing to this register will cause any firmware loaded to be overwritten and stops navigation. A hardware reset and SROM download are required to restore normal operation for motion reading. Refer to the Frame Capture section for use details.							

Register: 0x13								
Name: SROM_Enable								
Bit	7	6	5	4	3	2	1	0
Field	SE <sub>7</sub>	SE <sub>6</sub>	SE <sub>5</sub>	SE <sub>4</sub>	SE <sub>3</sub>	SE <sub>2</sub>	SE <sub>1</sub>	SE <sub>0</sub>
	Reset Value: N/A							
Access: R/W	Write Only							
Data Type:	8-bit unsigned integer							
Usage	<p>Write to this register to start either SROM download or SROM CRC test. See SROM Download section for details.</p> <p>SROM CRC test can be performed to check if SROM download was successful. Navigation is halted and the SPI port should not be used during this SROM CRC test. Registers will be reset to default value after completion of CRC test.</p> <p>SROM CRC read procedure is as below:</p> <ol style="list-style-type: none"> <li>1. Write 0x15 to SROM_Enable register.</li> <li>2. Wait for at least 10ms.</li> <li>3. Read register Data_Out_Upper and register Data_Out_Lower .</li> </ol>							

Register: 0x14								
Name: Run_Downshift								
Bit	7	6	5	4	3	2	1	0
Field	RD <sub>7</sub>	RD <sub>6</sub>	RD <sub>5</sub>	RD <sub>4</sub>	RD <sub>3</sub>	RD <sub>2</sub>	RD <sub>1</sub>	RD <sub>0</sub>
	Reset Value: 0x32							
Access: R/W	Read/ Write							
Data Type:	8-bit unsigned integer							
Usage	<p>This register set the Run to Rest1 downshift time. Default value is 500ms. Use the formula below for calculation. The minimum register value is 0x01. A value of 0x00 will be internally clipped to 0x01.</p> <p>Run Downshift time (ms) = RD[7:0] x 10 ms Default = 50 x 10 = 500ms Max = 255x10 = 2550ms = 2.55s</p> <p>All the above values are expected to have a +40% and -20% of tolerance.</p>							

Register: 0x15								
Name: Res1_Rate_Lower								
Bit	7	6	5	4	3	2	1	0
Field	R1R <sub>7</sub>	R1R <sub>6</sub>	R1R <sub>5</sub>	R1R <sub>4</sub>	R1R <sub>3</sub>	R1R <sub>2</sub>	R1R <sub>1</sub>	R1R <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read/Write							
Data Type:	16-bit unsigned integer							
Usage	Lower byte of the Rest1 frame rate register.							

Register: 0x16								
Name: Rest1_Rate_Upper								
Bit	7	6	5	4	3	2	1	0
Field	R1R <sub>15</sub>	R1R <sub>14</sub>	R1R <sub>13</sub>	R1R <sub>12</sub>	R1R <sub>11</sub>	R1R <sub>10</sub>	R1R <sub>9</sub>	R1R <sub>8</sub>
	Reset Value: 0x00							
Access: R/W	Read/Write							
Data Type:	16-bit unsigned integer							
Usage	<p>Upper byte of the Rest1 frame rate register. This register sets the Rest1 frame rate duration. Default value is 1 ms. To write to the registers, write Lower first, followed by Upper. Register read can be in any order but must be consecutive.</p> <p>R1R[15:0] value must not exceed 0x09B0, otherwise an internal watchdog will trigger a reset. Use the formula below for calculation.</p> <p>Rest1 frame rate duration = (R1R[15:0] + 1) x 1 ms Default = (0 + 1) x 1 = 1 ms</p> <p>All the above values are expected to have a +40% and -20% of tolerance.</p>							

Register: 0x17								
Name: Rest1_Downshift								
Bit	7	6	5	4	3	2	1	0
Field	R1D <sub>7</sub>	R1D <sub>6</sub>	R1D <sub>5</sub>	R1D <sub>4</sub>	R1D <sub>3</sub>	R1D <sub>2</sub>	R1D <sub>1</sub>	R1D <sub>0</sub>
	Reset Value: 0x1F							
Access: R/W	Read/Write							
Data Type:	8-bit unsigned integer							
Usage	<p>This register set the Rest1 to Rest2 downshift time. Default value is 9.92 sec. Use the formula below for calculation. The minimum register value is 0x01. A value of 0x00 will be internally clipped to 0x01. The default multiplier value is defined through SROM.</p> <p>Rest1 Downshift time = R1D[7:0] x 320 x Rest1_Rate. Default = Rest1_Downshift x 320 x Rest1_Rate = 9.92s ( default multiplier value is 320 )</p> <p>All the above values are expected to have a +40% and -20% of tolerance.</p>							



Register: 0x18								
Name: Rest2_Rate_Lower								
Bit	7	6	5	4	3	2	1	0
Field	R2R <sub>7</sub>	R2R <sub>6</sub>	R2R <sub>5</sub>	R2R <sub>4</sub>	R2R <sub>3</sub>	R2R <sub>2</sub>	R2R <sub>1</sub>	R2R <sub>0</sub>
	Reset Value: 0x63							
Access: R/W	Read/Write							
Data Type:	16-bit unsigned integer							
Usage	Lower byte of the Rest2 frame rate register.							

Register: 0x19								
Name: Rest2_Rate_Upper								
Bit	7	6	5	4	3	2	1	0
Field	R2R <sub>15</sub>	R2R <sub>14</sub>	R2R <sub>13</sub>	R2R <sub>12</sub>	R2R <sub>11</sub>	R2R <sub>10</sub>	R2R <sub>9</sub>	R2R <sub>8</sub>
	Reset Value: 0x00							
Access: R/W	Read/Write							
Data Type:	16-bit unsigned integer							
Usage	<p>Upper byte of the Rest2 frame rate register. This register sets the Rest2 frame rate duration. Default value is 100 ms. To write to the registers, write Lower first, followed by Upper. Register read can be in any order but must be consecutive.</p> <p>R2R[15:0] value must not exceed 0x09B0, otherwise an internal watchdog will trigger a reset. Use the formula below for calculation.</p> <p>Rest2 frame rate duration = (R2R[15:0] + 1) x 1 ms  Default = (99 + 1) x 1 = 100 ms</p> <p>All the above values are expected to have a +40% and -20% of tolerance.</p>							

Register: 0x1A								
Name: Rest2_Downshift								
Bit	7	6	5	4	3	2	1	0
Field	R2D <sub>7</sub>	R2D <sub>6</sub>	R2D <sub>5</sub>	R2D <sub>4</sub>	R2D <sub>3</sub>	R2D <sub>2</sub>	R2D <sub>1</sub>	R2D <sub>0</sub>
	Reset Value: 0xBC							
Access: R/W	Read/Write							
Data Type:	8-bit unsigned integer							
Usage	<p>This register set the Rest2 to Rest3 downshift time. Default value is 601.6s. Use the formula below for calculation. The minimum register value is 0x01. A value of 0x00 will be internally clipped to 0x01.</p> <p>Rest2 Downshift time = R2D[7:0] x 32 x Rest2_Rate. Default = 188 x 32 x 100 = 601.6s = 10mins</p> <p>All the above values are expected to have a +40% and -20% of tolerance.</p>							

Register: 0x1B								
Name: Rest3_Rate_Lower								
Bit	7	6	5	4	3	2	1	0
Field	R3R <sub>7</sub>	R3R <sub>6</sub>	R3R <sub>5</sub>	R3R <sub>4</sub>	R3R <sub>3</sub>	R3R <sub>2</sub>	R3R <sub>1</sub>	R3R <sub>0</sub>
	Reset Value: 0xF3							
Access: R/W	Read/Write							
Data Type:	16-bit unsigned integer							
Usage	Lower byte of the Rest3 frame rate register.							

Register: 0x1C								
Name: Res3_Rate_Upper								
Bit	7	6	5	4	3	2	1	0
Field	R3R <sub>15</sub>	R3R <sub>14</sub>	R3R <sub>13</sub>	R3R <sub>12</sub>	R3R <sub>11</sub>	R3R <sub>10</sub>	R3R <sub>9</sub>	R3R <sub>8</sub>
	Reset Value: 0x01							
Access: R/W	Read/Write							
Data Type:	16-bit unsigned integer							
Usage	<p>Upper byte of the Rest3 frame rate register. This register sets the Rest3 frame rate duration. Default value is 500 ms. To write to the registers, write Lower first, followed by Upper. Register read can be in any order but must be consecutive.</p> <p>R3R[15:0] value must not exceed 0x09B0, otherwise an internal watchdog will trigger a reset. Use the formula below for calculation.</p> <p>Rest3 frame rate duration = (R3R[15:0] + 1) x 1 ms</p> <p>Default = (499 + 1) x 1 = 500 ms</p> <p>All the above values are expected to have a +40% and -20% of tolerance.</p>							

Register: 0x24								
Name: Observation								
Bit	7	6	5	4	3	2	1	0
Field	Reserved	OB <sub>6</sub>	OB <sub>5</sub>	OB <sub>4</sub>	OB <sub>3</sub>	OB <sub>2</sub>	OB <sub>1</sub>	OB <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read/Write							
Data Type:	Bit Field							
Usage	The user must clear the register by writing 0x00, wait for minimum T <sub>dly_obs</sub> msec, and read the register. The active process will have set their corresponding bit. The register may be used as part of recovery scheme to detect a problem caused by EFT/B or ESD.							
	T <sub>dly_obs</sub> is defined as the longest frame period + 0.5msec. The longest frame period is Rest3. Clock tolerance need to be taken into account. For e.g. if the default Rest3 rate of 500msec is used, then T <sub>dly_obs</sub> = (500x1.4) + 0.5 = 700.5msec.							
	Field Name		Description					
	OB6		SROM_RUN: Indicates whether SROM is running. <b>0 = SROM not running</b> 1 = SROM running					
OB[5:0]		Set once per frame						

Register: 0x25								
Name: Data_Out_Lower								
Bit	7	6	5	4	3	2	1	0
Field	DO <sub>7</sub>	DO <sub>6</sub>	DO <sub>5</sub>	DO <sub>4</sub>	DO <sub>3</sub>	DO <sub>2</sub>	DO <sub>1</sub>	DO <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read Only							
Data Type:	16-bit unsigned integer							
Usage	Lower byte of the Data_Out register							

Register: 0x26														
Name: Data_Out_Upper														
Bit	7	6	5	4	3	2	1	0						
Field	DO <sub>15</sub>	DO <sub>14</sub>	DO <sub>13</sub>	DO <sub>12</sub>	DO <sub>11</sub>	DO <sub>10</sub>	DO <sub>9</sub>	DO <sub>8</sub>						
	Reset Value: 0x00													
Access: R/W	Read Only													
Data Type:	16-bit unsigned integer													
Usage	Data in these registers come from the SROM CRC test. The data can be read out in any order. The SROM CRC test is initiated by writing 0x15 to SROM_Enable register.													
	<table><tr><th>CRC Result</th><th>Data_Out_Upper</th><th>Data_Out_Lower</th></tr><tr><td>SROM CRC test</td><td>0xBE</td><td>0xEF</td></tr></table>								CRC Result	Data_Out_Upper	Data_Out_Lower	SROM CRC test	0xBE	0xEF
	CRC Result	Data_Out_Upper	Data_Out_Lower											
SROM CRC test	0xBE	0xEF												

Register: 0x29								
Name: Raw_Data_Grab								
Bit	7	6	5	4	3	2	1	0
Field	Valid	RD_D <sub>6</sub>	RD_D <sub>5</sub>	RD_D <sub>4</sub>	RD_D <sub>3</sub>	RD_D <sub>2</sub>	RD_D <sub>1</sub>	RD_D <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read / Write							
Data Type:	8-bit unsigned integer							
Usage	Write any value to this register to initialize the raw data output. Read motion register to check if first raw data is ready, and then read data from this register for the raw data.							
	<ol style="list-style-type: none"> <li>Write 0 to Bit [5] of register 0x10 (Config2) to disable Rest mode.</li> <li>Write any value to Raw_Data_Grab register to reset the register.</li> <li>Read MOTION register 0x02 &amp; check for Bit [4] for first raw data in raw data grab to be ready.</li> <li>Then continuously reading Raw_Data_Grab register for raw data for 1296 times. Ensure Bit [7] is valid for each raw data read.</li> <li>Write 1 to Bit [5] of register 0x10 (Config2) to enable rest mode if required.</li> </ol>							

Register: 0x2A								
Name: SROM_ID								
Bit	7	6	5	4	3	2	1	0
Field	SR <sub>7</sub>	SR <sub>6</sub>	SR <sub>5</sub>	SR <sub>4</sub>	SR <sub>3</sub>	SR <sub>2</sub>	SR <sub>1</sub>	SR <sub>0</sub>
	0x00							
Access: R/W	Read Only							
Data Type:	8-bit unsigned integer							
Usage	Contains the revision of the downloaded Shadow ROM (SROM) firmware. If the firmware has been successfully downloaded and the chip is operating out of SROM, this register will contain the SROM firmware revision; otherwise it will contain 0x00.							

Register: 0x2B								
Name: Min_SQ_Run								
Bit	7	6	5	4	3	2	1	0
Field	MSQR <sub>7</sub>	MSQR <sub>6</sub>	MSQR <sub>5</sub>	MSQR <sub>4</sub>	MSQR <sub>3</sub>	MSQR <sub>2</sub>	MSQR <sub>1</sub>	MSQR <sub>0</sub>
	Reset Value: 0x10							
Access: R/W	Read/Write							
Data Type:	Bit Field							
Usage	This register defines the minimum Squal threshold below which the chip will produce motion delta values of zero. Typically, the default value of this register should only be modified as a result of Lift cut off calibration SROM. Min_SQ_Run is only available for Tracking SROM and above.							

Register: 0x2C								
Name: Raw_Data_Threshold								
Bit	7	6	5	4	3	2	1	0
Field	RDTH <sub>7</sub>	RDTH <sub>6</sub>	RDTH <sub>5</sub>	RDTH <sub>4</sub>	RDTH <sub>3</sub>	RDTH <sub>2</sub>	RDTH <sub>1</sub>	RDTH <sub>0</sub>
	Reset Value: 0x0A							
Access: R/W	Read/ Write							
Data Type:	Bit Field							
Usage	<p>This register affects the SQUAL value register value. The SQUAL is a measure of the number of valid features. The raw data threshold register defines what is considered a valid feature. A low threshold value will make it easier for a feature to be considered valid. Therefore, a low raw data threshold will increase SQUAL since more features will be considered valid and vice versa.</p> <p>If raw data threshold is set too high, it will invalidate features that are actually trackable, thus making SQUAL too low and degrades tracking. If raw data threshold is set too low, it will validate features that are not trackable.</p> <p>Typically, the default value of this register should only be modified as the result of Lift cut off calibration SROM. Raw_Data_Threshold is only available with tracking SROM.</p>							

Register: 0x2F								
Name: Config5								
Bit	7	6	5	4	3	2	1	0
Field	RESX <sub>7</sub>	RESX <sub>6</sub>	RESX <sub>5</sub>	RESX <sub>4</sub>	RESX <sub>3</sub>	RESX <sub>2</sub>	RESX <sub>1</sub>	RESX <sub>0</sub>
	Reset Value: 0x31							
Access: R/W	Read/ Write							
Data Type:	Bit Field							
Usage	This register allows the user to change the X-axis resolution when the chip is configured to have independent X-axis and Y-axis resolution reporting mode via Rpt_Mod bit = 1 in Config2 register. The setting in this register will be inactive if Rpt_Mod bit = 0.Shown below are the bits, their default values, and optional values.							

Register: 0x3A								
Name: Power_Up_Reset								
Bit	7	6	5	4	3	2	1	0
Field	PUR <sub>7</sub>	PUR <sub>6</sub>	PUR <sub>5</sub>	PUR <sub>4</sub>	PUR <sub>3</sub>	PUR <sub>2</sub>	PUR <sub>1</sub>	PUR <sub>0</sub>
	Reset Value: N/A							
Access: R/W	Write Only							
Data Type:	8-bit unsigned integer							
Usage	Write 0x5a to this register to reset the chip. All settings will revert to default values. Reset is required after recovering from shutdown mode and to restore normal operation after Frame Capture							



Register: 0x3B								
Name: Shutdown								
Bit	7	6	5	4	3	2	1	0
Field	SD <sub>7</sub>	SD <sub>6</sub>	SD <sub>5</sub>	SD <sub>4</sub>	SD <sub>3</sub>	SD <sub>2</sub>	SD <sub>1</sub>	SD <sub>0</sub>
	Reset Value: N/A							
Access: R/W	Write Only							
Data Type:	8-bit unsigned integer							
Usage	Write 0xB6 to set the chip to shutdown mode. Refer to the Shutdown section for more details and on the recovery procedure.							

Register: 0x3F								
Name: Inverse_Product_ID								
Bit	7	6	5	4	3	2	1	0
Field	PID <sub>7</sub>	PID <sub>6</sub>	PID <sub>5</sub>	PID <sub>4</sub>	PID <sub>3</sub>	PID <sub>2</sub>	PID <sub>1</sub>	PID <sub>0</sub>
	Reset Value: 0xBD							
Access: R/W	Read Only							
Data Type:	Bit Field							
Usage	This value is the inverse of the Product_ID. It is used to test the SPI port hardware							

Register: 0x41								
Name: LiftCutoff_Tune3								
Bit	7	6	5	4	3	2	1	0
Field	RMSQ <sub>7</sub>	RMSQ <sub>6</sub>	RMSQ <sub>5</sub>	RMSQ <sub>4</sub>	RMSQ <sub>3</sub>	RMSQ <sub>3</sub>	RMSQ <sub>1</sub>	RMSQ <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read/Write							
Data Type:	Bit Field							
Usage	This register is valid only if the calibration procedure is stopped successfully. RMSQ[7:0] recommends a minimum Squal run value that replaces the default value in the Min_SQ_Run register to improve lift performance. LiftCutoff_Tune3 is only available if Lift cut off calibration SROM is used for Lift cut off calibration.							

Register: 0x42								
Name: Angle_Snap								
Bit	7	6	5	4	3	2	1	0
Field	AS_EN	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
Reset Value: 0x00								
Access: R/W	Read/Write							
Data Type:	Bit Field							
Usage	<p>The AS_EN bit in this register enables or disables the Angle Snap feature.</p> <p>AS_EN = 0 (Angle snap disabled. This is the default value.)</p> <p>AS_EN = 1 (Angle snap enabled with 5° snap setting.)</p>							

Register: 0x4A												
Name: LiftCutoff_Tune1												
Bit	7	6	5	4	3	2	1	0				
Field	RUN_CAL	Reserved	Reserved	Reserved	Reserved	CAL_STAT2	CAL_STAT1	CAL_STAT0				
	Reset Value: 0x00											
Access: R/W	Read/Write											
Data Type:	Bit Field											
Usage	This register is used to start either the Shutter Calibration or the SQUAL Calibration Lift cut off calibration procedure. It is also used to check the status of either procedure. Refer to the Lift cut off calibration section for more details.											
	<table><tr><th>Field Name</th><th>Description</th></tr><tr><td>RUN_CAL</td><td>0 = Stop Shutter Calibration procedure (default) 1 = Start Shutter Calibration procedure</td></tr></table>								Field Name	Description	RUN_CAL	0 = Stop Shutter Calibration procedure (default) 1 = Start Shutter Calibration procedure
	Field Name	Description										
	RUN_CAL	0 = Stop Shutter Calibration procedure (default) 1 = Start Shutter Calibration procedure										
	<table><tr><td>Bit [6:3]</td><td>Reserved</td></tr></table>								Bit [6:3]	Reserved		
	Bit [6:3]	Reserved										
<table><tr><td>CAL_STAT[2:0]</td><td>0x00 = Reserved 0x01 = Calibration in progress. 0x02 = Calibration successfully completed (minimum length met). Surface data collection continues until timeout. Registers LiftCutoff_Tune_Min_Length and LiftCutoff_Tune_Timeout define the minimum length threshold and timeout respectively. 0x03 = Calibration successfully completed (minimum length met) and timeout has triggered. Surface data collection stops automatically. 0x04 = Calibration unsuccessful (minimum length not met) and timeout has triggered. 0x05 - 0x07 = Reserved</td></tr></table>								CAL_STAT[2:0]	0x00 = Reserved 0x01 = Calibration in progress. 0x02 = Calibration successfully completed (minimum length met). Surface data collection continues until timeout. Registers LiftCutoff_Tune_Min_Length and LiftCutoff_Tune_Timeout define the minimum length threshold and timeout respectively. 0x03 = Calibration successfully completed (minimum length met) and timeout has triggered. Surface data collection stops automatically. 0x04 = Calibration unsuccessful (minimum length not met) and timeout has triggered. 0x05 - 0x07 = Reserved			
CAL_STAT[2:0]	0x00 = Reserved 0x01 = Calibration in progress. 0x02 = Calibration successfully completed (minimum length met). Surface data collection continues until timeout. Registers LiftCutoff_Tune_Min_Length and LiftCutoff_Tune_Timeout define the minimum length threshold and timeout respectively. 0x03 = Calibration successfully completed (minimum length met) and timeout has triggered. Surface data collection stops automatically. 0x04 = Calibration unsuccessful (minimum length not met) and timeout has triggered. 0x05 - 0x07 = Reserved											

Register: 0x50								
Name: Motion_Burst								
Bit	7	6	5	4	3	2	1	0
Field	MB <sub>7</sub>	MB <sub>6</sub>	MB <sub>5</sub>	MB <sub>4</sub>	MB <sub>3</sub>	MB <sub>2</sub>	MB <sub>1</sub>	MB <sub>0</sub>
	Reset Value: 0x00							
Access: R/W	Read/Write							
Data Type:	8-Bit unsigned integer							
Usage	The Motion_Burst register is used for high-speed access of up to 12 register bytes. See the Burst Mode-Motion Read section for full details of operation.							

Register: 0x58								
Name: LiftCutoff_Tune_Timeout								
Bit	7	6	5	4	3	2	1	0
Field	RMSQ <sub>7</sub>	RMSQ <sub>6</sub>	RMSQ <sub>5</sub>	RMSQ <sub>4</sub>	RMSQ <sub>3</sub>	RMSQ <sub>3</sub>	RMSQ <sub>1</sub>	RMSQ <sub>0</sub>
	Reset Value: 0x27							
Access: R/W	Read/Write							
Data Type:	Bit Field							
Usage	<p>This register sets the minimum Lift cut off calibration timeout threshold.</p> <p>Timeout (sec) = (TIMEOUT[7:0] + 1) x 0.5 sec  Default = (39 + 1) x 0.5 = 20 sec</p> <p>Allowed TIMEOUT[7:0] range is 0x00 (0.5 sec) to 0xF9 (125 sec).</p> <p>All the above values are expected to have a +40% and -20% of tolerance.</p>							

Register: 0x5A								
Name: LiftCutoff_Tune_Min_Length								
Bit	7	6	5	4	3	2	1	0
Field	MINL <sub>7</sub>	MINL <sub>6</sub>	MINL <sub>5</sub>	MINL <sub>4</sub>	MINL <sub>3</sub>	MINL <sub>3</sub>	MINL <sub>1</sub>	MINL <sub>0</sub>
	Reset Value: 0x09							
Access: R/W	Read/Write							
Data Type:	Bit Field							
Usage	<p>This register sets the minimum Lift cut off calibration length threshold.</p> <p>Minimum Length (inches) = (MINL[7:0] + 1) x 2 inches Default = (9 + 1) x 2 = 20 inches</p> <p>Allowed MINL [7:0] range is 0x00 (2 inches) to 0xF9 (500 inches).</p> <p>Actual distance is expected to have a tolerance that is strongly dependent on MINL. The tolerance is approximately 40% for MINL = 0x04 (10 inches) and above. It is not recommended to set a MINL that is lower because the tolerance can potentially increase to 100%.</p>							

Register: 0x62								
Name: SROM_Load_Burst								
Bit	7	6	5	4	3	2	1	0
Field	SL <sub>7</sub>	SL <sub>6</sub>	SL <sub>5</sub>	SL <sub>4</sub>	SL <sub>3</sub>	SL <sub>2</sub>	SL <sub>1</sub>	SL <sub>0</sub>
	Reset Value: N/A							
Access: R/W	Write Only							
Data Type:	8-Bit unsigned integer							
Usage	The SROM_Load_Burst register is used for high-speed programming SROM from an external PROM or microcontroller. See the SROM Download section for use details.							

Register: 0x63								
Name: Lift_Config								
Bit	7	6	5	4	3	2	1	0
Field	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	LIFC1	LIFC0
	Reset Value: 0X02							
Access: R/W	Read/Write							
Data Type:	Bit Field							
Usage	This register defines the lift detection height threshold. The lift status bit is asserted when the chip is above the threshold.							
	LIFC[1:0]		Description					
	00		Reserved					
	10		Lift detection height = nominal height + 2 mm (default value).					
	11		Lift detection height = nominal height + 3 mm.					

Register: 0x64								
Name: Raw_Data_Burst								
Bit	7	6	5	4	3	2	1	0
Field	RDB <sub>7</sub>	RDB <sub>6</sub>	RDB <sub>5</sub>	RDB <sub>4</sub>	RDB <sub>3</sub>	RDB <sub>2</sub>	RDB <sub>1</sub>	RDB <sub>0</sub>
	Reset Value: 0X00							
Access: R/W	Read Only							
Data Type:	8-Bit unsigned integer							
Usage	The Raw_Data_Burst register is used for high-speed access to all the raw data values for one complete frame capture, without having to write to the register address to obtain each raw data. The data pointer is automatically incremented after each read so all 1296 raw data values may be obtained by reading this register 1296 times. See the Frame Capture section for details.							
	<b>Note:</b> Maximum raw data value is 127. PB7 is always zero.							

Register: 0x65												
Name: LiftCutoff_Tune2												
Bit	7	6	5	4	3	2	1	0				
Field	Reserved	RPTH <sub>6</sub>	RPTH <sub>5</sub>	RPTH <sub>4</sub>	RPTH <sub>3</sub>	RPTH <sub>3</sub>	RPTH <sub>1</sub>	RPTH <sub>0</sub>				
	Reset Value:0x00											
Access: R/W	Read Only											
Data Type:	Bit Field											
Usage	This register provides Lift cut off calibration related readout registers. See the Lift cut off calibration section for more details.											
	<table><tr><th>Field Name</th><th>Description</th></tr><tr><td>RPTH[6:0]</td><td>These bits are valid only if calibration procedure is stopped successfully. RPTH[6:0] recommends a raw data threshold value that replaces the default value in the Raw_Data_Threshold register to improve lift performance.</td></tr></table>								Field Name	Description	RPTH[6:0]	These bits are valid only if calibration procedure is stopped successfully. RPTH[6:0] recommends a raw data threshold value that replaces the default value in the Raw_Data_Threshold register to improve lift performance.
	Field Name	Description										
RPTH[6:0]	These bits are valid only if calibration procedure is stopped successfully. RPTH[6:0] recommends a raw data threshold value that replaces the default value in the Raw_Data_Threshold register to improve lift performance.											

## 12.0 Document Revision History

Revision Number	Date	Description
1.00	19 Aug 2014	- Initial creation
1.10	26 Nov 2015	- pg8 update Fig6 Lens Outline Drawing - pg10 update Fig8 Recommended Base Plate Opening - pg28 add item #3 Delay for 30ms
1.20	25 Feb 2016	- pg23 add point #8 Write 0x00 to Config2 register for wired mouse or 0x20 for wireless mouse design
1.30	6 Apr 2016	- pg47 add Register 0x29 Pix_Grab information
1.40	3 Aug 2016	- pg55 modify Register 0x63 Lift_Config register information. Removed setting 0x00
1.50	26 Sep 2016	- Update document. Change “sensor” to “chip”& “pixel” to “raw data” - Change PixArt RoH Logo - Change Image Array to Picture Element Array