

Data Communication and Computer Network

BLM3051

Dr. Öğr. Üyesi Furkan ÇAKMAK



Lecture Information Form - Weekly Subjects

Hafta	Tarih	Konular
1	20.02.2024	Introduction to Data Communication Standards Used on Data Communication, Architectural models
2	27.02.2024	OSI Reference Model , Layers and Their Functions, Signaling and Signal Encoding
3	05.03.2024	Parallel and Serial Transmission, Communication Media and Their Technical Specs., Multiplexing (TDM, FDM)
4	12.03.2024	Error Detection and Error Correction Techniques, Data Link Control Techniques, Flow Control
5	19.03.2024	Asynchronous and Synchronous Data Link Protocols (BSC, HDLC)
6	26.03.2024	LAN Technologies Continued, IEEE 802.4, 802.5, 802.11
7	02.04.2024	Connectionless and Connection Oriented Services, Switching
8	09.04.2024	Tatil - Ramazan Bayramı Arifesi
9	16.04.2024	1. Ara Sınav
10	23.04.2024	Tatil - 23 Nisan Ulusal Egemenlik ve Çocuk Bayramı
11	30.04.2024	Static and Dynamic Routing, Congestion in the Network Layer, Its Causes and Solutions
12	07.05.2024	IP (Internetworking Protocol), ICMP, BOOTP, DHCP
13	14.05.2024	2. Ara Sınav
14	21.05.2024	UDP (User Datagram Protocol), TCP (Transmisson Control Protocol)

Data Link Control

Data link layerin temel görevleri

- Basic tasks of the data link layer:
 - Framing and determining of start and end points to ensure synchronization
 - Flow control
 - Error control / Retransmission
 - Addressing
 - Line discipline / Link management

*↳ framing yaparak
sentronezyon
öçerler*

Line Discipline / Link Management

- Enq/Ack (Enquiry/Acknowledgement)
- Poll/Select Connection Management

Bu veri iletiminde bir tarafın iletim başlatma talebinde bulunduğu ve diğer tarafın bu talebi aldığını ve onayladığını bildiriyor bir süreçtir

→ poll işlemi
kontrol cihazının bağlı cihazlardan veri göndermelerini istemesidir


→ select işlemi
kontrol cihazının belirli bir cihaza veri gönderme hakkı vermesidir

Enq/Ack (Enquiry/Acknowledgement)

→ Wan gibi noktadan noktaya iletişim kurulan ağ yapılarında kullanılan bir iletişim yöntemidir

- Point to point (in WANs)
- Units are expected to have equal properties

Birimlerin eşit özelliklere sahip olması beklenir

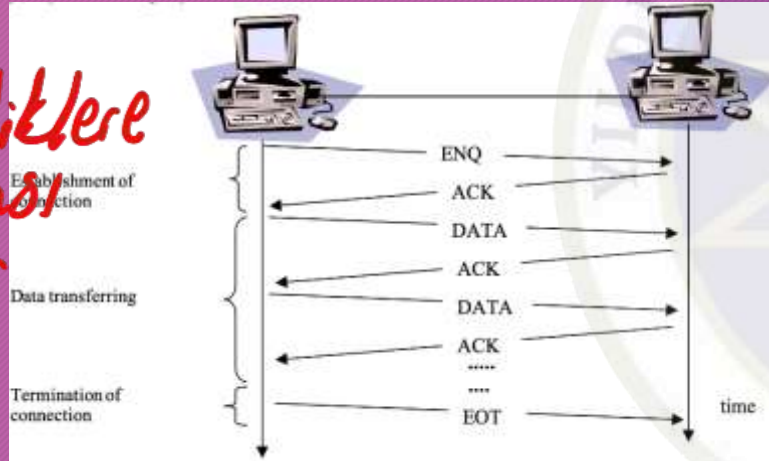


→ Bu tür iletişimde her iki tarafında doğrudan doğruya birbirine bağlı olduğu ve veri alışverişinde bulunmuş bir yapıdır

Primary

Primary

Secondaries

Secondaries

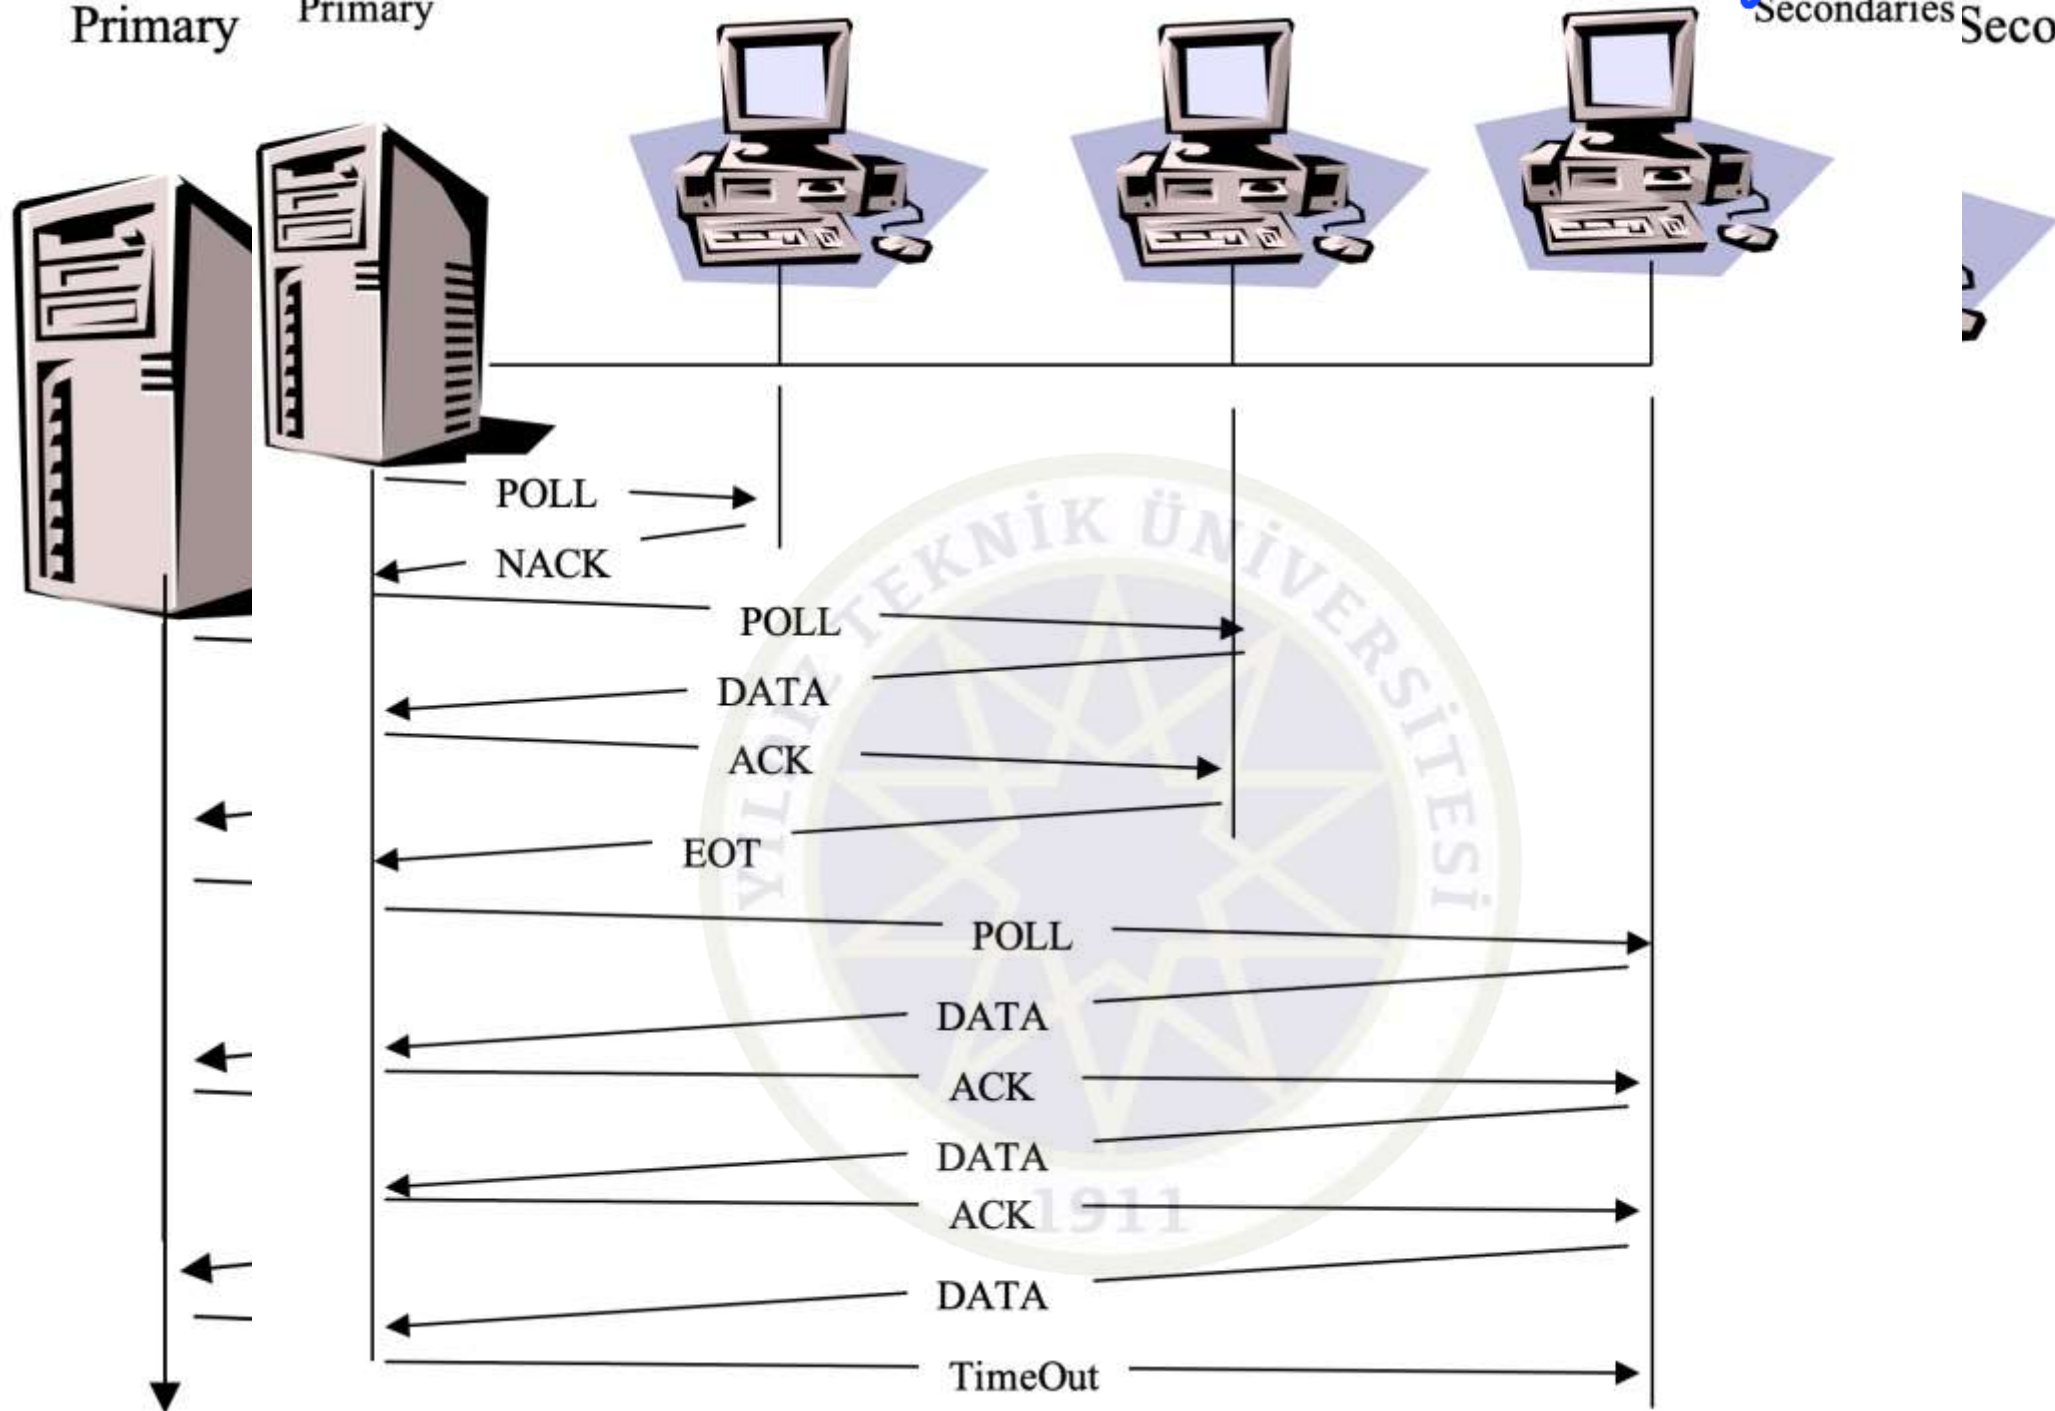

3051

ta
nication
puter
ork - 5

Flow Control

Akış kontrolünün önemli bileşenleri

- Overwhelm

Buffer

- There are two basic techniques:

- Stop & Wait

- Sliding Window

→ Ağ üzerindeki iletim sırasında bir uçtaki cihazın kısıtlı bir cihazı aşırı yüklemesini önlemek için kullanılan yöntemlerdir

Bir veri paketi gönderildikten sonra gönderici alıcıdan ACK bekler

Gönderici birden fazla paketi arka arkaya gönderir ve ACK bekler

Veri iletiminde verilerin geçici olarak saklanması sağlayan hafıza alanıdır. Akış kontrolünde gönderici ve alıcının işleme hızları

akanın veri
farklı olduğunda bu buffer
zayesinde veri kaybı önlenir

Stop & Wait

her aktarım için ACK
gerekir

- ACK is required for every transfer.
- Pros: (Avantajları)
 - Packages consist of smaller pieces
 - Effective use of buffers
 - Medium is busy for a shorter time
 - Error probability decreases
 - Error control processing times are shortened.
 - Wait time may be shorter for other devices in LANs.

LAN'larda
diğer cihazlar için
bekleme süresi daha

0 beklenti süresi
kuso olabilir

Stop & Wait - Line Utilization (U) Rate

- t_{frame} : Transmission time of a single frame
- t_{prop} : The time it takes from the sender to the receiver
- t_{ack} : The time it takes for all bits of the ACK to exit the receiver
- $T_F = t_{\text{frame}} + t_{\text{prop}} + t_{\text{ack}} + t_{\text{prop}}$
- $T_F = t_{\text{frame}} + 2t_{\text{prop}}$
- $U = \frac{t_{\text{frame}}}{t_{\text{frame}} + 2t_{\text{prop}}}$
- $a = \frac{t_{\text{prop}}}{t_{\text{frame}}} \Rightarrow U = \frac{1}{1 + 2a}$
- $t_{\text{prop}} = \frac{\text{distance}}{\text{velocity}} = \frac{d}{v}$ and $t_{\text{frame}} = \frac{\text{frameSize}}{\text{dataRate}} = \frac{L}{R}$

Stop & Wait - Line Utilization (U) Rate - Con't

- Example:
 - Data communication is made between two points at a distance of 1000 km ($d = 1000 \text{ km} = 10^6 \text{ m}$) at a speed of 155.52 Mbps ($R = 155.52 \cdot 10^6 \text{ bit/sec}$).
 - The transmission speed of the line is 200.000.000 m/sec ($V = 2 \cdot 10^8 \text{ m/sec}$).
 - Frame size is 424 bits ($L = 424 \text{ bit}$).
 - What is the Line Utilization (U) in Stop & Wait Flow Control mode?

• Answer

$$a = \frac{t_{prop}}{t_{frame}} \Rightarrow U = \frac{1}{1+2a}$$

$$t_{prop} = \frac{\text{distance}}{\text{velocity}} = \frac{d}{v} \text{ and } t_{frame} = \frac{\text{frameSize}}{\text{dataRate}} = \frac{L}{R}$$

$$a = \frac{\frac{10^6}{2 \cdot 10^8}}{\frac{424}{155,52 \cdot 10^6}} \approx 3030$$

$$U = \frac{1}{1+2 \cdot 3030} \approx 1,65 \cdot 10^{-4}$$

Sliding Window

→ Stop and wait'te hat kullanım oranı düşüktür

- U rate is low in Stop & Wait
- The sender sends a certain amount of data to the receiver without ACK data.
- Frames are transmitted in convoys.
- The receiver can send ACK data for several frames.
- Frame number is necessary
 - n-bit $\Rightarrow 2^n$ frame
- Piggy backing


→ frame'ler birbiri gönderilir

bu yöntemde alıcı onay verisini gönderdiği paketin veri kısmında gönderir


↓ gönderici alıcıdan ACK beklemeden belli miktarda veri gönderir


Sliding Window - Sender Side

- Window size: $2^n - 1$
 - Example: If frame sequence number bit length is $n=3$, windows size is $2^n - 1 = 7$

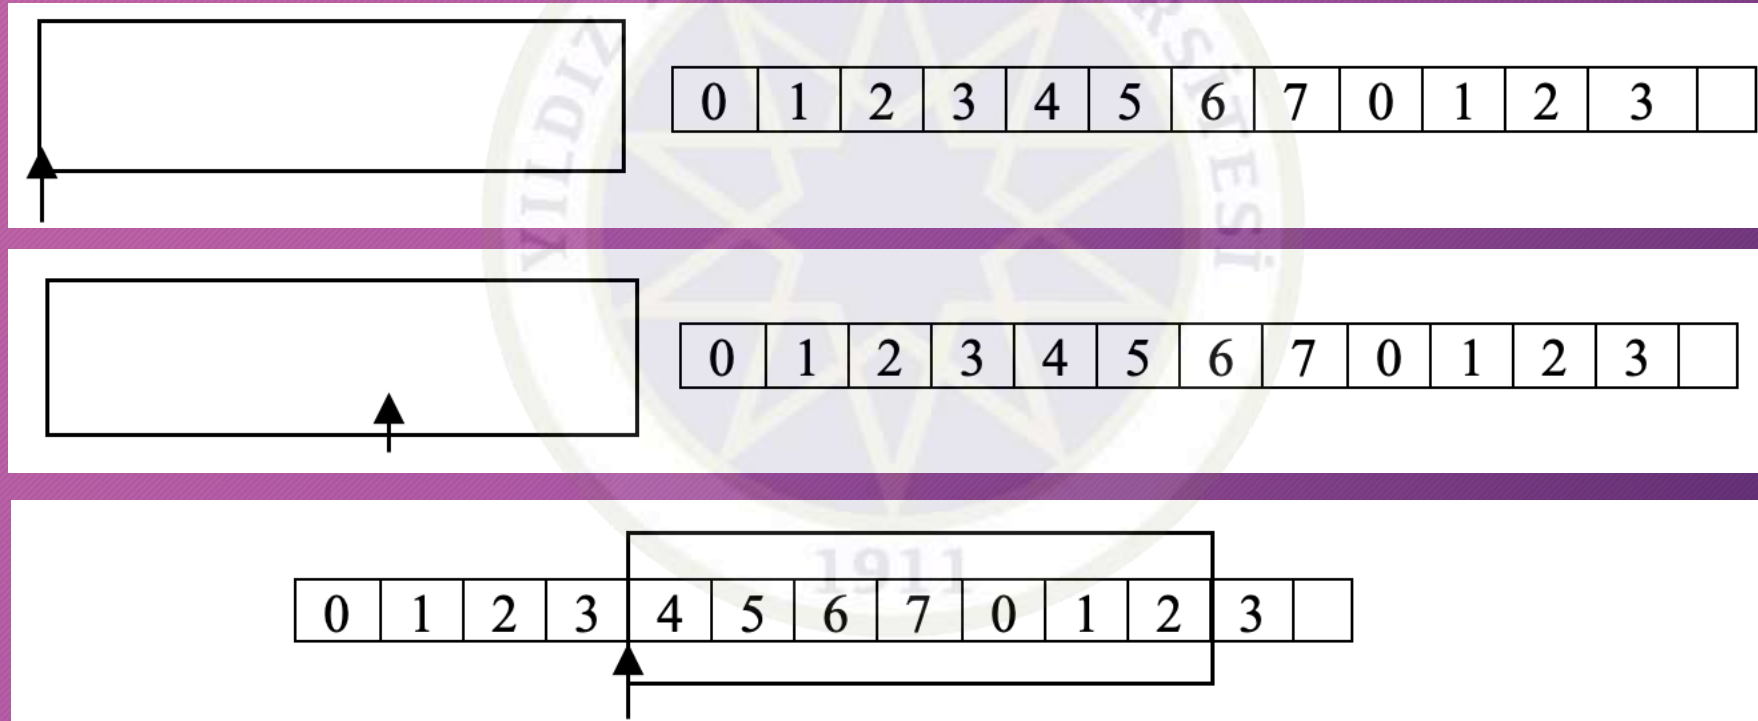


Sliding Window - Receiver Side

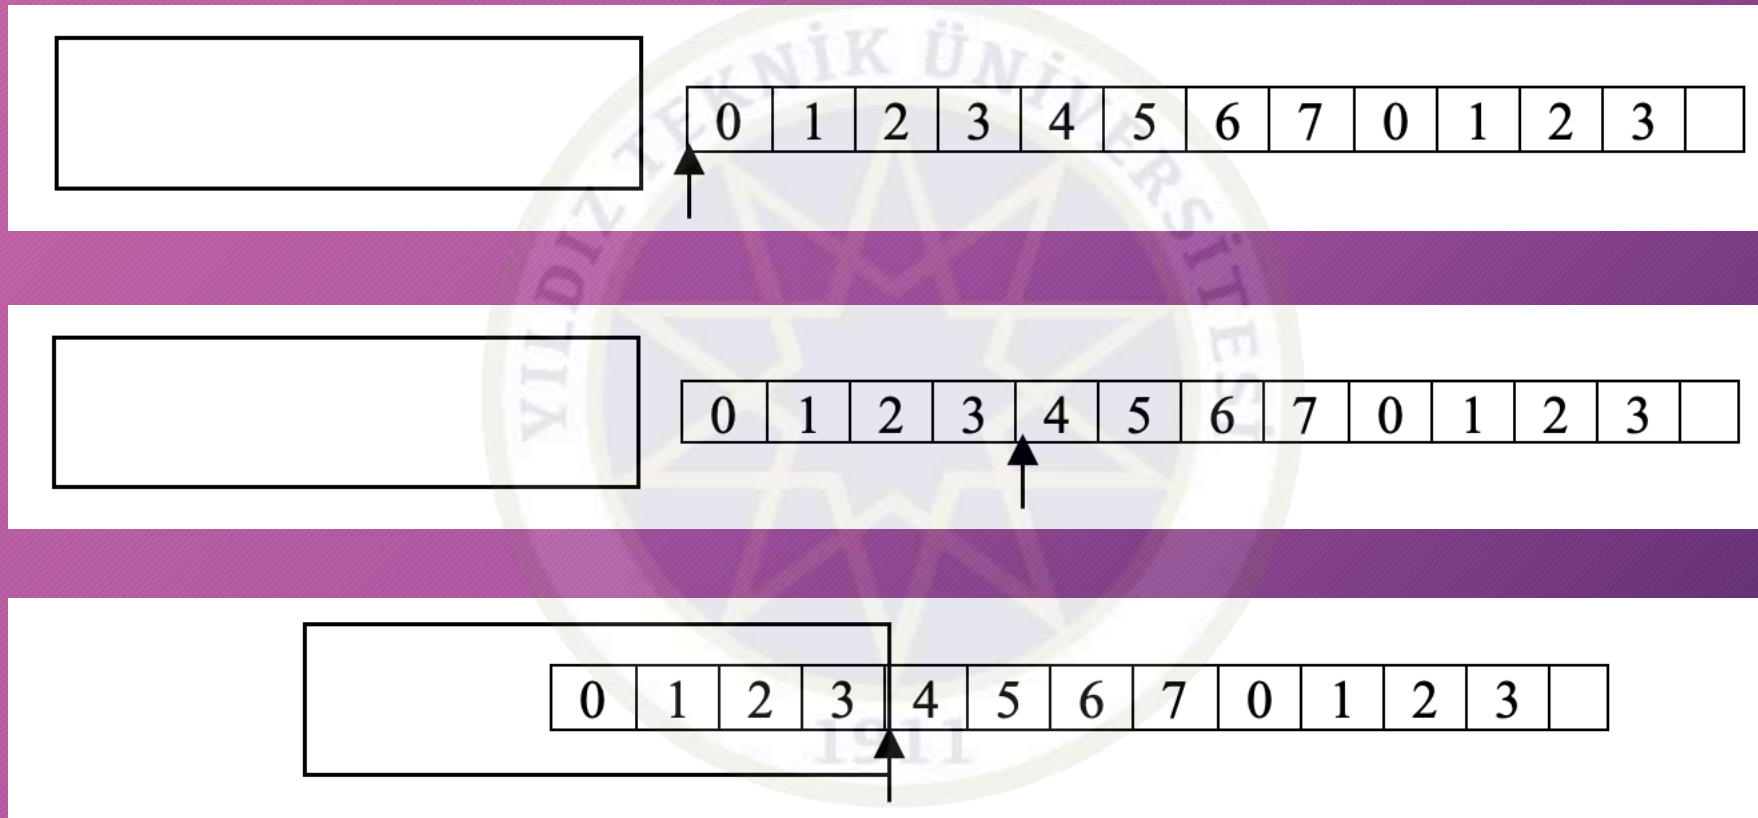

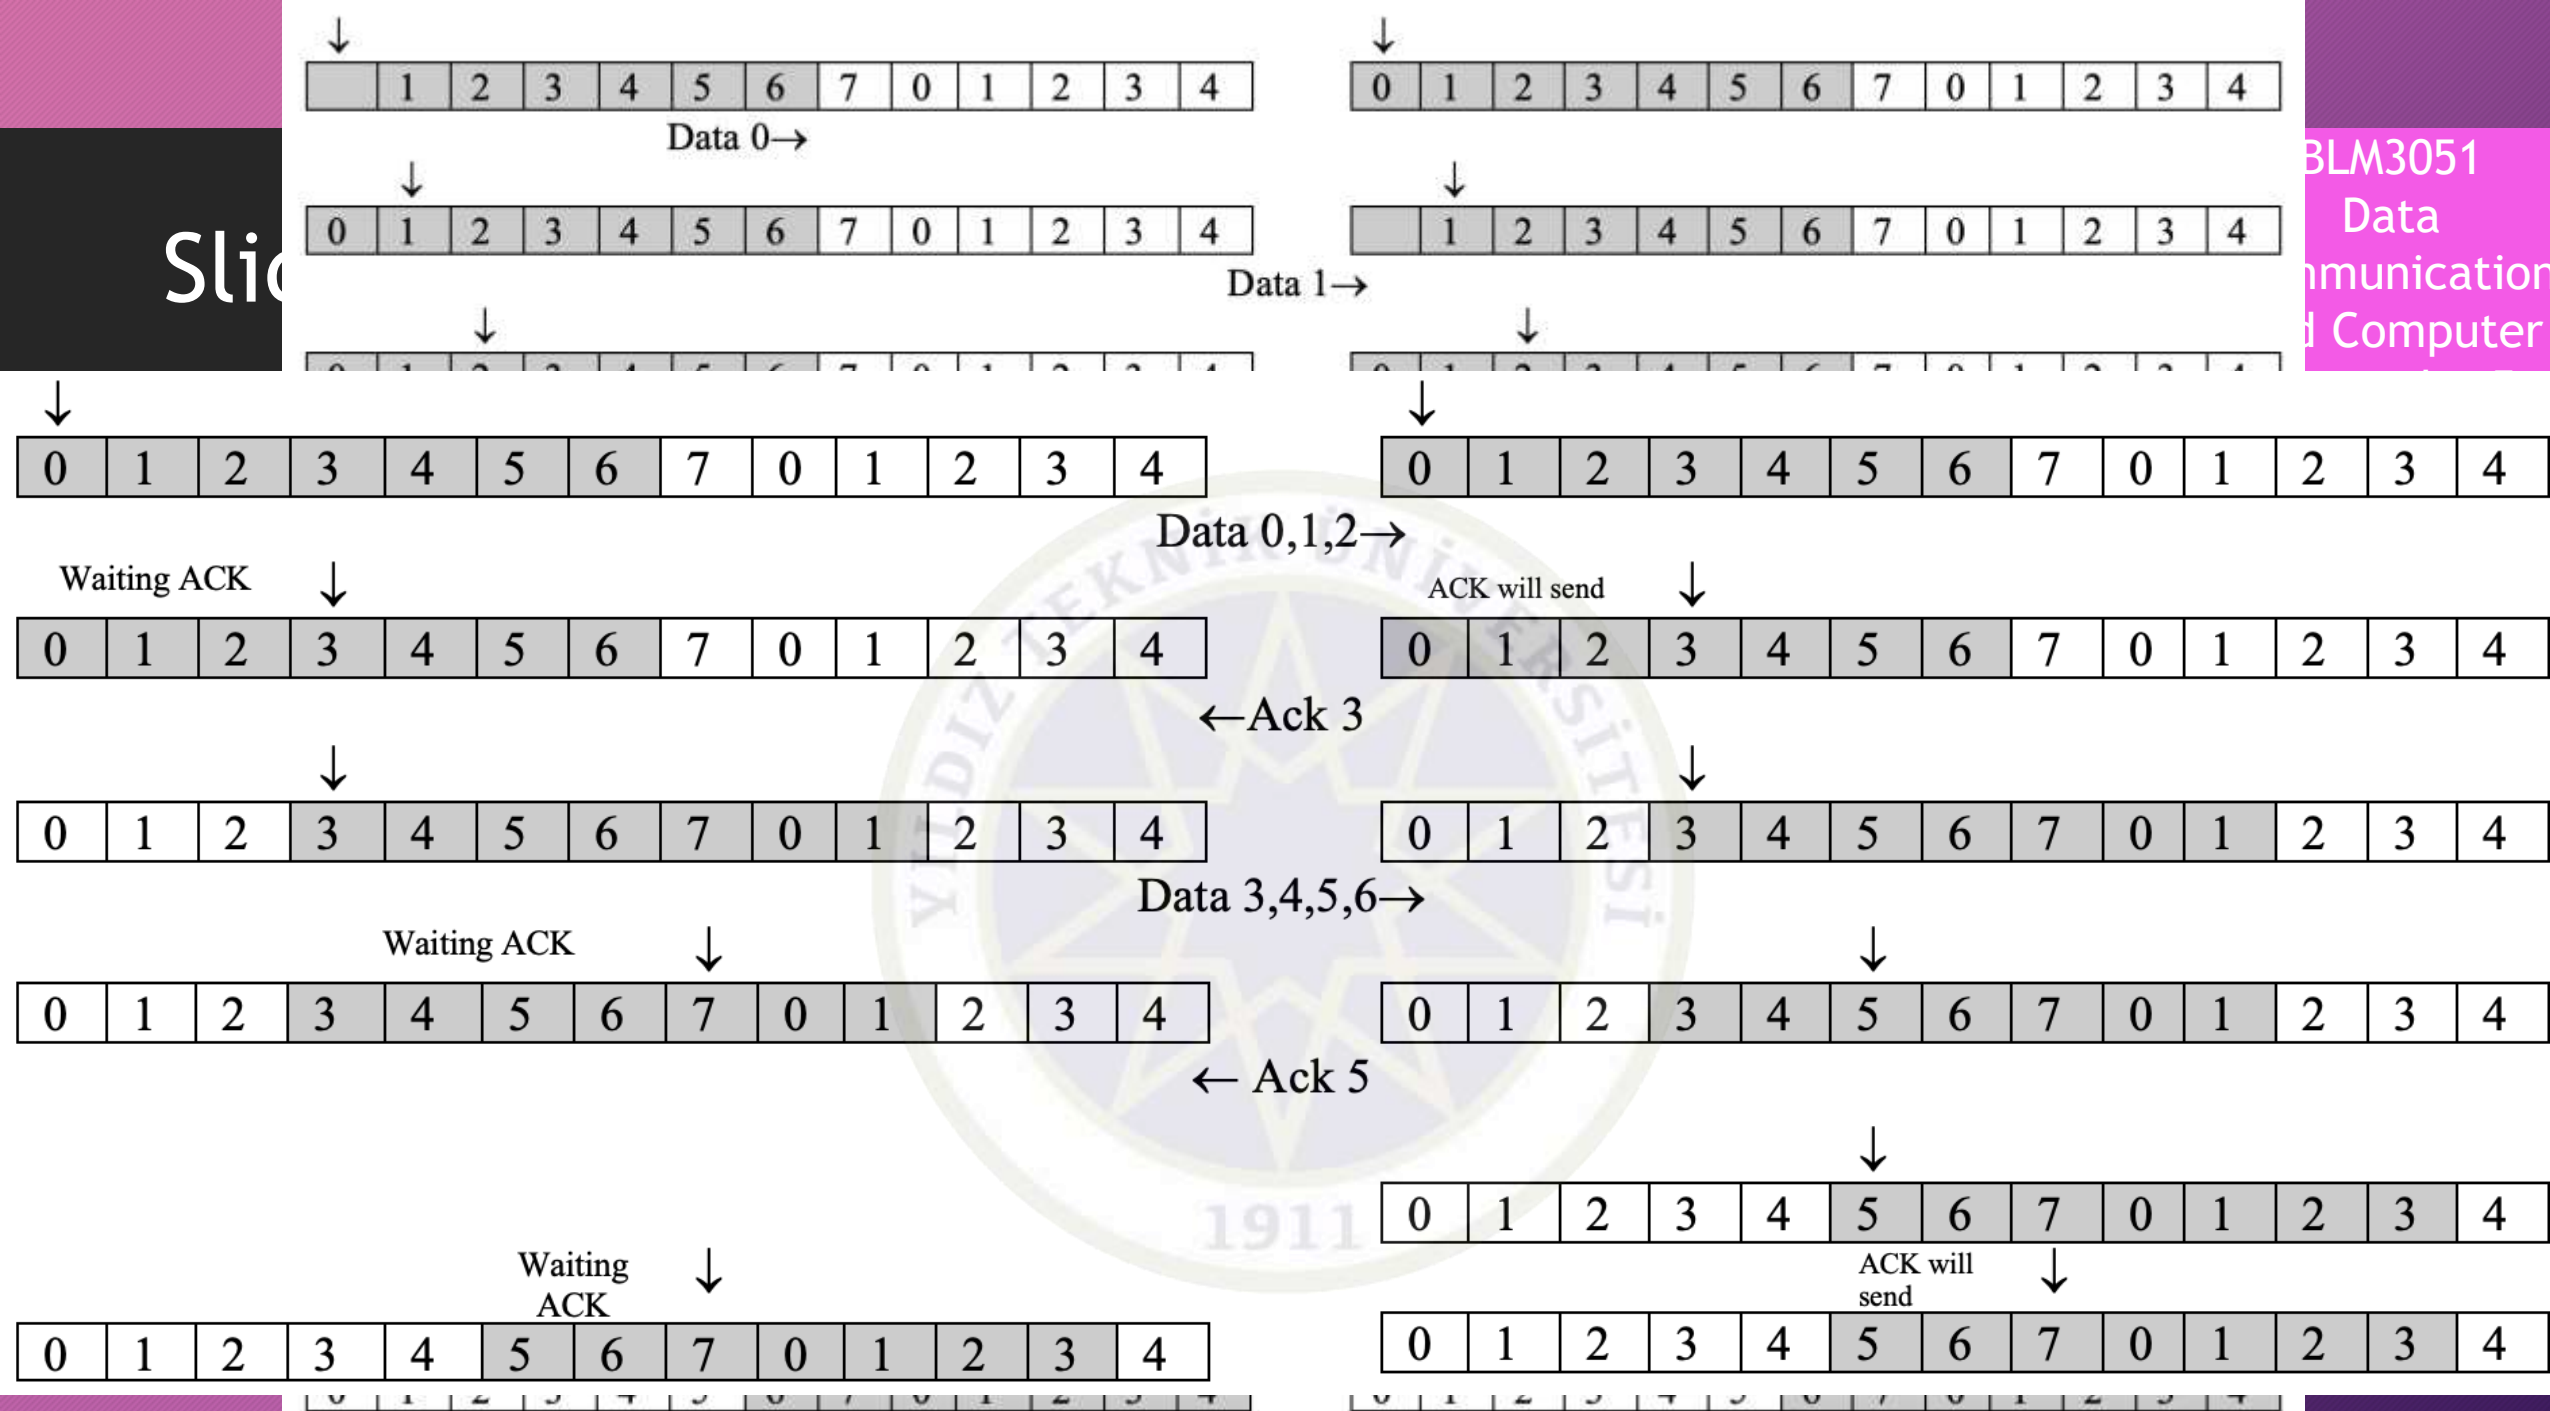


Sliding Window - Window Size 2^n-1

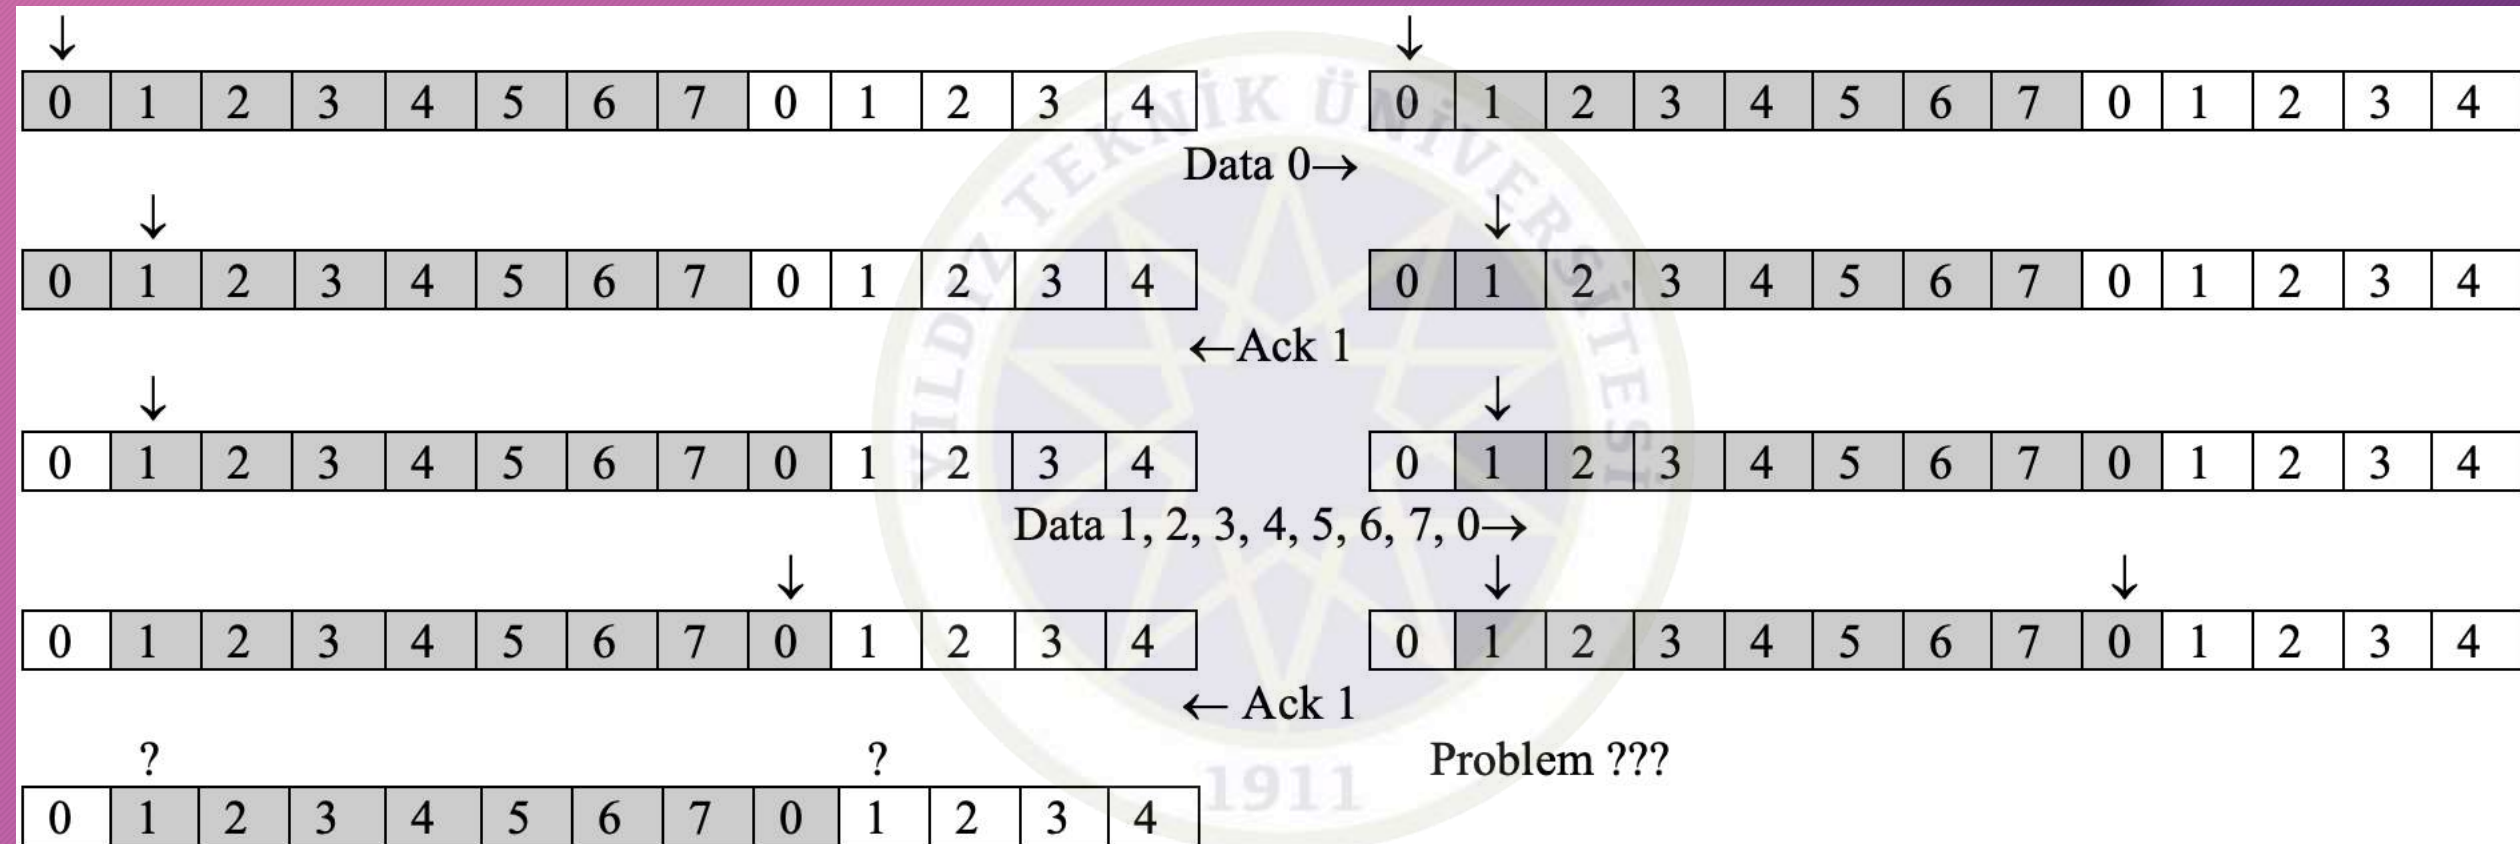


Sliding Window - Line Utilization (U) Rate

- In Stop & Wait $a = \frac{t_{prop}}{t_{frame}}$
- In Sliding Windows $t_{frame} = 1 \Rightarrow a = t_{prop}$
- If w (window size) $\geq (2a + 1)$
 - $U = \%100$
- If $w < (2a + 1)$
 - $U = \frac{w}{2a + 1}$
- $U = \begin{cases} 1 & w \geq 2a + 1 \\ \frac{w}{2a + 1} & w < 2a + 1 \end{cases}$

Error Control, Automatic Repeat reQuest (ARQ)

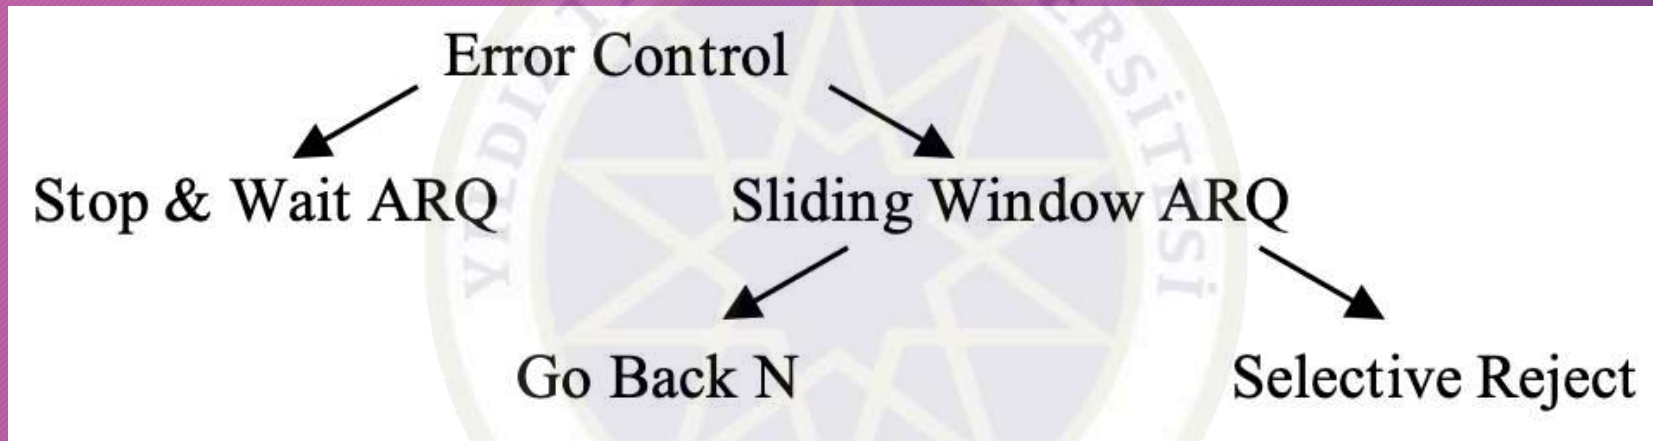

Stop & Wait ARQ

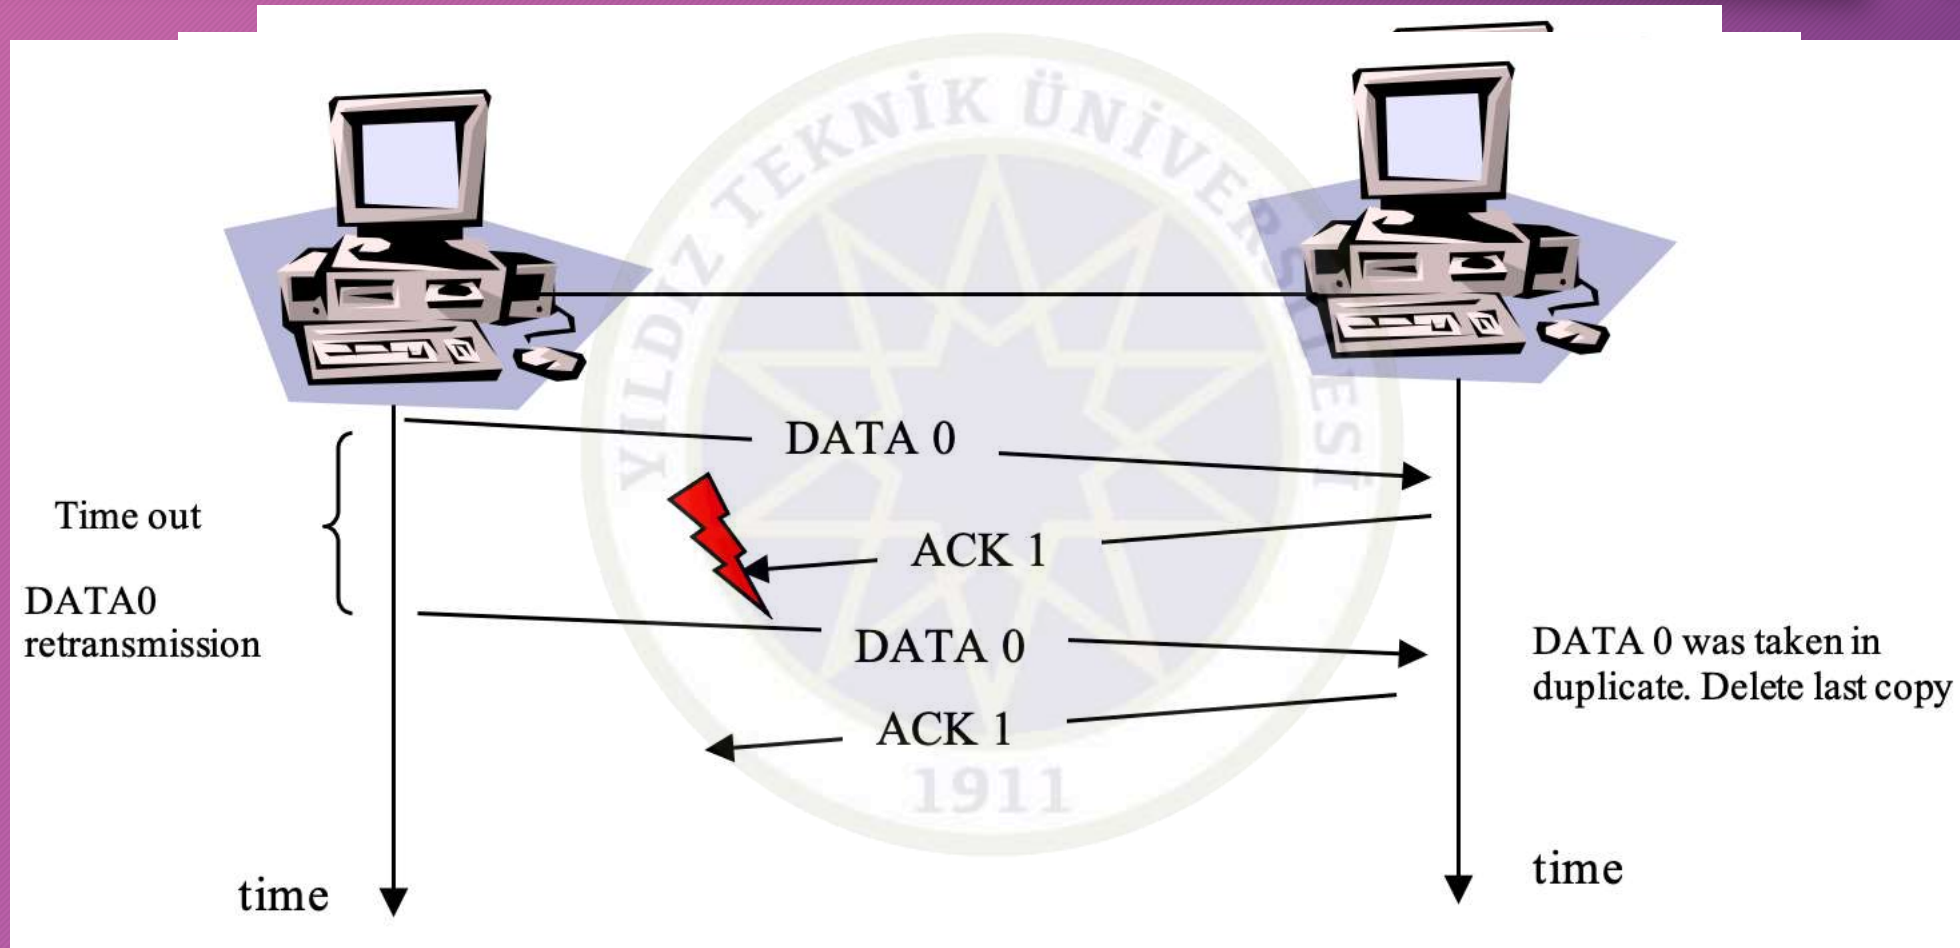

Sliding Window ARQ

- **There are some differences** caused by the sliding window technique when the frames inside the window are sent **without a receipt**.
 - The sender continues to **store the frames in the buffer** until it receives **ACK** for the frames.
 - In the **ACK / NACK information** coming from the **receiver**, there will be a **number field** showing **which** numbered frame **it is for**.
 - **Receive Ready**
 - RR 3 and RR 6 means: I have **received 3, 4, 5** numbered frames, **waiting for frame 6**.
 - **Each faulty frame is immediately reported by the receiver** to the sender.
 - **REJ - Reject** → *alıcının hatalı bir frame'i reddettiğini gösterir*
 - **SREJ - Selective Reject** → *alıcının yalnızca belirli bir frame'i reddettiğini gösterir*
 - **The sender also has a timer** in the sliding window approach.
 - Lost data frame
 - Lost acknowledge frame

Buradaki RR ifadesi alıcının veri almına hazır olduğunu

gösteriyor


S

Retransmitted
ones

Time out

ACK request
for last state


t

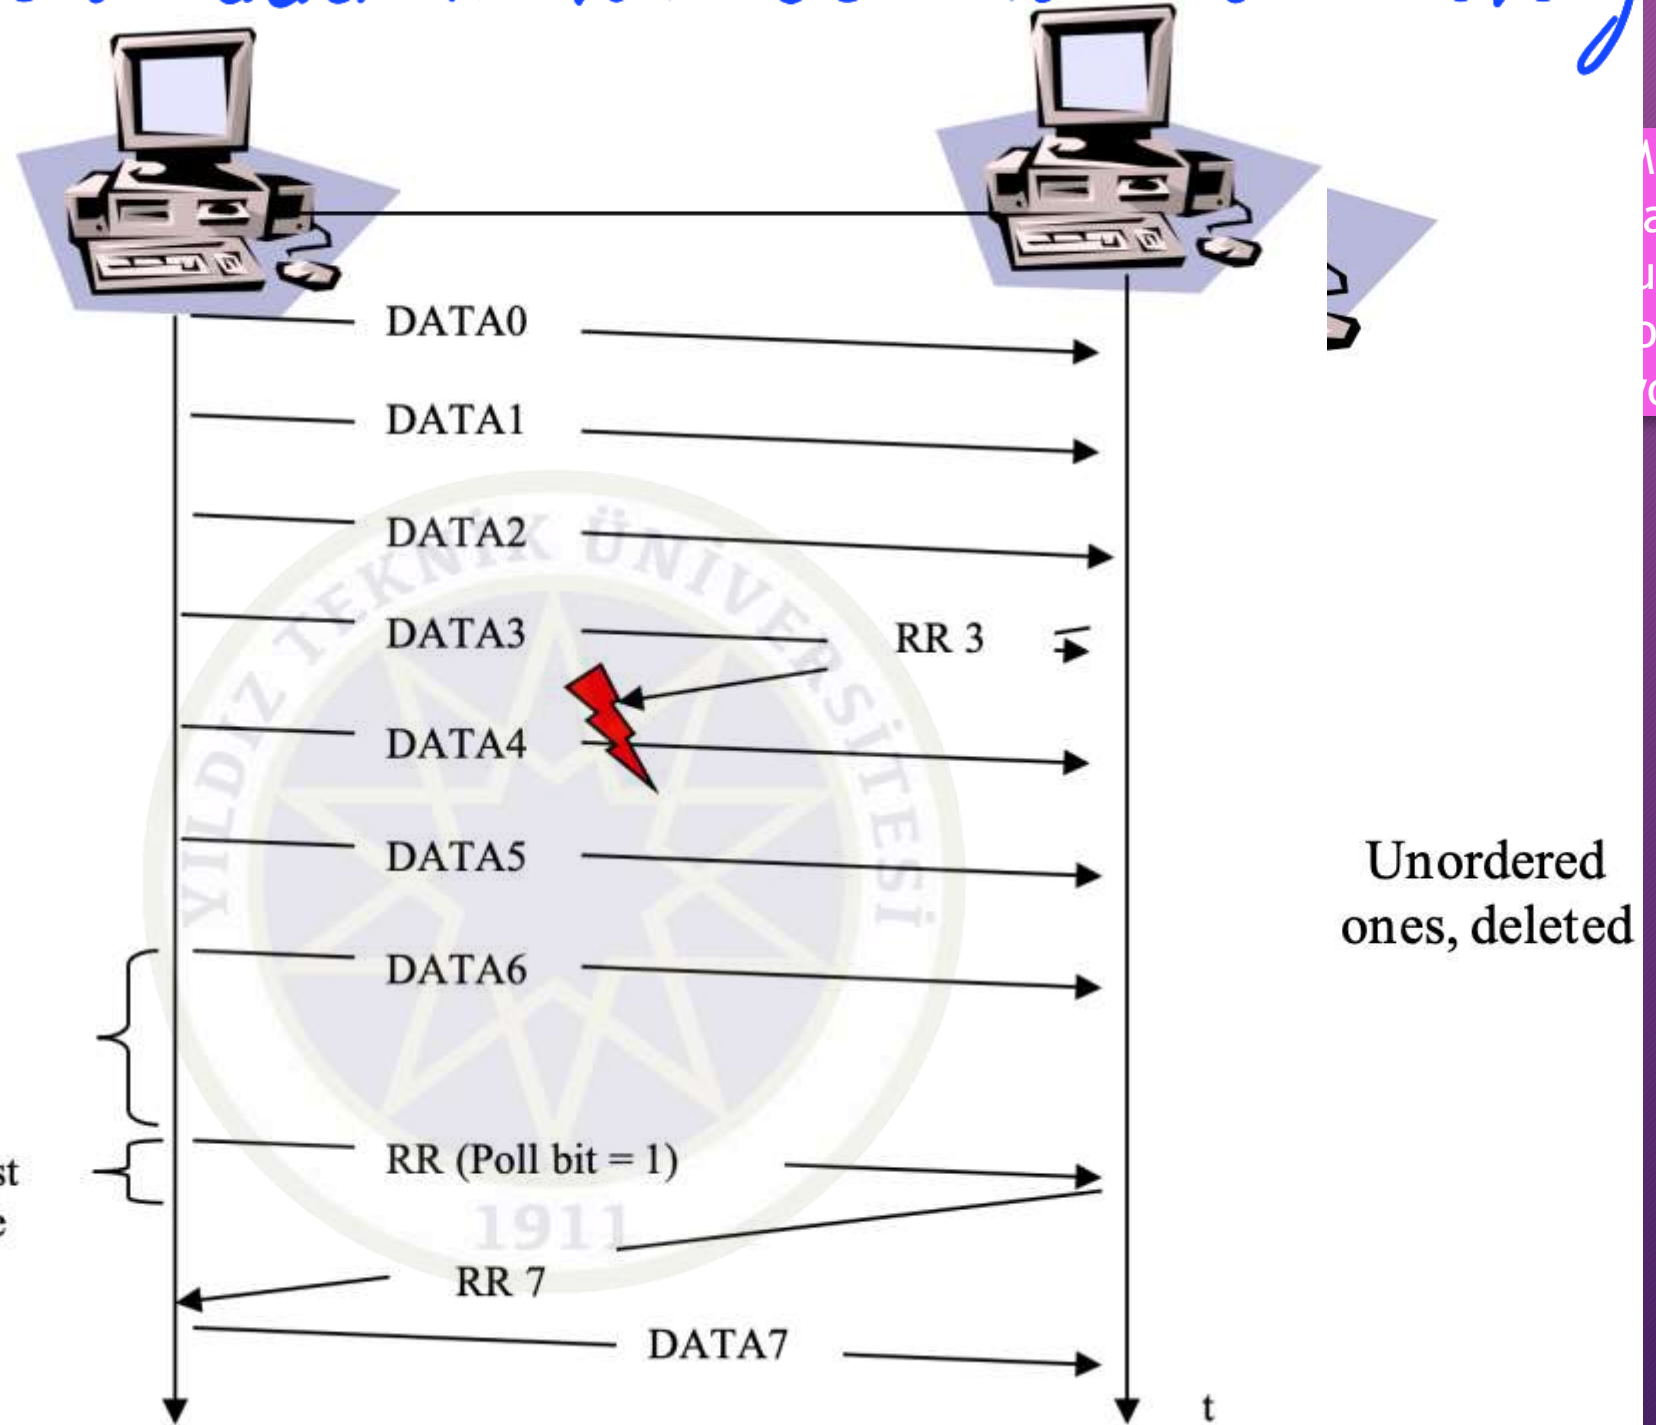

1911

Sliding Window - Selective Reject / Selective Repeat ARQ

- In this technique, the receiver will receive the frames unordered.
 - Search and Sort Algorithms are necessary.
 - Processing complexity increases
 - In Go Back n: $w = (2^n - 1)$
 - In Selective Reject: $w \leq (2^n + 1) / 2$
 - SREJ
 - The receiver accepts frames without error after faulty frame.
 - Frames will come in different order due to faulty frames.
 - Duplicated ones

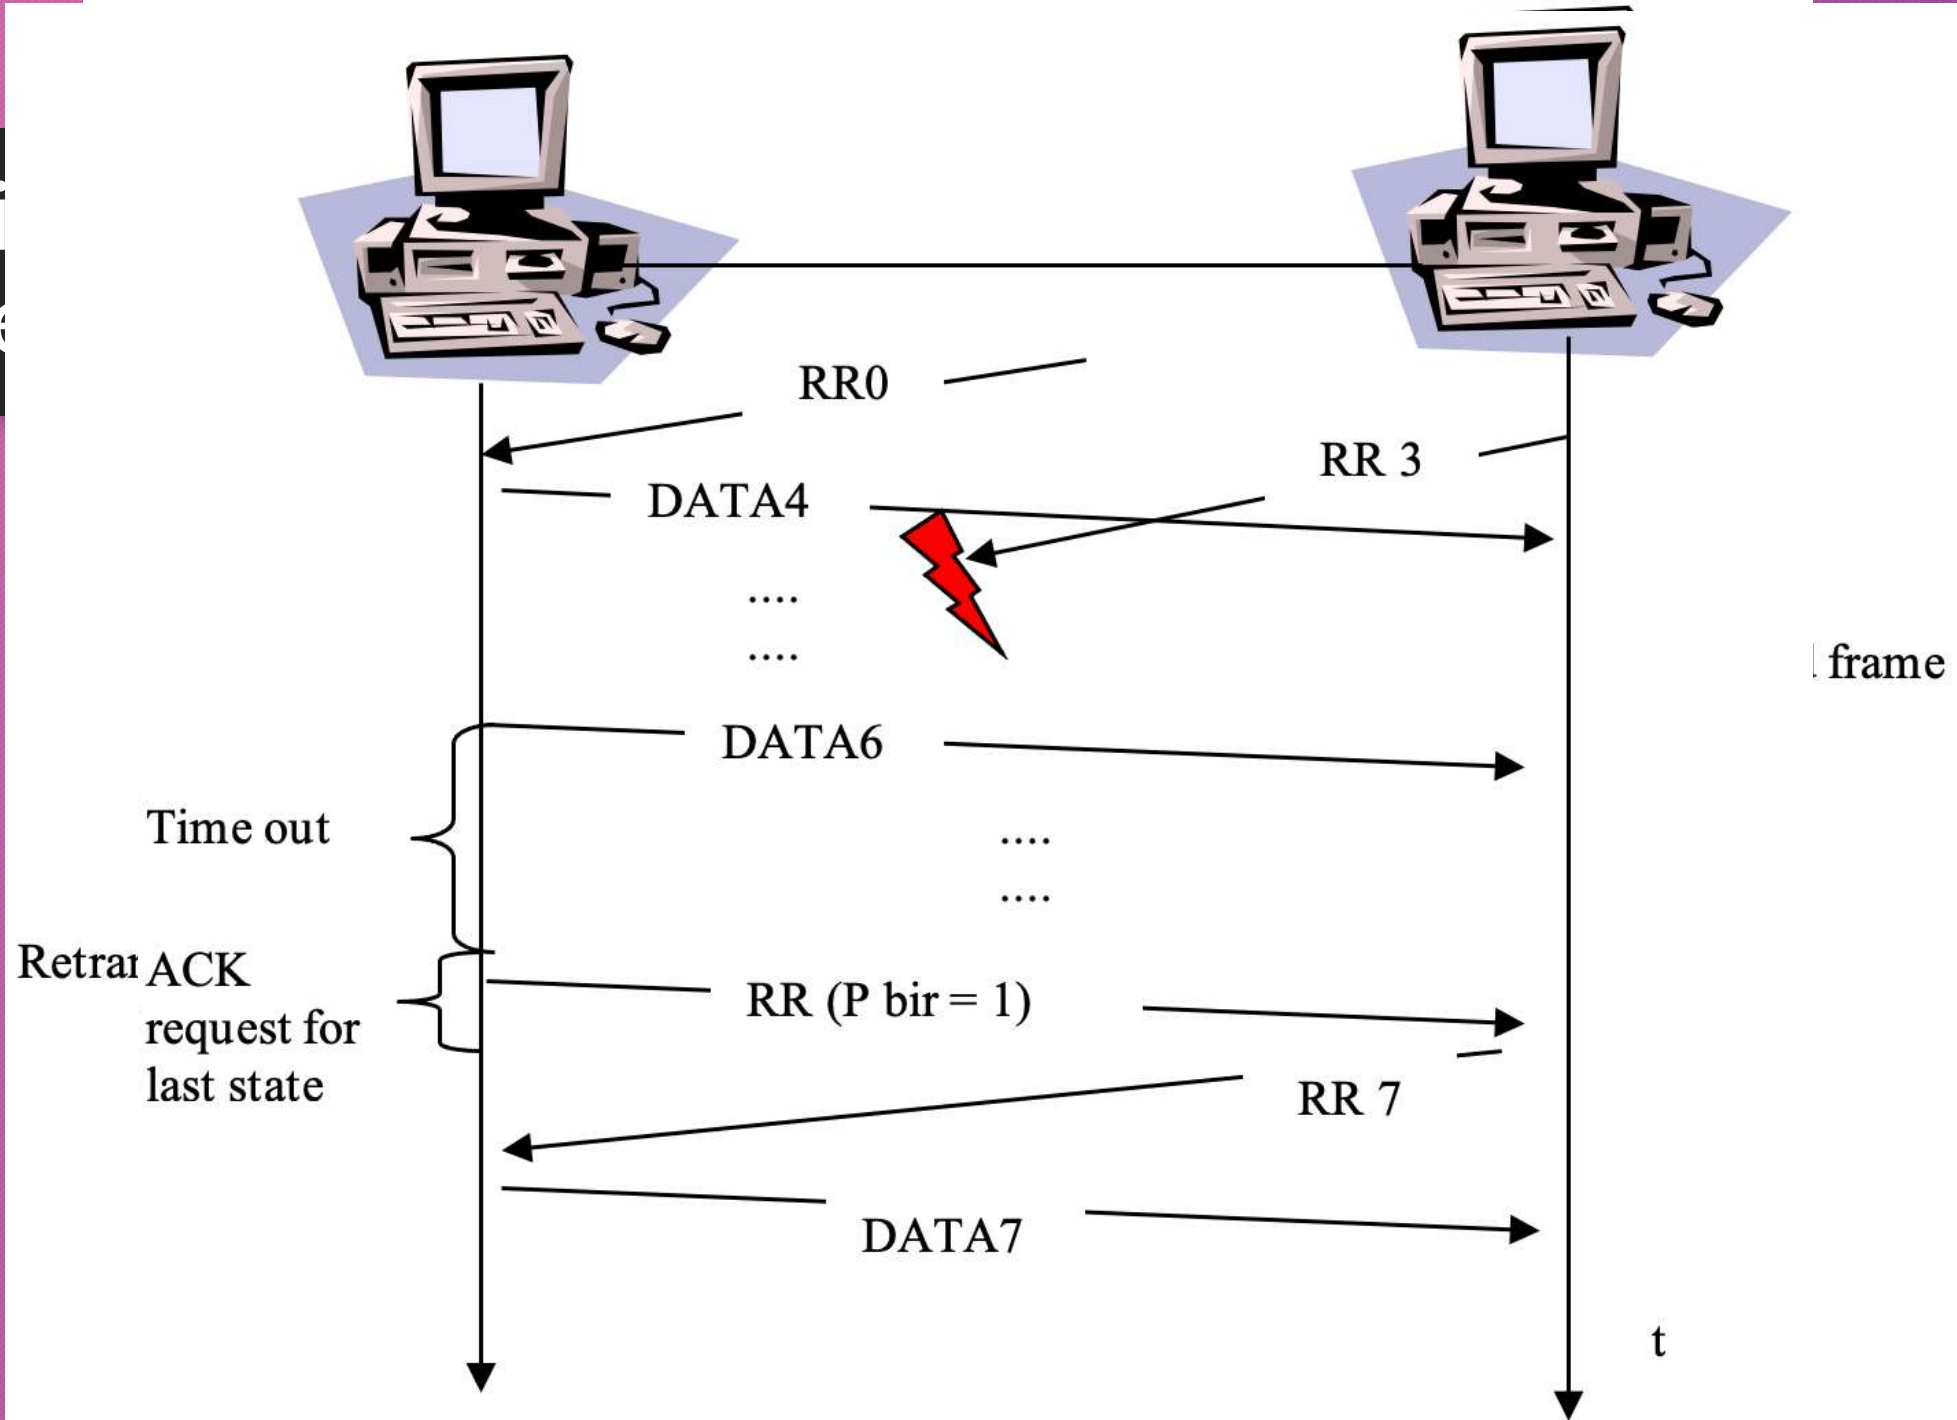


Data Link Protocols

Aşağıda data link protokolleri anlatılıyor

- Protocol is a set of rules used to perform the necessary operations during data flow.

- Synchronous
- Asynchronous

*Data link protokolleri
2 ana türde ayrılır*

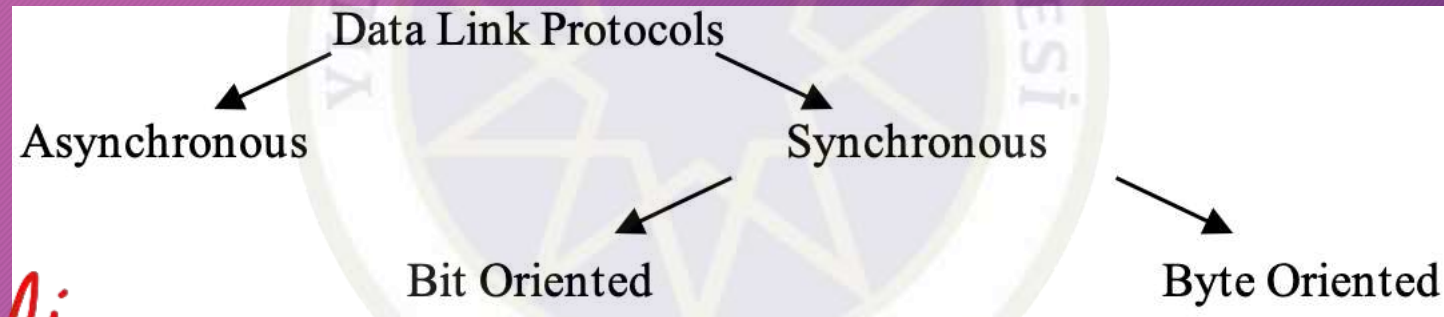

*protokol veri akışı
sırasında gerekli
işlemleri gerçekleştirmek için
kullanılan kural setidir*

bir dizi

Data Link Controls (DTC)

- Components
 - Software
 - Hardware (UART/USART)
- Tasks
 - Synchronous Transmission
 - Physical Level: Common timing signal
 - Logical Level: Special bit or bit-arrays
 - Flow Control
 - Error Control
 - Transmission Rules
 - Which one is sender/receiver?
 - Whether frames are for data or control purposes



↓

Asynchronous Protocols

- Used for connections made with a **modem**
- Logical Sync.
 - Start bit
 - End bit
- There may be gaps of variable sizes between data blocks.

- Cons: Additional data
- Cons: Slow transmission
- Most Common Examples:

- X-Modem
- Y-Modem
- Z-Modem
- Kermit

frameless
veri ya da kontrol
amaçlı olup olmadığı

modem kullanılarak
yapılan bağlantılarda
kullanılır

ekstra veri
gerekebilir
yavaş veri
iletimi olabilir

Veri blokları
arasında
değişken büyüklüklerde
başlıklar olabilir

dezenan
taj

Synchronous Protocols

Asenkron protokollerde başlangıç ve bitiş biti

Jenkron protokollerde bayraklar kullanılır

- Instead of start and end bits, FLAGS is used

- Synchronization premise **SYN** bit-arrays
- Synchronization successor **EOT** bit-arrays

- 2 types: 2 tip Jenk. vardır

- Physical Level Synchronization
 - Common Clock Signal
- Logical Level Synchronization (in Data Link Layer)
 - FLAGS

→ Jenkronizasyon başlatma bayrağı
→ Jenkronizasyon sonlandırma bayrağı

- Thanks to the fast transmission
 - Used in LAN, MAN and WAN technologies
- The protocol perceives the data sent as a consecutive byte sequence.
 - According to the coding system used (ASCII or EBCDIC)

Synchronous Protocols - Byte Oriented

veri iletimi karakterler halinde düzenlenir

*Character Oriented

• ASCII or EBCDIC coding

• 2 types of frames

- Control frames
- Data frames

2 adet frame vardır

Bunlar 2 farklı kodlama standardıdır


S Y N	S Y N	S T X	Data	E T X	BCC
-------------	-------------	-------------	------	-------------	-----

Control Chars	Explanation
SYN	Synchronous idle (makes the channel active)
PAD	Frame PAD (used for completion)
DLE	Data Link Escape (Escape char for control chars)
ENQ	Enquiry (Request)
SOH	Start of Heading
STX	Start of Text
ITB	End of Intermediate Block
ETB	End of Transmission Block
ETX	End of Text
EOT	End of Transmission
BCC	Block Check Count (LRC -> 1 byte, CRC -> 2 bytes)
ACK0	Acknowledge Even Numbered Blocks
ACK1	Acknowledge Odd Numbered Blocks
WACK	Wait Before Transmitting
TTD	Temporary Text Delay (While filling buffer in sender side)
RVI	Reverse Interrupt (Request for urgent response)
NUL	(Filling spaces)

Synchronous Protocols - Byte Oriented - Data Frames




Header includes address

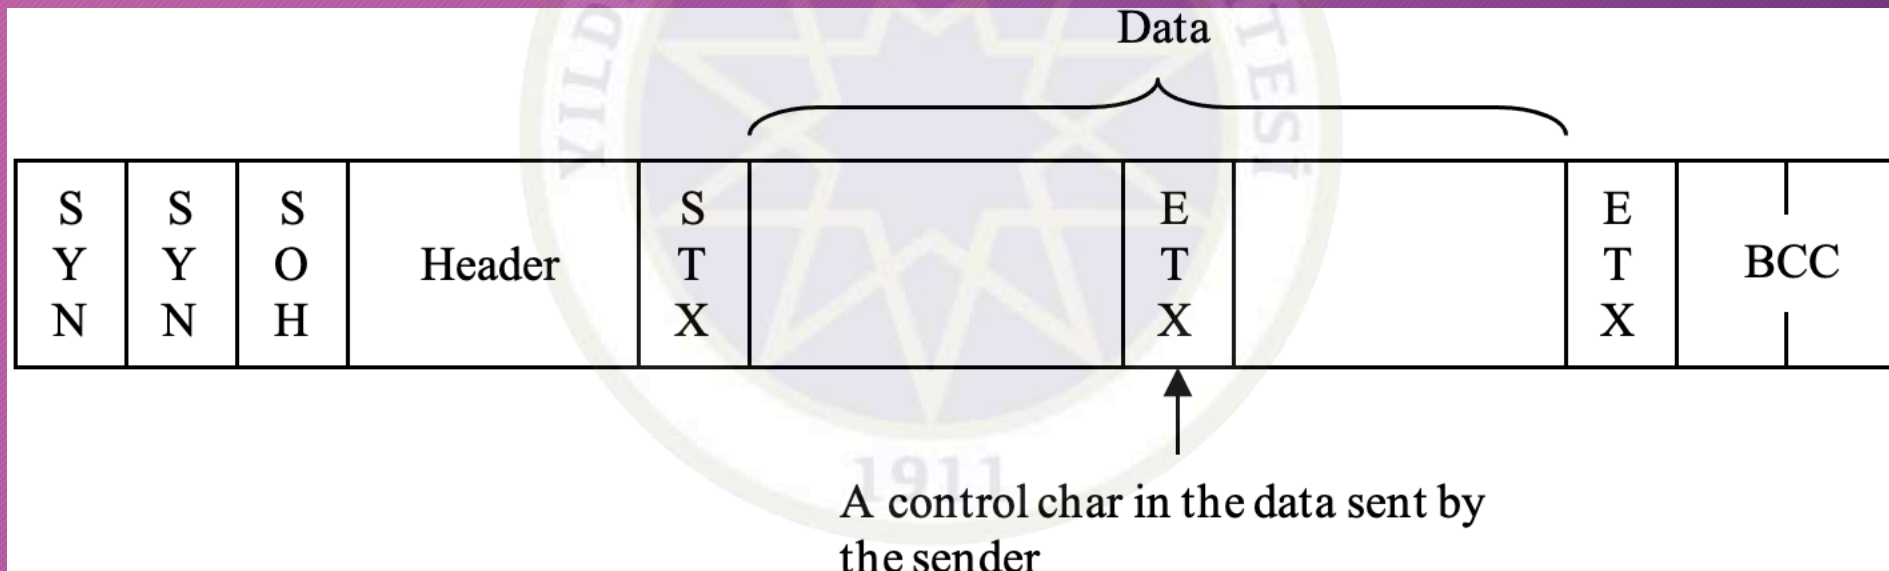


Data Transparency ? (in voice and image data)

Synchronous Protocols - Byte Oriented - Data Frames

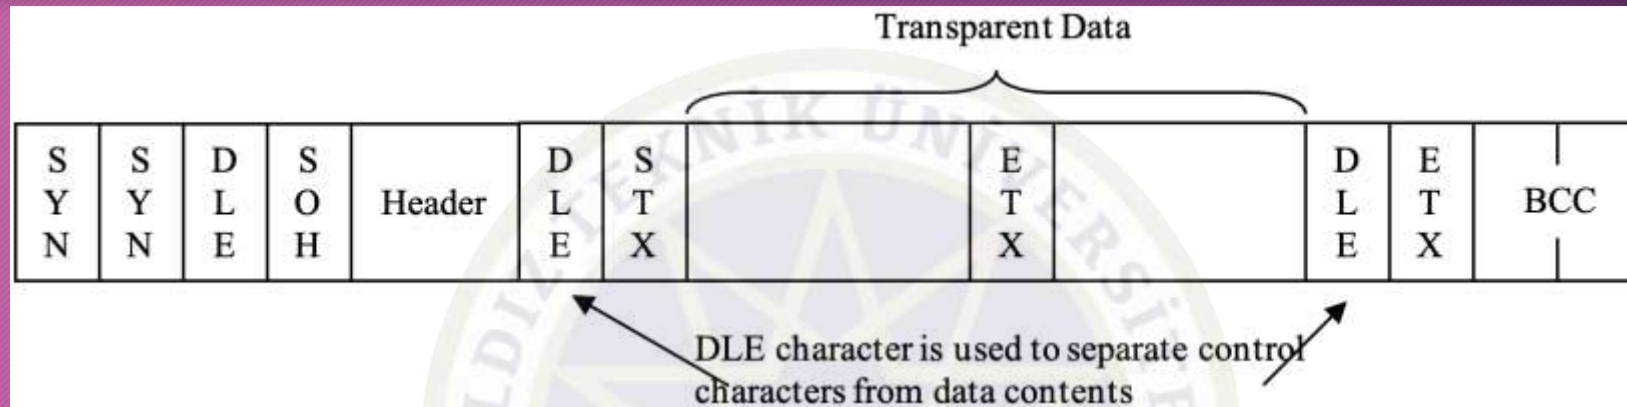


DLE before STX, ETX, ETB, ITB, SOH control chars

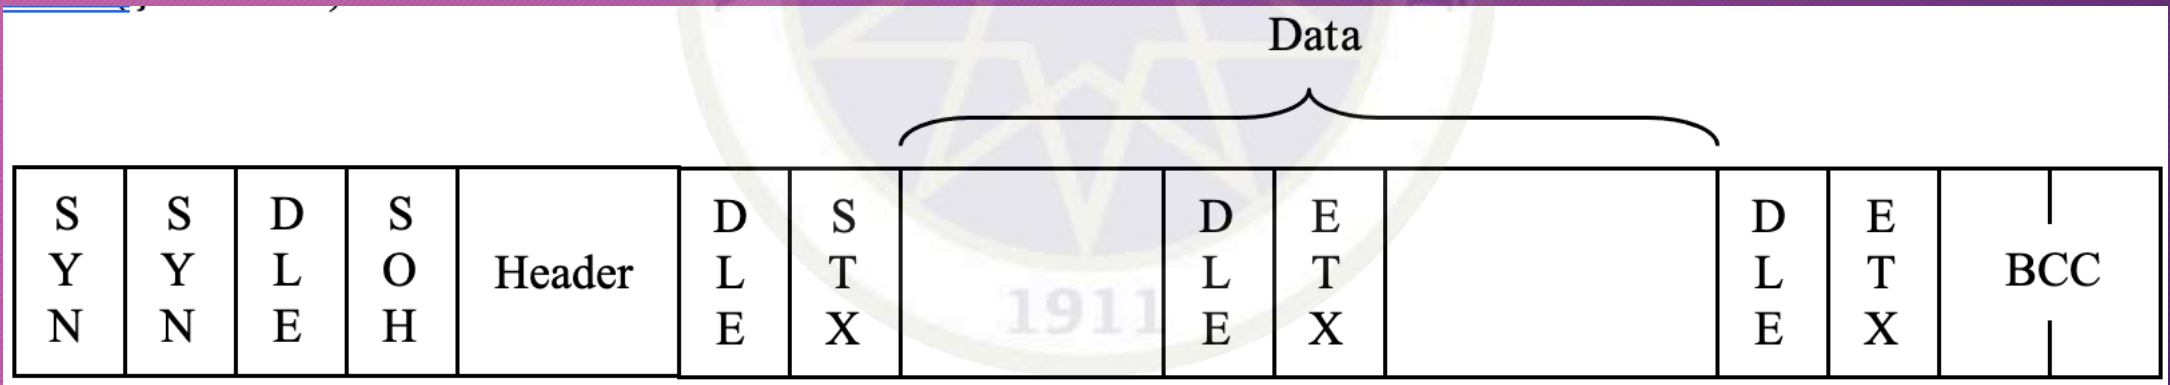


If data includes DLE char?

Synchronous Protocols - Byte Oriented - Data Frames

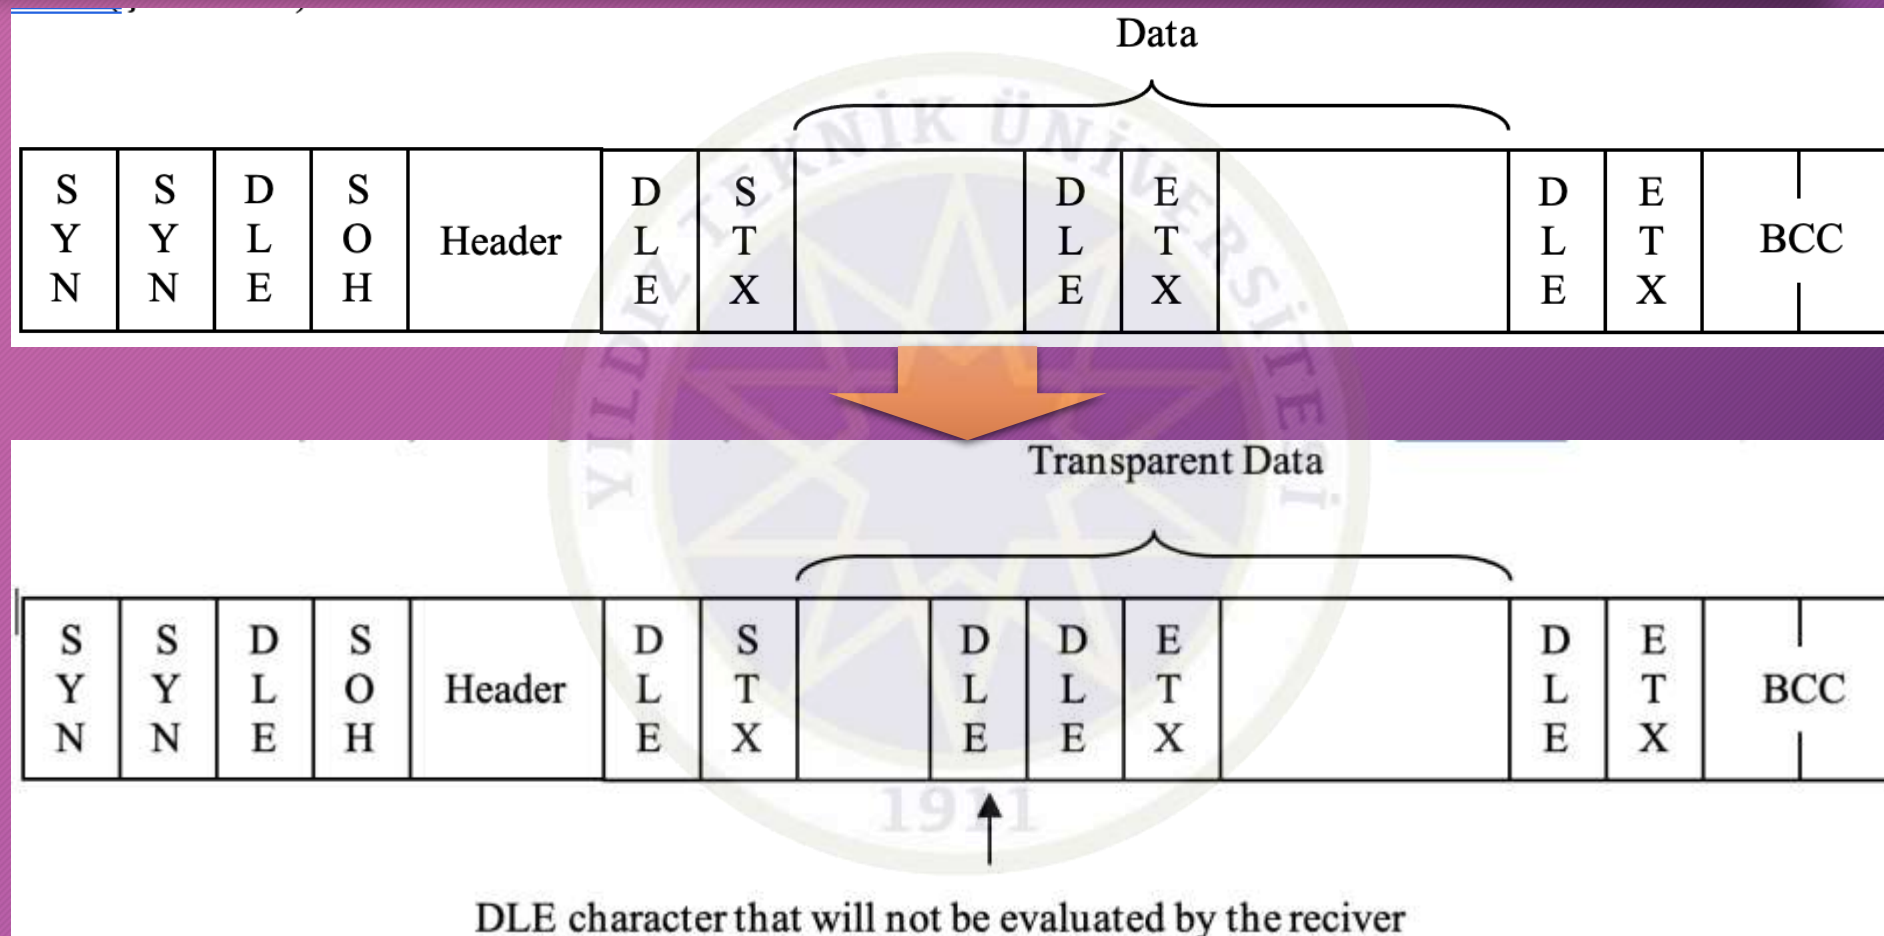


Synchronous Protocols - Byte Oriented - Multi Block Frames

BLM3051
Data
Communication
and Computer
Network - 5

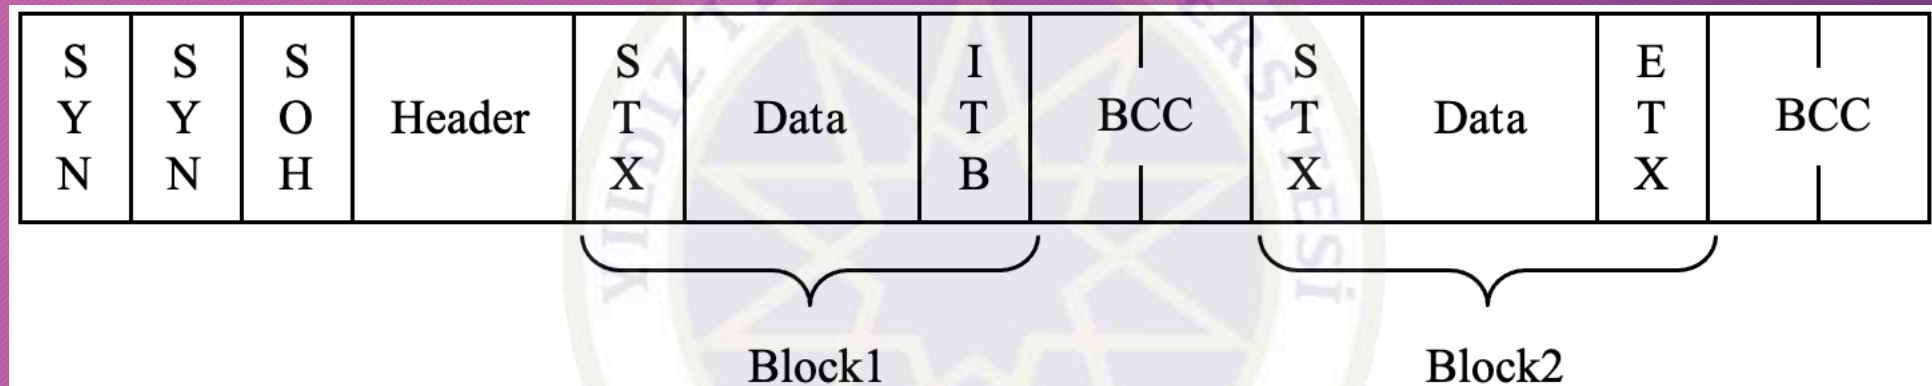

Synchronous Protocols - Byte Oriented - Multi-Frame

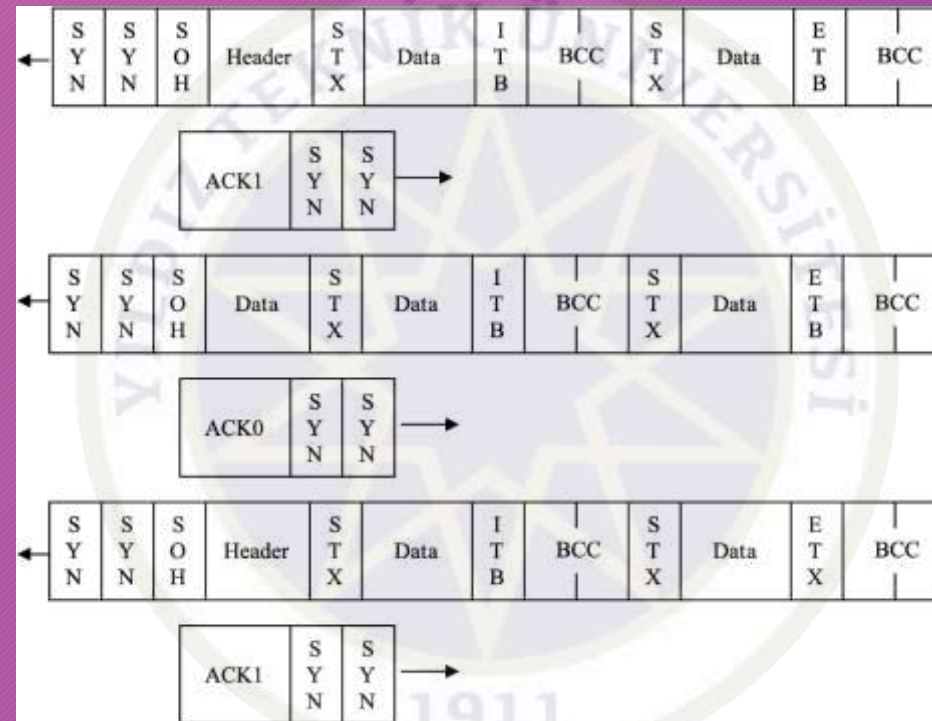

Synchronous Protocols - Byte Oriented - Control Frames

BLM3051
Data
Communication
and Computer
Network - 5



Synchronous Protocols - Byte Oriented - BSC (Binary Synchronous Communication)

- IBM

→ IBM tarafından
kullanılmıştır

- Used until the late 1960s

→ 1960'ların sonlarına kadar
kullanımı sürmüştür

- General Specs:

- Suitable for point-to-point or multi-point connections
- Half duplex
- Use STOP & WAIT for Flow Control and ARQ
- Code Dependent

half-duplex
modda
çalışır

→ Kod
bağımlıdır

Synchronous Protocols - Bit Oriented

byte oriented'den daha aktif kullanılır

Günkü daha
küçük bir frame'e
daha fazla bilgi
sığdırır

- Used more actively than byte oriented protocols
 - Fit more information into a shorter frame size
 - Less faced with data transparency problem
- All bit oriented protocols reference HDLC (High Level Data Link Control)
 - ISO

General Specs:


- Suitable for point-to-point or multi-point connection.
- Support Half duplex and Duplex
- Use Sliding Windows for Flow Control and ARQ
- Code Independent

Tüm bit oriented'ler
HDLC'yi referans
alır

Veri
Şeffaflığı
problemi

Kod bağımsızdır

Synchronous Protocols - Bit Oriented

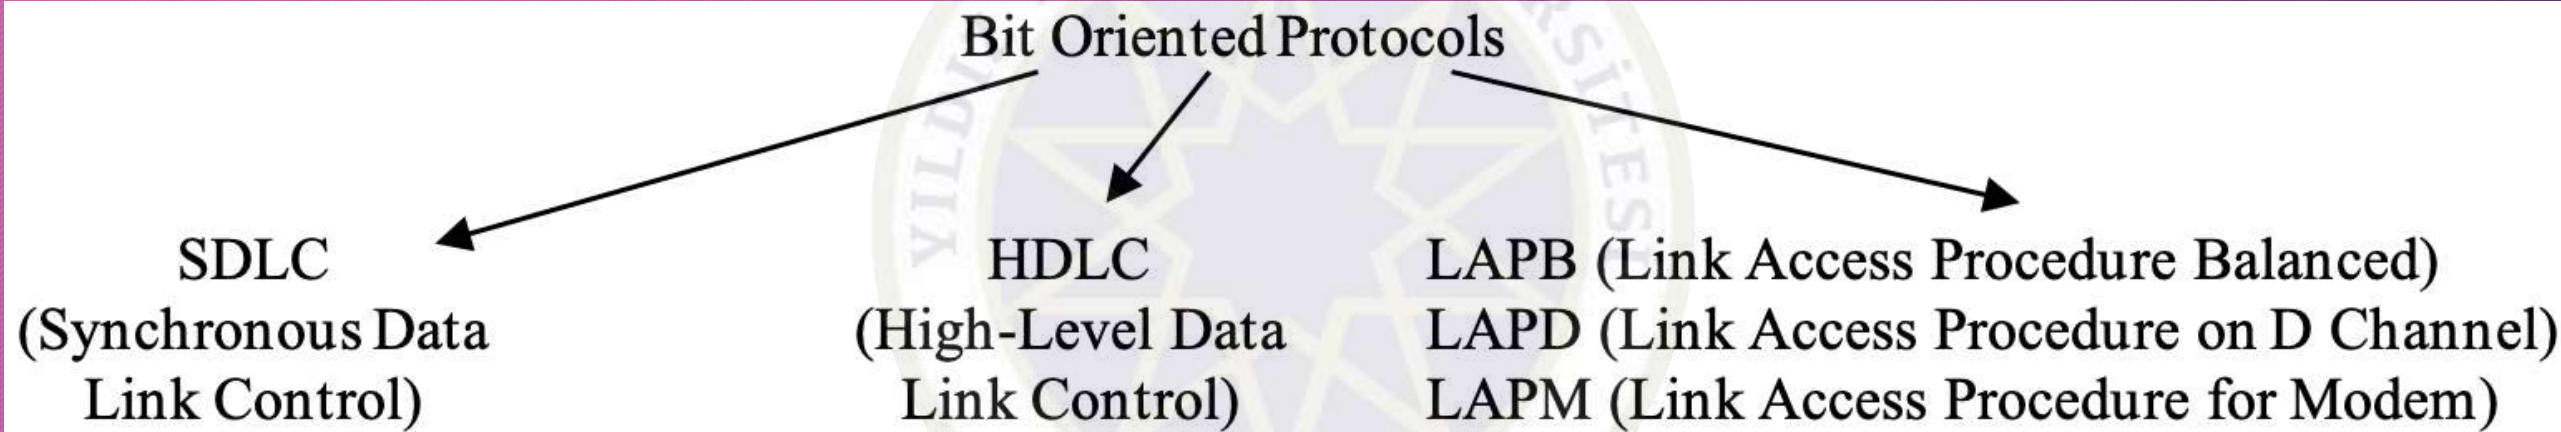

Synchronous Protocols - Bit Oriented - HDLC (High Level Data Link Control)

HDLC protokolünde kullanılan bazı temel kavramlar

• Concepts used in HDLC (HDLC'de kullanılan kavramlar)

• Station types

- Primary
- Secondary
- Combined

• Configuration

- Unbalanced
- Balanced (not defined in HDLC)


• Modes of communication

- NRM (Normal Response Mode): Unbalanced. The usual primary/secondary relationship
- ARM (Asynch. Response Mode): Unbalanced. Secondary station transmit data without primary station's permission if line is available.
- ABM (Asynch. Balanced Mode): Balanced

Modes of Communication	NRM	ARM	ABM
Station Types	Primary/Secondary	Primary/Secondary	Combined
Transmission Starter	Primary	Primary/Secondary	Any of them

Synchronous Protocols - Bit Oriented - HDLC Frame Structure

I-Frame	Information	It is used to carry user data and related control information.
S-Frame	Supervisory	It is the type of frame used at the data link layer to perform functions such as error and flow control.
U-Frame	Unnumbered	It is a special purpose management frame used to provide system management.

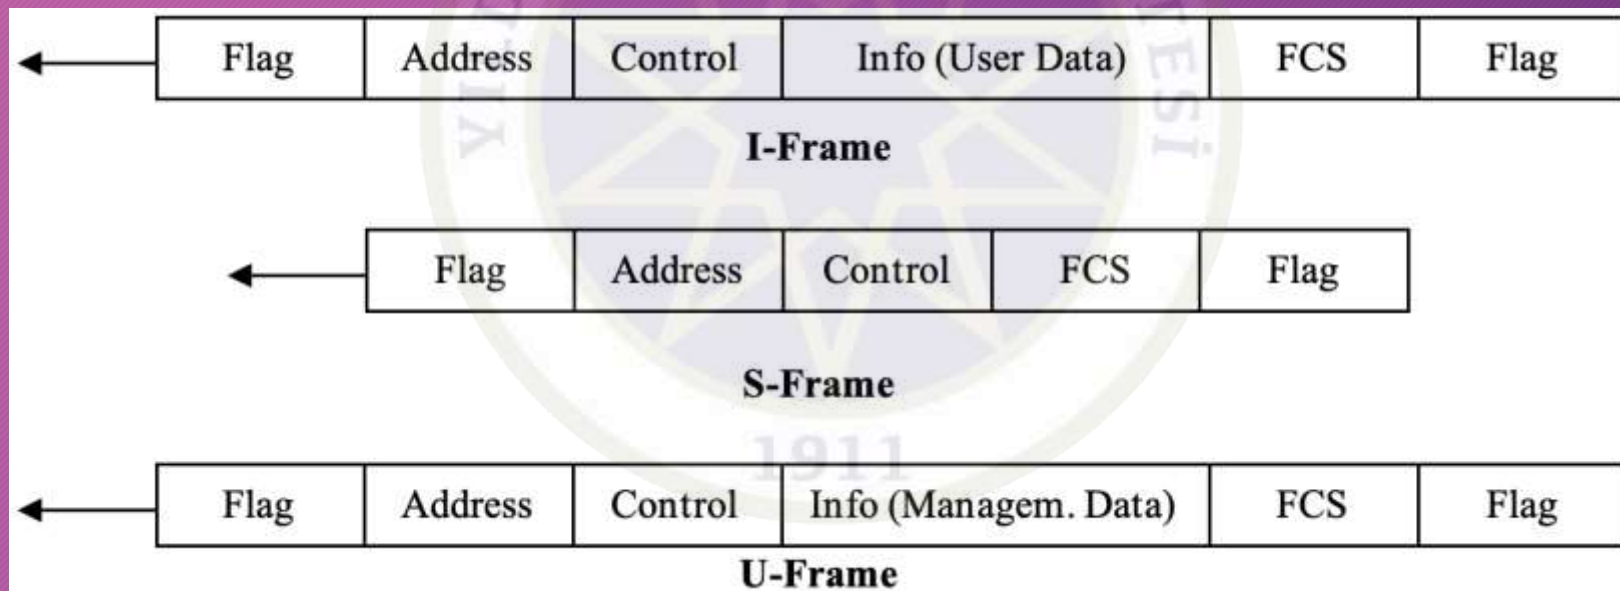

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - FLAG Field

HDLC frame yapısı

- Consist of 8-bits → *8 bitlik yapıdan oluşur*
 - 01111110
- Determinin start and end point of frames
- Ensure synchronicity
- Critical point for **data transparency**
 - Bit stuffing
 - Sender add a 0-bit between 1's (like escape char)


*Bit stuffing yöntemi
kullanılır*

pönderen ordalık 1'lerin arasına bir 0 bit ekler

bu kagıtı kopyeleri
İşler görür

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - FLAG Field - Bit Stuffing


BLM3051
Data
Communication
and Computer
Network - 5

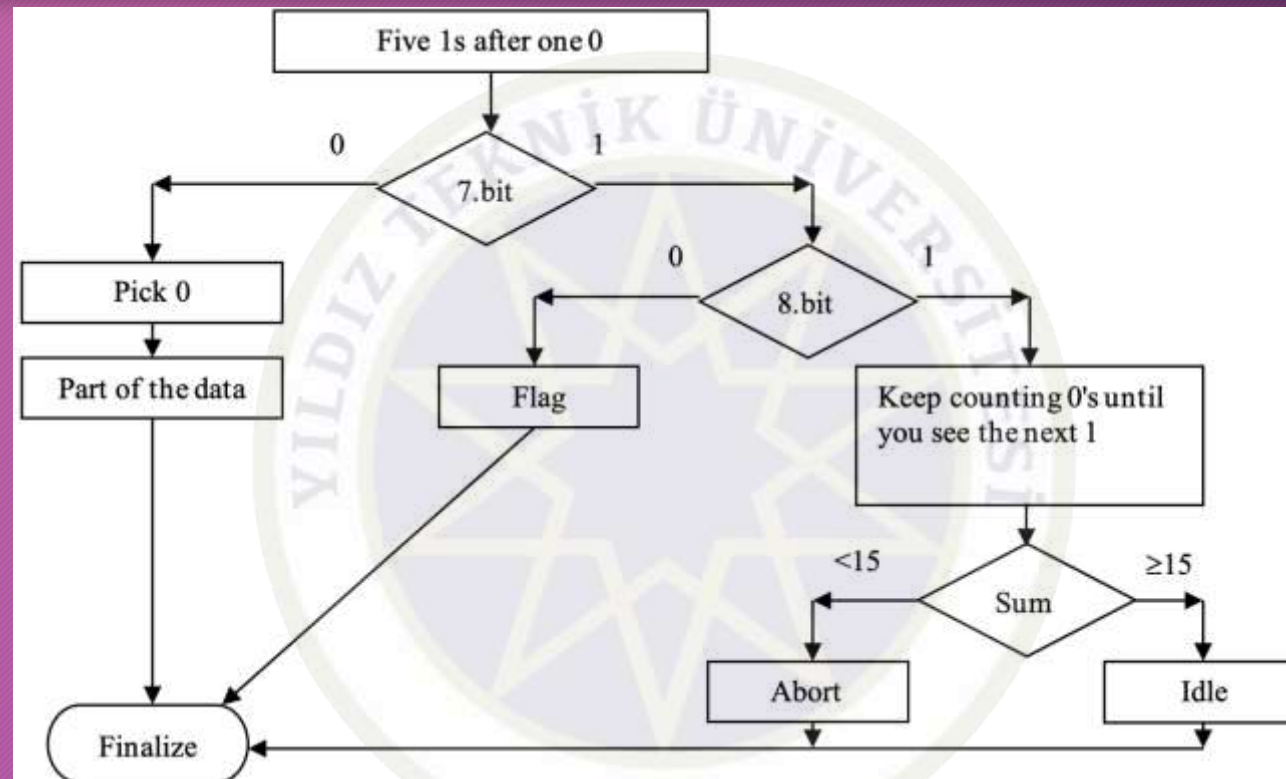

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - ADDRESS Field

- Contains the address of the secondaries.
- Address data is in Network Layer (Third Layer)
 - Used to determine whether;
 - Is it command? or Is it answer?

Bu adres alanı
iletilecek verinin bir
komut mu yoksa
bir yanıt mı olduğunu
belirlemek için
kullanılır



Single byte addressing

Burda bitin 1 olması
komut olduğunu gösterir



Multi byte addressing

Buradaki
bitin 1 olması
adres alanının
sonuna işaret
ediyor

ilk 7 bitlik adres alanının sonuna

şıra ek adres alanını göstermek
için bir 0 biti eklenmiş

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - CONTROL Field

- 1 or 2 byte length

- If $w=7$ in sliding window technique, length is 1
- If $w=127$ in sliding window technique, length is 2
 - In applications with high line delays such as WAN

0	
1	0
1	1

I-Frame

S-Frame

U-Frame

Kontrol alanı 1 veya 2 bayt uzunluğunda olur

2 bayt

veri taşıma ve
akış kontrolü
ayrılır

hata kontrolü
ve akış kontrolü

Sistem yönetimi ve
hata kurtarma

Kontrol alanının her bir tür

HDLC frame'ini temsil ettiği ilk bitlere göre belirlenir

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - **I-Frame**

BLM3051
Data
Communication
and Computer
Network - 5

- If $w=7$;
 - Each I-Frame contains 2 three-bit fields for flow and error control.
 - N(S): Sequence number of the **sending** window
 - Like ACK
 - N(R): Sequence number of the **receiving** window
 - If last frame is error-free, N(R) contains next frame's number
 - If last frame has errors, N(R) contains number of faulty frame
- If $w=127$
 - Each I-Frame contains 2 seven-bit fields for flow and error control.

0	N(S)	P/F	N(R)
---	------	-----	------

1 frame veri iletiminde
kullanılan aynı
zamanda akış
ve hata kontrol
rolü bilgilere
rini taşıyan
bir framedir

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - **S-Frame**

- S-Frame means that neither sides has data to send to the other.



Code	Abbreviation	Explanation
00	RR	Receive Ready
01	REJ	Reject – (go back n)
10	RNR	Receive Not Ready
11	SREJ	Selective Reject - (selective reject)

10
dizisi
ile başlar
bu da Gecikmenin
bir S frame aldığını
belirtir

belirli bir framein
yeniden gönderil-
mesini ister

RR denetrim frame'leri içinde yer alır, veri alırsanız verilerinde

Synchronous Protocols - Bit Oriented

HDLC Frame Structure - S-Frame - RR

BLM3051
Data


Communication
and Computer
Network - 5

• It has four basic uses:

- ACK
- POLL
 - P=1
- REJECT POLL
 - F=1
- ACCEPT SELECT
 - F=1

1	0	Code	P/F	N(R)
---	---	------	-----	------

Birinci istasyonun ikinci istasyondan veri almayı beklediği ve yanıt istediğini belirten sinyal

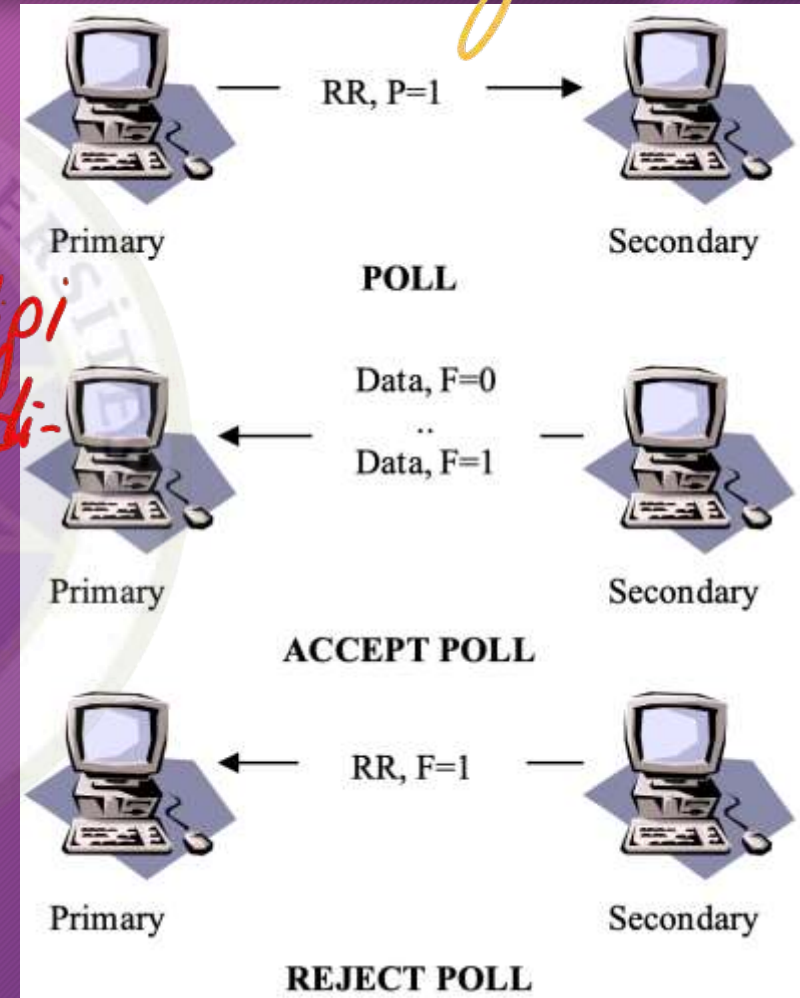

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - S-Frame - RNR

- It has three basic uses:


- ACK
- SELECT**

- P=1
- If primary sends RR and P=1, it means POLL.
- REJECT SELECT
- F=1

Birincil istasyonun ikincil istasyondan veri göndermesini talep ettiği

1	0	Code	P/F	N(R)
---	---	------	-----	------

2 bit dizesi frame'in S-frame

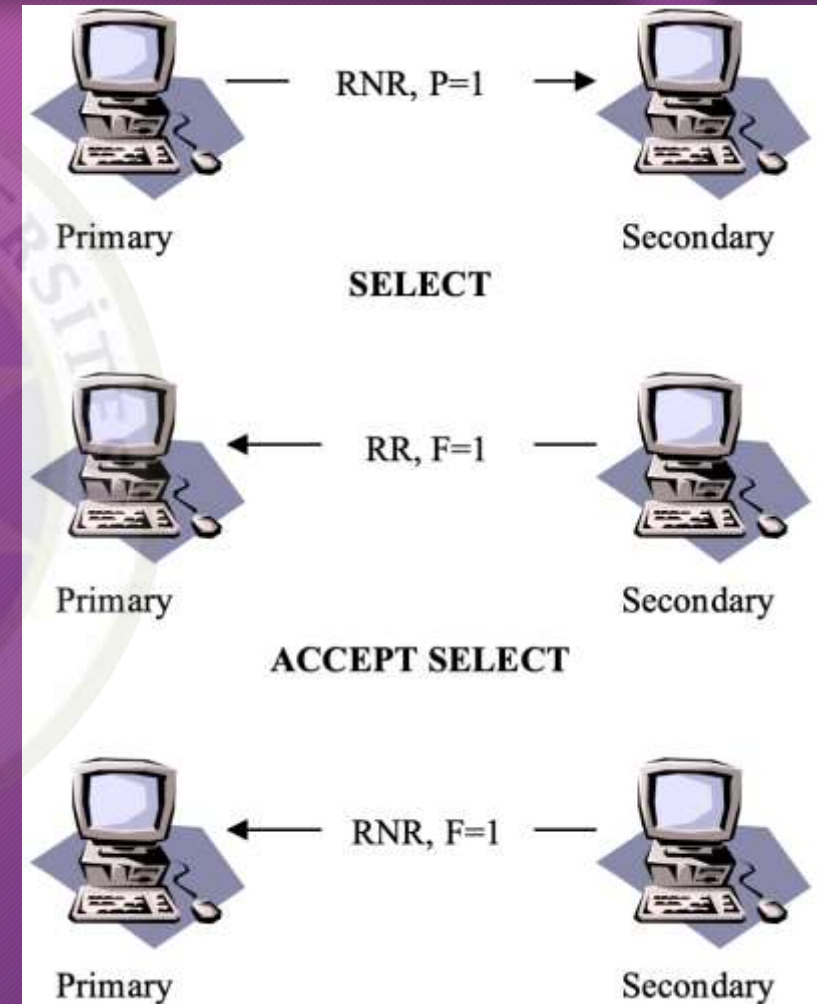

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - S-Frame - REJ, SREJ

- Used to return negative feedback from the receiver
 - REJ: Go Back N ARQ
 - It is used to inform the sender that the frame whose number is written in the N (R) field and the frames that come after it did not reach the receiver or that it received incorrectly, and to ensure that it is sent again.
 - SREJ: Selective Reject ARQ
 - It is used in the N (R) field to inform the sender that the data frame whose number is written on it did not reach the receiver or that it was received incorrectly and to send it again.

Belli
frame den
sonraki
framelerin
ulaşmadığı
ile ilgili
bilgi verir


→ spesifik bir
veri frame'inin
alınmadığını
alındığıyla
yo da yanlış
ilgili bilgi
verir

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - U-Frame

BLM3051

Data
Communication
and Computer
Network - 5

- Used to provide session control
- The data area is used to carry information required for system management functions
- 1st code field consist of 2 bits
- 2nd code field consist of 3 bits
- $2^5 = 32$ different state
- These states (commands and answers) can be collected in 5 different categories:
 - Mode setting
 - Unnumbered exchange
 - Disconnection
 - Initialization
 - Miscellaneous

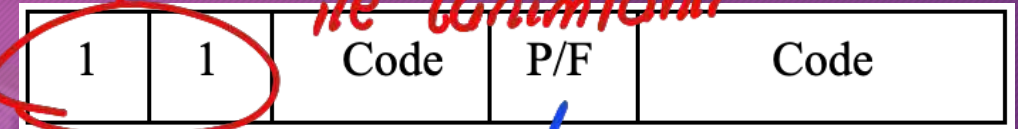

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - **U-Frame** - **Mode Setting**

- How will the transmission be?
 - 00-001 (SNRM-Set Normal Response Mode) -> w=7
 - 11-000 (SARM-Set Async. Response Mode) -> w=7
 - 11-100 (SABM-Set Async. Balanced Mode) -> w=7
 - 11-011 (SNRM Extended) -> w=127
 - 11-010 (SARM Extended) -> w=127
 - 11-110 (SABM Extended) -> w=127

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - **U-Frame - Unnumbered Exchange**

- Data connection information exchange
 - 00-100 (UP-Unnumbered Poll): POLL request
 - 00-000 (UI-Unnumbered Info): exchange of date/time information to be used for sync.
 - UI would be a command or answer.
 - If it is used for command, it transports list of parameters to be used for transmission.
 - If it is used for answer, it carries information that determines the capability of the receiver.
 - 00-110 (UA-Unnumbered Ack): Sent in response to the UP command

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - **U-Frame - Disconnection**

- There are 3 types of disconnection command.
 - 00-010 (DISC): **Sent by the first side** to terminate the connection to the other.
 - 00-010 (RD): It is used to notify the request to terminate the connection **from the second station** to the first.
 - 11-000 (DM): **When the address is sent** from the specified station to the station wishing to **establish the connection**, it is sent as **negative feedback** information to the **mode setting command**.

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - **U-Frame - Initialization**

U Frame'lerin başlatılması ve istasyonlar arası iletişimin ayarlanmasıyla ilgili bilgiler

- Used for initializations for all sides.
 - 10-000 with P (SIM-Set Initialization Mode)
 - Command is sent from the first station to the second
 - UI command will be sent in response to SIM command
 - 10-000 with F (RIM-Request Initialization Mode)
 - It means that «I am waiting SIM command»
 - It is used when the second station cannot respond to the mode setting command without receiving the SIM command from the first.

U frame'ler taşıyıcı olmayan kontrol görevleri
ve ek protokol işlemleri için kullanılır

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - **U-Frame** - Miscellaneous

↳ HDLC frame yapısındaki U Frame


BLM3051
Data
Communication
and Computer
Network - 5

- 11-001 (RESET)
 - This is usually sent in response to a received **FRMR** code.
 - Explains that the secondary station must do the same
- 11-101 (XID)
 - Emphasizes that a **self-determining information is requested** from the secondary station.
 - Like questioning what your address is
- 10-001 (FRMR)
 - Used to determine that a **syntax error** was encountered in the received frame.

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - **S-Frame - P/F (Poll/ Final)**

BLM3051
Data
Communication
and Computer
Network - 5

- P/F bit is always 1

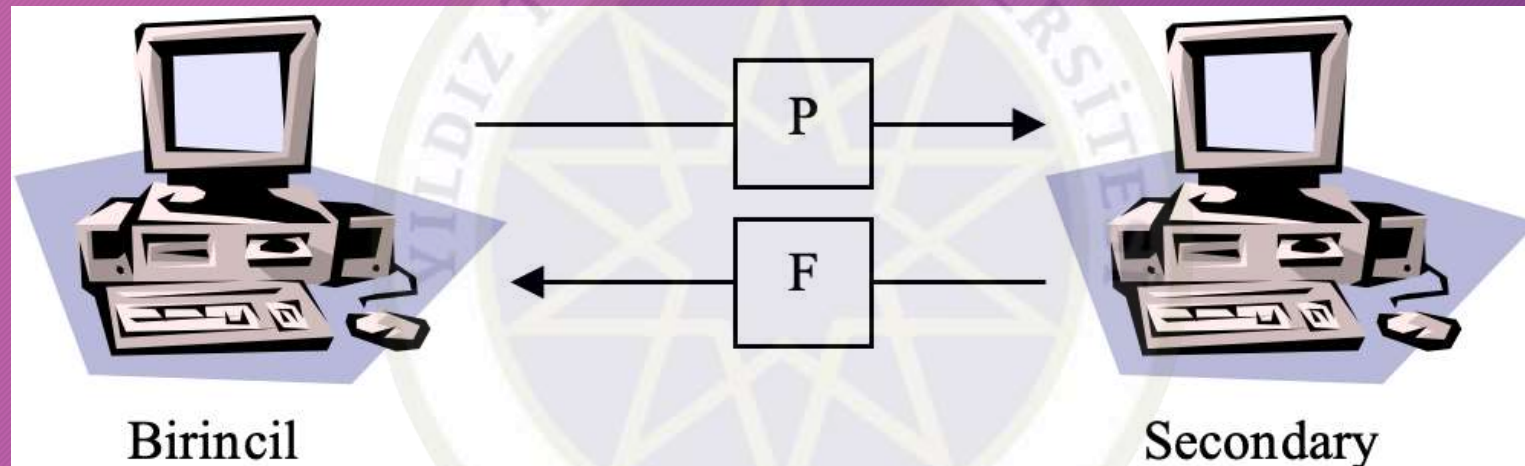

Synchronous Protocols - Bit Oriented

HDLC Mechanism

BLM3051

Data
Communication
and Computer
Network - 5

- I, U and S frames
- 3-phase mechanism
 - One of the sides must install the link
 - in order to be able to exchange data sequentially
 - User data, flow and control information required for error control must be transferred between the two ends.
 - One of the sides terminates the connection

HDLC'nin bazı özellikleri aşağıda verilmiştir.

Bu HDLC'nin bağlantı kurma veri transferi ve bağlantıyı sonlandırma olarak 3 aşama. bir işlem sürecine sahip olduğunu gösterir



Bir tarafın bağlantıyı kurması gerekir

HDLC protokolünde kullanılan 3 tip frame


I (information) → bilgi taşıyıcı

S (supervisory) → otomatik ve hata kontrol yapıları


Unnumbered → 65100

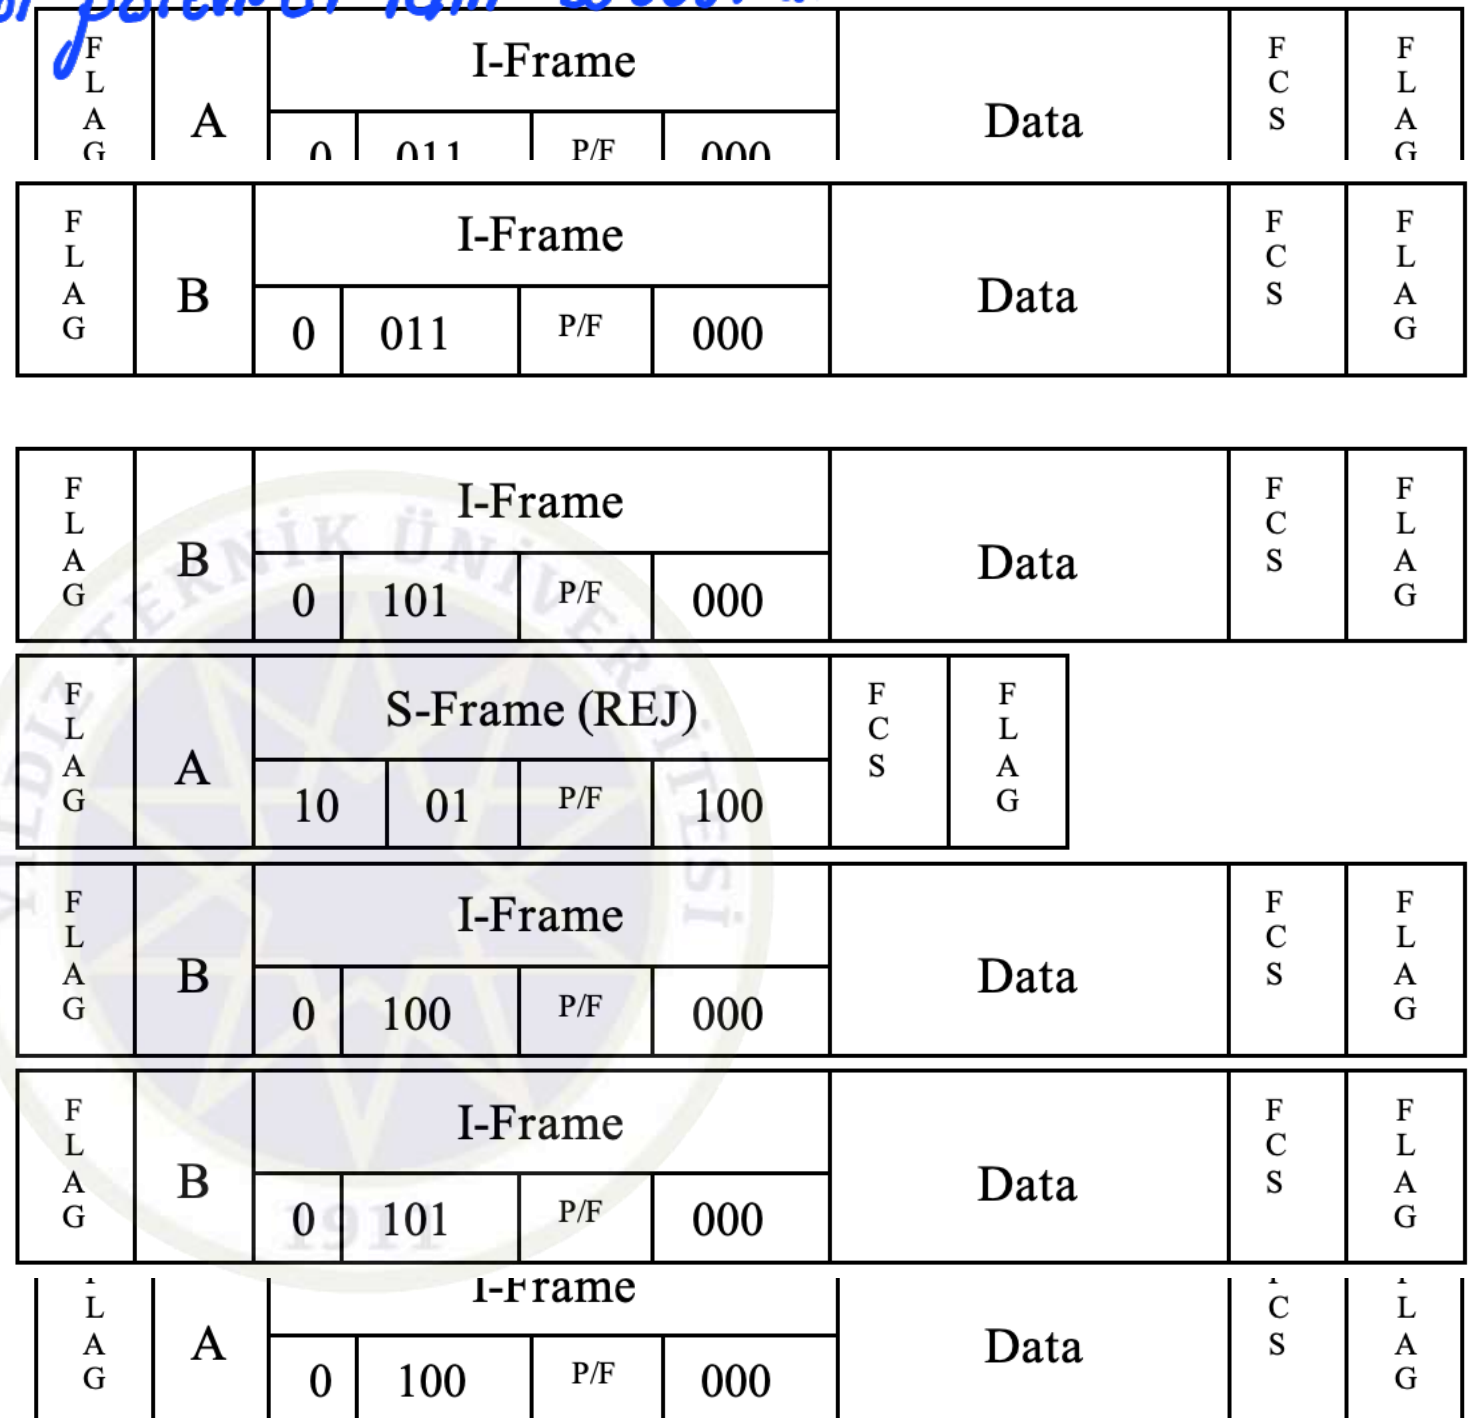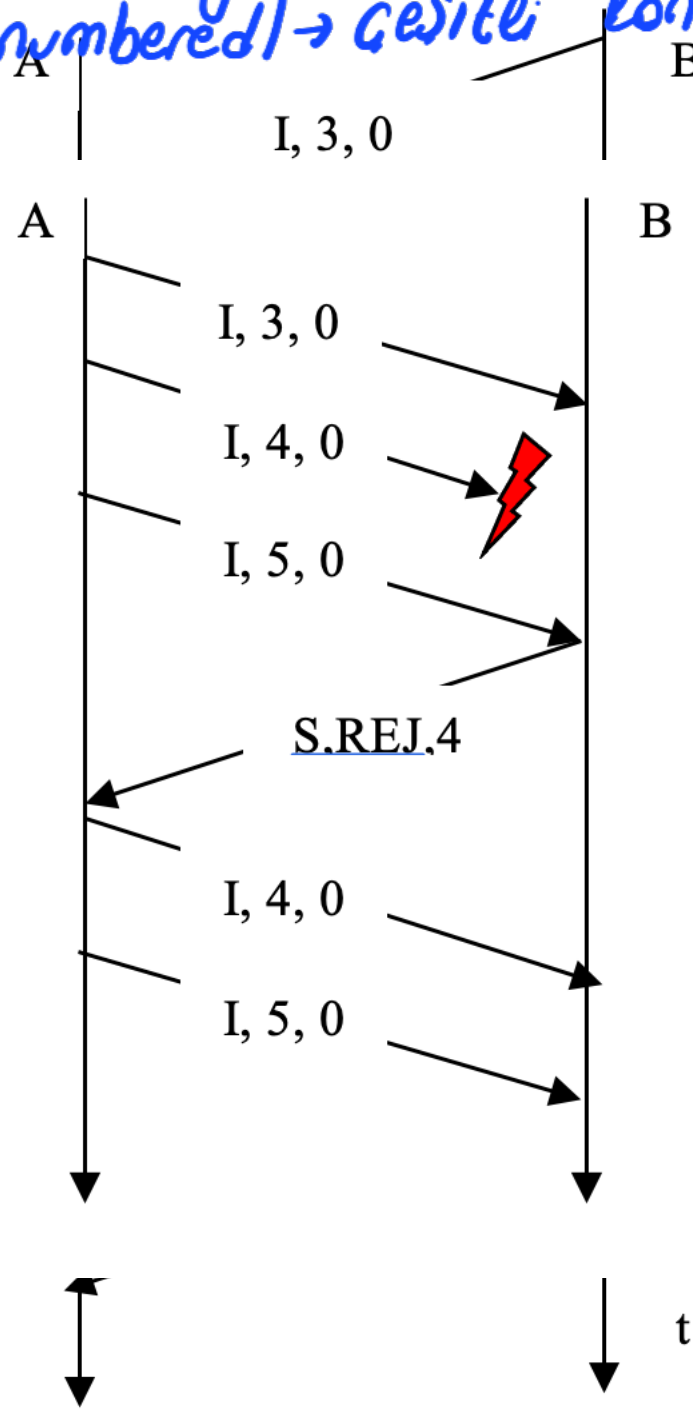

Synchronous Protocols - Bit Oriented - HDLC Mechanism - Multi-Point

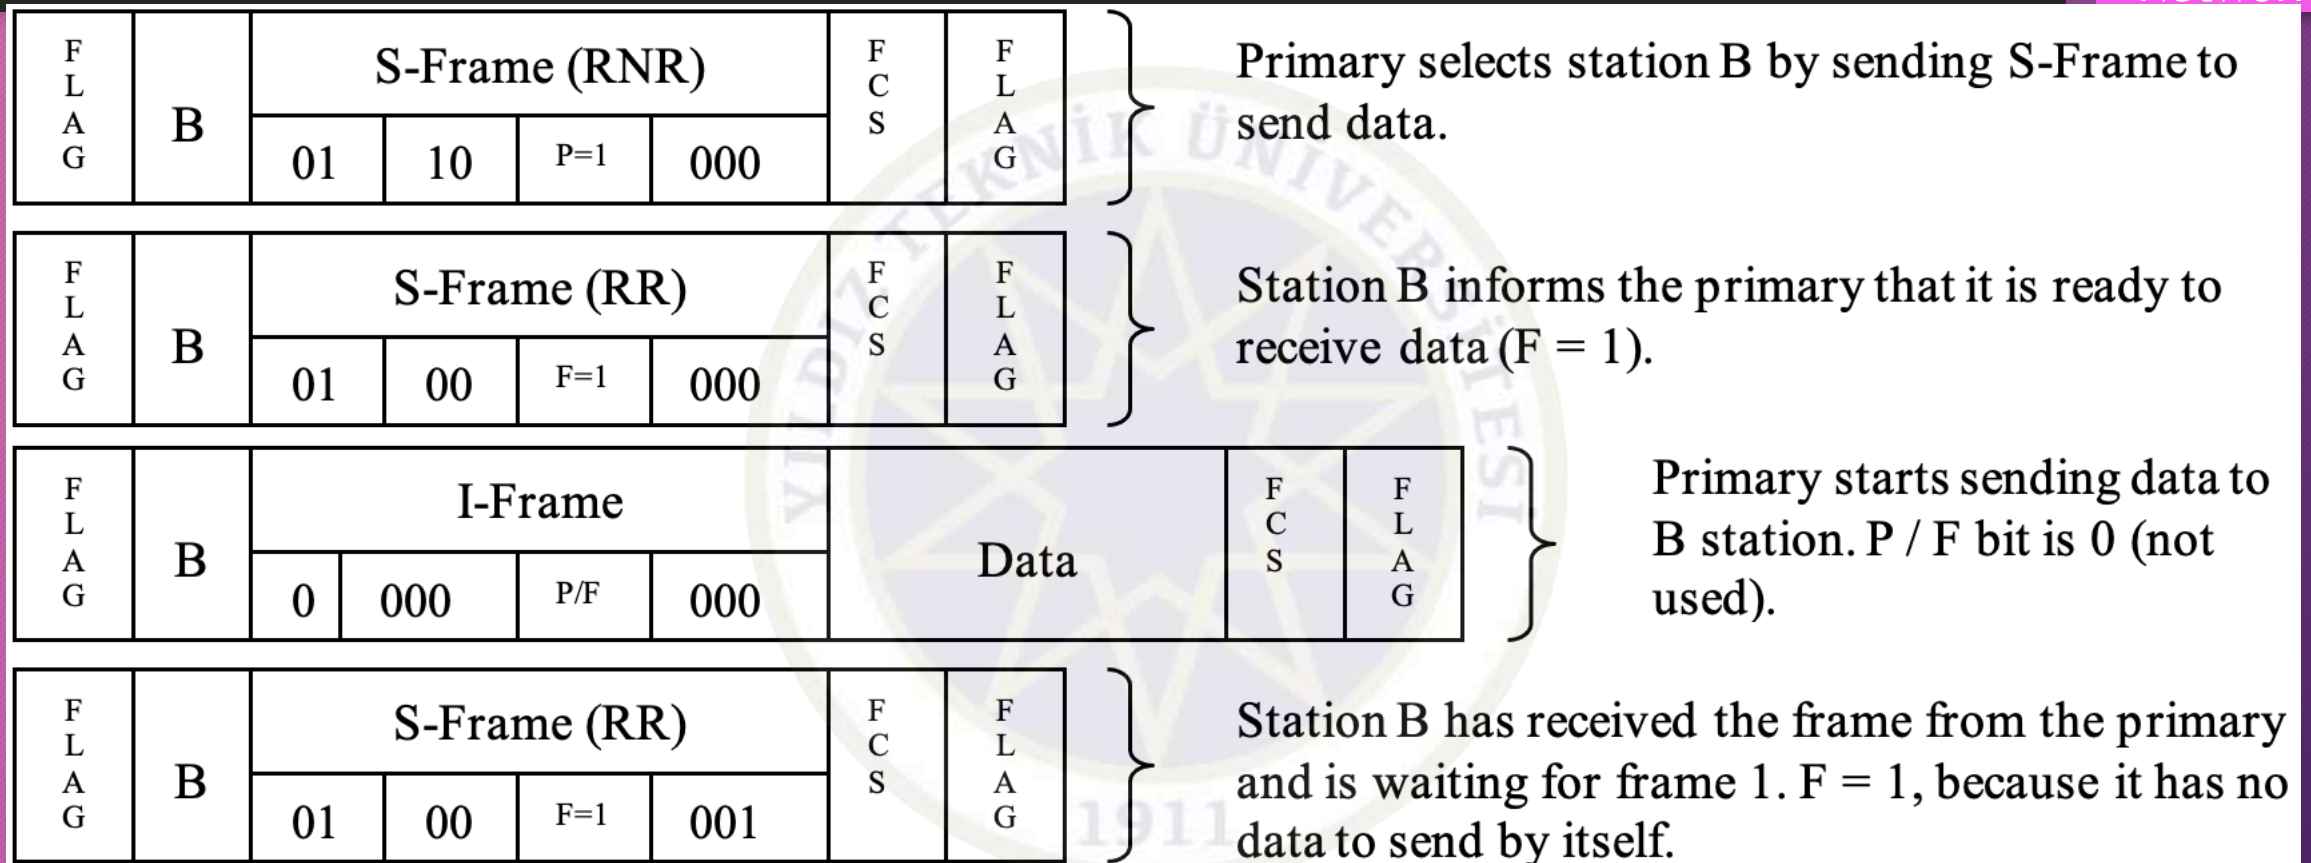

Synchronous Protocols - Bit Oriented - HDLC Mechanism - Combined

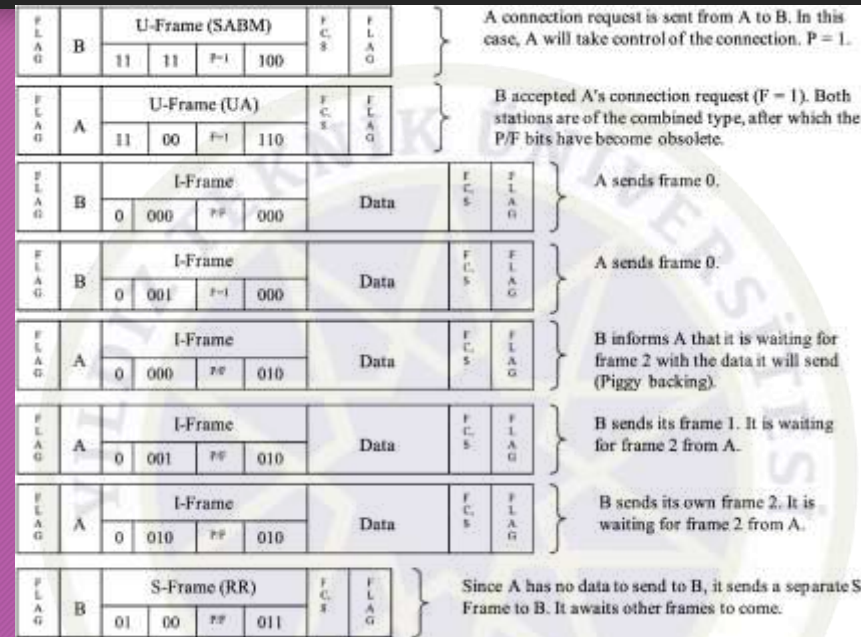

Thank you for your listening.

