




## Preparing a Print



We recommend using [PrusaSlicer](#).

- In PrusaSlicer, choose the printer profile named **Original Prusa MK4 Input Shaper** and a 0.4 mm nozzle.
- Select a filament profile that matches the filament loaded in the printer (the "Generic" profiles are usually fine for basic use).
- If you're new to PrusaSlicer, see Prusa's guide: [First print with PrusaSlicer](#)

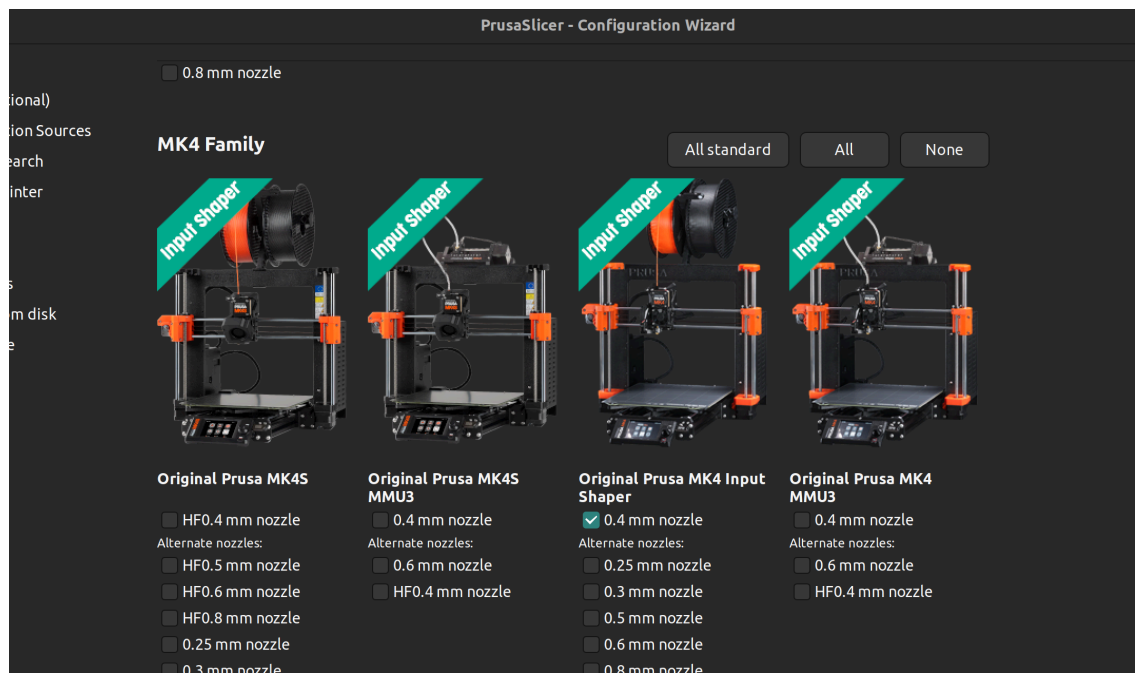

## Starting a Print (USB)

- Make sure the build plate is clean and properly seated. The spring-steel sheet is magnetically attached.
- Align the sheet so the alignment notch sits against the two locating pins at the top of the heatbed.
- Copy your G-code file to a USB drive and insert it into the USB port on the side of the MK4's display.
- Use the control knob (turn to move, press to select) to find your file and press Start.



### After Your Print

- When the print finishes, remove the spring-steel sheet by grasping the corners (avoid touching the print surface with bare hands).
- Gently flex the sheet to release parts; use a plastic scraper for stubborn pieces.
- Do not use metal tools that could gouge the spring steel surface.

### Wireless Printing

The MK4 supports Wi-Fi printing, but wireless access is restricted. To request permission to print wirelessly, submit this [Google Form](#).

- The form is required so we can verify user training and ensure proper filament/setup.
- If approved, you'll receive instructions and the steps needed to upload prints over Wi-Fi.

### Troubleshooting

- Poor adhesion: make sure the bed sheet is clean and aligned; consider adding a brim or Raft for small footprints.
- First-layer issues: slow down the first layer and verify Z-offset in PrusaSlicer/profile.
- Stringing: lower print temperature or enable retraction in slicer settings.
- If the printer reports a mechanical or sensor error, do not attempt physical repairs—contact the DTC lead.

### Warning

- Keep long hair, loose clothing, and jewelry away from the printer while it's running.
- The bed and nozzle become very hot—do not touch until they cool.
- Print in a well-ventilated area, especially for filaments like ABS or specialty materials.
- Use the correct print temperature and bed settings for the filament in use.

## Post-Shutdown Checklist

