


Pullup - enable IR LED unless over-ridden by DRV signal
Rlim - 91R -> 40mA @ 5V

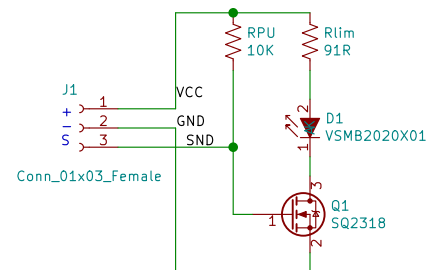

Transmit Side

Digital-REP

Sheet: /

File: DR-2_TX.sch

Title: Break-Beam sensor set

Size: USLetter Date: 2018-12-04

KiCad E.D.A. eeschema (5.0.1)-4

Rev: 1

Id: 1/1