



1. Network Topology

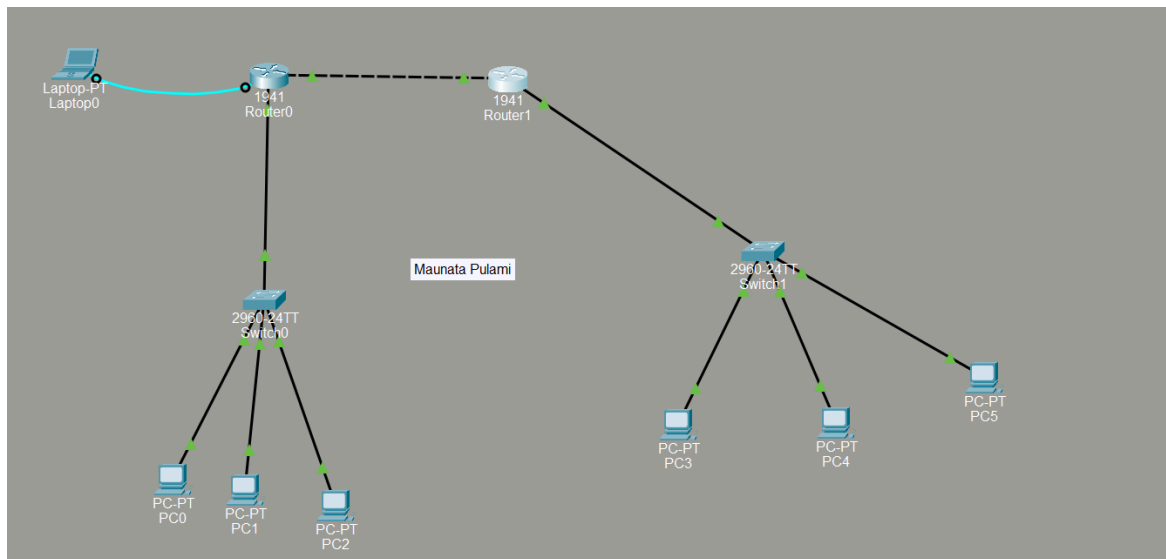

2. Without Static Routing

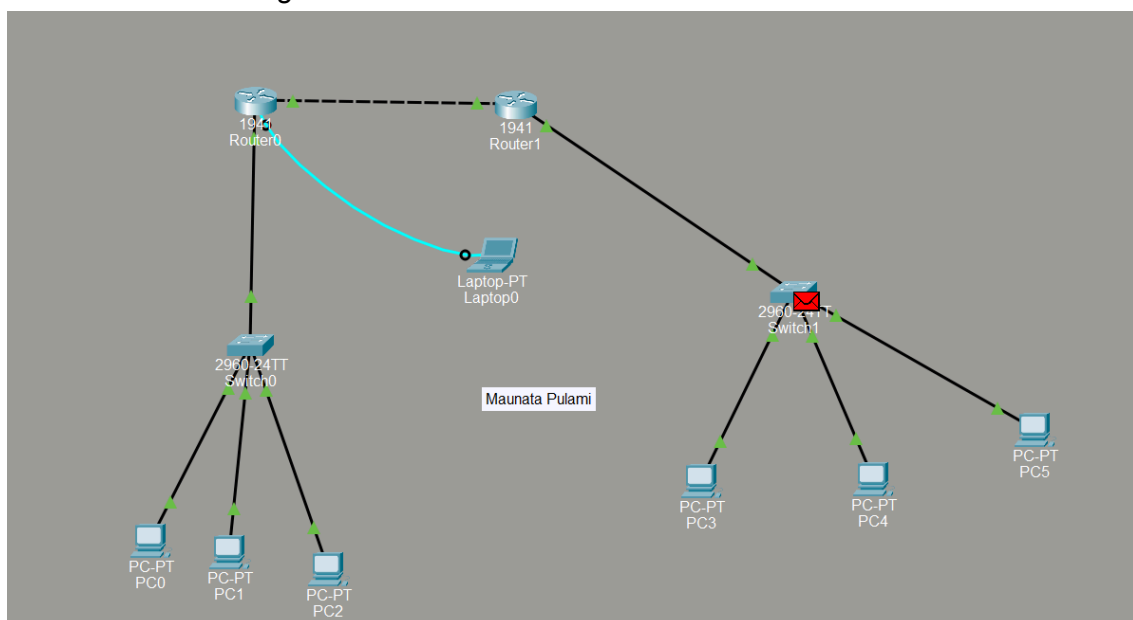

```
C:\>ping 192.168.2.3
```

```
Pinging 192.168.2.3 with 32 bytes of data:
```

```
Reply from 192.168.3.1: Destination host unreachable.
```

```
Request timed out.
```


```
Reply from 192.168.3.1: Destination host unreachable.
```

```
Reply from 192.168.3.1: Destination host unreachable.
```

```
Ping statistics for 192.168.2.3:
```

```
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

3. After Configuring Static Routing (from PC2 to PC3)

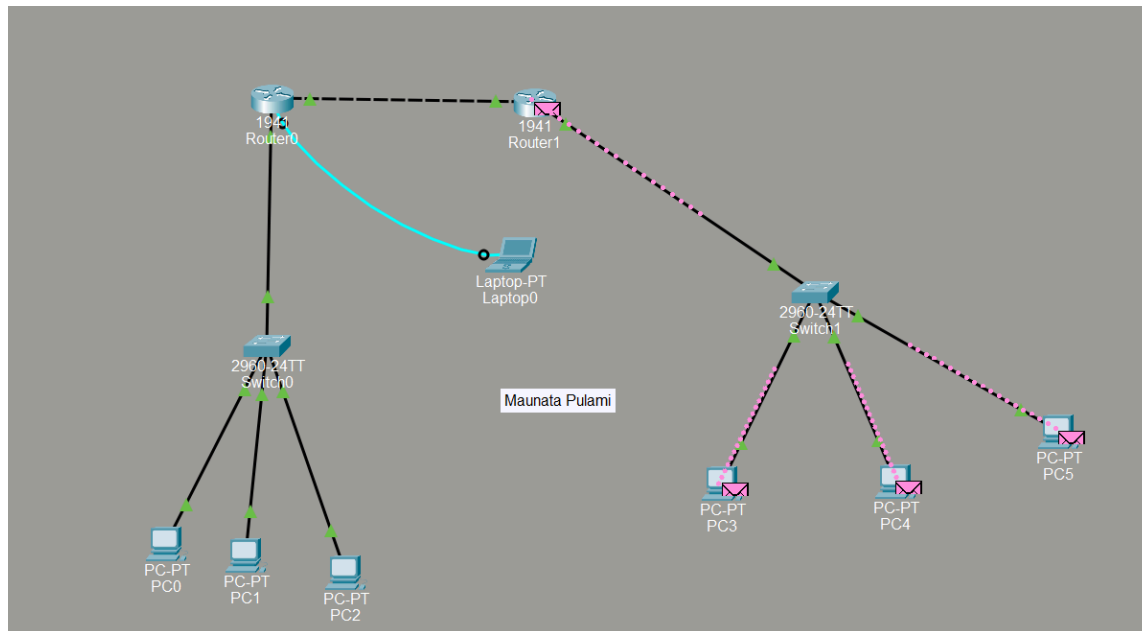

Cisco Packet Tracer PC Command Line 1.0

```
C:\>ping 192.168.2.1
```

Pinging 192.168.2.1 with 32 bytes of data:

Request timed out.

Reply from 192.168.2.1: bytes=32 time<1ms TTL=254

Reply from 192.168.2.1: bytes=32 time<1ms TTL=254

Reply from 192.168.2.1: bytes=32 time<1ms TTL=254

Ping statistics for 192.168.2.1:

Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms