




Raspberry Pi 5



CSI-2 ribbon cable
1456×1088 BGR frames

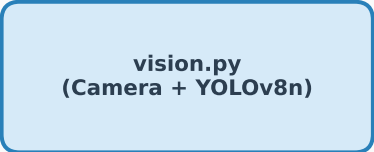

(found, x, y, conf)



Waypoint list



Position
check





Pixel coords




GPS estimate

Annotated
frame

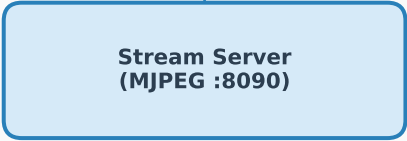

WiFi HTTP
MJPEG + detection overlay



UDP :14550
(MAVLink)

Commands:
GUIDED waypoints, arm,
takeoff, land, set mode


Telemetry:
GPS, altitude, heading,
battery, flight mode

UART 921600 baud

TCP :5762



433 MHz



SBUS

