



A



B



RST



D

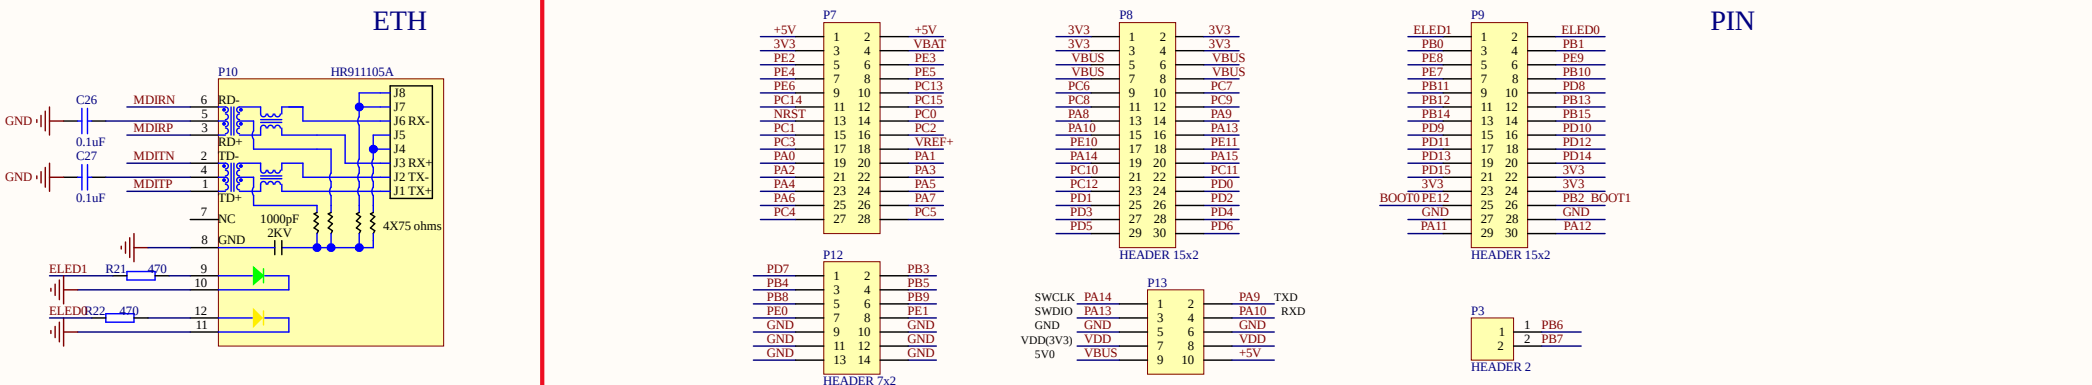


Figure 10 shows the pin connections for the B0520WS. The connections are as follows:

- VDDA is connected to R5 (0R) and 3V3.
- VDD is connected to R6 (0R) and 3V3.
- VDDK is connected to R8 (NC(0R)) and VDDK.
- VBAT is connected to D4 (B0520WS) and VDD.


The figure contains six diagrams showing the internal wiring of different USB connector types. Each diagram shows a connector block with pins and their connections to various components like resistors, capacitors, and other pins.

- P2:** A USB Type-A connector. It shows pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12. Pins 1 and 2 are connected to GND. Pins 3 and 4 are connected to +5V. Pins 5 and 6 are connected to GND. Pins 7 and 8 are connected to USB2DM and USB2DP. Pins 9 and 10 are connected to USB1DM and USB1DP. Pins 11 and 12 are connected to GND. A 10uF capacitor is connected between pins 3 and 4.
- P3:** A USB Type-B connector. It shows pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12. Pins 1 and 2 are connected to GND. Pins 3 and 4 are connected to +5V. Pins 5 and 6 are connected to GND. Pins 7 and 8 are connected to USB2DM and USB2DP. Pins 9 and 10 are connected to USB1DM and USB1DP. Pins 11 and 12 are connected to GND. A 10uF capacitor is connected between pins 3 and 4.
- P4:** A USB Type-A connector. It shows pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12. Pins 1 and 2 are connected to GND. Pins 3 and 4 are connected to +5V. Pins 5 and 6 are connected to GND. Pins 7 and 8 are connected to USB2DM and USB2DP. Pins 9 and 10 are connected to USB1DM and USB1DP. Pins 11 and 12 are connected to GND. A 10uF capacitor is connected between pins 3 and 4.
- P5:** A USB Type-B connector. It shows pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12. Pins 1 and 2 are connected to GND. Pins 3 and 4 are connected to +5V. Pins 5 and 6 are connected to GND. Pins 7 and 8 are connected to USB2DM and USB2DP. Pins 9 and 10 are connected to USB1DM and USB1DP. Pins 11 and 12 are connected to GND. A 10uF capacitor is connected between pins 3 and 4.
- P6:** A USB Type-A connector. It shows pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12. Pins 1 and 2 are connected to GND. Pins 3 and 4 are connected to +5V. Pins 5 and 6 are connected to GND. Pins 7 and 8 are connected to USB2DM and USB2DP. Pins 9 and 10 are connected to USB1DM and USB1DP. Pins 11 and 12 are connected to GND. A 10uF capacitor is connected between pins 3 and 4.
- P7:** A USB Type-B connector. It shows pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12. Pins 1 and 2 are connected to GND. Pins 3 and 4 are connected to +5V. Pins 5 and 6 are connected to GND. Pins 7 and 8 are connected to USB2DM and USB2DP. Pins 9 and 10 are connected to USB1DM and USB1DP. Pins 11 and 12 are connected to GND. A 10uF capacitor is connected between pins 3 and 4.


ETH

RST


PIN

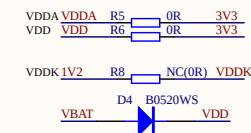


POWER

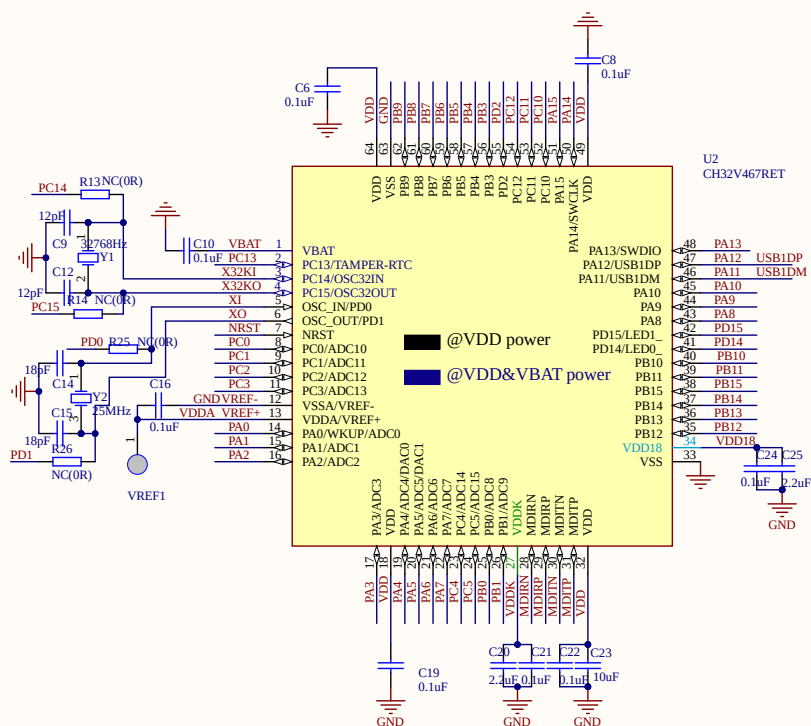


MCU

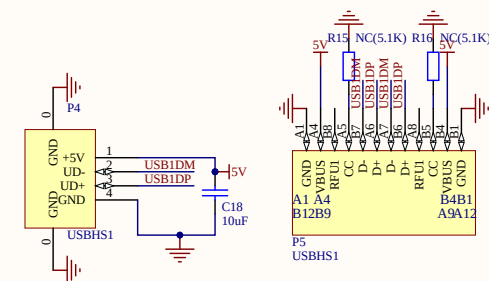



USB

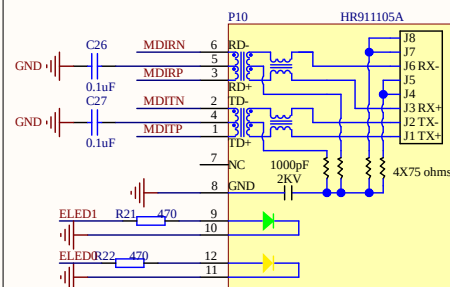


ETH





RST

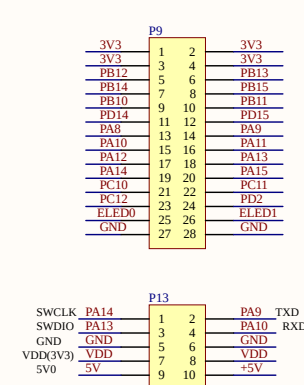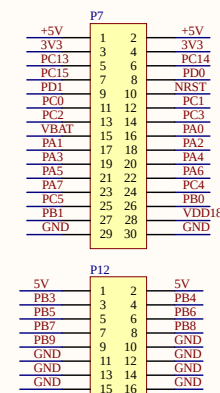


PIN



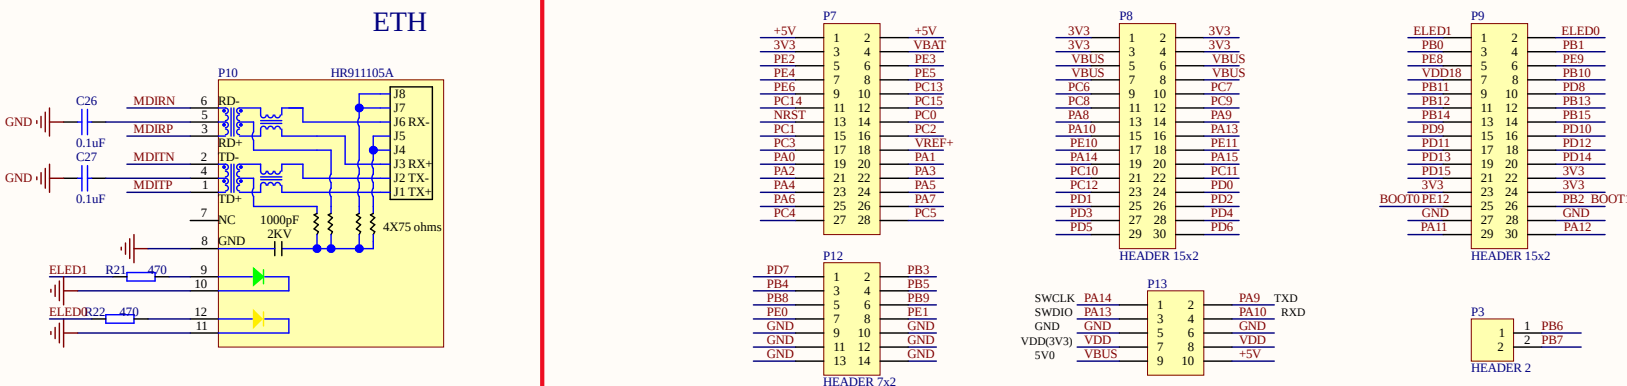





POWER

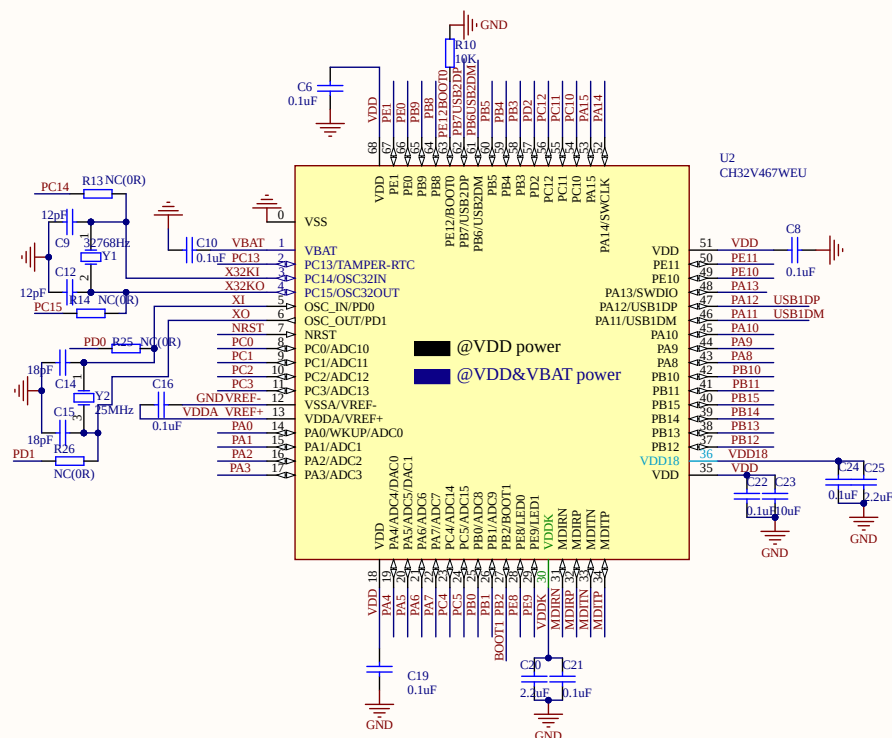


MCU

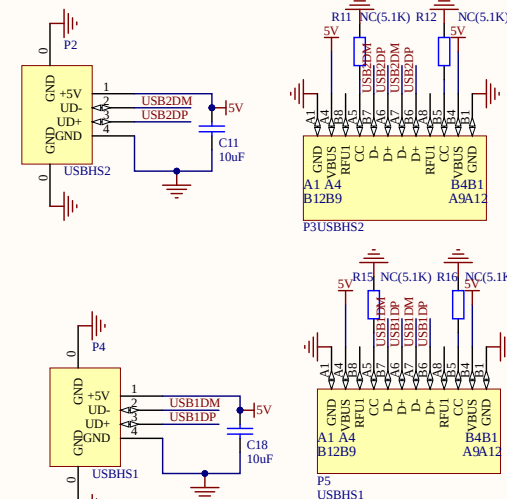



USB

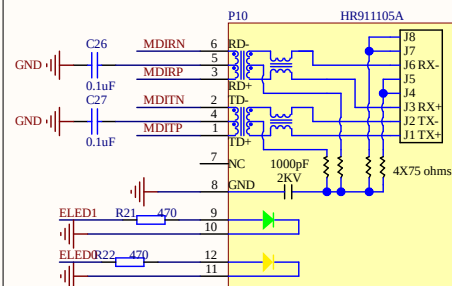

ETH



RST

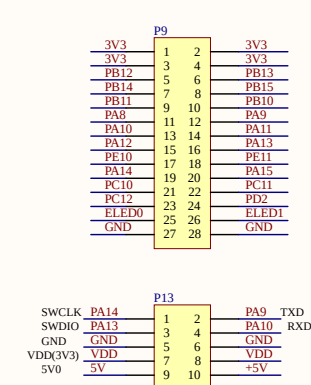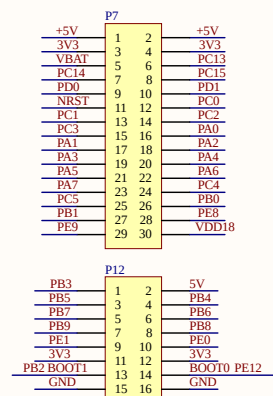

PIN

A

A

B

E

C

C

D

□