


- Verificação de Pin do User que pertença ao acme.pt

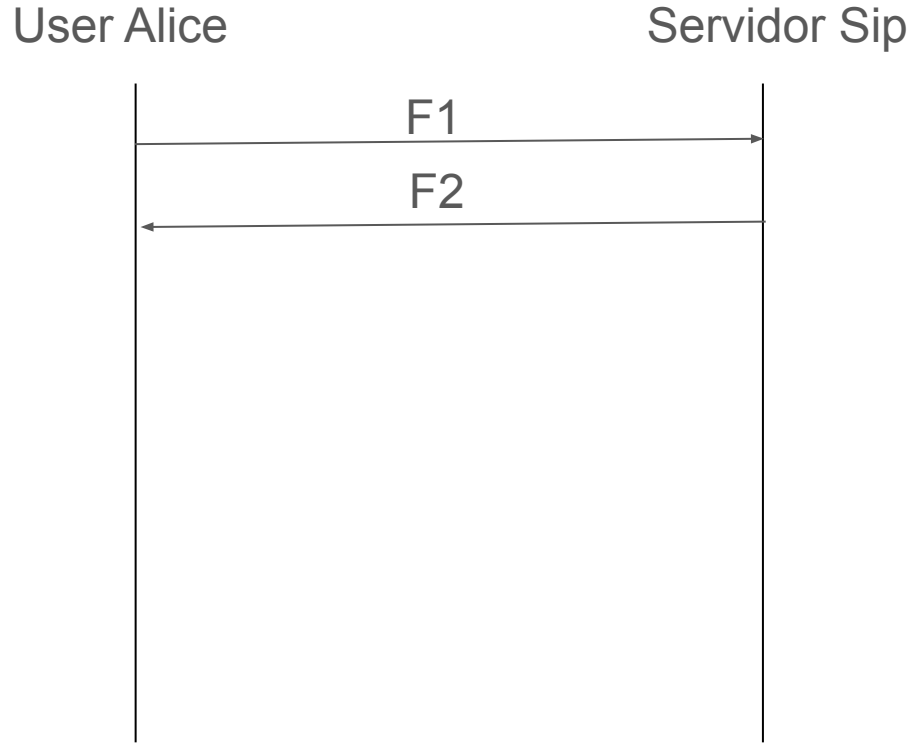

# F1

No.	Time	Source	Destination	Protocol	Length	Info
155	16.785655974	127.0.0.1	127.0.0.1	SIP	389	Request: MESSAGE sip:validate@acme.pt   (text/plain)

Frame 155: 389 bytes on wire (3112 bits), 389 bytes captured (3112 bits) on interface any, id 0  
Linux cooked capture v1  
Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1  
User Datagram Protocol, Src Port: 5555, Dst Port: 5060  
Session Initiation Protocol (MESSAGE)  
Request-Line: MESSAGE sip:validate@acme.pt SIP/2.0  
Message Header  
Via: SIP/2.0/UDP 127.0.0.1:5555;rport;branch=z9hG4bKrjzlhshb  
Max-Forwards: 70  
To: <sip:validate@acme.pt>  
From: "Alice" <sip:alice@acme.pt>;tag=fduoo  
Call-ID: bgqwjdghfyrdjvt@igrs-VirtualBox  
[Generated Call-ID: bgqwjdghfyrdjvt@igrs-VirtualBox]  
CSeq: 361 MESSAGE  
Content-Type: text/plain; charset=utf-8  
User-Agent: Twinkle/1.10.2  
Content-Length: 4  
Message Body  
Line-based text data: text/plain (1 lines)  
0000

# F2

No.	Time	Source	Destination	Protocol	Length	Info
156	16.789153867	127.0.0.1	127.0.0.1	SIP	412	Status: 200 PIN successfully validated

(MESSAGE) |  
Frame 156: 412 bytes on wire (3296 bits), 412 bytes captured (3296 bits) on interface any, id 0  
Linux cooked capture v1  
Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1  
User Datagram Protocol, Src Port: 5060, Dst Port: 5555  
Session Initiation Protocol (200)  
Status-Line: SIP/2.0 200 PIN successfully validated  
Message Header  
Via: SIP/2.0/UDP 127.0.0.1:5555;rport=5555;branch=z9hG4bKrzlzhbsb;received=127.0.0.1  
To: <sip:validate@acme.pt>;tag=9dd61ff61e802d8e2bef5f14621ef3c2.33c7ab3d  
From: "Alice" <sip:alice@acme.pt>;tag=fduoo  
Call-ID: bgqwjdhyrdojvt@igrs-VirtualBox  
[Generated Call-ID: bgqwjdhyrdojvt@igrs-VirtualBox]  
CSeq: 361 MESSAGE  
Server: kamailio (5.7.0 (x86\_64/linux))  
Content-Length: 0