


- Verificação de Pin invalido do User que pertença ao acme.pt

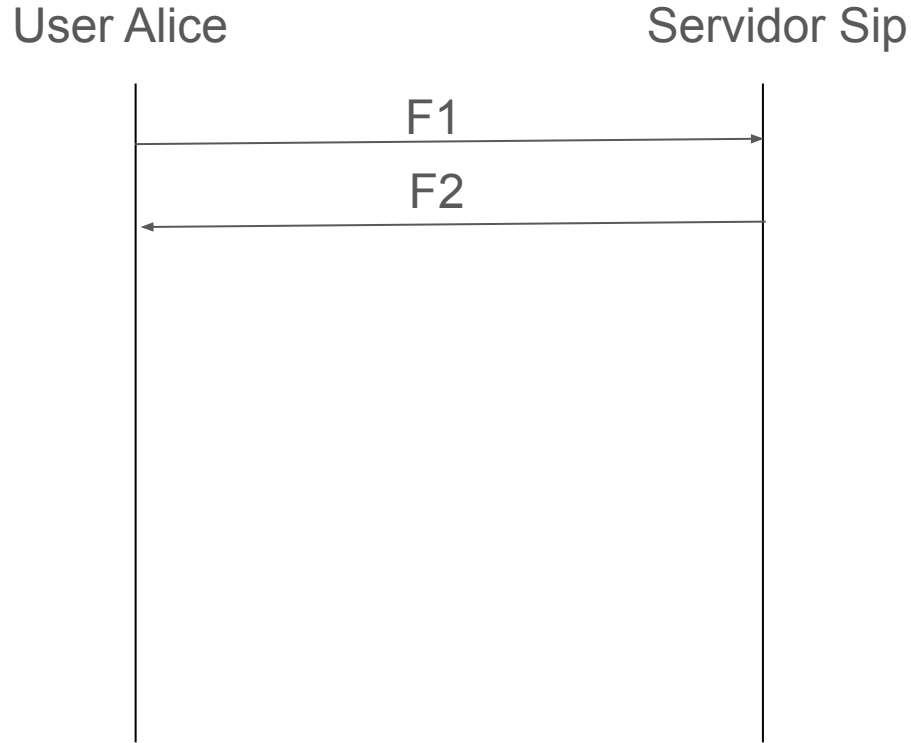

# F1

No.	Time	Source	Destination	Protocol	Length	Info
17	0.003229004	127.0.0.1	127.0.0.1	SIP	388	Request: MESSAGE sip:validate@acme.pt

(text/plain)

Frame 17: 388 bytes on wire (3104 bits), 388 bytes captured (3104 bits) on interface any, id 0

Linux cooked capture v1

Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1

User Datagram Protocol, Src Port: 5555, Dst Port: 5060

Session Initiation Protocol (MESSAGE)

Request-Line: MESSAGE sip:validate@acme.pt SIP/2.0

Message Header

Via: SIP/2.0/UDP 127.0.0.1:5555;rport;branch=z9hG4bKblalbhud

Max-Forwards: 70

To: <sip:validate@acme.pt>

From: "Alice" <sip:alice@acme.pt>;tag=kzhne

Call-ID: nkwwdywtjzpbchz@igrs-VirtualBox

[Generated Call-ID: nkwwdywtjzpbchz@igrs-VirtualBox]

CSeq: 282 MESSAGE

Content-Type: text/plain; charset=utf-8

User-Agent: Twinkle/1.10.2

Content-Length: 3

Message Body

Line-based text data: text/plain (1 lines)

000

# F2

No.	Time	Source	Destination	Protocol	Length	Info
19	0.504836884	127.0.0.1	127.0.0.1	SIP	408	Status: 403 Forbidden: Invalid PIN

Frame 19: 408 bytes on wire (3264 bits), 408 bytes captured (3264 bits) on interface any, id 0  
Linux cooked capture v1  
Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1  
User Datagram Protocol, Src Port: 5060, Dst Port: 5555  
Session Initiation Protocol (403)  
Status-Line: SIP/2.0 403 Forbidden: Invalid PIN  
Message Header  
Via: SIP/2.0/UDP 127.0.0.1:5555;rport=5555;branch=z9hG4bKblalbhud;received=127.0.0.1  
To: <sip:validate@acme.pt>;tag=9dd61ff61e802d8e2bef5f14621ef3c2.c8708ea5  
From: "Alice" <sip:alice@acme.pt>;tag=kzhne  
Call-ID: nkwwdywtjzpbchz@igrs-VirtualBox  
[Generated Call-ID: nkwwdywtjzpbchz@igrs-VirtualBox]  
CSeq: 282 MESSAGE  
Server: kamailio (5.7.0 (x86\_64/linux))  
Content-Length: 0