php1_roy

Intel Core i7-10610U testing with a Dell 0M5G57 (1.1.1 BIOS) and Intel UHD CML GT2 3GB on Ubuntu 20.04 via the Phoronix Test Suite.

Test Systems:

php1_roy1

Processor: Intel Core i7-10610U @ 4.90GHz (4 Cores / 8 Threads), Motherboard: Dell 0M5G57 (1.1.1 BIOS), Chipset: Intel Device 02ef, Memory: 16GB, Disk: Kioxia KBG40ZNS256G NVMe 256GB, Graphics: Intel UHD CML GT2 3GB (1150MHz), Audio: Realtek ALC3254, Network: Intel-AC 9462

OS: Ubuntu 20.04, Kernel: 5.13.0-35-generic (x86_64), Desktop: GNOME Shell 3.36.9, Display Server: X Server 1.20.13, OpenGL: 4.6 Mesa 21.2.6, Vulkan: 1.2.182, Compiler: GCC 9.4.0, File-System: ext4, Screen Resolution: 1920x1080

Kernel Notes: Transparent Huge Pages: madvise
Processor Notes: Scaling Governor: intel_pstate powersave (EPP: balance_performance) - CPU Microcode: 0xea - Thermald 1.9.1
Security Notes: itlb_multihit: KVM: Mitigation of VMX disabled + l1tf: Not affected + mds: Not affected + meltdown: Not affected + spec_store_bypass: Mitigation of SSB

disabled via prctl and seccomp + spectre_v1: Mitigation of usercopy/swapgs barriers and __user pointer sanitization + spectre_v2: Mitigation of Enhanced IBRS IBPB: conditional RSB filling + srbds: Mitigation of TSX disabled + tsx_async_abort: Mitigation of TSX disabled
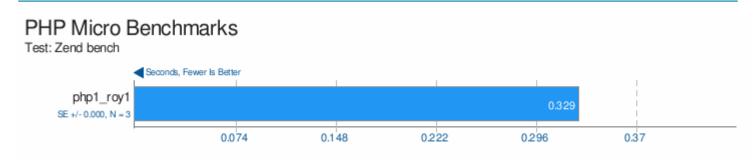
	php1_roy1
PHP Micro Benchmarks - Zend bench (sec)	0.329
Standard Deviation	0.2%

PHP Micro Benchmarks
Test: Zend bench

This file was automatically generated via the Phoronix Test Suite benchmarking software on Sunday, 20 March 2022 21:46.