

JST-12 SH SMD VERT 1.0MM
BM12-SRSS-TB(LF)(SN)




Expansion

Board compatible with SDK like esp32-c5-devkitm-1, esp32-c6-devkitm-1 and adafruit_feather_esp32c6

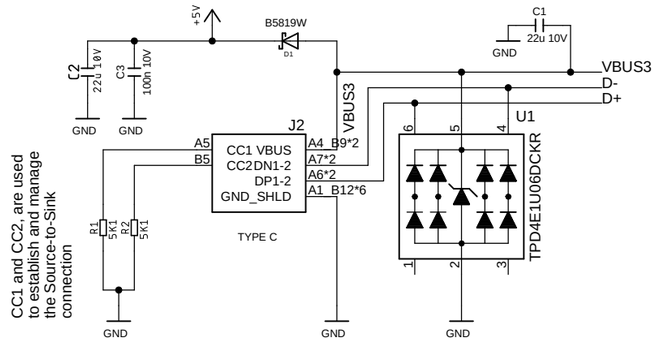

USB 3 | USB UART | Serial Monitoring | USB Flashing | Debug | ESD

Reverse SMD Tactile

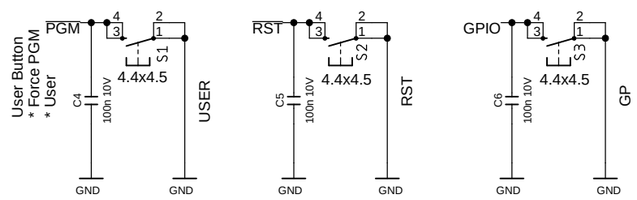


Tactile Switches | Reset | Usr/Pgm

Dual I2C headers for 0.96" or 1.3" OLED
128 x 64 SH1106 SSD 1306


[GND VCC SCL SDA]

[I2C]

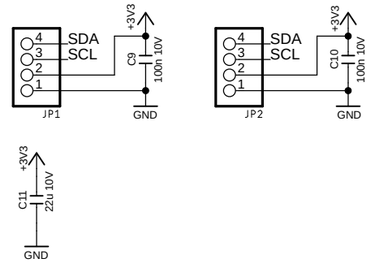


I2C Expansion | OLED Display

Reverse SMD LED



Status | LED


Reverse SMD LED

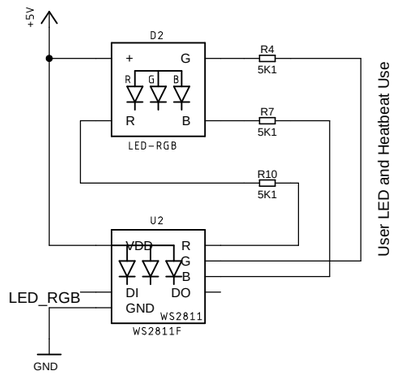

Status | RGB LED

JST-6 SH SMD VERT 1.0MM
BM06B-SRSS-TB(LF)(SN)

[SPI]

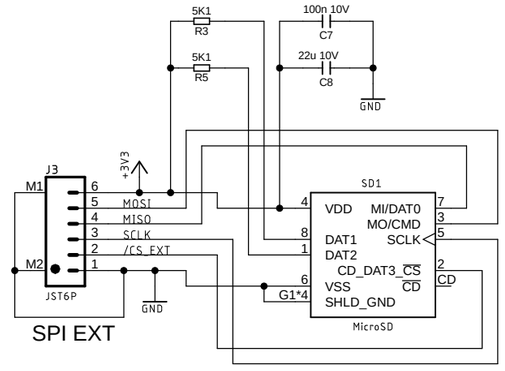

MicroSD Card

Display suitable for most 3V3 Arduino, MCU, FPGA, DSP, ESP, STM, PIC or Raspberry Pi based projects.

Enclosure VG-GR35 90x84x57 Main PCB 79.25x58.1

DitroniX
Home Automation | Internet of Things | Energy Monitoring

Production

(C)2021-2026 - DitroniX - Dave Williams G8PUO

For further information and code examples, please see our code and GitHub WIKI pages. ditronix.net | GitHub.com/DitroniX | Hackster.io/DitroniX

Components optimised for BOM

Interface I2C SPI SDK **ditronix.net** DitroniX Ltd – UK	Display User Panel VG-GR35 1.2604.103	
	FITS-DIN-ENCLOSURE-VG-GR35-(90X84X57)	
	Sheet: 1/1	Drwg/Chk: **Dave Williams** 28/04/2026 17:53