High Frequency Split Core Current Transformer OPCT16AL 1000/1 2000/1 3000/1 4000/1 5000/1 AC CT Clamp on Current Transformer

Description

Features:

1. Using high-quality materials, the quality is guaranteed 2. With low resistance lead 3. Application scope: car charging pile, power grid transformation, 5G base station detection 4. The product is easy to use 5. Multiple specifications optional

Specifications:

Type A Product Parameters: Model: OPCT16AL Ratio: 1000/1 Normally on current: 0-100A Accuracy error: 0.5% Line length: 1000mm Type B Product Parameters: Model: OPCT16AL Ratio: 2000/1 Normally on current: 0-100A Accuracy error: 0.5% Line length: 1000mm Type C Product Parameters: Model: OPCT16AL Ratio: 3000/1 Normally on current: 0-150A Accuracy error: 0.5% Line length: 1000mm Type D Product Parameters: Model: OPCT16AL Ratio: 4000/1 Normally on current: 0-150A Accuracy error: 0.5% Line length: 1000mm Type E Product Parameters: Model: OPCT16AL Ratio: 5000/1 Normally on current: 0-150A Accuracy error: 0.5% Line length: 1000mm

Package Included:

Transformer X1

Pictures

OPCT16AL
电流：0-100A
变比：1000/1
南京向上电子

OPCT16AL
电流：0-100A
变比：2000/1
南京向上电子

OPCT16AL
电流：0-150A
变比：3000/1
南京向上电子

OPCT16AL
电流：0-150A
变比：4000/1
南京向上电子

OPCT16AL
电流：0-150A
变比：5000/1
南京向上电子

OPCT16AL SERIES

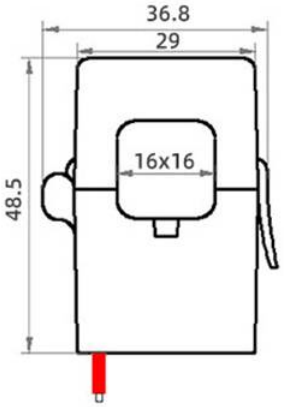

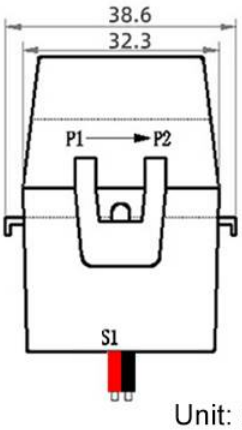

Unit: mm

	OPCT16AL -1000/1	OPCT16AL -2000/1	OPCT16AL -3000/1	OPCT16AL -4000/1	OPCT16AL -5000/1	Unit
Rated input	100	100	150	100	100	A (AC)
Rated output	100	50	50	25	20	mA (AC)
Rated sampling resistance	20	100	75	300	400	Ω
Rated sampling voltage	2	5	3.75	7.5	8	V (AC)
Ratio	1000/1	2000/1	3000/1	4000/1	5000/1	Magnification
Rated difference	60 (RL=0Ω)	45 (RL=0Ω)	45 (RL=0Ω)	45 (RL=0Ω)	45 (RL=0Ω)	Minute
Precision error	0.5	0.5	0.5	0.5	0.5	%
Linearity	0.3	0.3	0.3	0.3	0.3	%
Normally on current	0~100 (RL≤20Ω)	0~100 (RL≤100Ω)	0~150 (RL≤75Ω)	0~150 (RL≤50Ω)	0~150 (RL≤50Ω)	A (AC)
Maximum Current	0~120 (RL≤10Ω)	0~200 (RL≤10Ω)	0~190 (RL≤10Ω)	0~180 (RL≤10Ω)	0~160 (RL≤10Ω)	A (AC)
Secondary internal Resistance	41±5	125±15	293±30	565±50	860±80	Ω
Product Weight	82.1	89.2	87.8	87	87.4	g
Default line length	1000	1000	1000	1000	1000	mm

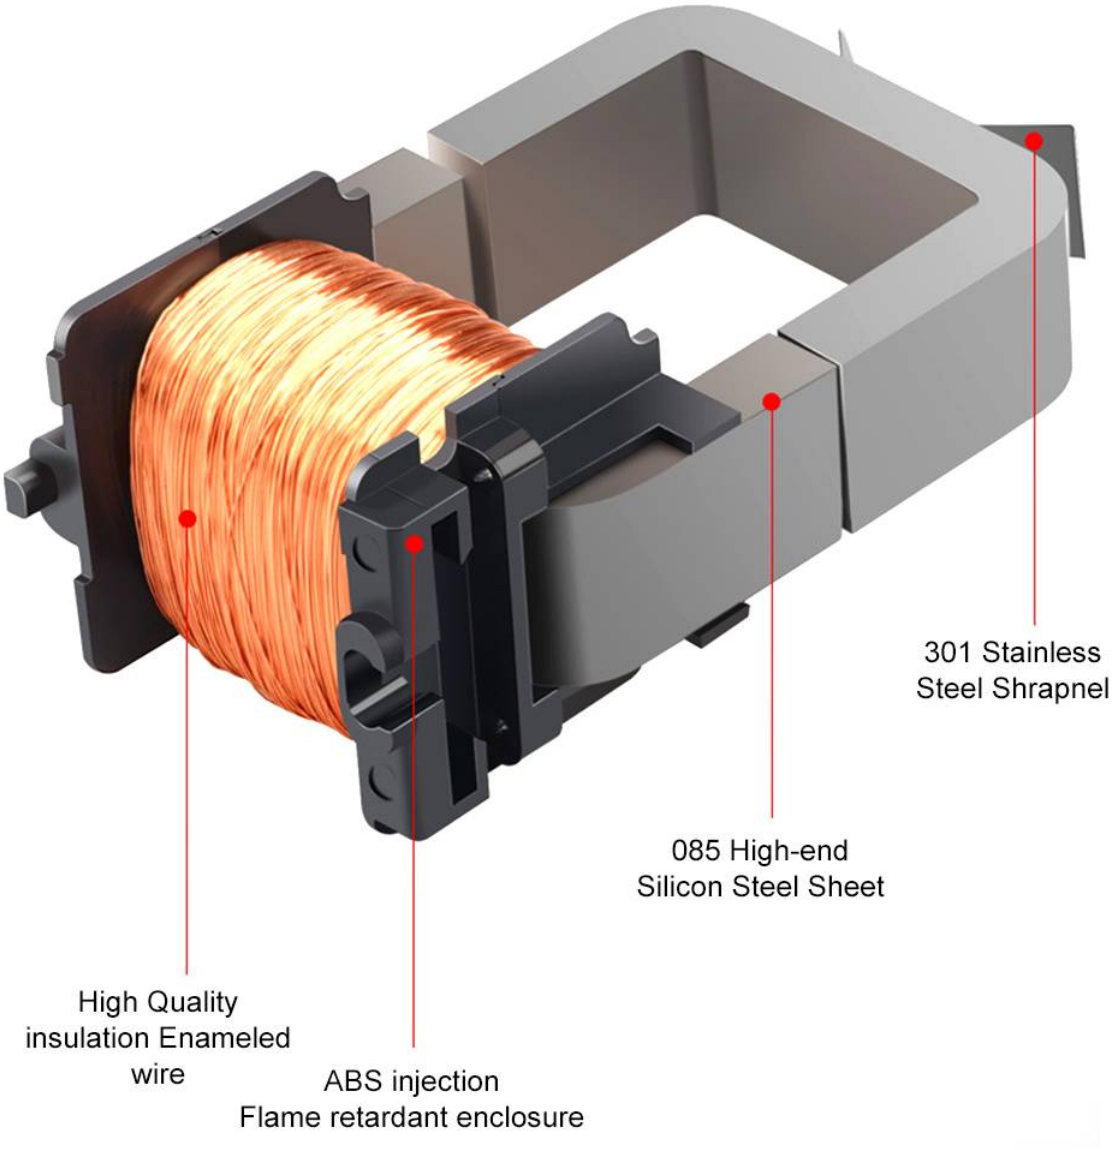
301 Stainless
Steel Shrapnel
085 High-end
Silicon Steel Sheet
High Quality
insulation Enameled
wire
ABS injection
Flame retardant enclosure

P2
P1
Low Resistance
Leads

Lightweight and convenient
Avoid the risk of misconnection

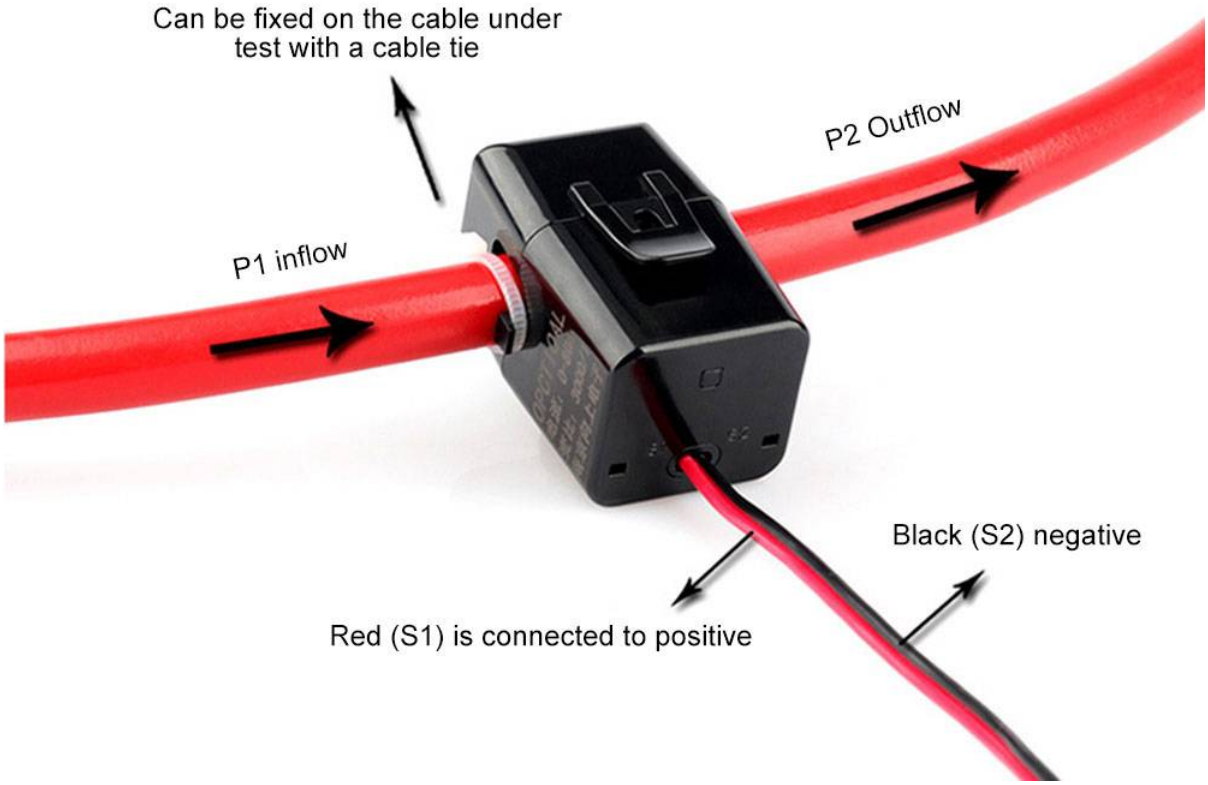

Wide Range of Applications

Car Charging Pile

Grid Transformation

5G base station Monitoring

OPCT16AL
电流：0-100A
变比：1000/1
南京向上电子

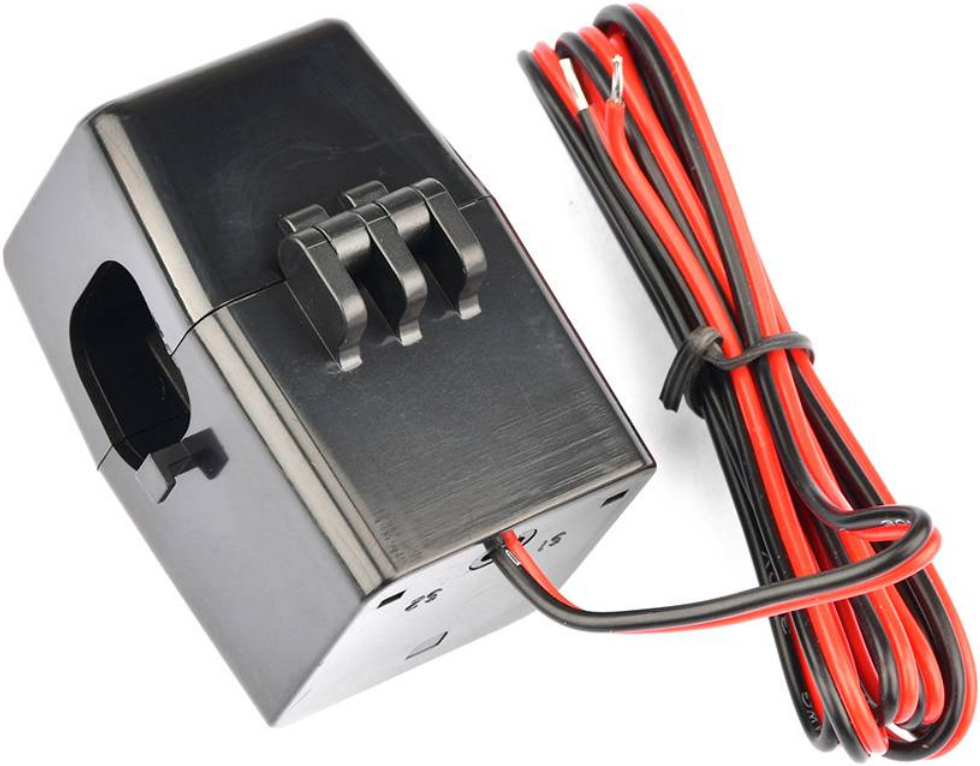

How to place an order

Payment

Bank Transfer

1) We accept Alipay, West Union, PayPal. TT. All major credit cards are accepted through secure payment processor ESCROW.

2) Payment must be made within 3 days of order.

3) If you can't checkout immediately after auction close, please wait for a few minutes and retry Payments must be completed within 3 days.

Shipping Channel

Shipping method	Courier		Shipping Time
Express Shipping	DHL	DHL Express	About 3-10 days
	EMS	EMS Shipping	About 3-10 days
Standard Shipping (for order over USD5)	Aliexpress	Aliexpress Standard Shipping	About 20-45 days
		Registered Air Mail(china post/e packet-only for USA)	About 40-60 days
Economy Shipping (for order under USD5)		Economy Post(finland economy/ SG economy/China economy)	About 40-60 days

Sales Service

Feedback

FEEDBACK

Your feedback is really important to us ,
please take a few seconds to leave great feedback if you are satisfied with our product or service,so many thanks!

If ourgoods or service does not satisfy you,or any questions ,pls contact us and give us a chance to improve before open a dispute or leaving any type of feedback.

Please give us five-star feedback

seller service ★★★★★

logistics ★★★★★

detailed description ★★★★★