V: 2024.H2

SIM7070-PCIE Series

SIMCom LPWA Module

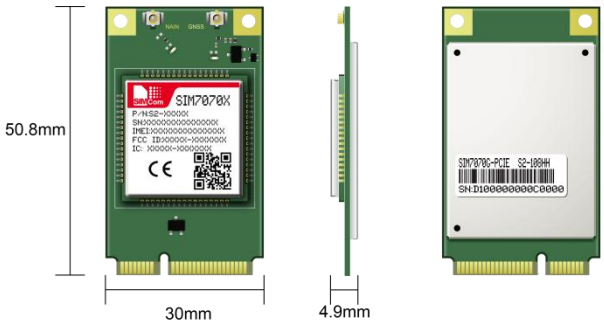

Global-Band

FOTA

Mini PCIe

LWM2M

Compact Size

MQTT

TCP/UDP

FTP

HTTP/SSL

Product Description

The SIM7070-PCIE series is the LPWA module which supports wireless communication modes of Cat-M/ Cat-NB/GPRS(optional)/EDGE(optional).

The SIM7070-PCIE series adopts Mini PCIe form factor. It is easy for customers to integrate.

The SIM7070-PCIE series has powerful expansibility with abundant interfaces including UART, USB etc. The SIM7070 series is designed for applications that need low power consumption, low throughput data communication in a variety of radio propagation conditions. Due to the unique combination of performance, security and flexibility, this module is ideally suited for M2M applications, such as metering, asset tracking, remote monitoring, E-health etc.

Key Benefits

- The SIM7070-PCIE series provides deeper coverage enhancement compared to GSM
- The form factor and AT commands of the SIM7070-PCIE series are compatible with SIM7000/SIM900/SIM800F

Copyright © 2020 SIMCom Wireless Solutions Limited All Rights Reserved
Building B, SIM Technology Building, No.633, Jinzhong Road Changning District, Shanghai P.R.China
Tel: 86-21-31575100 Email: support@simcom.com Web: www.simcom.com

Product		SIM7070G-PCIE	SIM7070E-PCIE	SIM7070G-MN-PCIE	SIM7070G-M-PCIE
Form Factor		Mini PCIe	Mini PCIe	Mini PCIe	Mini PCIe
Dimensions(mm)		50.8*30*4.9	50.8*30*4.9	50.8*30*4.9	50.8*30*4.9
Frequency Bands	Cat-M	B1/B2/B3/B4/B5/B8/B12/B13 /B14/B18/B19/B20/ B25/B26/B27/B28/B66/B85	B1/B2/B3/B4/B5/B8/B12/B13 /B14/B18/B19/B20/ B25/B26/B27/B28/B31/B66/B 72/B73/B85/B87/B88	B1/B2/B3/B4/B5/B8/B12/B13 /B14/B18/B19/B20/ B25/B26/B27/B28/B66/B85	B1/B2/B3/B4/B5/B8/B12/B13 /B14/B18/B19/B20/ B25/B26/B27/B28/B66/B85
	Cat-NB	B1/B2/B3/B4/B5/B8/B12/B13 /B18/B19/B20/B25/ B26/B28/B66/B71/B85	B1/B2/B3/B4/B5/B8/B12/B13 /B18/B19/B20/B25/ B26/B28/B31/B66/B73/B85/B 87/B88	B1/B2/B3/B4/B5/B8/B12/B13 /B18/B19/B20/B25/ B26/B28/B66/B71/B85	
	GSM	850/900/1800/1900MHz	850/900/1800/1900MHz		
LTE RF Power Class		Class 5 (Typ. 21dbm)	Class 5 (Typ. 21dbm) Class 2@B31/B72/B87/B88	Class 5 (Typ. 21dbm)	Class 5 (Typ. 21dbm)
GNSS		o	o	o	o
Temperature		-40℃ ~ +85℃	-40℃ ~ +85℃	-40℃ ~ +85℃	-40℃ ~ +85℃
Electrical Features					
Supply Voltage Range(V)		3.3~ 4.3, Typ 3.8	3.3~ 4.3, Typ 3.8	3.3~ 4.3, Typ 3.8	3.3~ 4.3, Typ 3.8
Power Consumption (mA)	@Sleep	2	2	2	2
	@Idle	15	15	15	15
Data Transfer					
Cat-M(Kbps)		589(DL)/1119(UL)	589(DL)/1119(UL)	589(DL)/1119(UL)	589(DL)/1119(UL)
Cat-NB(Kbps)		127(DL)/158.5(UL)	127(DL)/158.5(UL)	127(DL)/158.5(UL)	
EGPRS(Kbps)		296(DL)/236.8(UL)	296(DL)/236.8(UL)		
Software Features					
Protocol		TCP/UDP/HTTP/HTTPS/FTP /TLS/DTLS/PING/ LWM2M/COAP/MQTT	TCP/UDP/HTTP/HTTPS/FTP /TLS/DTLS/PING/ LWM2M/COAP/MQTT	TCP/UDP/HTTP/HTTPS/FTP /TLS/DTLS/PING/ LWM2M/COAP/MQTT	TCP/UDP/HTTP/HTTPS/FTP /TLS/DTLS/PING/ LWM2M/COAP/MQTT
FOTA		●	●	●	●
Firmware Upgrade		USB/FOTA	USB/FOTA	USB/FOTA	USB/FOTA
Interfaces					
SIM Card		1.8V	1.8V	1.8V	1.8V
UART		●	●	●	●
USB		●	●	●	●
Certification					
Regulatory		RoHS/REACH/CCC/NAL/SR RC/NCC/JATE/Telec/KC*/R CM/CE(RED)/GCF/UKCA/FC C/PTCRB/IC	RoHS/REACH/CE/FCC*/GC F	RoHS/REACH/CCC/NAL/SR RC/NCC/JATE/Telec/KC*/R CM/CE(RED)/GCF/UKCA/FC C/PTCRB/IC	RoHS/REACH/CCC/NAL/SR RC/NCC/JATE/Telec/KC*/R CM/CE(RED)/GCF/UKCA/FC C/PTCRB/IC
Carrier		Telstra*/Orange*/TIM*/Deuts che Telekom/Telefonica* /Vodafone*/AT&T/Verizon/T mobil e/US Celluar/OCD(Anatel)	Anatel	Telstra*/Orange*/TIM*/Deuts che Telekom/Telefonica* /Vodafone*/AT&T/Verizon/T mobil e/US Celluar/OCD(Anatel)	Telstra*/Orange*/TIM*/Deuts che Telekom/Telefonica* /Vodafone*/AT&T/Verizon/T mobil e/US Celluar/OCD(Anatel)

●: support o: optional * : on going

Copyright © 2020 SIMCom Wireless Solutions Limited All Rights Reserved
Building B, SIM Technology Building, No.633, Jinzhong Road Changning District, Shanghai P.R.China
Tel: 86-21-31575100 Email: support@simcom.com Web: www.simcom.com