V: 2024.H2

SIM7070G-PCIE-TT

Product		SIM7070G-PCIE-TT
Picture		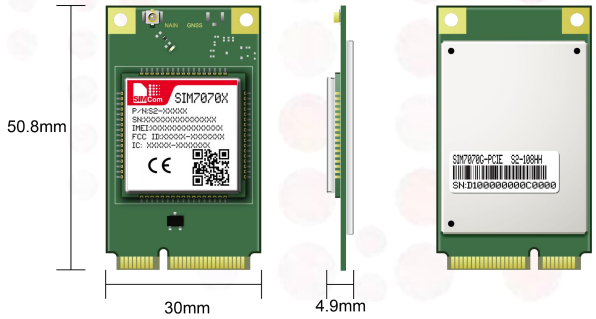
Form Factor		Mini PCIe
Dimensions(mm)		50.8*30*4.9
Frequency Bands	Cat-M	B1/B2/B3/B4/B5/B8/B12/B13 /B14/B18/B19/B20/ B25/B26/B27/B28/B66/B85
	Cat-NB	B1/B2/B3/B4/B5/B8/B12/B13 /B18/B19/B20/B25/ B26/B28/B66/B71/B85
	GSM	850/900/1800/1900MHz
LTE RF Power Class		Class 5 (Typ. 21dbm)
Temperature		-40℃ ~ +85℃
Electrical Features		
Supply Voltage Range(V)		3.3~ 4.3, Typ 3.8
Power Consumption(mA)	@Sleep	2
	@Idle	15
Data Transfer		
Cat-M(Kbps)		589(DL)/1119(UL)
Cat-NB(Kbps)		127(DL)/158.5(UL)
EGPRS(Kbps)		296(DL)/236.8(UL)
Software Features		
Protocol		TCP/UDP/HTTP/HTTPS/FTP /TLS/DTLS/PING/ LWM2M/COAP/MQTT
FOTA		●
Firmware Upgrade		USB/FOTA
Interfaces		
SIM Card		1.8V
UART		●
USB		●
Certification		
Regulatory		RoHS/REACH/CCC/NAL/SRRC/NCC/JATE/Telec/KC*/RCM/CE(RED)/GCF/UKCA/FCC/PTCRB/IC
Carrier		Telstra*/Orange*/TIM*/Deutsche Telekom/Telefonica* /Vodafone*/AT&T/Verizon/Tmobile/US Celluar/OCD(Anatel)

Copyright © 2022 SIMCom Wireless Solutions Limited All Rights Reserved
SIMCom Headquarters Building, Building 3, No. 289 Linhong Road, Changning District, Shanghai P.R.China
Tel: 86-21-31575100 Email: support@simcom.com Web: www.simcom.com