




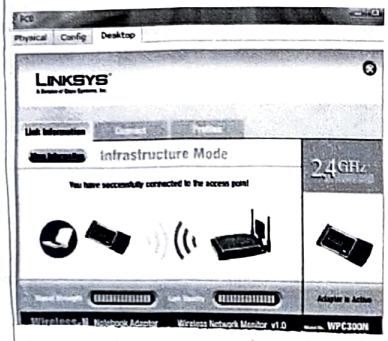

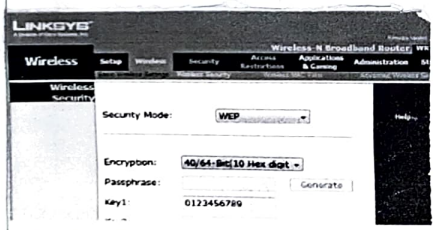

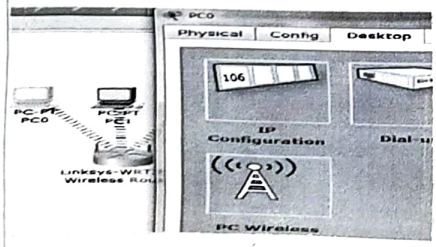

(b)

AIM:

To configure a wireless LAN using Cisco Packet Tracer by connecting 3 PC's to a Linksys Wireless Router, assigning static IP addresses, configuring an SSID and securing the wireless network using a WEP key.

PROCEDURE:


1. Create the topology.
   - ↳ Open Cisco Packet Tracer.
   - ↳ Place one Linksys Wireless router and 3 PC's: PC0, PC1, and PC2.
   - ↳ Connect the PC's to the wireless router.
2. Configure the Wireless Router.
   - ↳ click on the Wireless Router.
   - ↳ Select the Administration tab.
   - ↳ Set the username and password as:
     - * username : admin
     - * password : admin.
   - ↳ Click SAVE Settings.
3. Configure the SSID.
   - ↳ Go to the wireless tab.
   - ↳ change the default SSID to: Mother Network.
   - ↳ save the settings.
4. Configure Static IP Addresses.


PC → Desktop → IP configuration → Static.

Device	IP Address	Subnet Network	Default Gateway
Router	192.168.0.1	255.255.255.0	-
PC0	192.168.0.2	255.255.255.0	192.168.0.1
PC1	192.168.0.3	255.255.255.0	192.168.0.1
PC2	192.168.0.4	255.255.255.0	192.168.0.1

T

5. Configure wireless security.
   - ↳ Select Wireless security.
   - ↳ Set the security Mode to WEP.
   - ↳ Set Key 1 as: 0123456789.
   - ↳ Click Save Settings.

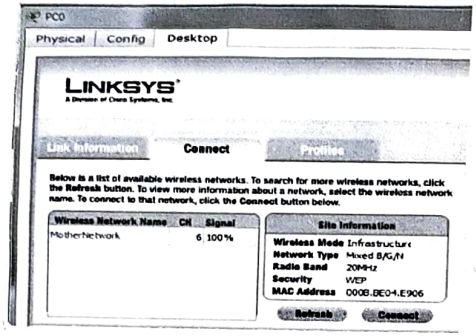

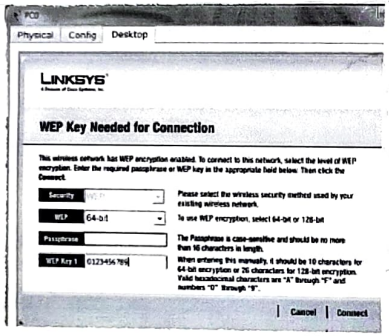

6. Connect PC_0 to the wireless Network.
   - ↳ Click PC_0
   - ↳ Select Desktop → PC wireless.
   - ↳ Select the connect tab.
   - ↳ Click refresh.
   - ↳ Select Mother Network.
   - ↳ Click Connect.
   - ↳ When prompted for the security key, enter: 0123456789
   - ↳ Click Connect.
7. Verify the Connection.
8. Connect PC_1 and PC_2.
9. Verify the wireless LAN after connecting all 3 PC's.

RESULT:

Thus a wireless LAN was successfully configured in Cisco Packet Tracer using a Linksys wireless Router. The SSID Mother Network, static IP addresses and WEP security key were configured and PC_0, PC_1, and PC_2 were successfully connected to the wireless network.