


~~Servo commands~~

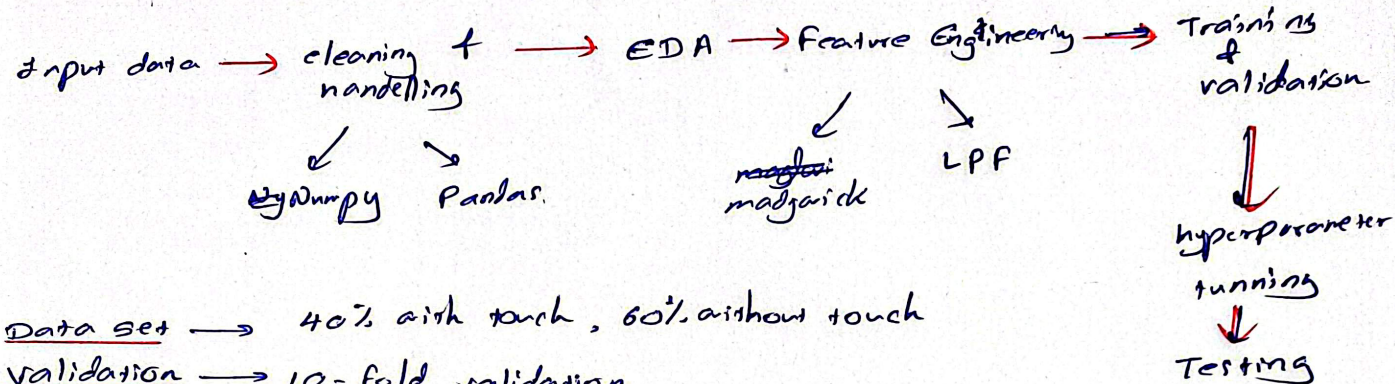

* Data set → 40% with touch, 60% without touch

* Validation → 10-fold validation.

* Hyper parameter Tuning → Per
Initial values

Reservoir size(N) = 500

Leak rate(α) = 0.30

spectral radius(ρ) = 0.90

Input scaling(β) = 0.10

Edge parameter(γ) = 1×10^6

washout = 200 ~~sample~~

Activation function = tanh

sampling rate = 100 Hz

Main Issues → Noises → MPU 6050 → Improve filtering
 Mechanical parts → Upgrade mechanical parts
 New design