

Experiment 1

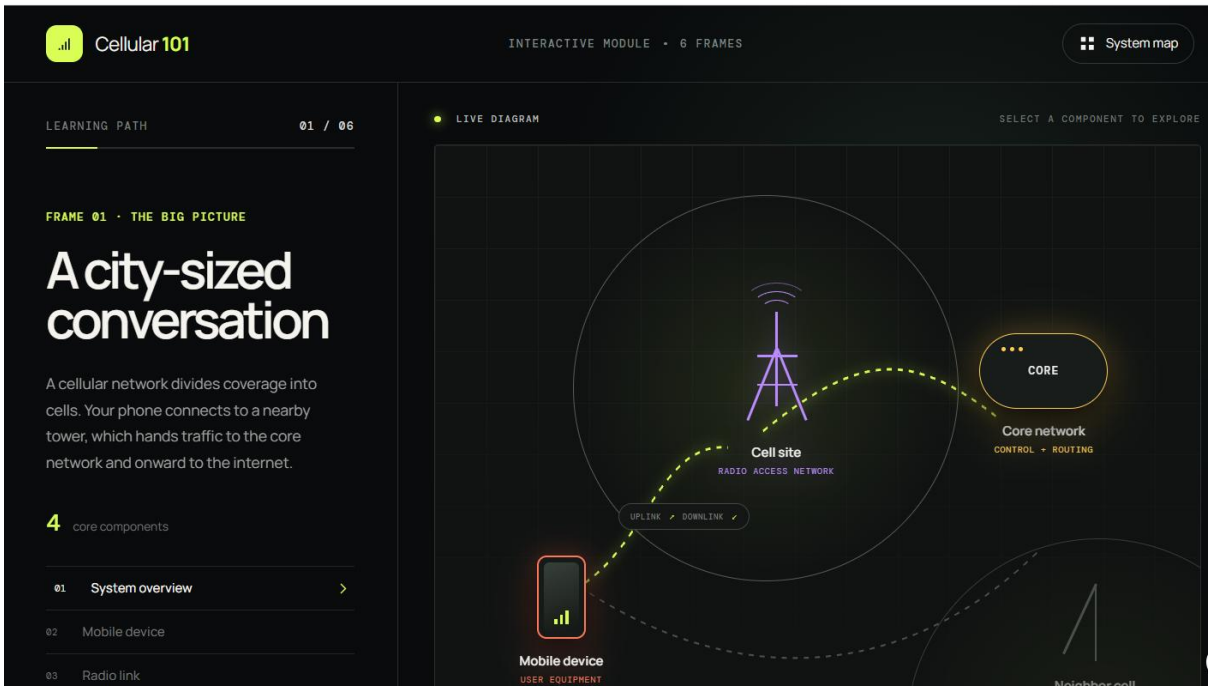

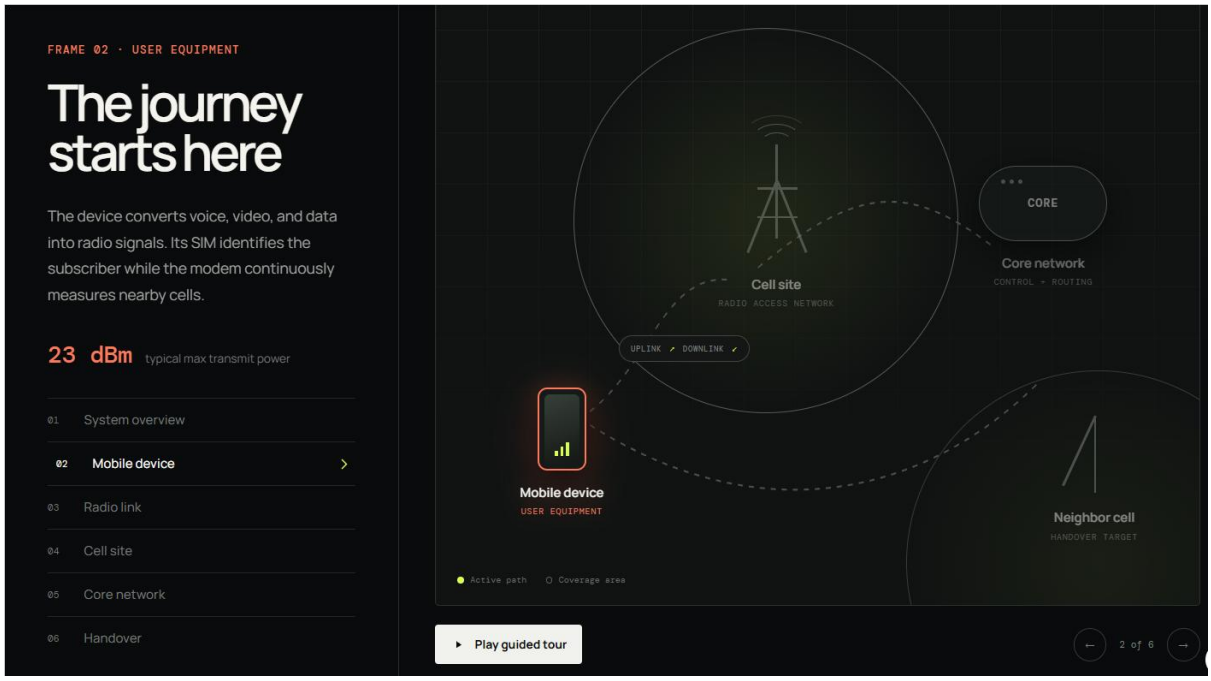


FRAME 03 · AIR INTERFACE

Data rides on radio waves

Uplink carries data from device to tower; downlink flows back. Scheduling lets many users efficiently share a limited slice of spectrum.

2-way uplink + downlink

01 System overview
02 Mobile device
03 Radio link ›
04 Cell site
05 Core network
06 Handover

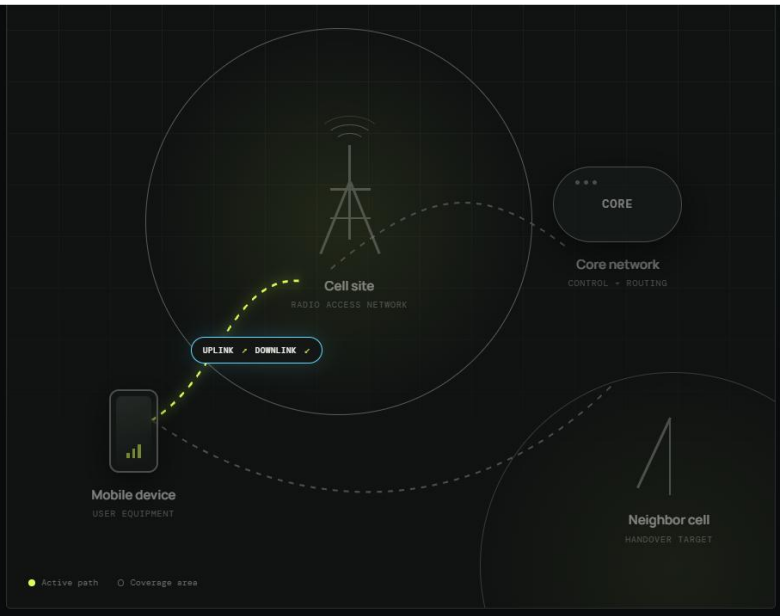

▸ Play guided tour

← 3 of 6 →


FRAME 04 · RADIO ACCESS NETWORK

The cell's local gateway

Antennas provide sector coverage. The base station allocates radio resources, encrypts traffic, and connects each active device to the core.

120° common sector coverage

01 System overview
02 Mobile device
03 Radio link
04 Cell site ›
05 Core network
06 Handover

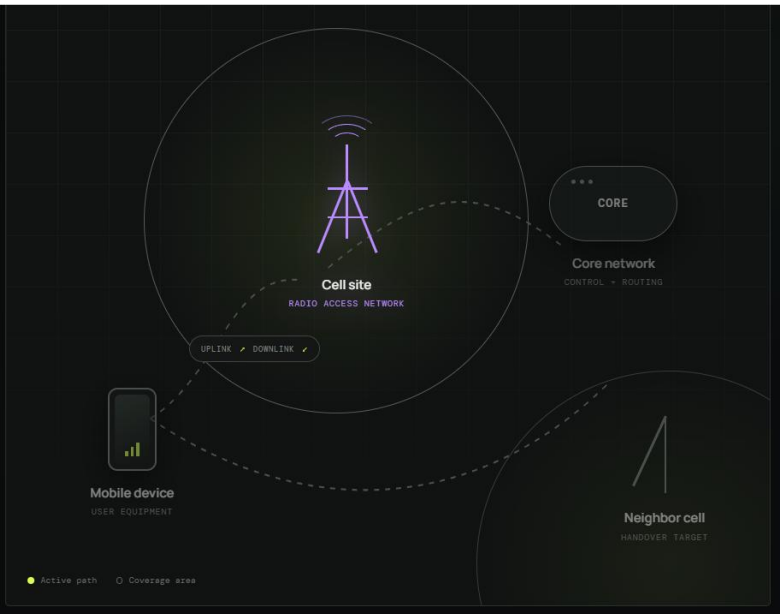

▸ Play guided tour

← 4 of 6 →


FRAME 05 · CONTROL + ROUTING

The network's brain

The core authenticates subscribers, tracks mobility, applies policy, and routes packets between the radio network, calls, and the public internet.

<20 ms target 5G latency

01 System overview
02 Mobile device
03 Radio link
04 Cell site
05 Core network
06 Handover

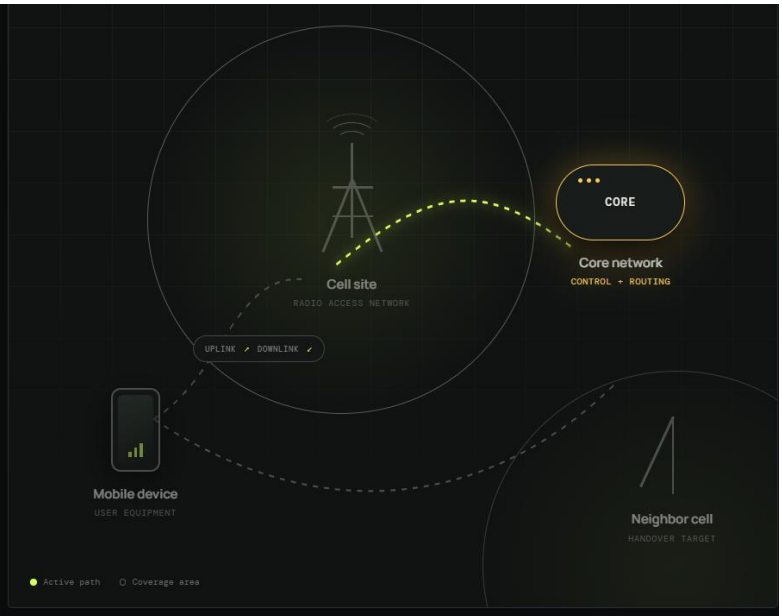

Play guided tour


5 of 6

Moving without dropping

As signal quality changes, the network prepares a neighboring cell and transfers the live connection—often without the user noticing.

50 ms typical handover window

01 System overview
02 Mobile device
03 Radio link
04 Cell site
05 Core network
06 Handover

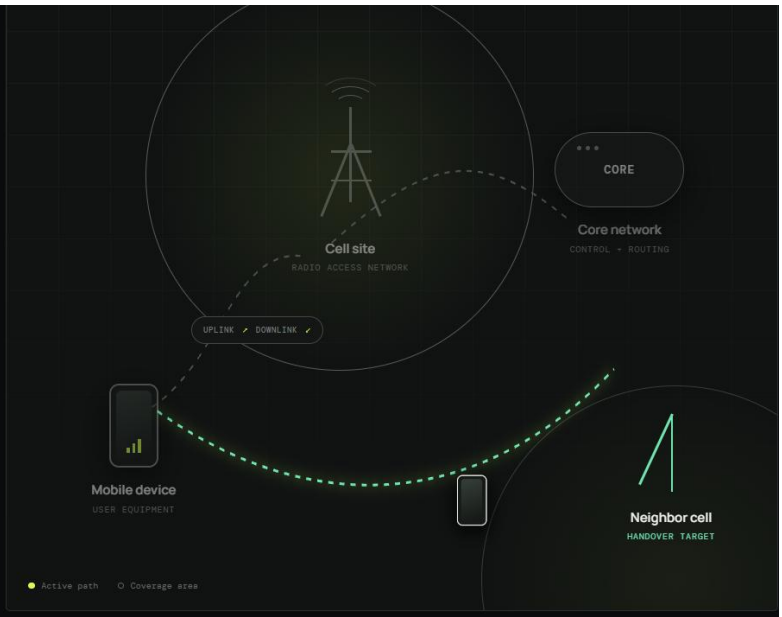

Play guided tour

6 of 6