

ADELAIDE**ELEV 20****AVFAX CODE 5001**

SA

UTC +9:30

YPAD

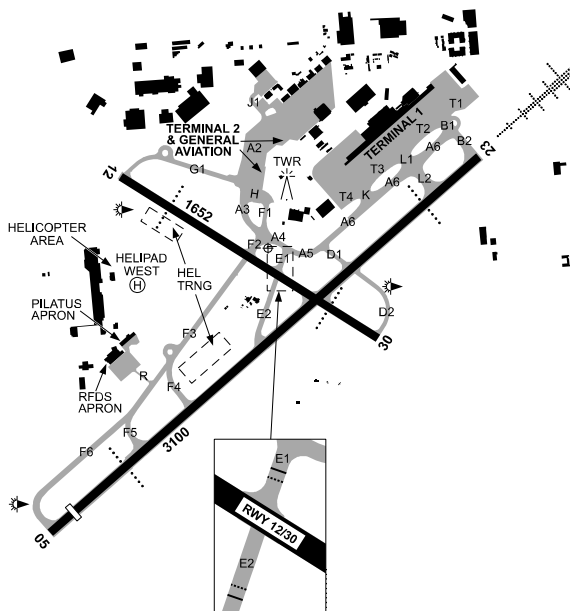
345642S

1383150E

VAR 8 DEG E

CERT

AD OPR Adelaide Airport Limited (AAL), 1 James Schofield Drive, Adelaide International Airport, Adelaide, SA, 5950. PH 08 8308 9211: H24 8154 9444. Fax 08 8308 9311.



CAUTION
RWY INCURSION
HOT SPOT

REMARKS

This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

AIR BP: 1830-1330 UTC. Phone 08 8234 4677, Mobile 0410 566 059, Fax 08 8234 3617.

AH 45MIN PN. AVGAS, JET A1 and JET/FSII. BP Carnet Card, Sterling Card or Account only.

MOBIL: H24. PH 08 8234 4844, Fax 08 8234 4741, Mobile 0418 121 221, JET A1 only. Mobil account, World Fuel Services, UVair cards and authorisations accepted.

Viva Energy Australia: H24. Mobile 0447 238 327. JET A1, AVGAS and JetPlus. Fuel2Sky Carnet Cards or Credit Cards (VISA and MasterCard only).

General

The AD OPR does not provide ACFT marshalling services. All requests for ACFT marshalling should be directed to the Airlines or a FBO.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 9: 2015-1345 UTC (1HR earlier HDS).
2. CAT 7: 1345-2015 UTC (1HR earlier HDS).
3. EMERG FREQ 131.0 MHz AVBL H24
4. Water Rescue Service AVBL H24

APRONS AND TAXIWAYS

1. Helipad West Lit.
2. HLS not AVBL for HEL ABV 9,000KG.
3. TWY L2 AVBL for ACFT up to Code F (A380).

AERODROME OBSTACLES

Lit BLDG 591FT AMSL BRG 055DEG MAG 8,355M FM SOT RWY 05.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
2. AWIS PH 08 8150 3800 - Report faults to BoM.
3. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 08 8366 2773.

PHYSICAL CHARACTERISTICS

05/23	042	102a	PCR 1290/F/D/W/T Grooved	WID 45	RWS 280
12/30	115	54a	PCR 700/F/D/W/T Grooved	WID 45	RWS 280

AERODROME AND APPROACH LIGHTING

RWY 05/23	HIRL		SDBY PWR AVBL
RWY 05/23	MIRL		SDBY PWR AVBL
RWY 05	PAPI	3.0 DEG61FT	SDBY PWR AVBL
RWY 23	HIAL-CAT I(1)		
RWY 23	PAPI	3.0 DEG59FT	SDBY PWR AVBL
RWY 12/30	MIRL		SDBY PWR AVBL
RWY 12/30	PAPI	3.0 DEG51FT	SDBY PWR AVBL

- (1) Aligned with ILS GP

1. ALS type and length

- a. RWY 23 - distance coded CL: 801M.
2. RWY edge light spacing: 05/23: 57M; 12/30: 59M.
 3. For B747 OPS, the THR wheel clearance height does not meet ICAO requirements. Pilots should make adjustment accordingly.

OTHER LIGHTING

1. Secondary PWR switchover time: 1 SEC during LVP, 15 SEC OT.
2. TWY LGT: Green CL.
3. Helipad lighting AVBL SDBY PWR AVBL.
4. RWY 05/23 RWY guard lights at all TWY/RWY intersections.

ATS AND AERODROME COMMUNICATION FACILITIES

ACD	ADELAIDE DELIVERY	126.1
APP/DEP	ADELAIDE APPROACH	118.2 (2) 124.2 (3) 128.6 (4) 243.0 (5) 306.3 (4)
ATIS	ADELAIDE ATIS	116.4 134.5
SMC	ADELAIDE GROUND	121.7
TWR	ADELAIDE TOWER	120.5
VOLMET	AUSTRALIA	6676 (1) 11387 (1)

- (1) H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.
- (2) WI 36NM of Adelaide SE of extended CL RWY 05/23.
- (3) WI 36NM of Adelaide on and NW of extended CL RWY 05/23.
- (4) WI 50NM N of Adelaide, Edinburgh CTR and Restricted Areas H24.
- (5) EMERG FREQ. FREQ will be tested 2130-2330 Local WED. Test transmissions up to 10 SEC duration may be made during these times.

RADIO NAVIGATION AND LANDING AIDS

DME	AD	116.4/111X	345649.5S	1383127.9E	(1)
VOR	AD	116.4	345649.1S	1383128.3E	
DME	IAD	109.7/ 34X	345636.9S	1383230.1E	(2)
		(RWY23)			
GP	IAD	333.2 (RWY23)	345636.7S	1383229.8E	
ILS	IAD	109.7 (RWY23)	345735.4S	1383055.1E	
LOC	IAD	109.7 (RWY23)	345735.4S	1383055.1E	
(1)		Antenna ELEV 35FT.			
(2)		Antenna ELEV 30FT.			

LOCAL TRAFFIC REGULATIONS

1. ACFT PARKING

- a. TWY F4 not AVBL to ACFT ABV Code D.
- b. TWY D1, E1 and E2 not AVBL to ACFT ABV Code C.
- c. TWY A2 NE of TWY G1 restricted to MAX Code C (B737) ACFT.
- d. RESTRICTION: ACFT ABV Code C to execute 180DEG turns at RWY 23 THR, RWY 05 end and adjacent TWY F5. RWY 23 THR 180DEG turns not AVBL to A350, A380, B777-300, B787-10, B747-8 ACFT.
- e. RESTRICTION: RWY 12/30 Not AVBL to ACFT ABV Code C (TKOF) and Code D (Landing).
- f. RESTRICTION: ACFT ABV Code D to use TWY A3 to A6, B1, B2, F2 to F6 except F4, T1 to T3, K, L1 and L2 only.
- g. All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
- h. ENG starting involving the use of more than idle PWR RQ ATC clearance.
- i. T1 Apron - all code C ACFT are required to push back in E direction only.
- j. The following taxi restrictions apply to Code C aircraft and below pushed back from Terminal 1:
 - TWY B1 not available from Bays 15 to 27.
 - TWY B1 and L1 not available from Bays 22 to 27.
- k. TWY H and F1 restricted to MAX Code C ACFT.
- l. TWY R restricted to MAX 18M wingspan ACFT.
- m. ACFT landing RWY 05 first AVBL TWY is E2 unless otherwise advised by ATC.
- n. ACFT landing RWY 23 first AVBL TWY is D1 unless otherwise advised by ATC.
- o. ACFT operating greater than 400 tonnes on RWY 05/23 to seek pavement concession.

2. GENERAL AVIATION APRON

- a. Hardstand located on Terminal 2 APN via TWY A2: AVBL for local commercial operators, private and overnight itinerant ACFT. No tie-down points AVBL.
- b. Private and overnight parking must be approved by the Airside Operations Manager - Phone 08 8154 9444 or Fax 08 8308 9324.

3. TRAINING FLIGHTS

- a. All ACFT planning practice instrument APCH (AVBL 0700-2300 Local) RQ prior ATC approval. Pilots must book a slot online at www.bookawk.com.
- b. Training Flights involving an approach to the reciprocal end of the RWY nominated for departures are not permitted.
- c. Non-jet training ACFT carrying out a practice instrument approach should plan a missed approach or full stop landing. Touch and Go landings are not normally approved.
- d. PPR Shift Manager 1, Melbourne 03 9235 2012 for circling APCH at night or when VIS is less than 5,000M or ceiling is BLW A025.
- e. Circuit training is only permitted at Adelaide BTN 0700-2100 Local (extended to 2200 Local HDS). RQ prior ATC approval. Pilots must book a slot online at www.bookawk.com. Noise abatement preferred RWY and flight paths may be waived.

4. SURVEY, AWK (NON-TRAINING), COASTAL TRANSIT AND PARACHUTING FLIGHTS

- a. The following flights must book online via www.sa.bookawk.com. If access to the booking page is not AVBL contact the Shift Manager 1, Melbourne on 03 9235 2012 BTN 0630 and 1930 Local DLY;
 - (i) Survey and AWK (non-training) flights planning to operate in CTA WI 36 NM Adelaide;
 - (ii) ACFT planning to transit AD CTR via the coast. If transit is required in both directions as part of the one flight, two slots should be booked; and
 - (iii) Parachuting flights planning to drop WI Adelaide CTR.

- b. For survey flights, operators must email maps to: ml.sm1@airservicesaustralia.com and call Shift Manager 1, Melbourne on 03 9235 2012 to discuss their planned operations prior to becoming airborne each day.

5. IFR TRAINING AREAS

IFR ACFT requiring an area for training may plan to operate in:

- (i) The Vincent IFR Training Area (VITAA) - The lateral limits of the VITAA are AD 230R-AD260R, 20DME-36DME AD.
- (ii) The FALEE IFR Training Area (FALEE) - The lateral limits of the FALEE are AD 280R-AD310R 20DME-36DME AD.

6. HELICOPTER OPERATIONS

- a. HEL air taxi via lit TWY at night.
- b. Wherever possible, helicopters shall depart a HLS in the same direction as the duty runway nominated on the ATIS, advising direction of take off with the taxi call e.g. "(CS) Request taxi, Departure South West".
- c. Subject to traffic, weather and priority considerations, helicopters shall adhere to the following departure and arrival routes:
 - (i) NW - via University playing fields and River Torrens outlet
 - (ii) SW - via Sea Rescue Squadron or Sewerage Treatment Works
 - (iii) N - over Kooyonga Golf Course
 - (iv) E - via Richmond Road and Keswick railway bridge
 - (v) S - via Glenelg Golf Course
- d. During HN, ATC and pilots will endeavour to confine as much noise as possible within the boundary of the aerodrome by ensuring helicopters depart and arrive overhead the Control Tower.

7. HELICOPTER TRAINING

- a. During daylight hours and in VMC, helicopter AWK will take place from the training sites adjacent to and parallel with RWY 12/30 and 23/05, known respectively as the Western and Southern training areas.
- b. NVIS equipped helicopters may operate from these areas HN in VMC.

FLIGHT PROCEDURES

1. ATC TRAFFIC MANAGEMENT SPEED

When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP YPAD must not exceed 250KT IAS when BLW 10,000FT. Advise ATC if a higher speed is operationally required.

2. ESTIMATED TRAFFIC DELAYS

- 2.1. Estimated airborne traffic delays for ARR ACFT may be expected due to terminal area traffic density.

- a. Scheduled:
 - (i) MON-FRI 0000-0130 UTC and 0700-1000 UTC: 10MIN.
- b. Non-scheduled/other:
 - (i) MON-FRI 2200-0300 UTC: 10MIN.
 - (ii) MON-FRI 0700-1100 UTC: 15MIN.

Note: All times 1HR earlier during HDS. Actual holding times may differ from holding estimates. Historical data on actual holding is available from the NOMC.

- 3. VFR HJ: Do not plan to transit or over-fly the Adelaide CTR below 6,000FT where an alternate route is available. Where an alternative route is not available, plan:
 - a. Coastal FM OHB to PNL or
 - b. Coastal PNL to OHB or
 - c. Hope Valley VFR ROUTE.
- 4. VFR HJ: Departures from Adelaide to Parafield, AWK training flights plan via OHB. Other ACFT plan via PAL.

5. LOW VIS TAKEOFFS

For CASA approved operators, RWY 23/05 are capable of supporting takeoffs with an RV/RWY VIS of not less than 550M.

NOISE ABATEMENT PROCEDURES

CURFEW applies - See AIP DAP Noise Abatement Procedures.

ADDITIONAL INFORMATION

1. The Pelican Point Power Station near the container terminal to the NW of Torrens Island emits a continuous plume of high temperature and high velocity gas discharges. Remain clear at all times.
2. Bird hazard exists. Pigeon flocks concentrate on RWY 23 and RWY 30 approaches. Pelican activity on RWY 05 approach.
3. Weather balloon launches APRX 2315 and 1115 UTC. Launches may occur at other times.
4. Model ACFT OPR HJ WI 160M radius of PSN 345618S 1383554E, BRG 075 DEG MAG 3.3NM FM ARP, SFC to 400FT AGL.

CHARTS RELATED TO THE AERODROME

1. WAC 3458, 3459.
 2. Aerodrome Obstacle Chart Type A: December 2024 AVBL from AD OPR.
 3. Also refer to AIP Departure and Approach Procedures.
-

ALICE SPRINGS**ELEV 1789****AVFAX CODE 8501**

NT

UTC +9:30

YBAS

234824S

1335408E

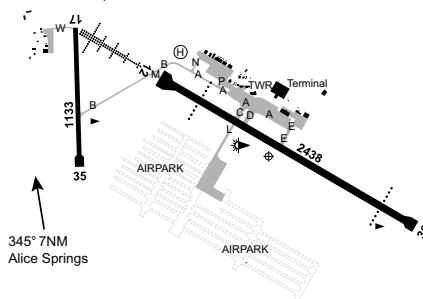
VAR 4 DEG E

CERT

AD OPR Alice Springs Airport Pty Ltd, PO Box 796, Alice Springs, NT, 0871.

Email: operationsASP2@adgnt.com.au. PH Admin: 08 8951 1211. ARO H24 0402 088 154.

Fax 8955 5046. Website: www.alicespringsairport.com.au.

**REMARKS**

- AD Charges: All ACFT. Copies of Conditions of Use can be obtained from AD OPR or website.
- Passengers and crew from all unscreened RPT services and MIL ACFT who have obtained permission FM AD OPR to park on the main RPT APN, shall enter the Terminal via Gates 1 or 10. Unscreened GA crew and PAX must not access Terminal airside via RPT APN.
- This AD is a Security Controlled Airport.
- Unscheduled operations diverting into Alice Springs require prior notice to the RFFS and Airport Management.
- Limited PRKG for ACFT ABV 5,700KG MTOW. CTC AD OPR for PRKG approval.
- All ACFT for the Airpark are to CTC www.apas.com.au for ARR/DEP PROC.

HANDLING SERVICES AND FACILITIES

Viva Energy Aviation: Dunning's Fuels Pty Ltd 2030-0830 UTC. PH 08 8955 5335 or 0417 644 965
 AH call out fee applies. JET A1, AVGAS, JetPlus. Fuel2Sky Carnet Cards or credit cards
 (V and MC).

AIR BP: 2030-0800 UTC DLY, H24 AVGAS card bowser. PH 08 8952 1120 (diverts to refueller),
 Fax 08 8955 5083, AH 0438 897 002. 60MIN PN. AVGAS, JET A1 and JET/FSII.

General

AD OPR does not provide ACFT marshalling. All requests should be made to RPT Airlines or fixed base operators.

RESCUE AND FIREFIGHTING SERVICES

- CAT 6:
 - MON - FRI 2145-0915 UTC.
 - SAT 2245-0550 UTC.
 - SUN 2245-0825 UTC.
- 131.0 MHz AVBL HO.

APRONS AND TAXIWAYS

- To minimise the effect of jetblast, all jet ACFT must TAX away FM APN PRKG positions using MNM breakaway thrust.
- Simultaneous use of TWY C and TWY D RESTR to ACFT with wingspan BLW 65M.
- All ACFT must TAX away FM RPT APN PRKG positions in accordance with the TAX lead-out lines.
- TWY A BTN TWY C and TWY P RESTR to ACFT with MAX 20M wingspan when Bay 9 occupied by B767-300 and ABV.
- Access via TWY A BTN TWY C and D not AVBL when Bay 26 or 28 occupied.
- TWY A west of RPT APN, TWY B and TWY M not AVBL to ACFT ABV Code B (Metro 23).

7. TWY N, TWY P MAX wingspan 20M.
8. Access to GA refuelling RESTR to ACFT with MAX 12.5M wingspan.
9. RESTR: Use of TWY L for ACFT under tow only.
10. TWY W and APN W of N end of RWY 17/35 closed to public. Approved operators only by prior arrangement.
11. **TWY E**
 - a. BTN TWY A and RWY 12/30 not AVBL to ACFT ABV B737 MAX8.
 - b. BTN TWY A and commuter APN not AVBL to ACFT ABV Dash 8-300.
 - c. PCR 434/F/B/1.45 MPa/T

AERODROME OBSTACLES

1. Lit ATC TWR, 1,849FT AMSL, 336 DEG MAG, 0.3NM from ARP infringes transitional SFC by 8FT.
2. When B737 and ABV parked on RPT APN, tail infringes transitional SFC.
3. APN floodlights 270M north of RWY CL infringe transitional SFC by up to 11FT.
4. Anemometer 180M south of RWY CL infringes transitional surface by 11FT.
5. Lit masts:
 - a. McDonnell Range (x3), 2,730FT AMSL, 329 DEG MAG, 5.6NM from ARP infringe outer HZS by up to 467FT.
 - b. 8HA aerial, 1,971FT AMSL, 320 DEG MAG 2.87NM from ARP. Infringes COS by 47FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, AD WRNG.
2. AWIS Phone 08 7922 2500 - Report faults to BoM.
3. AWIS FREQ 134.05 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

12/30	116	80a	PCR 531/F/B/X/U Grooved	WID 45	RWS 280
17/35	174	37a	PCR 36/F/B/0.73 MPa/U	WID 18	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 12/30	MIRL		SDBY PWR AVBL
RWY 12/30	PAPI(3)	3.0 DEG49FT	SDBY PWR AVBL
RWY 12/30	PTBL(1)		BY PRIOR
			ARRANGEMENT
RWY 12	HIAL-CAT I		SDBY PWR AVBL
RWY 12	HIRL		SDBY PWR AVBL
RWY 17/35	PTBL(2)		BY PRIOR
			ARRANGEMENT

- (1) EMERG and by arrangement.
- (2) Solar lighting for HN and EMERG OPR only.
- (3) Aligned with ILS GP.
1. **ALS type and length**
 - a. RWY 12 - distance coded CL: 900M.
2. RWY edge light spacing: 12/30: 60M.
3. RWY 12/30 RWY LGT and PAPI OPR Stage 2 HN; outside TWR HR Stage 6 HJ. Intensity changes on RQ during scheduled RPT hours. CTC AD OPR.
4. OBSTR LGT and IWI OPR HN.
5. HIAL OPR Stage 2 when TAF issued prior to 0830 Local indicates FCST or PROB of CLD or VIS less than CAT D ALTN MNM. HIRL and HIAL at other stages AVBL on 60MIN PN. Contact AD OPR 0402 088 154 H24. A fee may be payable for this SVC.

OTHER LIGHTING

1. SDBY PWR switchover time: 15 SEC.
2. TWY LGT: Blue reflective edge on A and B BTN TWY M and RPT APN.
3. RWY 17/35 and TWY M, B lit HN with portable solar lighting.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	119.8 On ground (Outside TWR HR)
ATIS	ALICE ATIS	115.9 123.0 335
TWR	ALICE TOWER	118.3

1. TWR HR: 2230-0830 UTC DLY. Phone 08 8950 7505.
Note: TWR HR may change at short notice, check status of airspace with ATS or Alice ATIS.
2. Alice TWR provides combined TWR and APP CTL services within Class C and D airspace 6,500FT AMSL and BLW DRG TWR HR. CTC TWR for clearance.
3. Melbourne Centre 119.8 provides ATS within Class C airspace ABV 6,500FT AMSL DRG TWR HR.
4. Outside TWR HR, Alice Springs Class C and D airspace FL125 and BLW becomes Class G and Class C airspace FL125 - FL245 becomes Class E.

RADIO NAVIGATION AND LANDING AIDS

DME	AS	115.9/106X	234734.4S	1335241.0E		(2)
NDB	AS	335	234640.6S	1335224.7E	Range 110 (HN 90)	(3)
VOR	AS	115.9	234734.4S	1335241.6E		(1)
DME	IAS	109.9/ 36X (RWY12)	234813.3S	1335342.9E		(5)
GP	IAS	333.8 (RWY12)	234813.1S	1335343.0E		(4)
ILS	IAS	109.9 (RWY12)	234855.7S	1335513.0E		(4)
LOC	IAS	109.9 (RWY12)	234855.7S	1335513.0E		(4)
(1)		116/1.5 to ARP				
(2)		116/1.5 to ARP - Antenna ELEV 1811FT.				
(3)		131/2.3 to ARP. Possible excessive needle oscillations near McDonnell Ranges.				
(4)		Pilot Monitored outside TWR HR.				
(5)		Antenna ELEV 1795FT.				

LOCAL TRAFFIC REGULATIONS

1. Departing ACFT which have not submitted flight notification to Airservices are to contact Alice TWR on 118.3 at least 5 MIN prior to requesting TAX clearance.
2. RESTRICTION: ACFT 80,000KG and ABV must use RWY 12/30 THR turning nodes. ACFT turn starboard 180DEG. Line designed to accommodate B777-300ER/A340-600 normal turn RAD. All ACFT to use MNM speed and MAX RAD turns to avoid pavement damage.
3. RESTRICTION: ACFT Code D (B767) and ABV must execute over steer turns from RWY 12/30 onto TWY C or D due insufficient TWY edge clearance.
4. PRKG Restrictions for non-RPT ACFT. PPR (obtainable FM AD OPR, AS, on at least 48 HR PN) for ACFT ABV 5,700KG MTOW to remain at or transit AS except when planned as ALTN.
5. Pilots are advised that IFR training and circuit training should be conducted before 0000 UTC, BTN 0400-0600 UTC and after 0730 UTC. Delays may be expected for training flights at all other times. Pilots are to contact TWR with training details at least 15 MIN prior to commencement.
6. Access to the GA APN via TWY A, N and P only.

FLIGHT PROCEDURES

For A380 operations, CAT 1 ILS OPS RWY 12 DA is as per published procedures.
Refer DAP W Alice Springs.

CTAF - AFRU 118.3

Outside TWR HR.

ADDITIONAL INFORMATION

1. Manned balloon activity in the vicinity of the circuit area at sunrise and early morning.
2. Weather balloon launch APRX 2315 UTC FM 1.4KM WNW ARP. Launches may occur at other times.
3. Animal and bird hazard exists. Bird hazard reduced on very hot summer days with increased bird hazard May-August daily and in months after increased average rainfall. Occasional feral animals present and seasonal influx of migratory birds. Animal hazard managed to minimal risk during daily airport business HRS.
4. Sealed drag strip located 1KM W of AD, aligned parallel with RWY 17/35 may be mistaken for RWY. Confirm RWY identification by RWY markings/lights.

CHARTS RELATED TO THE AERODROME

1. WAC 3232.
 2. Aerodrome Obstruction Chart Type A Charts: RWY 12/30, Edition 5, May 2021.
 3. Also refer to AIP Departure and Approach Procedures.
-

AVALON**ELEV 35****AVFAX CODE 3004**

VIC

UTC +10

YMAV

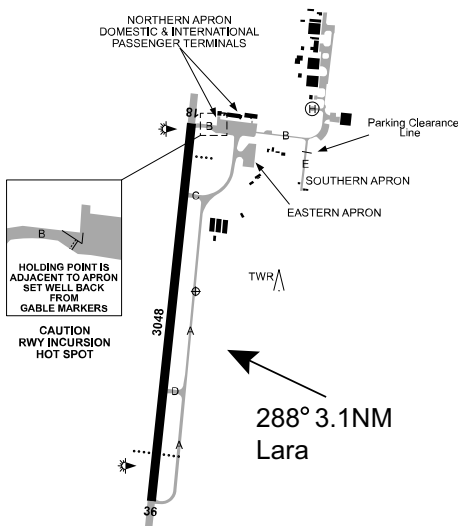
380222S

1442810E

VAR 12 DEG E

CERT

AD OPR Avalon Airport Australia Pty Ltd, Locked Bag 9, Lara, VIC, 3212. Email: enquiries@avalonairport.com.au. PH 03 5227 9100. ARO 03 5227 9470. PH AH 03 5227 9150.

**REMARKS**

1. AD Charges: All ACFT.
2. This AD is a Security Controlled Airport.
3. All ACFT ABV 10,000KG MTOW nominating Avalon as an alternate require prior permission from AD operator.

HANDLING SERVICES AND FACILITIES

BP: Avalon Airport Australia Pty Ltd. 1830-1330 UTC. AH call-out fee may apply.
Phone 03 5227 9470, AH 03 5227 9150. JET A1. Air BP fuel card and Air BP account.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6 - 1945-1330 UTC DLY. 1HR earlier HDS.
2. WI published hours of operation, CAT 7 is AVBL for diverting ACFT upon notification.
3. 131.0 MHz AVBL HO.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, AD WRNG.
2. AWIS Phone 03 8470 3200 - Report faults to BoM.
3. AWIS FREQ 116.1 AVBL outside TWR HR - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

18/36 176 100a PCR 800/F/C/X/T Grooved
Concrete ends RWY 18 and 36.

WID 45 RWS 300

AERODROME AND APPROACH LIGHTING

RWY 18/36	MIRL	AFRU+PAL 120.1		SDBY PWR AVBL
RWY 18	PAPI(2)	AFRU+PAL 120.1	3.0 DEG69FT	SDBY PWR AVBL
RWY 36	PAPI(1)	AFRU+PAL 120.1	3.0 DEG65FT	SDBY PWR AVBL

- (1) Double sided.
- (2) Left side.
1. RWY 18/36 edge light spacing: 60M.
2. If PAL activation fails, Phone ARO for MAN activation.
3. SDBY PWR (automatically activated) switchover time: 15 SEC.

OTHER LIGHTING

- HBN FLG 2 R ELEV 1188FT, 5.7NM NNW of ARP
1. Secondary PWR switchover time: 1 SEC during LVP; 15 SEC OT.
 2. TWY CL LGT G.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	135.7 On ground
APP	AVALON APPROACH	133.55 (1)
ATIS	AVALON ATIS	116.1 118.2
TWR	AVALON TOWER	120.1
UNICOM	AVALON UNICOM	129.3 (2)

- (1) On ground.
- (2) CS "Avalon Safety". AVBL 0430-2330 Local DLY. Fuel, ACFT parking and general ground support.
1. TWR HR:
 - a. 2100-1200 UTC (0700-2200 Local) DLY.
 - b. 2000-1200 UTC (0700-2300 Local) DLY HDS.

Note: TWR HR may change at short notice, check the status of airspace with ATS or Avalon ATIS.
2. Outside TWR HR the Avalon controlled airspace becomes Class E from 700FT AGL WI the lateral boundary of the CTR (upper level 2,500FT AMSL) and WI the steps from 1,500FT AMSL to an upper level of 4,500FT AMSL. SFC to 700FT AGL WI the lateral boundary of the CTR becomes Class G.

RADIO NAVIGATION AND LANDING AIDS

DME	AV	116.1/108X	380256.7S	1442733.3E	(2)
VOR	AV	116.1	380256.0S	1442732.2E	(1)
DME	I	109.5/ 32X	380150.2S	1442814.9E	(3)
		(RWY18)			
GP	I	332.6 (RWY18)	380150.2S	1442814.9E	
ILS	I	109.5 (RWY18)	380334.2S	1442750.4E	
LOC	I	109.5 (RWY18)	380334.2S	1442750.4E	
(1)	Operated by AD OPR. FREQ used for ATIS during TWR HR, and AWIS outside TWR HR.				
(2)	Antenna ELEV 70FT.				
(3)	Antenna ELEV 50FT.				

LOCAL TRAFFIC REGULATIONS

1. Pilots of widebody ACFT are required to apply MNM power when taxiing to prevent damage to TWY shoulders.
2. Limited parking AVBL. Contact ARO.
3. Code E and F ACFT must be under tow from intersection of TWY A and TWY B when accessing the hangar precinct. 24HR PN. Phone ARO.
4. Code F ACFT are not permitted to free move on TWY B past the passenger terminal when code C, D or E ACFT are parked at the terminal. Wing tip clearances cannot be met for code F ACFT in this situation - code F ACFT under tow only.
5. Outside TWR HR ACFT parked on Northern Apron Bay 1 must pushback east only.
6. TWY A Restriction: TWY A past TWY D not AVBL to code C ACFT (or larger) when a code C ACFT (or larger) is HLDG on TWY D.
7. **Instrument approach training:** all ACFT planning practice instrument APCH (AVBL 2000-1200 UTC, 1HR earlier during HDS) require prior ATC approval. Pilots must book a slot online at www.bookawk.com.
8. 180 DEG turns on RWY18/36 not permitted for Code C ACFT and above.

FLIGHT PROCEDURES

1. ATC TRAFFIC MANAGEMENT SPEED

When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP AV via Class C airspace must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

Note: Pilots must also comply with Class D airspace speed limits. Cancellation of ATC traffic management speeds does not cancel Class D airspace speed limits.

2. LOW VISIBILITY OPERATIONS

- 2.1. LVO AVBL during TWR HR:
- Preparations for the activation of LVP are commenced when the visibility has reduced to 1,500M and is further reducing. This ensures that the LVP are in force at or just prior to the visibility reducing to 800M.
 - For CASA approved operators, low VIS DEP on RWY 18/36 not AVBL BLW 550M VIS.
 - ACFT OPS in VIS BLW 800M not supported when ATC not AVBL. Prior arrangement only, CTC AD OPR.
 - Pilot must notify ATC if a "follow me" service is required.
3. All ACFT are REQ to make entry to circuit, inbound and taxi calls in addition to the mandatory calls due to WIP on and in the VCY of RWY and TWY outside tower HR.

CTAF - AFRU 120.1

CTAF-AFRU operates outside TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

- Bird hazard exists. Expect increased activity of juvenile magpies near midpoint of RWY, during months August to December.
- Quarry blasting from APRX 1NM SE of ARP. MON-FRI HJ. CTC Mountain View Quarry, Point Wilson (03) 5282 2077.

CHARTS RELATED TO THE AERODROME

- WAC 3469, 3470.
 - Aerodrome Obstruction Chart Type A: RWY 18/36, Edition 12 - June 2025.
 - Also refer to AIP Departure and Approach Procedures.
-

AYERS ROCK/CONNELLAN**ELEV 1626****AVFAX CODE 8502**

NT

UTC +9:30

YAYE

251110S


1305832E

VAR 4 DEG E

CERT

AD OPR Voyages Indigenous Tourism Australia Pty Ltd, Airport Manager, Ayers Rock Airport,
PO Box 125, Yulara, NT, 0872. Email: airport@voyages.com.au.

PH Airport Operations 08 8956 2020 H24. Website: www.ayersrockairport.com.au.

**REMARKS**

1. PPR from AD OPR via email:
 - a. 5 days PN for ACFT with an ACR at MAX OPR weight greater than PCR or tyre pressure greater than listed value.
 - b. 2 days for all other ACFT.
 - c. for HEL auto-rotation training onto sealed surfaces.
2. AD charges: All ACFT – CTC AD OPR.
3. Direct INTL flights to/from AD not approved.
4. Limited PRKG for ACFT. CTC AD OPR by email for parking slots 48HR PN required.
 - a. GA Apron Bay 10 RESTR to RFDS PC-12 ACFT only.
 - b. Administration fees apply for landing and parking slots required. without 48HR PN (EMERG exempt).
5. All ACFT confine OPS to sealed surfaces.
6. This AD is a Security Controlled Airport. All pilots and operators must possess and display a valid AUS/AYQ ASIC when airside.
7. AH airside access requires a call-out. PH 0428 881 325, call-out fees apply.

HANDLING SERVICES AND FACILITIES

Viva Energy/Air BP (JV) – Skyfuel Australia Pty Ltd. 2130-0730 UTC (0700-1700 ACST).

AH call-out fee applies. Phone: 0417 632 763 (primary) or 0418 862 100 (secondary).

Email: yulara@skyfuel.com.au. JET A1 tanker, AVGAS card swipe bowsers – V, MC,

Viva Fuel2Sky or BP Card.

General

The AD OPR does not provide ACFT marshalling services. All requests for ACFT marshalling should be directed to the airlines or a FBO.

PASSENGER FACILITIES

PT/HC/BU/LG/RF/WC

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6 OPR HR;
 - a. MON - FRI 2230-0730 UTC.
 - b. SAT and SUN 2300-0730 UTC.
2. 131.0 MHz AVBL HO.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. AWIS Phone 08 7922 2516 - Report faults to BoM.
3. AWIS FREQ 126.55 not AVBL outside CA/GRS HR - Phone BoM for current weather.

PHYSICAL CHARACTERISTICS

13/31 126 85a PCR 377/F/A/1.39 MPa/T Grooved WID 30 RWS 150

AERODROME AND APPROACH LIGHTING

RWY 13/31 LIRL AFRU+PAL 126.9 SDBY PWR AVBL
 RWY 13/31 PAPI AFRU+PAL 126.9 3.0 DEG54FT SDBY PWR AVBL
 RWY 13/31 edge light spacing: 60M.

OTHER LIGHTING

1. TWY LGT: Blue edge on TWY A and C.
2. APN LGT: Blue edge on RPT APN.
3. Secondary PWR switchover time: 10 SEC.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA MELBOURNE CENTRE 121.85 On ground
 CA/GRS AYERS ROCK/ 126.9 (1)
 CONNELLAN CA/GRS

- (1) CS "Ayers Rock Radio".
 - a. Provided on CTAF 126.9 during Air Transport Operation (ATO) OPR BTN 0815 – 1545 Local (2245 – 0615 UTC).
 - b. CA/GRS OPR HRS may be reduced if published SKED ATO have been completed, or extended for AH ATO HJ.
 - c. PAPI activated by CA/GRS during OPR HR.
 - d. CTAF/AFRU 126.9 provided when CA/GRS not AVBL.
 - e. AIS provided during CA/GRS operation 126.55.
 - f. CA/GRS responds to first broadcast of arriving, transiting or departing ACFT.
 - g. CA/GRS unable to cancel SARWATCH. Contact FIA 121.85 on ground.

RADIO NAVIGATION AND LANDING AIDS

DME	AYE	117.1/118X	251017.3S	1305829.2E		(1)
NDB	AYE	233	251021.7S	1305829.3E	Range 100	(2)

- (1) Antenna ELEV 1621FT.
- (2) 173/0.8 to ARP.

LOCAL TRAFFIC REGULATIONS

1. ACFT ABV 22,700KG must use RWY turn pads for 180DEG turns.
2. Sealed TWY B and D only AVBL to ACFT BLW 5,700KG MTOW.
3. Parking restrictions apply at Ayers Rock Airport. ACFT with a wingspan greater than 15M may operate with prior approval from AD OPR. GA apron only AVBL to ACFT BLW 5,700KG MTOW with a wingspan not exceeding 15M.
4. RPT Bays 5 and 5A cannot be occupied simultaneously unless authorised by AD OPR.
5. Pilots of all jet and turboprop ACFT are required to apply MNM power on all engines when departing from parking Bays 1-5 on RPT apron. Also on taxiing to prevent erosion of soft TWY shoulders.
6. Pilots of HEL should hover TAX from or to parking from the FATO.
7. HEL not permitted to land/take off directly from GA/RPT aprons unless OPR on approved helipads.
8. HEL OPS ABV 5,700KG MTOW to be coordinated with the AD OPR.
9. To avoid confusion, pilots should refer to the aerodrome as "Ayers Rock" or "Ayers Rock Aerodrome" and should refer to the Rock itself (the icon) as "The Rock".

FLIGHT PROCEDURES

1. Pilots of arriving ACFT shall broadcast on the CTAF at 20NM YAYE.
2. Pilots of arriving ACFT are requested to broadcast their intended RWY for landing and the planned circuit entry procedure with the inbound broadcast.
3. Pilots of outbound ACFT shall monitor the CTAF until 20NM YAYE or WI CTA.
4. Non-residential pilots wishing to visit Ayers Rock/Connellan are advised to call the CA/GRS to gain an awareness of local patterns, busy periods and local weather info.
Contact CA/GRS on 08 8956 3668.
5. Right hand circuits RWY 31.
6. Low VIS TKOF less than 800M are not supported.
7. STANDARD SCENIC FLIGHT PROCEDURES - See ERSa Special Procedures.

CTAF - AFRU 126.9**ADDITIONAL INFORMATION**

1. Bird and animal hazard exists. Confirmed hazards advised via NOTAM.
2. Hazardous conditions exist for light ACFT when LDG on RWY 13 with an E crosswind, due to close proximity of sand dunes alongside the RWS at the N end. Windshear in both speed and direction can exist. To minimise the hazard pilots should aim to achieve touch down either in the first 400 of the RWY or beyond 800 FM the THR. Pilots should also be aware that dust devils are prevalent around the AD throughout the year.
3. Delicensed AD 2 KM NE of Ayers Rock has ceased to exist as a LDG area.
4. Motor Gliders with wing span greater than 15M required to give airport 72HR notice to arrange parking, and should also fold wings prior to entering the GA APN and parking area.
5. UA OPS (swarm BLW 500G each) will take place OPR WI 250M radius of PSN 251551S 1305857E, SFC to 656FT AGL. OPR will monitor CTAF. OPR CTC PH: 0423 616 440.

CHARTS RELATED TO THE AERODROME

1. WAC 3344.
 2. Aerodrome Obstruction Chart Type A: RWY 13/31 September 2012.
 3. Also refer to AIP Departure and Approach Procedures.
-

BALLINA/BYRON GATEWAY**ELEV 7****AVFAX CODE 2005**

NSW

UTC +10

YBNA

285002S

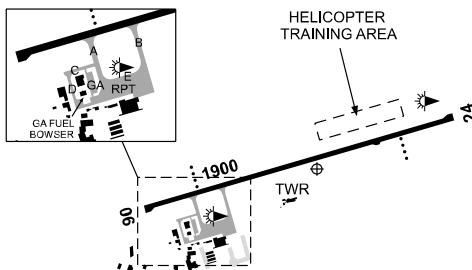
1533345E

VAR 12 DEG E

CERT

AD OPR Ballina Shire Council, PO Box 450, Ballina, NSW, 2478. PH Airport 02 6681 1858 BH.

ARO H24 0414 482 584. Council PH 02 6686 4444 BH.

**REMARKS**

1. This AD is a Security Controlled Airport.
2. The RPT apron is a Security Restricted Area. All non RPT ACFT must obtain prior approval of AD OPR to gain access to and from the RPT apron.
3. Terminal is closed to airside access except for RPT services. Prior approval of AD OPR must be obtained for access to the terminal building. Passenger and baggage screening may be in operation.
4. Access to GA apron area via pedestrian gate 1A. GA access to terminal building not AVBL.
5. AD Charges: Landing fees all ACFT. Parking fees apply to all non RPT ACFT.
6. High visibility safety vest (or equivalent) and valid ASIC or BBGA VIC must be worn/ displayed airside.

HANDLING SERVICES AND FACILITIES

VIVA Ballina Refueling. JET A1 tanker. Site hours 0730 - 1630 Local DLY. Site PH 0431 215 233. AH callout fee may apply. AH PN required. AH PH 0402 209 919. AVGAS bowser only. Viva fuel, carnet and credit cards (V and MC) – must present card.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6:
 - a. MON, TUE and SAT: 2015-1115 UTC
 - b. WED - FRI and SUN: 2015-1145 UTC
 Note: 1HR earlier HDS.
2. Water rescue service AVBL.

APRONS AND TAXIWAYS

1. TWY C and D not AVBL to ACFT ABV 5,700KG.
2. TWY D limitation: ACFT 15M MAX wingspan.
3. GA PRKG apron limitations: ACFT 15M MAX wingspan, 11.5M MAX length. No HEL PRKG

AERODROME OBSTACLES

1. Multiple trees infringe the TNS within an arc BRG 300-027 DEG MAG 350-493M FM ARP.
2. Lit aerial 233FT AMSL BRG 136 DEG MAG 3,845M FM ARP. Infringes HZS by 81FT.
3. Trees on high terrain (lit):
 - a. 388FT AMSL BRG 041 DEG MAG 3,520M FM ARP. Infringes HZS by 235FT.
 - b. 176FT AMSL BRG 253 DEG MAG 4,557M FM ARP. Infringes HZS by 24FT.
4. Towers (lit):
 - a. 229FT AMSL BRG 130 DEG MAG 4,226M FM ARP. Infringes HZS by 67FT.
 - b. 516FT AMSL BRG 280 DEG MAG 5,251M FM ARP. Infringes COS by 310FT.
 - c. 533FT AMSL BRG 279 DEG MAG 5,366M FM ARP. Infringes COS by 309FT.
 - d. 540FT AMSL BRG 279 DEG MAG 5,558M FM ARP. Infringes COS by 291FT.
 - e. 501FT AMSL BRG 279 DEG MAG 5,318M FM ARP. Infringes COS by 301FT.
 - f. 682FT AMSL BRG 239 DEG MAG 12,387M FM ARP. Infringes APCH SFC by 52FT.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT B, METAR/SPECI.
- 2. AWIS Phone 02 9353 6402 - Report faults to BoM.
- 3. AWIS FREQ 134.8 - AVBL outside TWR HR - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

- 06/24 062 62a PCR 225/F/B/1.20 MPa/U Grooved. WID 30 RWS 150
- 1. All ACFT takeoff, landing and taxiing to be confined to sealed surfaces only.
 - 2. Transitional SFC at W end infringed by transient vehicles.

AERODROME AND APPROACH LIGHTING

- | | | | | |
|-----------|---------|--------------|-------------|---------------|
| RWY 06/24 | MIRL | PAL+AA 121.3 | | SDBY PWR AVBL |
| RWY 06/24 | PAPI(1) | PAL+AA 121.3 | 3.0 DEG53FT | SDBY PWR AVBL |
| RWY 06/24 | RTIL | PAL+AA 121.3 | | SDBY PWR AVBL |

- (1) Left Side.
- 1. Outside TWR HR:
 - a. PAL+AA 121.3 AVBL
 - b. AFRU 124.2 AVBL.
- 2. RWY 06/24 edge light spacing: 60M

OTHER LIGHTING

- 1. Secondary PWR switchover time: 15 SEC.
- 2. TWY LGT: Blue edge.
- 3. RWY 06/24 RWY guard lights:
 - a. OPR at RWY HLDG points.
 - b. Not provided on road access points.

ATS AND AERODROME COMMUNICATION FACILITIES

- | | | |
|------|------------------|-----------------------------------|
| FIA | BRISBANE CENTRE | 120.3 CCT area. On ground COM CTC |
| | | 126.05. Outside TWR HR |
| APP | BALLINA APPROACH | 118.35 |
| ATIS | BALLINA ATIS | 128.65 (1) |
| TWR | BALLINA TOWER | 124.2 |
- (1) During TWR HR.
 - 1. Ballina AFRU disabled during TWR HR.
 - 2. TWR and APP HR: 2100-1000 UTC DLY (1HR earlier HDS).
 - 3. Phone BNA TWR: 02 6618 7750 BNA APP: 07 3866 3694 BN CEN: 07 3866 3224.
 - 4. Ballina TWR provides Class D TWR services within Ballina CTR, SFC to 1,500FT AMSL. CTC TWR for CLR.
 - 5. During TWR HR, BNA APP provides ATS:
 - a. WI Class D CTA steps up to 4,500FT AMSL and
 - b. WI Class C airspace above the Class D CTA steps, up to FL125.
 - 6. Outside TWR HR Brisbane Centre provides:
 - a. ATS within Class C airspace ABV 4,500FT AMSL.
 - b. Class G service at and below 4,500FT AMSL.

*Note: Outside TWR HR, CTC Brisbane Centre for TAX and on ground reports in this airspace.
Note: TWR and APP may operate independently, hours or airspace responsibility may change at short notice. Check status of airspace with ATS, NOTAM or Ballina ATIS.*

RADIO NAVIGATION AND LANDING AIDS

- | | | | | | | |
|-----|-----|-----|-----------|------------|------------------|-----|
| NDB | BNA | 206 | 285004.2S | 1533344.6E | Range 25 (HN 25) | (1) |
|-----|-----|-----|-----------|------------|------------------|-----|
- (1) Pilot monitored outside TWR HR. Not suitable for navigation in Sector 300 - 340. OPR by AD OPR.

LOCAL TRAFFIC REGULATIONS

- 1. All radius turns on the APN follow the lead-in/lead-out lines marked on the pavement. No tight turns.
- 2. All radius turns on RWY turning nodes must follow the lead line marked on the pavement. No tight turns - to avoid pavement damage.
- 3. ACFT ABV 7,500KG must use turning nodes for 180 DEG turns on RWY. No mid-RWY turns.

4. To minimise the effect of jet blast, all jet ACFT must taxi onto and away FM apron PRKG positions using MNM breakaway thrust.
5. Circuit training only permitted BTN 2100-1200 UTC (0700-2200 Local), 1 HR earlier during HDS.
6. **INSTRUMENT APPROACH TRAINING**
 - a. Capacity for instrument APCH training at YBNA is limited and is subject to scheduled operations. Instrument APCH training availability can be found via www.bookawk.com.
 - b. All aircraft planning practice instrument APCH must book a slot online at www.bookawk.com.
 - c. Practice approaches to the non-duty runway may not be available or subject to extensive delays.
7. **CTR AIRWORK**
 - a. All aircraft planning AWK other than circuit training or instrument approach training should coordinate via phone with Ballina Tower on 02 6618 7750 prior to operating. Email maps to: ballina.tower@airservicesaustralia.com
8. **BALLINA CTA SURVEY**
 - a. Survey aircraft operating in CTA must book online via www.bookawk.com. If access to the booking page is not AVBL contact Brisbane TMA, Phone 07 3866 3694 BTN 0700 and 2000 Local DLY.
 - b. For survey flights up to and including FL125, operators must email maps to: bntcu.sm@airservicesaustralia.com and brisbane.os2@airservicesaustralia.com with a follow up call to BNA APP 07 3866 3694 to discuss their planned operations prior to becoming airborne each day.
9. Simulated asymmetric operations or simulated engine failure after takeoff:
 - a. Not permitted until ACFT cleared of built-up areas;
 - b. DRG TWR and APP HR, prior approval from ATC required.
10. **Parking:**
 - a. Non-RPT ACFT 15M wingspan and above must gain prior approval from AD OPR.
 - b. Grass PRKG not AVBL.
 - c. Helicopter PRKG not AVBL without prior approval of AD OPR.

FLIGHT PROCEDURES

1. Outside TWR HR: right hand circuits RWY 06.
2. **ATC TRAFFIC MANAGEMENT SPEED**
 - a. When not on a SID or STAR (including vectoring) - ACFT ARR or DEP YBNA via Class C airspace must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.
3. **LOW VISIBILITY PROCEDURES – During TWR HR**
 - a. ATC will initiate activation of Low Visibility Procedures (LVP) when visibility has reduced to 2,000M.

CTAF - AFRU 124.2

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

Outside TWR HR: for noise abatement purposes - When DEP RWY 06, maintain RWY HDG until E of the coast.

ADDITIONAL INFORMATION

Wildlife hazard exists:

- a. The following species are present all year round:
 - (i) Flocks of small birds feeding above RWY and short final including fairy martin, welcome swallow, tree martin, and white-throated needletail.
 - (ii) Pacific black duck – may transit across RWS, particularly at dawn and dusk.
 - (iii) Cattle egret – may transit across RWS, particularly RWY 06 THR.
 - (iv) Australian magpie – focuses W end of airfield, may transit across RWY 06.
- b. A seasonal increase in the numbers of the following species can be EXP:
 - (i) MAR-MAY - flying foxes transit RWY 06 threshold at dusk.
 - (ii) APR to OCT - masked lapwing activity focuses W and E ends of airfield day or night.

-
- (iii) Autumn and Spring – tree martin feeding above RWY and short final as they migrate through the region.
 - (iv) JUN-JAN – Australian white ibis may transit across AWS.
 - (v) AUG-MAR - black kite activity focused foraging above RWY 1000-1500 Local with increased temperatures.
 - c. Increased bird activity during and post rainfall and adverse weather events including Australian white Ibis, straw-necked Ibis, white-throated needletail, ducks and silver gull.
 - d. Species specific NOTAM will be issued during periods of increased activity.

CHARTS RELATED TO THE AERODROME

1. WAC 3357.
 2. Also refer to AIP Departure and Approach Procedures.
-

BRISBANE WEST WELLCAMP**ELEV 1509****AVFAX CODE 4013**

QLD

UTC +10

YBWW

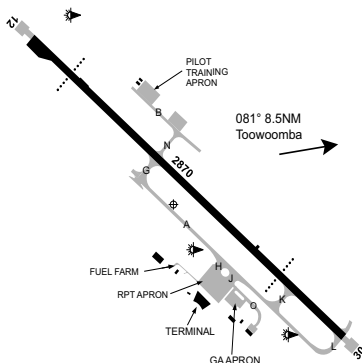
273331S

1514739E

VAR 11 DEG E

CERT

AD OPR Brisbane West Wellcamp Airport Pty Ltd, 1511 Toowoomba-Cecil Plains Road, Wellcamp, QLD, 4350. Email: admin@wellcampairport.com.au. PH BH 07 4614 3200. PH AH 0498 998 060. Website: www.wellcamp.com.au.

**REMARKS**

- AD charges: All ACFT. Schedule of Charges AVBL on website.
- YBWW is a Security Controlled Airport. ASIC/VIC regulations apply.
- AD usage: combination of private and public.
- The Main APN is a Security Restricted Area and is shared BTN RPT and non-RPT OPS. For assistance with PRKG and access to the terminal for unscreened PAX and crew, CTC ARO on CTAF 127.65 or PH.
- For ACFT arriving with unscreened PAX/baggage and wishing to use the Main APN and/or terminal, special security requirements apply. Please CTC ARO on CTAF to notify of arrival and requirements.
- Crew wishing to access the Main APN from landside should CTC ARO. AH access from the terminal go to Gate P4, use the pin pad with code at the turnstile.
- All ACFT are required to be secured if left unattended.

HANDLING SERVICES AND FACILITIES

Wellcamp Airport Fuel Services. JET A1 and AVGAS available between 1830-1230 UTC, AH fuel requirements CTC ARO. 60MIN PN required. Call out fee applies. Cash or credit card (V or MC). Where practicable, text fuel order in advance to ARO. Refer to Location Briefings/NOTAM for any applicable temporary changes to the above.

Wellcamp Airport Ground Handling Services AVBL. Please CTC AD Management 07 4614 3200 or ARO for assistance.

IOR Fuel Charge AVBL at AVGAS bowser.

PASSENGER FACILITIES

PT/TX/LG/RF/WC/HC

APRONS AND TAXIWAYS

- TWY A - Code E, sealed, 23M wide.
- TWY G, K and L - Code E, sealed, 23M wide.
- TWY J - Code E, concrete, 23M wide.
- TWY H - Code E, concrete, 23M wide.
- TWY B and N - Code C, concrete, 15M wide.
- TWY O - Code B, sealed, 10.5M wide.

AERODROME OBSTACLES

1. Terrain:
 - a. Boral Quarry - BRG 062 MAG 1.28NM FM ARP, low intensity steady red.
 - b. Gowrie Mountain - BRG 027 MAG 3.15NM FM ARP, low intensity steady red.
 - c. Beckers Hill - BRG 090 MAG 1.61NM FM ARP, low intensity steady red.
 - d. Schmidts Hill - BRG 230 MAG 2.32NM FM ARP, low intensity steady red.
 - e. Sugarloaf Hill - BRG 123 MAG 3.30NM FM ARP, unlit.
2. High terrain:
 - a. APRX 800M right of CL, 800M FM THR on APCH to RWY 30.
 - b. APRX 1,300M right of RWY 30 CL abeam APRX 600M FM RWY 30 end.
3. Structures:
 - a. NBN Monopole - BRG 067 MAG 2.77NM FM ARP, low intensity steady red.
 - b. Telstra Tower - BRG 116 MAG 7NM FM ARP, medium intensity steady red.
 - c. Telstra Monopole lit - 86FT AGL BRG 058 MAG 0.65NM FM ARP. Infringes OLS by 59FT.
 - d. AD perimeter fence post 11FT AGL BRG 110 MAG 0.87NM FM ARP. Infringes OLS by 3.5FT.
4. CAUTION: Power lines beneath APCH to RWY 12. APRX 250M FM THR.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI.
2. AWIS PH 07 3564 3746 - Report faults to BoM.
3. AWIS FREQ 133.6 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

12/30 122 94a PCR 550/F/B/1.45 MPa/T Grooved WID 45 RWS 300

AERODROME AND APPROACH LIGHTING

RWY 12/30	MIRL(1)	PAL+AA 120.65		SDBY PWR AVBL
RWY 12/30	PAPI(2)	PAL+AA 120.65	3.0 DEG75FT	SDBY PWR AVBL
RWY 12/30	RTIL(1)	PAL+AA 120.65		SDBY PWR AVBL

- (1) ACT by PAL H24. SDBY PWR H24.
 - (2) ACT by PAL H24. SDBY PWR H24. Double sided.
- RWY edge light spacing: 60M.

OTHER LIGHTING

1. Secondary PWR switchover time: 15 SEC.
2. TWY LGT: Green CL to all TWY, Blue on RPT APN.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE 121.2 500FT

On ground communications may be AVBL with ATS dependent on ACFT location and terrain or building shielding. FREQ 135.6 may be tried for cancellation of SAR.

LOCAL TRAFFIC REGULATIONS

1. For DEP RWY 12, ACFT RQ to backtrack from either TWY K, TWY G, or TWY L.
2. AD is in close proximity to Oakey (YBOK) MIL controlled airspace and restricted areas. YBOK BRG 323 MAG 9.5NM FM ARP. To ensure protection of Oakey controlled airspace, published DEP procedures must be used wherever practicable.

FLIGHT PROCEDURES

1. Right hand CCTS RWY 12, left hand CCTS RWY 30 due high terrain NE side of RWY.
2. Clearance through R654A may not be available on the YTWB/BIVAT-MESD-Q484 or Q303 routes. VFR clearances AVBL via the Warrego VFR route.
3. VFR transits of OK CTR via WARREGO VFR route.

CTAF - AFRU 127.65

1. Oakey, Toowoomba and Wellcamp.
2. Excluding Oakey controlled airspace when active.

NOISE ABATEMENT PROCEDURES

1. During HR of 1900-1200 UTC RWY 12 preferred for LDG and RWY 30 preferred for TKOF.
2. Where practicable, during the HR of 1200-1900 UTC, RWY 12 must be used for LDG and RWY 30 must be used for TKOF.
3. Where practicable, minimise night movements (BTN 1200-1900 UTC), with preference to operation in day period (sunrise to sunset).
4. Where practicable, BTN 1200-1900 UTC, avoid use of reverse thrust after LDG.
5. Where practicable, minimise use of APUs while parked on the RPT APN. Where feasible, use rectifier or GPU.
6. Where practicable, avoid noise sensitive areas as follows:
Toowoomba city ARC BRG 063 MAG to 103 MAG 4 to 11NM FM ARP.
Westbrook township BRG 114 MAG 4.9NM FM ARP.
Wyreema township BRG 139 MAG 6.8NM FM ARP.
Agricultural area BRG 291 MAG 1.54 NM FM ARP.
Agricultural area BRG 317 MAG 1.65 NM FM ARP.
7. After TKOF RWY 30, climb on RWY heading to MAX practicable altitude before turning to establish outbound track.

ADDITIONAL INFORMATION

1. Bird and wildlife hazards exists:
Magpies, galahs, ibis and black kites in vicinity of AD. Increased bird activity at harvest time - OCT-NOV and MAR-APR.
Rabbits, hares, foxes or feral cats may be on airfield.
NOTAM will be issued for increased activities.
2. Pilots are advised to check YBWW website for additional general INFO.
3. Poor VHF CTC with GND vehicles and ACFT is present from TWY A/L/K (SE side of airport) towards TWY G/N due terrain shielding. FTA utilize TWY N most, and caution must be exercised when entering the RWY from the SE side.
4. CAUTION: Proximity to GA, charter, warbird and training OPS (fixed and rotary wing) Toowoomba Airport. YTWB BRG 070 MAG 6.4NM FM ARP.
5. CAUTION: Proximity to Oakey (YBOK) and Amberley (YAMB) MIL controlled airspace and restricted areas. YBOK BRG 323 MAG 9.5NM FM ARP. YAMB BRG 085 MAG 49NM FM ARP.
6. CAUTION: Flight Training Adelaide (FTA) operations out of YBWW 1900-1400 UTC (0500-0000 Local) DLY.
7. PJE OPS by prior arrangement only.

CHARTS RELATED TO THE AERODROME

1. WAC 3340.
 2. Also refer to AIP Departure and Approach Procedures.
-

BRISBANE**ELEV 15****AVFAX CODE 4001**

QLD

UTC +10

YBBN

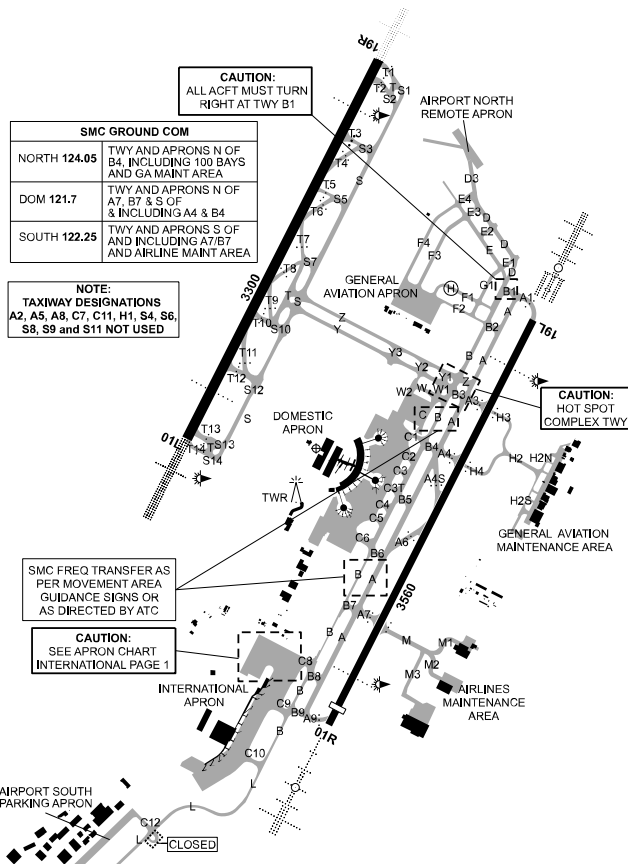
272303S

1530703E

VAR 11 DEG E

CERT

AD OPR Brisbane Airport Corporation Pty Ltd, PO Box 61, Hamilton Central, QLD, 4007. Email: adm@bne.com.au: INTL OPS intops@bne.com.au: DOM and GA OPS domops@bne.com.au. PH H24 07 3406 3171: 0412 052 977. OPS (Safety/Security): H24 07 3406 3072. PH BH Executive General Manager Aviation OPS: 07 3406 3000. Website: www.bne.com.au.

**REMARKS**

- AD Charges: All ACFT - Phone 07 3406 3000 during BH.
- This AD is a Security Controlled Airport.
- ACFT transporting dangerous goods or livestock require 4 days notice and prior approval.

HANDLING SERVICES AND FACILITIES

BP - Air Refuel Pty Ltd: H24. PH: 07 3860 5996 or 07 3860 5988, 0418 718 238. JET A1.

Ampol Aviation: H24. PH: 0438 753 572. JET A1.

Viva Energy Refuelling (or Aviation) - Jet Valet and GA: H24. PH: 1300 847 538. JET A1 and AVGAS. Fuel2Sky (Carnet) Card and credit cards (V and MC).

Contact details for FBO, catering, ground handlers, maintenance and other associated services are available from Brisbane Airport web address:

<https://www.bne.com.au/corporate/work-at-bne/aviation-service-providers>

RESCUE AND FIREFIGHTING SERVICES

1. CAT 9 H24
2. 131.0 MHz AVBL H24. Request via ATC.
3. Water Rescue Service AVBL H24.

APRONS AND TAXIWAYS

Taxilane FM Logistic APN to Brenzil Hangar and FBO unrated. No ACFT parking or taxiing outside licence area.

SURFACE MOVEMENT AND GUIDANCE

Decommissioned stop bar microwave barrier devices. Support posts are installed at all RWY TWY intersections in the obstacle RESTR area.

AERODROME OBSTACLES

1. Lit building 900FT AMSL, PSN 272818.75S 1530143.45E APRX BRG 211 DEG MAG 7.07NM FM ARP. Infringes outer HZS by 396FT.
2. Lit high voltage pylon, 105FT AMSL, PSN 272240.55S 1530622.10E APRX BRG 342 DEG MAG 0.31NM FM RWY 01L THR. Infringes TNS by 13FT.
3. Cruise vessels MAX 241FT AMSL, BTN PSN 272244.30S 1530929.86E APRX BRG 071 DEG MAG 2.2NM FM ARP and PSN 272315.34S 1530917.15E APRX BRG 085 DEG MAG 2NM FM ARP. Infringes inner HZS by 82FT.
4. Lit buildings and cranes (BRG/DIST FM VOR):
 - a. Crane 351FT AMSL, PSN 272205.13S 1531024.33E APRX BRG 083 DEG MAG 1.83NM. Infringes inner HZS by 192FT.
 - b. Crane 354FT AMSL, PSN 272225.72S 1531009.85E APRX BRG 095 DEG MAG 1.68NM. Infringes inner HZS by 195FT.
 - c. BLDG, Cement Australia, 210FT AMSL, PSN 272449.35S 1530826.13E APRX BRG 168 DEG MAG 2.85NM. Infringes inner HZS by 51FT.
 - d. Crane at Port of Brisbane 357FT AMSL, PSN 272155.22S 1531031.23E APRX BRG 078 DEG MAG 1.93NM. Infringes conical SFC by 180FT.
 - e. BLDG, Spire, Riparian Plaza, 839FT AMSL, PSN 272805.37S 1530149.39E APRX BRG 212 DEG MAG 8.43NM. Infringes outer HZS by 335FT.
 - f. BLDG, Aurora 715FT AMSL, PSN 272754.51S 1530149.64E APRX BRG 214 DEG MAG 8.3NM. Infringes outer HZS by 212FT.
 - g. BLDG, Brisbane Square 574FT AMSL, PSN 272813.92S 1530121.95E APRX BRG 214 DEG MAG 8.81NM. Infringes outer HZS by 71FT.
 - h. BLDG, Commonwealth Bank, 544FT AMSL, PSN 272800.73S 1530128.91E APRX BRG 215 DEG MAG 8.59NM. Infringes outer HZS by 40FT.
 - i. BLDG, Commonwealth Bank, 860FT AMSL, PSN 272803.84S 1530110.17E APRX BRG 215 DEG MAG 8.82NM. Infringes outer HZS by 356FT.
 - j. BLDG, Infinity TWR 823FT AMSL, PSN 272744.48S 1530157.30E APRX BRG 214 DEG MAG 8.10NM. Infringes outer HZS by 320FT.
 - k. Crane at Port of Brisbane 355FT AMSL, PSN 272124.04S 1531051.56E APRX BRG 065 DEG MAG 2.3NM. Infringes conical SFC by 42FT.
 - l. Crane at Port of Brisbane 355FT AMSL, PSN 272247.04S 1530953.38E APRX BRG 110 DEG MAG 1.59NM. Infringes outer HZS by 196FT.
5. GP antenna (Lit):
 - a. 57FT AMSL BRG 158 DEG MAG 1,915M FM ARP. Infringes TNS by 45FT.
 - b. 57FT AMSL BRG 055 DEG MAG 1,804M FM ARP. Infringes TNS by 44FT.
6. RWY 01R anemometer (unlit) 45FT AMSL BRG 156 DEG MAG 1,918M FM ARP. Infringes TNS by up to 1FT.
7. RVR Transmissometers (unlit, frangible) within RWS, all runways, 13FT AGL.
8. Refinery exhaust stack 203FT AMSL, PSN 272503.83S 1530919.82E BRG 124 DEG MAG 5,295M FM ARP. Infringes inner horizontal SFC by 47FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
2. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 07 3239 8737.
3. AWIS PH 07 3564 3705 - Report faults to BoM.

PHYSICAL CHARACTERISTICS

01L/19R 016 108a PCR 1250/F/D/X/T 220M(722) RWY 01L and WID 60 RWS 300
300M(984) RWY 19R ends concrete. Grooved.

01R/19L 016 117a PCR 1250/F/D/X/T 100M(328) ends concrete. WID 45 RWS 300
Grooved.

AERODROME AND APPROACH LIGHTING

RWY 01L/19R	HAL-CAT I		SDBY PWR AVBL
RWY 01L/19R	HIRL		SDBY PWR AVBL
RWY 01L/19R	PAPI(2)	3.0 DEG71FT	SDBY PWR AVBL
RWY 01L/19R	RCLL(1)		SDBY PWR AVBL
RWY 01R/19L	HIRL		SDBY PWR AVBL
RWY 01R/19L	MIRL		SDBY PWR AVBL
RWY 01R/19L	PAPI(2)	3.0 DEG64FT	SDBY PWR AVBL
RWY 01R/19L	RCLL(1)		SDBY PWR AVBL
RWY 01R	HAL-CAT I		SDBY PWR AVBL
RWY 01R	RTIL		SDBY PWR AVBL
RWY 19L	HAL-CAT II		SDBY PWR AVBL
RWY 19L	RTZL		SDBY PWR AVBL

(1) 15M spacing.

(2) Both sides.

1. ALS type and length

- a. RWY 01R - distance coded CL: 900M.
- b. RWY 19L - distance coded CL: 900M.
- c. RWY 01L/19R - HAL ALSF II reduced length 720M layout barrette CL array.
2. RWY edge light spacing: 01R/19L: 60M; 01L/19R: 60M;
3. RGL and Stop Bars at all RWY/TWY intersections.
4. RWY THR LGT: Green.
5. RWY end LGT: Red.
6. RWY 01R/19L and 01L/19R PAPI system provides a special minimum wheel clearance of 6M for B747.

7. LIGHTING COLOUR CODING

7.1. RWY 01L and 19R

7.1.1. HIRL - white with last 600M yellow.

7.1.2. Centre line lighting

- a. White to 900M FM end, 900M-300M FM end alternating 2 red 2 white, 300M FM end red.

7.2. RWY 01R and 19L

7.2.1. MIRL – intensity white.

7.2.2. HIRL - white with last 600M yellow.

7.2.3. Centre line lighting

- a. White to 900M FM end, 900M-300M FM end alternating 2 red 2 white, 300M FM end red.

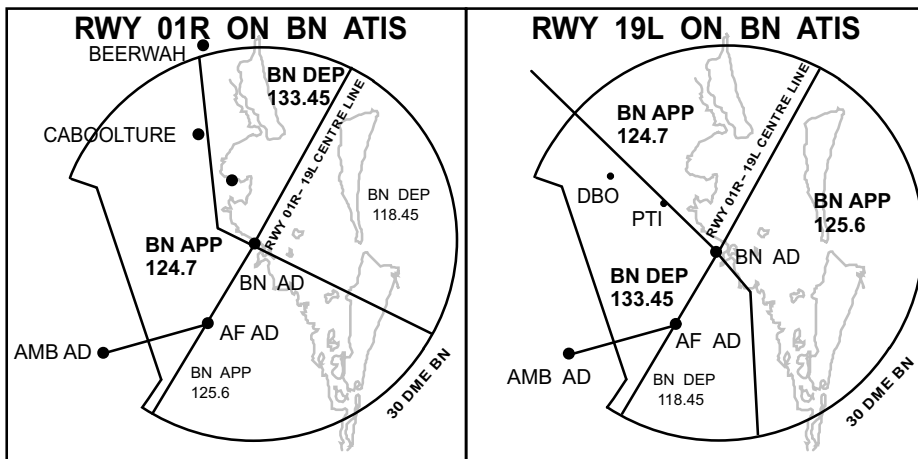
OTHER LIGHTING

1. Secondary PWR switchover time: 1 SEC during LVP; 15 SEC OT.
2. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	121.2
FIA	BRISBANE CENTRE	125.7 (5)
ACD	BRISBANE DELIVERY	118.85
APP	BRISBANE APPROACH	124.7 (4) 125.6 (3)
APP/DEP	BRISBANE APPROACH	123.5 (2)
ATIS	BRISBANE ATIS	113.2 125.5
BMN	BRISBANE FINALS	119.25
DEP	BRISBANE DEPARTURES	118.45 (3) 133.45 (4)
SMC	BRISBANE GROUND (11)	121.7 (6) 122.25 (7) 124.05 (8)
TWR	BRISBANE TOWER	118.0 (10) 120.5 (9)
VOLMET	AUSTRALIA	6676 (1) 11387 (1)

- (1) H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.
- (2) Gold Coast Approach Services.
- (3) WI 30NM of Brisbane SE of extended centreline 01R/19L.
- (4) WI 30NM of Brisbane NW of extended centreline 01R/19L.
- (5) Pilots planning to enter Class C airspace associated with Brisbane Approach, contact Brisbane Centre for SSR Code allocation and other instructions. Refer also to Brisbane/Archerfield Section 6 Departures, Para 6.2.
- (6) SMC Domestic TWYs and aprons North of B7 and General Aviation Maintenance Area.
- (7) SMC South TWYs and aprons south of and including A7, B7 and Airline Maintenance Area.
- (8) SMC North TWYs north and west of and including A3, B3, W, TWY Charlie and 100 bays, General Aviation Maintenance Aprons.
- (9) RWY 01R/19L.
- (10) RWY 01L/19R.
- (11) Unless otherwise directed by ATC, contact the relevant SMC FREQ when indicated by FREQ movement area guidance signs.



RADIO NAVIGATION AND LANDING AIDS

DME	BN	113.2/ 79X	272157.5S	1530821.4E	(3)
VOR	BN	113.2	272157.9S	1530821.2E	(1)
DME	IBA	109.5/ 32X (RWY01R)	272403.2S	1530716.0E	(6)
GP	IBA	332.6 (RWY01R)	272403.1S	1530715.8E	
ILS	IBA	109.5 (RWY01R)	272212.6S	1530812.8E	(5)
LOC	IBA	109.5 (RWY01R)	272212.6S	1530812.8E	
DME	IBE	109.3/ 30X (RWY19R)	272130.8S	1530709.7E	(7)
GP	IBE	332 (RWY19R)	272130.9S	1530709.9E	
ILS	IBE	109.3 (RWY19R)	272308.0S	1530619.4E	
LOC	IBE	109.3 (RWY19R)	272308.0S	1530619.4E	
DME	IBN	111.5/ 52X (RWY01L)	272248.0S	1530625.5E	(7)
GP	IBN	332.9 (RWY01L)	272248.1S	1530625.7E	
ILS	IBN	111.5 (RWY01L)	272115.2S	1530723.9E	
LOC	IBN	111.5 (RWY01L)	272115.2S	1530723.9E	

DME	IBS	110.1/ 38X (RWY19L)	272240.2S	1530803.5E	(2)
GP	IBS	334.4 (RWY19L)	272240.1S	1530803.3E	
ILS	IBS	110.1 (RWY19L)	272427.1S	1530655.9E	
LOC	IBS	110.1 (RWY19L)	272427.1S	1530655.9E	(4)
(1)	216/1.6 to ARP.				
(2)	For RWY 19L - Antenna ELEV 21FT.				
(3)	217/1.6 to ARP - Antenna ELEV 35FT.				
(4)	Scalloping and possible false course capture observed beyond 9NM (BN DME) between radials 330 to 350 (BN VOR) below 4,000FT.				
(5)	Antenna ELEV 28FT				
(6)	Antenna ELEV 23FT.				
(7)	Antenna ELEV 24FT.				

LOCAL TRAFFIC REGULATIONS

1. Pilots should ensure flight plan details are submitted for flight in Class C airspace associated with Brisbane Approach, preferably through NAIPS or Flight Watch, well in advance of requesting SSR code allocation. Failure to do so will result in delays for airways clearance.
2. ACFT parking requests email or PH AD OPR H24.
3. All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
4. B737 ACFT and ABV not to execute 180DEG turns on RWY 01R/19L and 01L/19R.
5. Ground running of engines above idle requires prior approval. PH OPS.
6. Drains located airside (ADJ the manoeuvring area) are not marked.
7. GA APN OPS are subject to RWY/APN slot management. ACFT operating on the GA APN are to confirm allocated parking with Brisbane Airport Corporation Duty Manager prior to arrival.
8. RVR equipment - Vaisala LT31 transmissometers and support posts installed at all RWY touchdown zones and midpoints inside the obstacle restricted area.
9. **AWK and Survey Flights**
 - a. Pilots intending to conduct AWK in the Brisbane TMA must obtain pre-flight briefing and approval from Brisbane TMA, Phone 07 3866 3694[^]. Survey or airwork maps should be submitted at least 30 MIN prior to making contact with BN TMA.
 - b. Survey flights are subject to TFC and ATC workload with operations subject to approval on the day. Operational restrictions can be expected, including possible delays.
 - c. Clearances for AWK/SVY operations BLW 8,000FT in excess of 15MIN may not be AVBL.
 - d. During periods of noise abatement procedures (SODPROPS) as defined in AIP DAP-E YBBN NAP, outside the hours of 2200-0600 Local survey and airwork flights within 30NM YBBN not available.
10. **APN and TWY Availability and Restrictions**
 - a. All TWY: Outboard engines on B747 and A340 ACFT to be operated at low power to prevent TWS erosion and engine ingestion.
 - b. All ACFT must turn right at BRAVO 1
 - c. B777-300, A340-600 and A380-800 OPS: TWY associated with RWY 01R/19L are 23M wide (AD REF code 4E). Due excessive ACFT wheelbase, normal TWY safety edge margin not AVBL. Pilots should apply judgemental oversteer when negotiating TWY intersections at B/C9, B/C10 and on INTL APN. Pilots should request marshalling assistance from a FBO if ACFT GND manoeuvring cameras are not AVBL.
 - d. A380 (Code F ACFT) OPS using INTL APN to use TWY C9 and TWY C8 only to INTL APN A380 compatible Bays 71, 72, 73, 74, 75, 76. TWY C10 and INTL APN taxiway not AVBL to A380 (Code F ACFT) OPS.
 - e. TWY L BTN TWY C13 and 100M S of TWY C12 not AVBL to jet ACFT with wingspan ABV 36M northbound EXC under tow.
 - f. Pilots to exercise caution on TWY C12 and L due to lack of visibility FM the control TWR.
 - g. TWY C3 Tango and APN Taxilane BTN TWY C3 and TWY C4 restricted to ACFT with MAX wingspan 36M.

- h. GA APN southern taxilane restricted to 24M MAX wingspan.
- i. TWY C4 restricted to MAX A330 ACFT.
- j. TWY C6 restricted to ACFT with MAX wingspan 36M.
- k. TWY F3 not AVBL.
- l. TWY H2 not AVBL to ACFT ABV FLW MAX WT limitations:
 - (i) A330 - 144,000KG
 - (ii) B777 - 197,000KG
- m. TWY H2N, TWY H2S and TWY M east of the perimeter road designated as APN, are provided for combined ACFT and vehicle TFC FM maintenance hangars. Vehicle TFC under own observation remaining well clear of all taxiing ACFT.
- n. TWY H3 restricted to MAX B777-300ER ACFT (Code E ACFT).
- o. TWY H4 restricted to MAX B737/A320 ACFT (Code C ACFT) AVBL for DH8D.
- p. TWY M not AVBL to ACFT ABV FLW MAX weight limitations:
 - (i) A330 154,344KG
 - (ii) A340 260,063KG
 - (iii) A350 182,000KG
 - (iv) A380 321,002KG
 - (v) B737 79,000KG
 - (vi) B747 335,640KG
 - (vii) B767 141,925KG
 - (viii) B777 182,242KG
 - (ix) B787 162,000KG
- q. ACFT to use MNM power when entering, exiting and operating on all APN.
- r. All ACFT vacating INTL apron RQ continuous taxi on TWY C9 and TWY C10 using MNM PWR.
- s. Aircraft vacating RWY 19R onto TWY T7 are to continue south on TWY T unless otherwise instructed by ATC.
- t. TWY A is designed to be used in the same direction as the duty RWY. TWY B is for use in the opposite direction unless otherwise instructed by ATC.
- u. When RWY 19L is nominated, TWY A4 is not AVBL for arriving ACFT unless directed by ATC.
- v. TWY Y is to be used in a westerly direction and TWY Z is to be used in a easterly direction unless otherwise instructed by ATC
- w. TWY D BTN TWY B and TWY E1 not AVBL.
- x. TWY E BTN TWY E1 and TWY D not AVBL.
- y. TWY E4 not AVBL.
- z. TWY F4 not AVBL EXC for HJ access to HLS.
- A. TWY F1 and TWY F2 not AVBL to ACFT ABV 66,000KG.
- B. Following TWY not AVBL HN due to parked ACFT and AVBL HJ under tow only:
 - (i) TWY G1 BTN TWY E and TWY F1.
 - (ii) TWY D BTN TWY E4 and TWY E1.
 - (iii) TWY E BTN TWY E4 and TWY E1.
 - (iv) TWY E1, TWY E2, TWY E3 and TWY F3.
- C. TWY C13 restricted to ACFT with MAX wingspan 36M under tow only.
- D. TWY J and Logistics APN not AVBL to jet ACFT with wingspan ABV 36M EXC under tow, initiate tow by TWY L intermediate holding point prior to TWY C13.
- E. TWY L BTN TWY C13 and TWY C12 not AVBL to jet ACFT with wingspan ABV 36M northbound EXC under tow.
- F. Airport South Parking Apron BTN TWY C12 and TWY C13 restricted to MAX wingspan 36M HJ under tow only due parked ACFT.
- G. Airport South Parking Apron restricted to MAX Code C ACFT (B737, Q400 and A320) AVBL HJ under tow only.
- H. Turn around loop AVBL for ACFT up to MAX wingspan 36M on Logistic APN.
- I. Airport North Remote Apron and Airport South Parking Apron do not form part of the manoeuvring area, ATC clearance is not required.
- J. Compass swing site established BTN TWY M1 and TWY M2, details FM AD OPR.
- K. Wing walkers not supported beyond the apron parking clearance line markings.

11. HEL OPS

- a. Rotary wing ACFT using GA APN CAUTION multiple LGT TWR 100FT AGL on and surrounding GA APN.
- b. HEL OPS excluding maintenance and rescue activities on TWY H system, to be conducted on the GA APN or Logistics precinct building APN.
- c. HEL touchdown/lift on TWY F4 and PRKG area on GA APN commissioned.
- d. HEL touchdown/lift unlit on southern end taxiway L BTN TWY C12 and TWY C13 for logistic APN commissioned.
- e. HEL touchdown/lift unlit on western end TWY F1 commissioned.

12. TRAINING FLIGHTS

- a. Jet and turboprop training and flight test operations not requiring RWY or IAL procedures shall be flight planned in either:
 - (i) Low Performance Area (LPA) - within the minor arc BTN 030 and 100 VOR BTN 15 and 30 DME; or
 - (ii) High Performance Area (HPA) - within Class C and Class A airspace within the minor arc BTN 040 and 090 VOR BTN 40 and 100 DME BN.
- b. Arriving ACFT may request an IAL for training or licence renewal. The request should be made as early as possible, preferably at flight planning.
- c. IAL training LTD due to TFC. IAL training not AVBL MON-FRI. IAL training AVBL SAT 0300-0800 UTC and SUN 2300-0200. For other than arriving ACFT, IAL training approval shall be obtained from Brisbane TMA, Phone 07 3866 3694^ prior to departure. IAL training flights are subject to TFC and ATC workload, operational restrictions can be expected, including possible delays.
- d. Aircraft conducting a practice instrument approach can expect to make a landing due to traffic management requirements. TWR will advise if traffic disposition allows for a missed approach.

13. TURNING

- a. TWY S - no right turn into TWY S2 or S5.
- b. TWY S2 - no left turn into TWY S
- c. TWY S2 - no right turn into TWY T, HN.
- d. TWY S5 - no left turn into TWY S.
- e. TWY S7 - no entry FM TWY S.
- f. TWY S13 - no right turn into TWY S.
- g. TWY S13 - no left turn into TWY T, HN.
- h. TWY T - no entry FM TWY S7, T8 and T9.
- i. TWY T BTN Z and TWY S7 not AVBL northbound TFC.
- j. TWY T5 and T10 not AVBL to ACFT exiting RWY 01L/19R.
- k. TWY T14 not AVBL to ACFT exiting RWY 19R.
- l. Entry onto rapid exit taxiways FM other than the RWY not permitted.
- m. TWY T2 - no left turn into TWY T.
- n. TWY H3 - no through access to TWY H4. AVBL under tow only.
- o. TWY H4 - no through access to TWY H3. AVBL under tow only.

FLIGHT PROCEDURES**1. ESTIMATED AIRBORNE TRAFFIC DELAYS****1.1. For ARR ACFT:**

- a. May be expected due to terminal area traffic density and/or single RWY operations:
 - (i) MON-FRI 2100-0000 UTC and 0600-1100 UTC: Less than 20MIN
 - (ii) SAT 2100-0000 UTC: 10MIN
 - (iii) SUN 0600-1100 UTC: 20MIN
 - (iv) DLY 0000-0600 UTC: 10MIN.
- b. During periods of noise abatement procedures (SODPROPS) as defined in AIP DAP-E YBBN NAP, preferred runway operations, outside the hours of 2200-0600 Local, possible delays of up to 20 MINS may occur.

Note: Actual holding times may differ from holding estimates. Historical data on actual holding is available from the NOMC.

2. ATC TRAFFIC MANAGEMENT SPEED

When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP BN must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

3. VFR ACFT DEP YBBN must FPL via either MBHB, TVT or BLHS.

4. **Circling APCH PROC to RWY 01L/19R at night is not permitted, MIRL NOT AVBL.**

5. **AIR TRAFFIC FLOW MANAGEMENT PROCEDURES**

5.1 **Strategic ATFM - Airport Demand Management Scheme (ADMS)**

Brisbane ADMS is applicable to all airline and ACFT operators using Brisbane Airport. All flights operating into and out of Brisbane must obtain an Airport Coordination Australia (ACA) slot in accordance with *AIP ENR 1.9*.

GA APN operations are subject to RWY/APN slot management. Approved slot holders operating on the GA APN are to confirm allocated parking with BAC Duty Manager prior to arrival.

For full information regarding the Brisbane ADMS, see ACA website:
www.airportcoordination.org/airports/australia/brisbane-airport/.

5.2 **Ground Delay Program (GDP)**

Brisbane GDP is run on demand and promulgated by NOTAM BTN 2000-1300 UTC. GDP is applicable to all fixed wing, non-priority flights departing FM all Australian domestic airports, and arriving at Brisbane.

Flights to Brisbane during the operation of GDP must obtain an ACA slot and Calculated Off Blocks Time (COBT) in accordance with *AIP ENR 1.9*. The COBT can be obtained through their company or the NOMC on 1800 020 626^.

5.3. **Airport Collaborative Decision Making (A-CDM)**

Brisbane A-CDM is run continuously H24. A-CDM is applicable to all IFR fixed wing non-priority flights departing Brisbane, who are required to comply with A-CDM in accordance with procedures outlined in *AIP ENR 1.9*. Compliance with a Target Off Blocks Time (TOBT) is required. All flights departing Brisbane Airport are required to submit a TOBT through a local Designated Ground Handling Agent (DGHA) or local Fixed Based Operator (FBO). For further enquiries email: acdm@bne.com.au or PH H24 07 3406 3171.

5.4. **Flow Tactical Landing Slots**

Flights inbound to Brisbane with a duration of less than 45MIN must:

- a. Validate their COBT with Brisbane Flow on 07 3866 3588 during HR of GDP; or
- b. Confirm a tactical landing slot with Brisbane Flow on 07 3866 3588 outside periods of GDP. Failure to do so will result in delays.

Flights departing YBAF, YBCG and YBSU for a landing at YBBN must CTC Brisbane Flow Controller on 07 3866 3588 prior to engine start.

For full information regarding the Ground Delay Program see *AIP ENR 1.9*.

5.5. **Start and Pushback Procedures**

- a. Departing aircraft with ground power must CTC Delivery ready for pushback or start. Aircraft will be instructed to stand-by for Ground once compliant with any applicable ATFM procedures. Ground will approve pushback or start clearance when able.
- b. Departing aircraft without ground power are approved to start at own discretion, advising Delivery when start complete. Aircraft for pushback will be instructed to stand-by for Ground once compliant with any applicable ATFM procedures. Aircraft for taxi from bay will be instructed to CTC Ground for taxi clearance once compliant with any applicable ATFM procedures. Ground will approve pushback or taxi when able.

6. **INDEPENDENT PARALLEL APPROACH OPERATIONS**

6.1. Refer to DAP EAST Brisbane Independent Parallel Approach User Instructions.

7. **ARRIVAL PROCEDURES**

By day, ATC may use 2,400M RWY separation between ACFT arriving to RWY 01R/19L and RWY 01L/19R. Both ACFT may occupy the RWY during application of the standard.

8. **DEPARTURES**

8.1. Departures shall normally be cleared in the order in which they are ready for takeoff, except that deviations may be made from this order to facilitate the maximum number of departures with the least average delay.

9. **PARALLEL OPERATIONS RUNWAY ASSIGNMENT**

Unless instructed by ATC or operationally required, ACFT shall be issued the following runways:

9.1. Departures

- a. RWY 01L/19R for all jet ACFT routes north, and
- b. RWY 01R/19R for all jet ACFT routes west, and
- c. RWY 01R/19L for all jet ACFT routes to south and east.

9.2. Arrivals

- a. RWY 01L/19R for all aircraft from routes north and west, and
- b. RWY 01R/19L for all aircraft from routes south and east.

9.3. Aircraft arriving via ENLIP

- a. RWY 01L/19L for all aircraft arriving via ENLIP STAR

Note 1: ACFT which operationally require a different runway from that assigned, must advise ATC at clearance delivery stage.

Note 2: RWY assignment is subject to Noise Abatement Procedures.

10. LOW VISIBILITY**10.1. Operations**

- a. For CASA approved operators, RWY 01R/19L and 01L/19R are capable of supporting take-offs with an RVR of not less than 125M.
- b. TWY LGT spacing supports use in visibility not less than:
 - (i) 550M RVR for TWY C12, C13, F1, J and L.
 - (ii) 300M RVR for all other TWY.
- c. Refer to AIP DAP for Aerodrome Ground Movement Charts.

10.2. Procedures

- a. LVP require restrictive measures during specific weather conditions. LVP protects the ILS sensitive and critical areas and ensures safe ground movements and the safety of ACFT conducting low VIS OPS.
- b. Preparations for the activation of LVP are commenced when visibility has reduced to 1,500M. This ensures that the LVP are in forced when:
 - (i) the cloud ceiling is 210FT or less; or
 - (ii) the RVR is at or below 550M or the Runway Visibility (RV) is 800M or less when RVR is not available.
- c. Intersection departures are not permitted. All aircraft will be directed to the full length of a runway for departure.
- d. Any pilot unsure of their position whilst operating on the Manoeuvring Area must Hold Position (STOP) and immediately advise ATC.
- e. Radio failure – Aircraft must hold position and await further guidance from a ‘follow me’ vehicle.
- f. Instrument RVR is provided at touchdown zone, midpoint zone and end zone for each RWY.
- g. In the event of failure of RVR, manual RWY visibility assessments will be provided.
- h. ATC use an Advanced Surface Movement Guidance Control System (ASMGCS) to monitor ACFT and vehicles on the Manoeuvring Area.
- i. If ASMGCS is unserviceable during LVP, ATC will restrict aircraft and vehicle access to the Manoeuvring Area.
- j. Aircraft are limited to one movement at a time on any portion of the Manoeuvring Area unless stop bars are operational.

- 11. All TWY are suitable for use in conditions of greater than RVR 550M

NOISE ABATEMENT PROCEDURES

Refer AIP DAP.

ADDITIONAL INFORMATION

1. Part of DCMSD Eagle Farm AD repainted in yellow, now Airport South Parking APN.
2. DCMSD cross runway north of GA Apron now utilised as parking only.
3. Significant bird hazard exists.
 - a. Nankeen Kestrel (birds of prey), peak activity on airfield expected March-July.
 - b. Australian White Ibis flocking on airfield HJ, increased numbers expected February-June.
 - c. Straw necked ibis present on airfield HJ, increased numbers expected July-October.
 - d. Flying fox HN only.
 - e. Cattle egret present on airfield HJ, increased numbers expected November-March.
 - f. Increased pelican and cormorant in VCY of AD.
 - g. White bellied sea eagle activity on airfield HJ.
4. Significant mud wasp ACT WI AD VCY affecting pitot tubes. Pitot tube covers recommended.
5. Fuel/Oil clean-up/disposal are chargeable and must meet Governmental Environmental standards.
6. Due to local effects from structural and topographical features the ground winds advised on the ATIS may vary to the wind aloft. Where there is a significant variation reported in these winds, ATC will advise a reported 500FT wind in addition to the aerodrome wind.
7. Weather balloon launch APRX 2315 and 1115 UTC. Launches may occur at other times.


CHARTS RELATED TO THE AERODROME

1. WAC 3340.
 2. Aerodrome Obstruction Chart Type A Chart: RWY 01R/19L - 23rd Edition (FEB 2025).
 3. Aerodrome Obstruction Chart Type A Chart: RWY 01L/19R - 8th Edition (FEB 2025).
 4. Aerodrome Obstruction Chart Type B Chart: Issued February 2025.
 5. Also refer to AIP Departure and Approach Procedures.
-

BROKEN HILL

ELEV 959

AVFAX CODE 2232



NSW
320005S 1412818E UTC +9:30 YBHI

VAR 9 DEG E CERT

AD OPR Council of the City of Broken Hill, PO Box 448,
Broken Hill, NSW, 2880. PH 08 8080 3300. ARO H24 0418
858 378. Fax 08 8080 3423.

- REMARKS**
1. AD Charges: Landing fees all ACFT. Schedule of
charges AVBL at <http://bit.ly/1RRWAwz>.
2. This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

AIR BP: JET A1 MON-FRI 0800-1700 Local. AH by arrangement. AVGAS self serve. BP card facility. Phone 0408 728 605 H24.
IOR Aviation Pty Ltd. JET A1 and AVGAS 100LL AVBL H24 self-serve bowser.
Payment method via IOR Aviation tag for account holders or via the Fuelcharge APP.
JET A1 U/W and O/W (refueller vehicle) 0700-1600 Local MON-FRI; 0800-1600 weekends. AH call out fee applies. IOR mobile contact 0460 046 609 or 1300 457 467.

APRONS AND TAXIWAYS

Taxiing only permitted via sealed surfaces.

AERODROME OBSTACLES

1. Lit mast 1,320FT AMSL, 323DEG MAG, 1.85NM FM ARP, Infringes HZS by 250FT.
2. Tower 1,275FT AMSL, 330DEG MAG, 4NM FM ARP.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT C, METAR/SPECI.
2. AWIS PH 02 9353 6406 - Report faults to BoM.
3. AWIS FREQ 123.15 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

05/23	047	82a	PCR 125/F/A/0.93 MPa/U	WID 30	RWS 150
14/32	134	33c	5700 kg/0.55 MPa Brown sand. Sealed each end.	WID 30	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 05/23	LIRL	PAL+AA 119.6	SDBY PWR AVBL
RWY 05/23	PAPI(1)	PAL+AA 119.6	3.0 DEG47FT
RWY 05/23	PTBL(2)		SDBY PWR AVBL
			BY PRIOR
			ARRANGEMENT
RWY 14/32	PTBL(2)		BY PRIOR
			ARRANGEMENT

- (1) Left side.
- (2) EMERG only. 90MIN PN.
- RWY edge light spacing: 60M.

OTHER LIGHTING

TWY LGT: Blue edge on A, B, C and C1.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA MELBOURNE CENTRE 122.6 On ground

RADIO NAVIGATION AND LANDING AIDS

DME	BHI	114.2/ 89X	320002.4S	1412847.3E		(2)
NDB	BHI	332	315931.3S	1412806.4E	Range 150 (HN 85)	(3)
VOR	BHI	114.2	320002.4S	1412847.9E		(1)
(1)	256/0.5 to ARP - Scalloping may occur on final RWY 05.					
(2)	Antenna ELEV 973FT.					
(3)	158/0.6 to ARP.					

LOCAL TRAFFIC REGULATIONS


1. RWS not maintained for ACFT OPS.
2. General aviation parking via TWY C.

CTAF - AFRU 126.7**ADDITIONAL INFORMATION**

Bird and animal hazard exists.

CHARTS RELATED TO THE AERODROME

1. WAC 3458.
 2. Also refer to AIP Departure and Approach Procedures.
-

BUNDABERG**ELEV 107****AVFAX CODE 4022**

QLD YBUD
 245414S 1521907E VAR 10 DEG E CERT
 AD OPR Bundaberg Regional Council, PO Box 3130, Bundaberg, QLD,
 4670. Email: airport@bundaberg.qld.gov.au. PH 1300 883 699.
 ARO 0418 796 991 (H24).

REMARKS

1. AD Charges: All ACFT.
2. This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

Air BP - Bundaberg Aviation Fuel; MON-SUN 0730-1700 Local. AH refuelling fee \$160 plus GST/\$176 plus GST. Phone H24 07 4155 1061, 0468 425 130. Email: bdbavfuel@gmail.com. H24 Air BP carnet card swipe AVGAS 100LL bowser. JET A1 truck. O117, O125, other 24HR PN. Credit cards office hours only.

IOR Aviation Pty Ltd - JET A1 AVBL truck O/W and U/W MON-SUN 0800-1700 Local. AH call-out available, fees apply, \$250.00 plus GST - payment method via IOR Aviation account holders, credit card or EFTPOS. CTC 0484 690 921.

PASSENGER FACILITIES

LG/WC/TX/HC/AC/RF

AERODROME OBSTACLES

1. Lit mast APRX 259FT AMSL BRG 008 DEG MAG 1,957M FM ARP. Infringes inner HZS by 12FT.
2. LIOL on APN light:
 - a. APRX 182FT AMSL BRG 017 DEG MAG 585M FM ARP. Infringes TNS by 8FT.
 - b. APRX 180FT AMSL BRG 012 DEG MAG 620M FM ARP. Infringes TNS by 6FT.
3. Tree 157FT AMSL BRG 338 DEG MAG 1,312M FM ARP. Infringes VSS by 5FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. AWIS Phone 07 3564 3706 - Report faults to BoM.
3. AWIS FREQ 135.45 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

07/25	059	37c	Unrated. Grassed grey silt clay	WID 30	RWS 90
14/32	138	66a	PCR 450/F/C/1.40 MPa/U Grooved. Sealed shoulders 7.5 M wide (old RWY), 3M wide on SE extension.	WID 30	RWS 150

AERODROME AND APPROACH LIGHTING

RWY 14/32	LIRL(1)	AFRU+PAL 126.9		SDBY PWR AVBL
RWY 14	PAPI	AFRU+PAL 126.9	3.0 DEG55FT	SDBY PWR AVBL
RWY 32	PAPI	AFRU+PAL 126.9	3.0 DEG53FT	SDBY PWR AVBL

(1) HN only.

1. RWY edge lighting spacing: 14/32: 60M.
2. PAL only activates PAPI HJ.

OTHER LIGHTING

1. SDBY PWR switchover time: 15 SEC.
2. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE 124.1 On ground

RADIO NAVIGATION AND LANDING AIDS

NDB	BUD	302	245423.7S	1521913.1E	Range 65 (HN 60)	(1)
(1)	149DEG MAG 363M FM ARP					

LOCAL TRAFFIC REGULATIONS

1. ACFT ABV 23,000KG to execute 180DEG turns at RWY ends.
2. TWY D MAX 5,700KG.
3. RPT APN limited to RPT ACFT and other ACFT approved by the AD OPR with 24HR PN for bay allocation.
4. RPT APN PRKG restrictions apply - not AVBL for GA, helicopters or itinerant ACFT PRKG except for RAAF and government ACFT with PN. Other requests considered with 24HR PN. Email approval for ACFT that require RPT APN due to mass or wingspan limitations. ACFT PRKG and passenger fees apply.
5. GA ACFT engine runs to be conducted in GA area, clear of RPT APN. CTC ARO for other location REQ.
6. Light ACFT with tail skids to confine OPS to RWY 07/25.
7. **HELICOPTER PARKING**
 - a. PSN H1 and H2 MAX rotor DIA 13M.
 - b. PSN H3 MAX rotor DIA 15M.
 - c. Large wheeled HEL park on RPT APN Bay 1 with PN.

CTAF - AFRU 126.9**NOISE ABATEMENT PROCEDURES**


1. Preferred RWY 32 for ARR, RWY 14 for DEP.
2. If DEP RWY 32 RQ, full length of RWY to be used.
3. Circuit training permitted 2000-0900 UTC.
4. Night circuit training permitted 0900-1200 UTC for local ACFT. Other ACFT PPR.

ADDITIONAL INFORMATION

1. Ultralight OPS take place WI 1NM RAD Booyan ALA (14NM NW Bundaberg) not above 1,000FT AGL.
2. Winch (rope) launched GFY to A030 at Elliott Field 200DEG/10NM YBUD ARP. Gliders OPR on YBUD CTAF.
3. Access to aprons via pedestrian gates. Code AVBL to bona fide aircrew by contacting the ARO.
4. Pilots, crew and operators must display a current ASIC when airside and have a bona fide reason to be in the Security Restricted Area.
5. Increased flying fox activity in vicinity during twilight periods.

CHARTS RELATED TO THE AERODROME

1. WAC 3340.
 2. Also refer to AIP Departure and Approach Procedures.
-

BUSSELTON**ELEV 56****AVFAX CODE 6305**

WA 334114S 1152401E UTC +8 YBLN
 VAR 3 DEG W CERT
 AD OPR City of Busselton, Locked Bag 1, Busselton, WA, 6280. Email:
 airport@busselton.wa.gov.au. PH AD 08 9781 0444. ARO 0417 928 916.
 Website: www.busseltonmargaretriverairport.com.au.

REMARKS

- AD Charges and Noise Management Plan apply to all ACFT, refer to Busselton-Margaret River Airport website.
- This AD is a Security Controlled Airport. Security gate access codes can be obtained by contacting the AD office.
- All pilots and OPR are REQ to wear acceptable hi vis clothing or vests when airside and must possess and display current ASIC.
- STD OPR HR ACFT:
EMERG services unrestricted.
Recreational and GA 0600-2200 Local.
RPT and CHTR ACFT 0600-0000 Local - PPR.
- All ACFT over 5,700KG notify AD OPR for LDG approval and use of AD as an alternate.
CTC ARO by phone or email.

HANDLING SERVICES AND FACILITIES

ABP/City of Busselton, JET A1, AVGAS Phone AD OPR, Carnet card only.
 JET A1 truck refuelling AVBL, JET A1 and AVGAS bowsers AVBL, CTC AD OPR.
 ACFT requiring ground handling services call MRBTA on 0437 372 074.

METEOROLOGICAL INFORMATION PROVIDED

- TAF CAT A, METAR/SPECI.
- AWIS Phone 08 6216 2604 - Report faults to BoM.
- AWIS FREQ 128.05 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

03/21 028 81a PCR 550/F/A/2.30 MPa/U Grooved. WID 45 RWS 280

AERODROME AND APPROACH LIGHTING

RWY 03/21 LIRL(1) PAL 119.6 SDBY PWR AVBL
 RWY 03/21 PAPI(1) PAL 119.6 3.0 DEG65FT SDBY PWR AVBL

(1) PAL requires three three-second pulses to activate.

RWY edge light spacing: 03/21: 60M.

OTHER LIGHTING

- SDBY PWR switchover time: 25 SEC.
- TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA MELBOURNE CENTRE 124.9 Circuit area

RADIO NAVIGATION AND LANDING AIDS

NDB BLN 386 (RWY21) 334132.7S 1152342.6E Range 50 (HN 50)

LOCAL TRAFFIC REGULATIONS

- Flight training not AVBL without prior approval. Contact AD OPR for further information.
- Light ACFT and HEL PRKG AVBL in marked areas.
- Restrictions:
 - ACFT ABV Code B LTD to TWY A, B, C.

- b. PRKG Bays 1-4 by approval only.
 - c. TWY E not AVBL DRG HELITACK TKOF and LDG.
 - d. Wide body ACFT PRKG Bay 1 only via TWY A or B, approval FM AD OPR RQ.
4. Jet ACFT must taxi away FM APN PRKG PSN using MNM breakaway thrust.
 5. Unlit HEL APN position mid field adjacent to ARP. Restricted to DFES use November to April.
 6. Departing ACFT ABV 15,000KG MTOW are required to taxi on RCL to the THR of RWY in use and turn at the turning nodes.
 7. Arriving ACFT ABV 15,000KG MTOW requiring 180 DEG backtrack turns are to extend the landing roll to the end of the RWY in use and use turning nodes for turning.
 8. All turns on the RWY and the turning nodes are to be at MNM speed and MAX turning radius.

FLIGHT PROCEDURES

1. TKOF and landing on grass strip not permitted.
2. Training flights conducting practice instrument approaches should add 1,000FT to all the ALT prescribed in the approach to reduce noise nuisance and interference with circuit traffic. Such flights should BCST their intentions, including ALT limit of OPS when turning inbound. IMC flight should remain as high as practical when encountering VMC and join the circuit in a standard manner.

CTAF - AFRU 127.0

NOISE ABATEMENT PROCEDURES

1. Pilots are requested to use the same RWY for DEP and ARR - if operationally acceptable.
2. Adopt rate of CMB/decent which minimises noise over residential areas.

ADDITIONAL INFORMATION

Bird hazard. Possibility of large numbers of wetland birds in the vicinity of AD.

CHARTS RELATED TO THE AERODROME

1. WAC 3462.
 2. Also refer to AIP Departure and Approach Procedures.
-

CAIRNS/CAIRNS INTL**ELEV 10****AVFAX CODE 4511**

QLD

UTC +10

YBCS

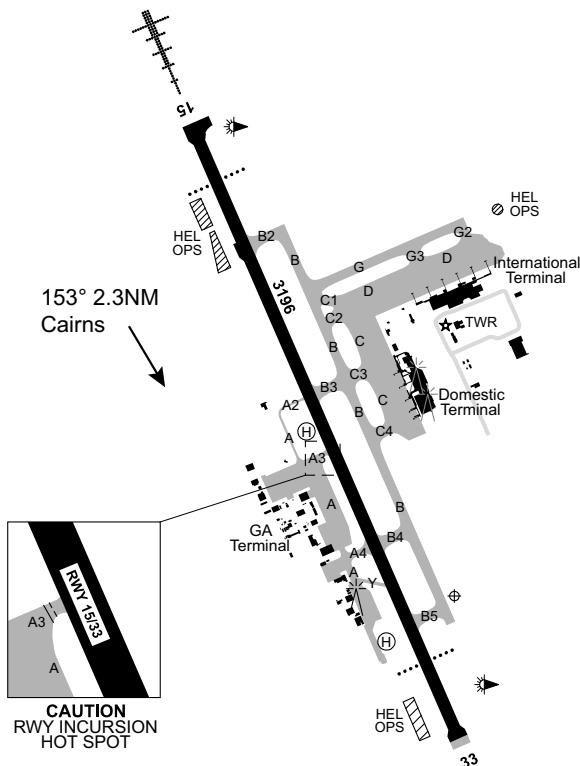
165309S

1454519E

VAR 7 DEG E

CERT

AD OPR Cairns Airport Pty Ltd, PO Box 57, Airport Administration Centre, Cairns Airport, QLD, 4870. Email: enquiries@cairnsairport.com.au. PH H24 07 4080 6744. Website: www.cairnsairport.com.au.

**REMARKS**

1. AD Charges: All ACFT refer conditions of use on website.
2. Restrictions apply for ground OPS. Contact Cairns Airport Pty Ltd for details. Phone 07 4080 6744 or 0412 773 065. Email coords@cairnsairport.com.au.
3. Aerodrome operations frequency - Cairns Airport Pty Ltd VHF 129.9.
4. INTL flights requiring Customs; Phone 07 4052 3551/4052 3552.
5. This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

Air BP - Danshe Pty Ltd: 2000-0800 UTC DLY. Phone 07 4035 9872. Fax 07 4034 9238.
 Mobile 0418 778 956. AH 1HR PN. AH call-out fee. VHF 126.40. AVGAS, JET A1, JET FSII.
 Viva Energy Aviation – JL Aviation Fuelling Pty Ltd:
 a. RPT domestic/international aprons H24. JET A1. Mobile 0429 142 922.

- b. GA Apron MON-FRI 1900 – 0800 UTC, SAT-SUN 1930 – 0800 UTC. JET A1 and AVGAS. Mobile 0417 788 330. JET A1 AH CTC 0429 142 922.

Machjet International: Marshalling and Ground Handling services H24 DLY.

Phone: +61 428 756 929 or +61 7 5457 0778. Email: fbo@machjet.com.au.

Jet Aviation Australia - FBO Services and VIP Lounge H24 (civil and MIL ACFT).

PH OPS H24 +61 478 880 776 or +61 7 4030 1859. Email: cnsfbo@jetaviation.com. VHF 135.95, CS 'Jet Aviation'.

General

Aircraft marshalling is required for all charter and visiting aircraft using the Domestic and International aprons. All aircraft using these aprons must be facilitated through a Fixed Base Operator or ground handler. Crew and passengers must be escorted to and from the aircraft. The AD OPR does not provide a marshalling service.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 8 H24 131.0 MHz AVBL H24.
2. Water Rescue Service AVBL.

APRONS AND TAXIWAYS

1. Pavement restrictions - TWY A2 and A BTN A2 and A3 not AVBL to ACFT ABV 7,000KG, TWY A4 not AVBL to ACFT ABV 90,000KG. TWY Y not AVBL to ACFT ABV 10,000KG.
2. Taxiways - outboard ENG on four-engine jet ACFT to be OPR at low PWR to prevent erosion and ENG damage.

AERODROME OBSTACLES

1. Unlit NDB CS BRG 327 MAG 2.6NM FM ARP 152FT AMSL. Infringes inner HZS by 0.9FT.
2. Unlit fence APRX BRG 150 MAG 3,219.9M FM RWY 15 THR offset 123.9M R 16.75FT AMSL. Infringes APCH SFC by 6.5FT and not part of TODA and STODA gradients.
3. Unlit NF aerial APRX BRG 148 MAG 3,246M FM RWY 15 THR offset 0.3M L 12.8FT AMSL inside CWY. Infringes APCH SFC by 2.9FT.
4. Lit LLZ BLDG by red OBST LGT APRX BRG 330 MAG 3,359.1M FM RWY 33 THR offset 100.8M R 25.1FT AMSL. Infringes APCH and TKOF SFC by 9.1FT.
5. Lit LLZ BLDG by red OBST LGT APRX BRG 147 MAG 3,282M FM RWY 15 THR offset 103.6M L 21.9FT AMSL. Infringes APCH SFC by 9.5FT.
6. Lit LLZ aerial by red OBST LGT APRX BRG 148 MAG 3,307.2M FM RWY 15 THR 15.9FT AMSL. Infringes APCH SFC by 1.9FT TKOF SFC by 3.9FT.
7. Lit LLZ aerial by red OBST LGT APRX BRG 328 MAG 3,336.2M FM RWY 33 THR 15.25FT AMSL. Infringes APCH and TKOF SFC by 0.9FT.
8. Tree 56FT AMSL BRG 176 MAG 0.66NM FM ARP. Infringes RWY 33 APCH SFC by 17FT.

SURFACE MOVEMENT GUIDANCE

1. TWY A3 not AVBL for ACFT ABV 23,000KG.
2. TWY A3 holding point marking ONLY clearly visible when taxiing on centre line of TWY. Holding points are NOT aligned with gable markers.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
2. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM BoM 07 3239 8721.
3. AWIS PH 07 3564 3708 - Report faults to BoM.

PHYSICAL CHARACTERISTICS

15/33 150 105a PCR 910/F/D/1.58 MPa/T Grooved WID 45 RWS 300
RWS variation - RWY 33 (South end) is 180M, increased to 300M at 1,352M from THR.
RWY 15 (North end) is 300M, reduced to 180M at 1,804 FM THR.

AERODROME AND APPROACH LIGHTING

RWY 15/33	HIRL(1)		SDBY PWR AVBL
RWY 15/33	MIRL		SDBY PWR AVBL
RWY 15	HAL-CAT I(1)		SDBY PWR AVBL
RWY 15	PAPI	3.0 DEG53FT	SDBY PWR AVBL
RWY 33	PAPI	3.0 DEG61FT	SDBY PWR AVBL

(1) Six (6) stage intensity.

1. **ALS type and length**
 - a. RWY 15 - distance coded CL: 900M.
2. THR lights: Green-coloured. No wing bars installed.
3. RWY touchdown zone lights: Not installed.
4. RWY centerline lights: Not installed.
5. RWY edge lights spacing: 59.6M. MIRL Stages 1-3 White-coloured. HIRL Stages 4-6 White-coloured. Yellow-coloured for last 600M.
6. RWY end lights: Red-coloured. No wing bars installed.
7. Stopway lights: Not installed.
8. Turn pads: Blue-coloured edge lights.

OTHER LIGHTING

ABN ALTN 8 WG Location and activation: ATC TWR. Activated 20MIN prior to ARR HN. Before DEP HN. Periods of low VIS as determined by ATC.

HBN R FLG R 1.5 SEC. Installed on natural terrain.

HBN R Installed on other OBST.

1. TWY LGT: Green CL. Stages 1-3.
2. RWY Guard Lights at RWY 15/33 TWY intersections.
3. Secondary PWR switchover time: 15 SEC.
4. TWY LGT: Blue reflective edge on C BTN C3 and C4.
5. RWY 33: Four THR end lights not visible FM 600M DIST at 3M AGL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	CAIRNS APPROACH	126.1
ACD	CAIRNS DELIVERY	128.75
APP/DEP	CAIRNS APPROACH	118.4
APP/FIA	CAIRNS APPROACH	126.1
ATIS	CAIRNS ATIS	(2) 113.0 131.1
SMC	CAIRNS GROUND	121.7
TWR	CAIRNS TOWER	124.9
VOLMET	AUSTRALIA	6676 (1) 11387 (1)

(1) H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.

(2) Also AVBL on Phone 07 4050 5311.

For ATC and training prior arrangements, Phone 1300 353 170 or 07 3866 3533^.

RADIO NAVIGATION AND LANDING AIDS

DME	CS	113.0/ 77X	165100.5S	1454438.2E	(2)
NDB	CS	364	165049.1S	1454408.0E	Range 50 (HN 50) OW 160 (3) (OW HN110)
VOR	CS	113.0	165100.1S	1454438.0E	(1)
DME	ICN	109.5/ 32X (RWY33)	165209.6S	1454436.7E	(5)(9))
LOC	ICN	109.5 (RWY33)	165152.8S	1454435.0E	(4)
DME	ICS	109.9/ 36X (RWY15)	165208.7S	1454436.3E	(6)(8))
GP	ICS	333.8 (RWY15)	165208.6S	1454436.6E	
ILS	ICS	109.9 (RWY15)	165335.6S	1454521.4E	
LOC	ICS	109.9 (RWY15)	165335.6S	1454521.4E	(7)
(1)	158/2.2 to ARP.				
(2)	158/2.2 to ARP - Antenna ELEV 41FT.				
(3)	144/2.6 to ARP.				
(4)	Use of Localizer on W side limited to WI 30DEG of the extended RCL. Use of LOC at 25NM limited to above 6,000FT. Use of LOC at 17NM limited to above 4,000FT.				
(5)	Antenna ELEV 22FT.				
(6)	Antenna ELEV 22FT				
(7)	Coverage BTN 10DEG to 35DEG W of RWY centreline limited by high terrain and varies BTN 2000FT and 4500FT.				
(8)	Poor coverage below 5000FT beyond 25DEG W of RWY centreline.				
(9)	Poor coverage below FL150 BTN 20DEG and 35DEG W of RWY centreline.				

LOCAL TRAFFIC REGULATIONS

1. All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
2. Parking restrictions. Due to critical shortage of apron space, all non-RPT ACFT ABV 5,700KG and rotary wing, Government and MIL requiring access to the GA, Domestic or INTL aprons and rotary wing requiring parking on HP1 abeam TWY A3 must obtain prior parking approval from Cairns Airport Pty Ltd. 48HR PN; Phone 07 4080 6744 H24. VHF 129.9. Email coords@cairnsairport.com.au.
3. RWY 15 THR turn pads - clockwise turns only.
4. ACFT with wingspan ABV 36M must use turn pads at RWY ends. ACFT to execute MAX RAD turns.
5. All ACFT using RWY 15/33 turn pads to use MAX radius turns. All wide bodied ACFT using RWY 15/33 turn pads are also requested to use minimum thrust.
6. **RWY INCURSION HOTSPOTS**
RWY 15/33 and TWY A3.
7. Western run-up bay not AVBL to turbine engine ACFT except for normal pre-flight checks associated with departure. Noise Abatement Procedures apply.
8. Fixed wing ACFT departing from a point within 100NM of Cairns for arrival at Cairns will be processed more expeditiously if a specific landing time has been obtained from ATC.
9. When requesting taxi instructions, pilots must nominate intersection departure, or full RWY length requirement.

10. TRAINING AND AIRWORK FLIGHTS WITHIN CAIRNS CTR/A

- a. Training involving IAL procedures and any other airwork or flight testing involving operations in Cairns Class C airspace must be arranged with Cairns ATC on 1300 353 170 or 07 3866 3533^.
 - b. Practice instrument approaches by arriving aircraft will normally be approved, however, requests should be made as early as possible, preferably at the flight planning stage.
 - c. NDB-B and VOR-B approaches will not normally be approved BTN 0800-1700 Local.
 - d. Training operations contrary to the prevailing traffic pattern/operational runway direction will not normally be approved.
 - e. A missed approach from the IAL may not be available if it conflicts with the prevailing traffic pattern.
 - f. Fixed wing flights YBCS for YBCS with an EET of 45MIN or less must contact Cairns Approach on 1300 353 170 or 07 3866 3533^ to obtain a landing slot.
 - g. All ACFT requesting circuits or AWK within the CTR are subject to prior approval by Cairns Tower on 07 4050 5356^. Traffic restrictions may be applied during peak traffic periods. Landing Slot Times are required for these operations.
 - h. Circuit training by jet ACFT and other ACFT exceeding 5,700KG MTOW is not permitted BTN 2200-0700 Local.
 - i. Circuit training preferred directions:
 - (i) RWY 15 - Left hand circuits.
 - (ii) RWY 33 - Right hand circuits.
11. TS advice system installed on DOM and INTL APN. Expect ACFT docking and DEP delays when lightning is detected WI 5NM, indicated by blue strobe lights.
 12. Taxilane wingspan limitations apply at the GA APN and are indicated in blue letters on white gable markers at the entry of the taxilanes.

FLIGHT PROCEDURES

1. ATC TRAFFIC MANAGEMENT SPEED

- When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP CS must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.
2. ACFT requesting DEP from within the CS CTR must contact CS Delivery 128.75 for airways clearance.
3. All VFR ACFT leaving CS CTR at or BLW 1,000FT shall switch to area FREQ (126.1).

4. LOW VISIBILITY OPERATIONS

- a. RWY 15 - CAT I precision APCH.

- b. Low VIS TKOF are NOT supported. RWY 15/33 is capable of supporting TKOF with a RWY VIS of not less than 800M.
 - c. Manual RV readings are provided to the control TWR. Transmissometers are not installed.
 - d. RWY Guard Lights - a pair of unidirectional flashing yellow lights are installed at each TWY INT to caution pilots or vehicle drivers that they are about to enter an active RWY.
5. **SPECIAL PROCEDURES - VFR CORRIDORS**
- a. Flights established in the Western VFR corridor:
 - (i) MUST remain WEST of the Captain Cook Highway between PALM COVE and the CABLEWAY TERMINAL.
 - (ii) MUST remain WEST of the Cairns Western Arterial Road between the CABLEWAY TERMINAL and MARINO'S QUARRY.
 - (iii) Due to poor radar coverage 2,500FT to SW of AD, must not leave the corridor until specifically instructed by ATC.
 - (iv) MUST remain WEST of MARINO'S QUARRY, KOPPEN PARK, EARLVILLE SHOPPING CENTRE and CAIRNS GOLF COURSE between MARINO'S QUARRY and CAIRNS GOLF COURSE.
 - (v) MUST remain WEST of the Bruce Highway SOUTH of the CAIRNS GOLF COURSE.
 - (vi) MUST remain clear of the Edmonton parachute area.
 - b. ACFT cleared inbound via the Eastern VFR corridor must track via the corridor to ABM the SUGAR TERMINAL and thence as directed by ATC.
6. ACFT planning to enter the CS CTR BTN: Mt Gorton, Cape Grafton and Upolo Cay at 500FT, must contact CS TWR for airways clearance.
7. ACFT landing RWY 15 RQ approval to vacate on TWY A2 and B2.
8. ACFT landing RWY 33 RQ approval to vacate on TWY Y and B5.
9. B777-300 pilots should be aware that normal clearance to TWY edge may not be AVBL during turns.
10. **HELICOPTER PROCEDURES**
- a. Arrivals: On first CTC with CS TWR notify intended LDG point on the AD
 - b. Departures: Notify CS TWR of current position and intended DEP position on the AD with READY call.
 - c. Helicopter operations from Armour Museum Caravonica, 3NM west of ARP, close proximity to VFR corridor.
 - d. Fly Neighbourly Procedures apply

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

- 1. Bird hazard exists. Increased numbers of the following species are expected during the specified times and locations and may transit through critical airspace:
 - a. JAN-APR: magpie geese, pied imperial pigeons and lapwing.
 - b. MAY-SEP: black kites, white faced heron, ibis, intermediate and cattle egret, beach stone-curlew and bush stone-curlew and lapwing.
 - c. OCT-DEC: pied imperial pigeons, white faced heron, ibis, egret and lapwing.
 - d. Flying foxes can pose a hazard at any time of the year; peak activity around dusk and dawn.
 - e. Increased bird activity during and post rainfall and adverse weather events including Australian white ibis and straw-necked ibis.
 - f. Flocks of small birds feeding in air above RWY, RWY 15 undershoot and short final including fairy martin and welcome swallow, particularly during breeding season from JUL-JAN.
- 2. Bird Watch Condition Reports and species specific NOTAM will be issued during periods of increased activity.
- 3. Intense parachuting activity occurs in the Edmonton parachuting area (D762), as depicted on Cairns VTC, HJ. Jump ACFT broadcast on 126.1.
- 4. CAUTION: False Traffic advisories (may be generated on TCAS equipment due to transponders on naval vessels operating from HMAS Cairns (Position APRX 3NM on extended RCL RWY 15/33, SE of Cairns).

CHARTS RELATED TO THE AERODROME

1. WAC 3219.
 2. Aerodrome Obstacle Chart Type A: August 2023.
 3. Also refer to AIP Departure and Approach Procedures.
-

CANBERRA**ELEV 1887****AVFAX CODE 2111**

ACT

UTC +10

YSCB

351825S

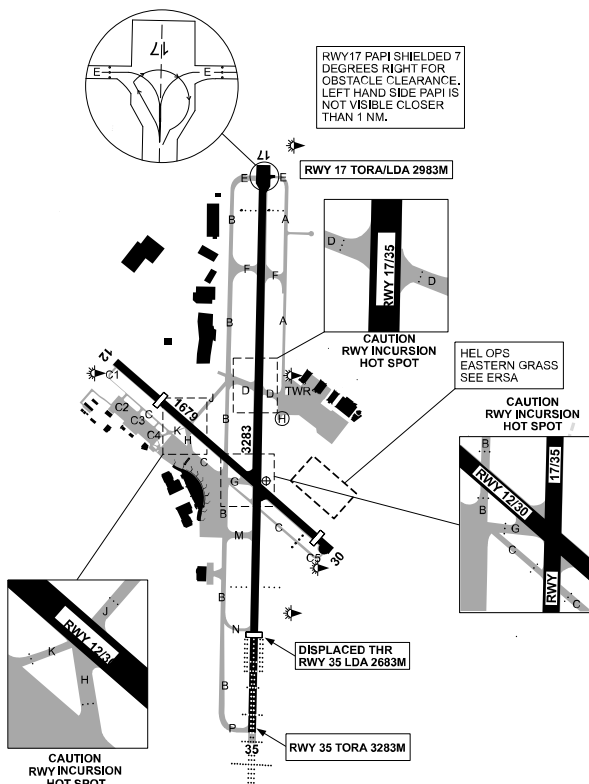
1491142E

VAR 13 DEG E

CERT

AD OPR Canberra Airport Pty Ltd, Level 4, Plaza Offices - West, Terminal Ave, Canberra Airport, ACT, 2609. Email: info@canberraairport.com.au. PH 02 6275 2222.

Website: www.canberraairport.com.au.

**REMARKS**

- AD Charges: Landing and access charges will be charged in accordance with Canberra Airport general conditions of use, which are AVBL on the Canberra Airport website.
- Pavement Concessions REQ in advance from AD OPR if ACR at MAX ACFT OPR weight or MTOW is greater than PCR or tyre pressure is greater than RWY listed value.
- General aviation apron access - entry and exit via Gate 4 requires prior notice. BTN 0500-0000 Local, contact 02 6275 2219. BTN 0000-0500 Local, contact 0411 696 082
- Prior Approval from AD OPR is required for non-scheduled widebody ACFT movements.
- 5 working days PN required to AD OPR for pavement concessions.
- This AD is a Security Controlled Airport. All fixed wing aircraft and helicopter crew operating at Canberra Airport (CBR/YSCB) must hold either an Australian (AUS) or Canberra (CBR) Aviation Security Identification Card (ASIC).

7. All charter operators or visiting aircraft must be facilitated through a Fixed Base Operator or ground handler (see HANDLING SERVICES AND FACILITIES), are to be met on arrival or departure, and are to be escorted to and from aircraft.
8. RPT apron is a Security Restricted Area (SRA). All authorised persons accessing the RPT apron must submit themselves to the Canberra Airport Airside Security Screening Process and have an operational need to be airside and must display a RED Aviation Security Identification Card (ASIC).
9. Prior consent from Canberra Airport for the use as a scheduled international alternate. Canberra Airport may require a separate agreement as capacity is limited.

HANDLING SERVICES AND FACILITIES

SWISSPORT - Ground Handling Agent: 0500-2200 Local DLY. AVBL AH with PN.

Phone 0402 167 265, Fax 02 6230 4050. Full handling services to CIVIL and MIL ACFT.

CANBERRA AIRPORT FUEL FACILITY: Phone 02 6248 6376, Fax 6248 6150, Managing Agent Ampol. Ampol - JET A1, Shell - JET A1, Aerorefuellers - AVGAS via bowser only. AVGAS self serve (accepts Aero Refuel Card, V and MC - unsuitable for fixed wing aircraft with wing span greater than 12M).

CORPORATE AIR - Phone Ground Handling Manager 0400 774 012 (H24) or 02 6249 7044.

Email: fbo@corporate-air.com.au. VHF 126.40 C/S "Corporate Air Canberra". Full ground handling services to CIV ACFT and MIL ACFT up to B747 (PN for B747 apron) including Customs/Quarantine, O/R JET A1, AVGAS, WC, potable water, O125, O133, O142, H536, S745, MMX60, E1, E5, HPOX. DC, MC, V, AMEX.

Royal Australian Air Force (RAAF) MIL APN - Limited transit and overnight parking AVBL. RAAF VIP movements take priority. APN not AVBL for military or civilian ACFT parking unless approved by RAAF VIP Operations. Approved non-VIP ACFT may be subject to delays or unable to park on APN at short notice.

ACFT handling – For APN AVBL CTC FBN 34SQN Air Support Services MON-FRI 0800-1700

Local. Phone: 02 6127 6344; Mobile 0455 194 083;

Email: fbn34sqn.airsupportservices@defence.gov.au. AH phone H24: Mobile 0474 800 870.

Inbound details – Approved inbound ACFT CTC 'Air Support Services' VHF 129.65, with ETA and handling requirements. PRKG bay and any delays due VIP movements will be advised.

Crew room facilities – RAAF VIP Terminal and 34SQN HQ facilities not AVBL for military or civilian aircrew use without prior approval by RAAF VIP Operations. ADF crews contact RAAF VIP Duty Operations Officer for approval to use facilities. Details AVBL via Defence Protected Network (DPN). 34SQN APN AVBL up to B747 ACFT with PN.

Restrictions – ACFT hot-refuelling prohibited.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 7:
 - a. 1845-2105 and 0145-0920 UTC SAT.
 - b. 1845-1205 and 0145-1230 UTC SUN-FRI.
2. 131.0 MHz AVBL HO.

APRONS AND TAXIWAYS

1. Code D and E ACFT are limited to the use of TWY B, TWY C between TWY K to TWY G, D, E (west), F (west), G, M, N and P.
2. All wide bodied ACFT with wingspan of up to MAX 65M taxiing movements at the intersection between TWY B and C must use the oversteer turn guidance markings.
3. All wide body ACFT with wingspan of up to MAX 65M (Code E) taxiing movements on TWY G are required to use the Code E over-steer turn guidance markings.
4. Outboard engines on four-engine wide body ACFT when taxiing must operate at low power to prevent erosion and engine ingestion.
5. TWY C suitable for MAX 15M wingspan ACFT BLW 5,700KG BTN TWY C1 to TWY K and TWY B to TWY C5.
6. Taxi along RWY 12/30 not AVBL for ACFT larger than Dash 8.
7. GA apron entry and exit for ACFT with 15M to MAX 24M wingspan. ACFT ABV 5,700KG via TWY K only.

SURFACE MOVEMENT GUIDANCE

All taxi guidelines and apron parking restrictions indicated by painted pavement markings.

AERODROME OBSTACLES

1. Towers:
 - a. Lit, 110FT AGL BRG 011 DEG MAG 686M FM ARP. Infringes transitional SFC by 41FT.
 - b. Unlit, 2,051FT AMSL BRG 206 DEG MAG 5.58NM FM ARP.
 - c. Unlit, 2,051FT AMSL BRG 206 DEG MAG 5.60NM FM ARP.
 - d. Unlit, 2,051FT AMSL BRG 205 DEG MAG 5.61NM FM ARP.
2. Lit OBST 26FT AGL BRG 355 DEG MAG DIST 1,515M FM RWY 35 THR. Infringes TNS by 17.8FT.
3. Trees (unlit):
 - a. 2,753FT AMSL, BRG 340 DEG MAG, 6,031M FM RWY 17 THR. Infringes Visual Segment Surface (VSS).
 - b. 2,895FT AMSL, BRG 338 DEG MAG, 5,969M FM RWY 17 THR. Infringes VSS.
 - c. 240FT AGL BRG 161 DEG MAG 6,030.4M FM RWY 17 THR. Infringes VSS.
 - d. 393FT AGL BRG 159 DEG MAG 5,966.7M FM RWY 17 THR. Infringes VSS.
 - e. 28FT AGL BRG 110 DEG MAG 1,787M FM RWY 30 THR. Infringes VSS.
 - f. 10FT AGL BRG 292 DEG MAG 1,763M FM RWY 30 THR. Infringes VSS.
 - g. 15FT AGL BRG 292 DEG MAG 1,745M FM RWY 30 THR. Infringes VSS.
 - h. 2,163FT AMSL, BRG 109 DEG MAG, 1,787M FM RWY 30 THR. Infringes VSS.
 - i. 2,143FT AMSL, BRG 111 DEG MAG, 1,761M FM RWY 30 THR. Infringes VSS.
 - j. 2,147FT AMSL, BRG 111 DEG MAG, 1,747M FM RWY 30 THR. Infringes VSS.
4. Buildings (lit):
 - a. 19FT AGL BRG 354 DEG MAG DIST 1,670M FM RWY 35 THR. Infringes TNS by 2.7FT.
 - b. 72FT AGL BRG 307 DEG MAG DIST 436M FM RWY 35 THR. Infringes TNS by 2.9FT.
5. Masts (lit):
 - a. 79FT AGL BRG 358 DEG MAG DIST 1,482M FM RWY 35 THR. Infringes TNS by 31.5FT.
 - b. 33FT AGL BRG 014 DEG MAG DIST 520M FM RWY 35 THR. Infringes TNS by 1.3FT.
 - c. 45FT AGL BRG 016 DEG MAG DIST 344M FM RWY 35 THR. Infringes TNS by 46.9FT.
 - d. 26FT AGL BRG 352 DEG MAG DIST 2,868M FM RWY 17 THR. Infringes TNS 17FT.
6. Lights (lit):
 - a. APN light 102FT AGL BRG 003 DEG MAG DIST 1,227M FM RWY 35 THR. Infringes TNS BY 27.4FT.
 - b. APN light 81FT AGL BRG 325 DEG MAG DIST 786M FM RWY 35 THR. Infringes the TNS by 5.2FT.
 - c. HBN 2,164FT AMSL BRG 110 DEG MAG DIST 1,783M FM RWY 30 THR. Infringes VSS.
7. Unlit power poles:
 - a. 90FT AGL BRG 196 DEG MAG 2.21NM FM ARP. Infringes inner HZS by 44FT.
 - b. 94FT AGL BRG 195 DEG MAG 2.15NM FM ARP. Infringes inner HZS by 44FT.
 - c. 79FT AGL BRG 194 DEG MAG 2.10NM FM ARP. Infringes inner HZS by 44FT.
 - d. 80FT AGL BRG 197 DEG MAG 2.27NM FM ARP. Infringes inner HZS by 44FT.
 - e. 71.2FT AGL BRG 163 DEG MAG 2.86NM FM ARP. Infringes inner HZS by 12.1FT.
8. Pole 2,614FT AMSL BRG 156 DEG MAG 4.1NM FM ARP.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, TAF3 H24, METAR/SPECI, AD WRNG, WS WRNG.
2. AWIS PH 02 9353 6408 - Report faults to BoM.
3. AWIS FREQ 116.7 AVBL outside TWR HR - Report faults to AD OPR.
4. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MO 02 6249 6579 AVBL 0400-2040 Local MON-FRI and 0630-1800 Local SAT-SUN. AH AVBL FM MWO 02 9296 1527.

PHYSICAL CHARACTERISTICS

12/30	117	55a	PCR 270/F/D/X/T	WID 30	RWS 90
17/35	167	108a	PCR 640/F/C/X/T Grooved. 7.5M shoulders sealed.	WID 45	RWS 300

Additional TKOF length AVBL for RWY 35. Refer ERSa Runway Distance Supplement (RDS) for further details.

AERODROME AND APPROACH LIGHTING

RWY 12/30	MIRL	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 30	PAPI(1)	AFRU+PAL 118.7	3.9 DEG31FT	SDBY PWR AVBL
RWY 17/35	HIRL	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 17/35	MIRL	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 17/35	RCLL	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 17	PAPI(2)	AFRU+PAL 118.7	3.0 DEG67FT	SDBY PWR AVBL
RWY 35	HIAL-CAT II			SDBY PWR AVBL
RWY 35	PAPI(2)	AFRU+PAL 118.7	3.0 DEG57FT	SDBY PWR AVBL
RWY 35	RTZL			SDBY PWR AVBL

(1) Left side.

(2) Double sided.

1. ALS type and length

a. RWY 35 - distance coded CL: 900M.

2. RWY edge light spacing: 17/35: 60M; 12/30: 90M.

3. RWY 12/30 edge lights retained at 45M WID.

4. RWY edge light colour: RWY 35 Edge LGT - Red BTN beginning of RWY pavement and DTHR; White BTN DTHR and 600M FM RWY end; Yellow for last 600M.

5. Outside TWR HR PAPI, HIRL, HIAL and MIRL Stage 2 MAN ACT by AFRU+PAL.

Responsible person AVBL CTC Phone 02 6275 2221, 30MIN PN for lighting activation. AFRU+PAL faults reports CTC Responsible person.

6. RWY 30 PAPI commissioned by ground survey. Not AVBL to RPT JET aircraft.

7. RWY 30 lead on lights FM TWY G not AVBL. Entry onto RWY 30 FM TWY G AVBL during daylight/clear weather.

8. RWY 17 PAPI shielded 7DEG right for obstacle clearance. Left hand side PAPI is not visible closer than 1NM.

9. Hold points lights at all RWY 12/30 intersections.

10. Stop Bars at all RWY 17/35 and 12/30 TWY holding points during ATC hours. RGL at all 17/35 TWY intersections.

11. RWY 17/35 THR lights: green coloured. Wing bars installed.

12. RWY 12/30 THR lights: green coloured. No wing bars installed.

13. RWY 35 touchdown zone light length 900M.

14. RWY end LGT: red coloured. No wing bars installed.

15. LIGHTING COLOUR CODING

15.1. RWY 17

a. Edge lighting

(i) MIRL/CGL – white (Stages 1 to 3).

(ii) HIRL – white with last 600M yellow. Followed by red 300M declared stopway (Stages 1 to 6).

b. Centre line lighting

(i) White to 900M from end, 900M-300M from end ALTN 2 red 2 white with last 300M red (Stages 1 to 6).

15.2. RWY 35

a. Edge lighting

(i) MIRL/CGL – white (Stages 1 to 3).

(ii) HIRL – Starter extension to DTHR 600M red. White with last 600M yellow (Stages 1 to 6).

b. Centre line lighting

(i) White to 900M from end, 900M-300M from end ALTN 2 red 2 white with last 300M red (Stages 1 to 6).

15.3. RWY 12

a. Edge Lighting

(i) MIRL- to DTHR 360M red. White (Stages 1 to 3)

15.4. RWY 30

a. Edge Lighting

(i) MIRL - White (Stages 1 to 3)

OTHER LIGHTING

- ABN ALTN 8 WG Mt Ainslie - 128/2.85NM to ARP.
 HBN Numerous.
- Secondary PWR switchover time: 1 SEC.
 - TWY LGT: Green CL; spaced 30M on straight sections, 15M on curved section.
 - Blue Edge on RWY 17 turning node.
 - RWY 17/35: RWY guard lights OPR at RWY holding points.
 - RWY 12 yellow illuminated WDI.
 - RWY 35 illuminated WDI relocated to E side of RWY 35 PSN BRG 052 MAG 245M FM RWY 35 THR.
 - LIOL (steady red) for obstacles on the AD.

ATS AND AERODROME COMMUNICATION FACILITIES

- | | | |
|------|-----------------------|----------------------------------|
| FIA | MELBOURNE CENTRE | 125.9 On ground (Outside TWR HR) |
| APP | CANBERRA APPROACH (1) | 124.5 (5) 125.9 (6) |
| ATIS | CANBERRA | 116.7 127.45 263 (3) |
| SMC | CANBERRA GROUND (2) | 121.7 (4) |
| TWR | CANBERRA TOWER | 118.7 (4) |
- Automatic re-transmit when APP combined.
 - SMC/ACD
 - Voice AVBL on NDB for EMERG transmissions.
 - Automatic re-transmit when TWR/SMC combined.
 - Within 30NM of CB, E of RWY 17/35 RCL.
 - Within 30NM of CB, W of RWY 17/35 RCL.
 - TWR and APP HR:
 - 1945-1300 UTC DLY.
 - During HDS 1845-1215 UTC DLY.
 - Phone Canberra TWR: 02 6268 5850[^]. Canberra APP: 03 9235 2012[^]
 - Outside TWR/APP HR Class C CTR and CTA W/ 30NM CB SFC to 8,500FT AMSL becomes Class G.
 - Class C airspace may be reactivated for RPT/VIP ACFT at any time. Check NOTAM and ATIS for airspace status.

Note: TWR and APP may operate independently, hours or airspace responsibility may change at short notice. Check status of airspace with ATS, NOTAM or Canberra ATIS.

RADIO NAVIGATION AND LANDING AIDS

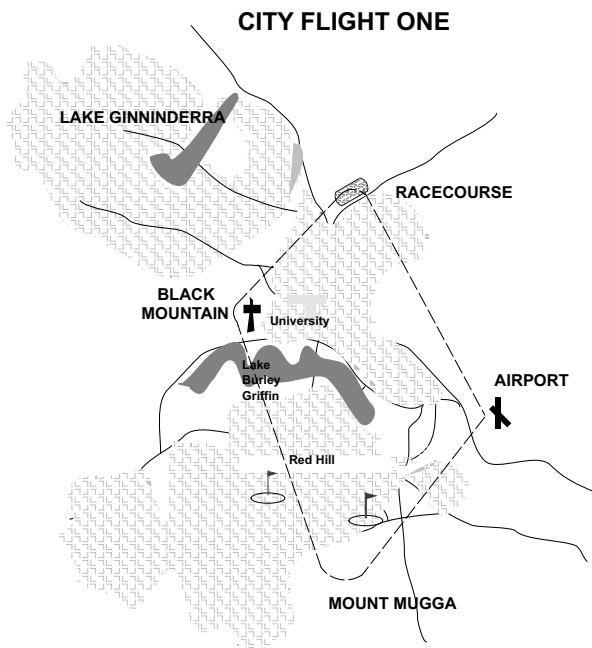
- | | | | | | |
|-----|-----|---------------|-----------|------------|------------------|
| DME | CB | 116.7/114X | 351653.3S | 1491145.4E | (2) |
| NDB | CB | 263 | 351744.2S | 1491226.6E | Range 40 (HN 40) |
| VOR | CB | 116.7 | 351653.2S | 1491144.6E | (1) |
| DME | ICB | 109.5/ 32X | 351843.4S | 1491147.0E | (4) |
| | | (RWY35) | | | |
| GP | ICB | 332.6 (RWY35) | 351843.4S | 1491146.7E | |
| ILS | ICB | 109.5 (RWY35) | 351714.4S | 1491140.0E | (3) |
| LOC | ICB | 109.5 (RWY35) | 351714.4S | 1491140.0E | |
- Coverage reduced due to terrain shielding beyond 30NM BLW 6000FT particularly BTN 015-125 radials.
 - 178/1.3 to ARP - Antenna ELEV 1919FT. Unreliable on 332 radial at low ALT beyond 9NM.
 - ILS RWY 35 Performance Classification II/D/3
 - Antenna ELEV 1887FT.

Outside TWR HR all NAVAIDS are Pilot Monitored.

LOCAL TRAFFIC REGULATIONS

- All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
- RWY 35 turning node at northern end designed to accommodate the normal turning radius of a B777-300 ACFT. ACFT make 180 DEG clockwise turn. Nose wheel line markings provided. For "follow me" service contact ATC on 118.7.
- TWY A not AVBL to Code D and above ACFT unless ACFT operator has been issued with CASA exemption.
- HEL access to MIL apron from HEL area NE of RWY INT not AVBL due LGT TWR OBST.

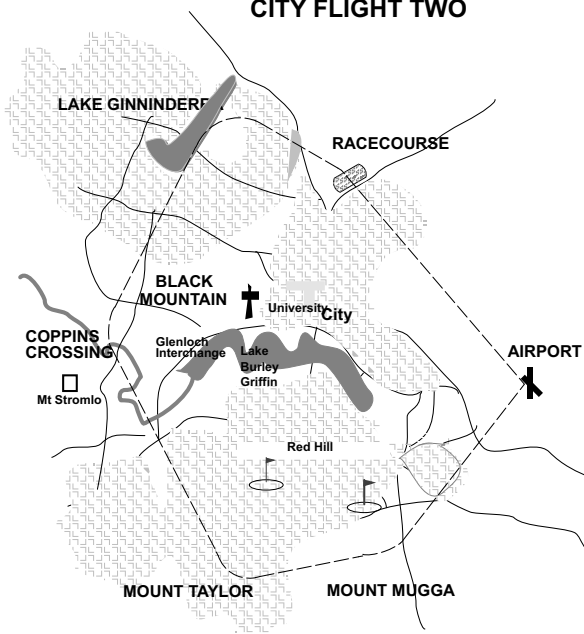
5. ACFT departing from Canberra shall obtain airways clearance from Canberra Ground prior to taxi.
6. RWY 12/30 lit entry via TWY G not AVBL HN.
7. **TRAINING FLIGHTS**
 - a. All ACFT planning instrument training or airwork (except CCTS, see sub para e.) WI the CB terminal airspace require ATC approval. Pilots must book a slot online at www.bookawk.com.
If access to the booking page is not AVBL, contact Shift Manager 1, Melbourne on 03 9235 2012 BTN 0700 and 2000 Local DLY.
 - b. Delays can be expected for Instrument Approach training 0600-0800 UTC MON-FRI (1HR earlier during HDS) (1600-1800 Local).
 - c. Pilots requesting practice NDB approaches may expect extended delay when RWY 30 or RWY 35 in use.
 - d. Extensive delays for practice 35 ILS or 35 VOR/DME APCH expected whenever RWY 12 or 17 in use.
 - e. All ACFT planning CCTS 0600-0800 UTC SUN-FRI (1HR earlier during HDS) (1600-1800 Local) require prior ATC (CB Tower) approval. Contact 02 6268 5850^.
 - f. For survey flights ABV 3,500FT AMSL operators must email maps to: ml.sm1@airservicesaustralia.com and call Shift Manager 1, Melbourne on 03 9235 2012 to discuss their planned operations prior to becoming airborne each day.
8. **SCENIC FLIGHTS**



- a. Routes
 - (i) CITY ROUTE ALPHA ONE
Canberra (Airport) - Racecourse - Black Mountain - Mount Mugga - Canberra (Airport)
 - (ii) CITY ROUTE CHARLIE ONE
Canberra (Airport) - Mount Mugga-Black Mountain - Racecourse - Canberra (Airport)

- (iii) **CITY ROUTE ALPHA TWO**
Canberra (Airport) - Racecourse - Lake Ginninderra - Coppins Crossing - Mount Taylor - Mount Mugga - Canberra (Airport)
- (iv) **CITY ROUTE CHARLIE TWO**
Canberra (Airport) - Mount Mugga - Mount Taylor - Coppins Crossing - Lake Ginninderra - Racecourse - Canberra (Airport)
- b. Normal cleared altitude 4,000FT.
- c. AVBL HJ only.
- d. Routes ALPHA ONE and ALPHA TWO may be expected when RWY 35 or 30 is nominated for DEP.
- e. Routes CHARLIE ONE and CHARLIE TWO may be expected when RWY 17 or 12 is nominated for DEP.
- f. Pilots not familiar with the area or the specified routes shall obtain a briefing from a local flying school or HEL OPR.

CITY FLIGHT TWO



9. **PARKING**

- a. GA ACFT with wingspan ABV 24M or ramp weight ABV 35,000KG and all MIL ACFT not parked on RAAF Military Apron must park on the Fairbairn Apron. PPR for all parking on Fairbairn Apron. All ACFT must park on a designated parking bay allocated by Airport Operations Officer (02 6275 2219) and must obtain ATC clearance to enter a TWY before commencing DEP from the parking bay.
- b. RPT Apron not AVBL for GA or MIL ACFT parking.
- c. GA apron ACFT parking bay restrictions are indicated by ACFT type, weight or wingspan.
- d. GA parking Bays 51 to 60 designated for ACFT with MAX wingspan 15M to 24M in accordance with GA Apron Layout Plan (ref DAP EAST). Contact Airport Operations Officer on 02 6275 2219 with PN for parking bay allocation. ACFT exiting from these bays must exit via TWY K.
- e. Bays 51 to 60 only suitable for aircraft with MAX wingspan ABV 12M.
- f. Remainder of GA apron hardstand designated for ACFT with MAX wingspan 12M.
- g. Non-paved parking areas are designated for ACFT BLW 5,700KG.

- h. Access to designated non-paved parking areas is only by way of designated marked taxi lane. Other access may be uneven or otherwise unsafe.
 - i. Visiting GA aircraft with out access permit must arrange access to and from airfield with FBO, or via the GA Gate 4 Access Facility by contacting Airport Operations Officer, Phone 02 6275 2219.
 - j. Air Ambulance must operate on GA Apron with access via Vehicle Gate 5.
10. All RAAF F/A-18 OPS into Canberra are to comply with Remarks Note 2.
11. RAAF Military Apron is for VIP and MIL air movements only. PPR for all movements from RAAF VIP Operations via FBN 34SQN Air Support Services. Refer 'Handling Services and Facilities' for information and contact details.
12. VFR route Cotter (COTR) to Tharwa (THAW) is depicted on the Canberra VTC with positions COTR - BDG - BDGE - THAW.

FLIGHT PROCEDURES

1. ATC TRAFFIC MANAGEMENT SPEED

When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP CB must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

2. ACFT departing Canberra CTR at or below 3,500FT, are not required to make an airborne call to TWR. Remain on TWR FREQ within the CTR. On exit from the CTR, change FREQ and squawk code 1200 (MIL ACFT - 6000).
3. To minimise delays, and subject to weather conditions, inbound fixed wing ACFT proposing to enter Class C airspace should request a clearance at or ABV 4,000FT on the appropriate CB APP FREQ.
4. For TFC management reasons, inbound ACFT may be positioned onto a 5NM Final.
5. CB TWR 118.7 is the Controlling Authority of the Canberra Class C airspace, up to and including 3,500FT.

6. LOW VISIBILITY OPERATIONS

- a. For CASA approval operators, RWY 17/35 is capable of supporting takeoffs with an RVR/RV of not less than 350M. Instrument RVR is provided for RWY 17/35. If instrument RVR is not AVBL, RV assessment measurements AVBL.
- b. Secondary PWR switchover time: 1 SEC during LVP.
- c. For CASA approved operators, RWY 35 is capable of supporting CAT II approaches.
- d. No intersection departures permitted from TWY C.
- e. Taxiway lights installed at 60M spacing on TWY C East and C West.
- f. The following TWY are intended for use in RVR conditions of less than a value of 550M but not less than 350M:
 - (i) TWY B, P, N, M, G, D, F West, E West, J and H.
 - (ii) TWY C – BTN TWY B and K.
- g. All TWY are intended for use in RVR conditions of 550M or greater.

7. LOW VISIBILITY PROCEDURES

- a. Preparations for the activation of Low Visibility Procedures (LVP) are commenced when the visibility has reduced to 1,500M and are further reducing. This ensures that the LVP are in force at or just prior to the visibility reducing to 800M.
- b. When visibility is less than 800M, ATC will limit vehicle access on the manoeuvring area to the Airport Operations Officer (AOO) and RFFS/other EMERG vehicles. ACFT position reporting procedures may be implemented.
- c. Flight crew must notify ATC if a Follow Me service is required.
- d. Radio Failure - ACFT must hold position and await further guidance from a Follow ME vehicle.
- e. High Intensity Approach Lighting (HIAL) system and High Intensity Runway Edge Lighting are used in reduced visibility.

8. HEL OPR in circuit are parallel to and in close proximity to RWY final. Subject to ATC clearance, helicopters may expect landing and departure clearance from the HEL parking areas S of TWY C. ARR and DEP from the GA and RPT aprons not AVBL.

9. Night OPS RWY 30 - high ground to right of approach path. Pilots unfamiliar with local terrain should limit descent to 2400FT until past lit mast on Disaster Hill (BRG 120/1NM from RWY 30 THR).
10. Local HEL OPS are to be conducted on the eastern grass, which is NE of the RWYs INT. Circuit OPS from the eastern grass are to be conducted PARL to RWY 12/30 and within the blue gable markers.
11. Circuit TRG MIL JET ACFT. Circuit ALT will be 3,500FT for NAP unless otherwise advised by ATC. Base turn point for RWY 35 should avoid direct overfly of Queanbeyan or Jerrabomberra Estate.

CTAF - AFRU 118.7

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

1. During strong westerly winds TURB may be experienced in touch down area LDG RWY 35.
2. Pilots landing RWY 12 in crosswinds should note possible turbulence in northerly and north easterly wind conditions.
3. Canberra International Dragway aligned parallel and to the left of RWY 30 on final approach, may be mistaken for RWY 30. Confirm RWY identification by RWY markings/lights.
4. Bird hazards exist at AD. There is seasonal bird activity on and in the vicinity of the AD with an increase of galahs in summer, and an increase of magpies in autumn each year.
5. Instrument number CASA 37/19 applies for additional MBDs located at all taxiway holding points inside the obstacle restricted area. All MBDs within the obstacle restricted area are models 596530 and are mounted on frangible posts. Further information can be provided upon request.
6. CAUTION: ACFT operating BTN Black Mountain and Canberra Airport may experience radio interference.

CHARTS RELATED TO THE AERODROME

1. WAC 3457, 3456.
 2. Aerodrome Obstruction Chart Type A:
 - a. RWY 17 Edition 11 (March 2025).
 - b. RWY 35 Edition 9 (March 2025).
 - c. RWY 35 (5 degree offset) Edition 10 (March 2025).
 - d. List of Obstructions (March 2025).
 3. Also refer to AIP Departure and Approach Procedures.
 4. Precision Approach Terrain Chart for RWY 35, AVBL upon request from Airport Management for airline operators.
-

COFFS HARBOUR**ELEV 18****AVFAX CODE 2016**

NSW

UTC +10

YCFS

301914S

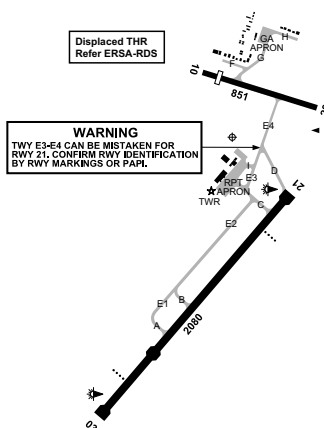
1530659E

VAR 12 DEG E

CERT

AD OPR Coffs Harbour Airport Pty Ltd, PO Box 251, Coffs Harbour, NSW, 2450. PH 02 6650 4812.

ARO 0418 869 285 H24.

**REMARKS**

- AD Charges: All ACFT.
- This AD is a Security Controlled Airport.
- RPT apron is security restricted. Passenger screening applies in main RPT Terminal. Unscreened access through Charter Lounge at N end of RPT apron. All non-RPT ACFT must obtain prior approval of AD OPR to gain access to and from RPT apron. Charges apply. To obtain approval CTC ARO.

HANDLING SERVICES AND FACILITIES

AVGAS: H24, V, MC and Aero Refuellers carnet cards. CTC Coffs Harbour Aero Club when open, 02 6652 2992 for call-outs. Fee may apply.

World Fuel Services: 0800 - 1700 Local MON-FRI, 0930 - 1630 Local SAT and SUN, AH and PH 2HR PN required, service fee may apply. JET A1 tanker, AVGAS H24 WFS Cardswipe or credit card (via smartphone APP). PH: 0408 665 792 or email: wfscoffsharbour@gmail.com.

RESCUE AND FIREFIGHTING SERVICES

- CAT 6 OPR HR
 - MON-FRI: 2000-1120 UTC.
 - SAT and SUN: 2015-1120 UTC.

Note: All times 1HR earlier during HDS.
- 131.0 MHz AVBL HO.

APRONS AND TAXIWAYS

- RWY 10/28, TWY B, E4, F, G, and H not ABV 5,700KG MTOW.
- Exit and entry to TWY F not ABV FM RWY 10/28.
- TWY D not ABV 34,000KG MTOW.

AERODROME OBSTACLES

- Lit:
 - TWR 266FT AMSL BRG 321 DEG MAG 1.1NM FM ARP. Infringes inner HZS by 33.7M.
 - Water tank, 230FT AMSL BRG 184 DEG MAG 2.2NM FM ARP. Infringes inner HZS by 22.5M.

- c. TV mast, 346FT AMSL BRG 215 DEG MAG 2.86NM FM ARP. Infringes inner HZS by 51.8M.
- d. Two towers, 549FT AMSL BRG 308 DEG MAG 1.9NM FM ARP. Infringes inner COS by 115M.

2. MIOL 217FT AMSL BRG 045 DEG MAG 1.2NM FM ARP.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT A, METAR/SPECI. AD WRNG.
- 2. AWIS Phone 02 9353 6412 - Report faults to BoM.
- 3. AWIS FREQ 122.475 - Report faults to AD OPR outside of TWR HR.

PHYSICAL CHARACTERISTICS

03/21	029	68a	PCR 430/F/A/1.50 MPa/T Grooved	WID 45	RWS 150
10/28	095	28a	5700 kg/0.46 MPa	WID 18	RWS 80

AERODROME AND APPROACH LIGHTING

RWY 03/21	MIRL(1)	AFRU+PAL 118.2		SDBY PWR AVBL
RWY 03/21	PAPI(1)	AFRU+PAL 118.2	3.0 DEG51FT	SDBY PWR AVBL
(1)	AFRU+PAL outside TWR HR.			

RWY edge light spacing: 03/21: 60M.

OTHER LIGHTING

ABN ALTN 8 WG

- 1. Secondary PWR switchover time: 15 SEC.
- 2. TWY LGT: Blue edge on TWY A, B, C, D, E1, E2, E3 and I.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	122.6 On ground (Outside TWR HR)
ATIS	COFFS	117.0 130.3
TWR	COFFS TOWER	118.2 (1)

(1) Or PH 02 6650 2785

1. TWR HR:

- a. MON-SAT: 2045-0730 UTC
- b. SUN: 2335-0700 UTC

Phone: 02 6650 2785

Note: All times 1HR earlier during HDS. TWR HR may change at short notice, check status of airspace with ATS or Coffs ATIS.

- 2. Coffs TWR provides combined TWR and APP CTL services within Class D airspace 4,500FT AMSL and BLW DRG TWR HR. CTC TWR for clearance.
- 3. Outside TWR HR, Coffs Harbour Class D airspace becomes Class G.
- 4. Brisbane Centre 134.2 operates Coffs Harbour Class C airspace H24.

RADIO NAVIGATION AND LANDING AIDS

DME	CFS	117.0/117X	301910.3S	1530715.7E	(1)
VOR	CFS	117.0	301910.2S	1530715.2E	

(1) Antenna ELEV 38FT.

LOCAL TRAFFIC REGULATIONS

- 1. Due to shortage of space, time limited parking applies on RPT apron; parking fee may apply. Parking available in GA area for ACFT not ABV 5,700KG MTOW.
- 2. ACFT ABV 23,000KG to execute 180DEG turns at RWY ends or turning nodes.
- 3. Circuit training only permitted BTN 0700-2200 Local (2100-1200 UTC) (1HR earlier during HDS).
- 4. Escort AVBL to and FM GA APN for essential night time OPS with PN to AD Safety Officer.
- 5. For ACFT engine ground run location and approval, refer to *SOP-CHA-OPS-010 (Aircraft Engine Ground Running)*. ATC approval may be required prior to ground run.

FLIGHT PROCEDURES

1. Right hand circuits required when OPR on RWY 03, except as directed by ATC.
2. RPT ACFT may conduct straight-in approaches outside TWR HR.
3. **Instrument training and AWK**
 - a. All ACFT planning practice instrument APCH, NAVAID training or AWK require prior ATC approval. Pilots must book a slot online at www.nsw.bookawk.com.
 - b. Bookings may be subject to cancellation by ATC:
 - (i) on daily review of forecast MET conditions; or
 - (ii) due to OPR restrictions.
 - c. Pilots requesting an APCH to the non-duty RWY may expect extended delay. Conduct of an APCH to the non-duty RWY is not guaranteed.

CTAF - AFRU 118.2

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

1. SEV TURB off W end of RWY 10/28 during strong winds.
2. Wildlife hazard exists, periods of heightened risk will be communicated via NOTAM.
 - a. Increased flying fox activity in vicinity during twilight periods.
 - b. Juvenile white-bellied sea eagle HJ activity increased NOV-APR.
3. WARNING: TWY E3-E4 can be mistaken for RWY 21. Confirm RWY identification by RWY markings or PAPI.
4. Blasting may take place two to three times per month at two locations, 301707.09S 1530345.53E (Tom Jung Quarry) and 301804.87S 1530317.85E (Boambee Quarry).

Contact information:
Tom Jung Quarry - 02 6652 8410 or 0407 146 679
Boambee Quarry - 02 6652 9467 or 0417 624 814

CHARTS RELATED TO THE AERODROME

1. WAC 3357.
 2. Also refer to AIP Departure and Approach Procedures.
-

DARWIN**ELEV 103****AVFAX CODE 8001**

NT

UTC +9:30

YPDN

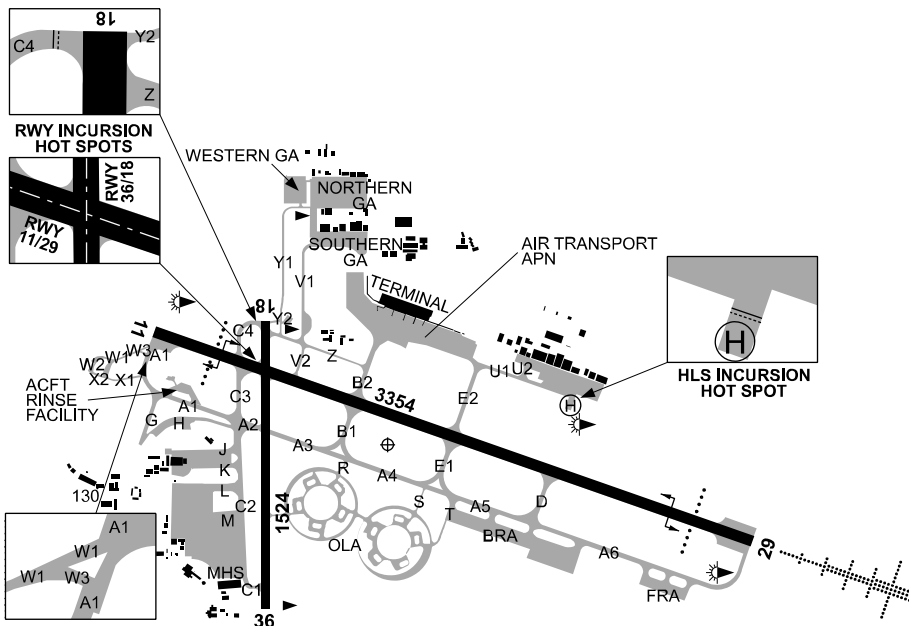
122453S

1305236E

VAR 2 DEG E

JOINT

AD OPR Darwin International Airport Pty Ltd (DIA), PO Box 40996, Casuarina, NT 0811. RAAF Base Darwin, Winnellie, NT, 0820. PH Civil 08 8920 1811 (ADMIN HJ): OPS 0402 088 145 H24: MIL 08 8923 8888. Website: Civil www.darwinairport.com.au.

**REMARKS**

- Access to the RPT terminal not available to itinerant aircraft without PN.
- AD Charges: All civil ACFT, copies of Conditions of Use can be obtained from civil AD OPR or website.
- PPR for civil and foreign MIL ACFT transiting RAAF Darwin from Airbase Operations Centre. 72HR PN.
- Civil airport H24. MIL AD H24, CTC ABOC PH: 08 8923 8888, email: dar.abcp@defence.gov.au for HN OPS.
- The Air Transport APN is a Security Restricted Area. Identification authorised by civil AD OPR must be worn by all personnel not accompanied by an approved airside escort
- This AD is a Security Controlled Airport.
- OPR must confirm Ground Support Equipment (GSE) AVBL with ground handling services prior to unscheduled operations.

HANDLING SERVICES AND FACILITIES**Civil Airport**

AIR BP/SHELL JET A1 (Air Transport APN), Hydrant Bays 1 to 8, 21 to 25: H24.

Phone 08 8945 2655, 0458 093 833. AH 0458 093 833, 0410 060 730.

Viva Energy Australia Pty Ltd: JET A1 Tanker Refuelling H24 (Air Transport, HEL and GA Aprons, excluding Western GA): Phone 0409 889 236, Office 08 9194 7701 (0800-1600 Local MON-FRI).

AVGAS Tanker Refuelling 0500-1600 Local (Air Transport, HEL and GA Aprons, excluding Western GA): Phone 0438 450 038.

Viva and BP AVGAS Bowser H24 Northern GA Apron. Enquiries 0530-1700 Local 0438 450 038, 1700-0530 Local 0409 889 236.

MIL air movements/base duty crew AVBL 2030-1030 UTC, OT 72HR PN, subject to Air Base Executive approval. CTC ABOC PH: 08 8923 8888, email: dar.abcp@defence.gov.au.
Jet Aviation Australia – FBO Services H24 Civil and MIL ACFT. Phone OPS H24 +61 466 026 706. Email: drwfbo@jetaviation.com VHF 135.95 CS ‘Jet Aviation’.
Pearl Flight Centre – Full FBO services, fuel sales and VIP facilities. MEDEVAC, Customs, Immigration and Biosecurity services AVBL H24 with 2HR PN for Civil and MIL ACFT. Short/long-term hangarage (subject to availability) and apron PRKG AVBL on private apron, direct ACFT and vehicle access. Apron and hangar are located off TWY U2.
H24 OPS: +61 434 124 740. Email: pfc@pearlflightcentre.com.au.

PASSENGER FACILITIES

N GA Apron terminal: LG/WC
Domestic and International terminal: PT/TX/HC/BU/AC/LG/RF/WC/ME

RESCUE AND FIREFIGHTING SERVICES

- 1. CAT 8 H24.
- 2. 131.0 MHz AVBL H24. Request via ATC.

APRONS AND TAXIWAYS

- 1. TWY C PCR 810/C EXC TWY C1 S of MHS PCR 200/F/C.
- 2. Military Hard Stand (MHS) PCR 810/C.
- 3. Central Light Duty Apron (Bay 3A) PCR 200/C.
- 4. GA aprons PCR 101/F/C/0.69 MPa/U.

SURFACE MOVEMENT GUIDANCE

- 1. RWY 11/29 DIST to run markers (lit) from 9,000FT.
- 2. RWY 29 and 36 LAHSO DIST to go signs 900M, 600M and 300M.

AERODROME OBSTACLES

- 1. Unlit lightning rod on Fire Station tower 152FT AMSL BRG 327 DEG MAG 0.33NM FM ARP. Infringes TNS by 3.4FT.
- 2. Lit:
 - a. Anemometer 139FT AMSL BRG 278 DEG MAG 0.25NM FM ARP. Infringes TNS by 17.8FT.
 - b. GP antenna 128FT AMSL 310M FM SOT RWY 29 and 148M right of CL. Infringes the 5% plane of RWY 11/29 flyover area by 33FT.
 - c. Control tower 264FT AMSL BRG 039 DEG MAG 0.42NM FM ARP. Infringes inner HZS by 22FT.
 - d. LGT TWR 112FT AGL PSN 122441.28S 1305301.98E.
- 3. Unlit mast 121FT AMSL PSN 122437.58S 1305145.86E. Infringes TNS by 1.6FT.
- 4. For information regarding obstacles CTC AD OPR.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
- 2. AWIS PH 08 7922 2503 - Report faults to BoM.
- 3. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 08 8920 3814.
- 4. RWY condition code AVBL via digital ATIS or on request.

PHYSICAL CHARACTERISTICS

11/29	107	110a	PCR 810/F/C/X/T C5A B747. Grooved. 91M concrete ends RWY 11 and RWY 29 ungrooved.	WID 45	RWS 300
18/36	178	50a	PCR 200/F/C/1.05 MPa/U N of TWY A PCR 810/F/C/X/T	WID 30	RWS 90

ARRESTING GEAR

RWY 11	BAK 12/14 (R)(B) 410 (1,345)	-----	BAK 12/14 (R)(B) 465 (1,525)	RWY 29
--------	------------------------------------	-------	------------------------------------	--------

1. **BAK 12/14 Hookcable** RWY 11 and 29
 - a. Recessed bi-directional BAK 12/14 hookcables INSTL 410M (1,345FT) FM THR RWY 11 and 465M (1,525FT) FM THR RWY 29. Marked by yellow disks. DIST BTN cables 2,479M (8,133FT) no crossing RESTR in down PSN. Steel sheave/CONC kerb 31CM High, 14.7M FM RWY side stripe. When in OPR PSN, pit hatch lids 13.7M FM edge graded strip infringe the 5% plane of RWY 11/29 fly-over area by 2.7FT. Air conditioner condenser eastern end, 19M from southern edge graded strip infringes the 5% plane of RWY 11/29 fly-over area by 0.2FT.
 - b. NML OPR PSN:
 - (i) Arrestable ACFT DEP - DEP end up, APCH end down.
 - (ii) Arrestable ACFT ARR - DEP end down (DEP end up for EMERG, RWY wet or tailwind), APCH end down.
 - (iii) Non-arrestable ACFT OPR - both ends down.

Note: For all ACFT, arrestor system status will not be provided when in NM OPR PSN.
2. BAK 14 Hookcables will be bolted down unless requested for MIL OPS with 48 HRS PN. Hookcables when unbolted will be advised by NOTAM and will be in NML OPR PSN.
3. Maintenance conducted on a regular basis, refer to NOTAM for details.
4. When RWY 11/29 THR displaced for BAK 12/14 hookcable maintenance, RWY not AVBL marked by lighted visual aids (trailer mounted illuminated vertical crosses) and 36M fabric cross.

AERODROME AND APPROACH LIGHTING

RWY 11/29	HIRL		SDBY PWR AVBL
RWY 11/29	MIRL		SDBY PWR AVBL
RWY 11	PAPI	3.0 DEG65FT	SDBY PWR AVBL
RWY 29	HAL-CAT I		SDBY PWR AVBL
RWY 29	PAPI	3.0 DEG60FT	SDBY PWR AVBL
RWY 29	SFL		SDBY PWR AVBL

1. **ALS type and length**
 - a. RWY 29 - distance coded CL: 900M.
2. RWY edge light spacing: 11/29: 59M (Longitudinal) 45M (Lateral).
3. RWY Guard Lights at all RWY/TWY intersections.
4. RWY 11/29 CL and TDZ LGT not provided.
5. RWY 18/36 are unlit. Only military ACFT or ACFT subject to an EMERG may OPR on RWY 18/36 during HN. RWY 18/36 is not visible from the TWR and TWR cannot guarantee the area is clear of obstructions.

OTHER LIGHTING

1. TWY LGT: Green CL. However, TWY C1, C4, V2, Y and Z west of TWY V are unlit.
2. Air Transport APN TXL LGT: Blue edge LGT S of Bays 2, 3 and 21, 22.
3. Safegate Visual Docking System Bays 1 to 5.
4. LGT signal 'ALDIS LGT' FM Control TWR restricted FM NE (BTN 030 to 090 DEG MAG) due to new TWR construction.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	118.15
ACD	DARWIN DELIVERY	126.8 237.3
APP E/DEP	DARWIN APP E/DEP	125.2 305.5 (3)
APP W/	DARWIN APP W/DEP	134.1 243.0 363.8 (2)
DEP		
ATIS	DARWIN ATIS (4)	128.25 308 316.2
DEP	DARWIN APPROACH	123.0 325.4
SMC	DARWIN GROUND	119.55S 121.8P 265.3
SMCV	DARWIN GROUND (VEHICLES)	119.55P 121.8S
TWR	DARWIN TOWER	133.1 243.0 257.8
VOLMET	AUSTRALIA	6676 (1) 11387 (1)
(1)	H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.	

- (2) Darwin APCH provides ATS in CTA out to 40NM.
(3) Provides ATS in CTA FM 360 RDL THRU E to 180 RDL 0030-0830 UTC JO.
(4) ATIS also AVBL on phone 08 7929 4787.
1. RAAF ATC 08 7929 4816 (TWR), 08 7929 4817 (APP), email: dar.atc@defence.gov.au
2. FREQ 243.0 - Monitored H24. Test transmissions on voice and beacon on 243.0 will take place BTN 0100-0110 UTC every MON not exceeding 10 SEC duration.
3. Automatic retransmit FAC exists BTN FLW FREQ: 134.1/363.8; 125.2/305.5; 133.1/257.8; 123.0/325.4; 121.8/265.3; 126.8/237.3.
4. When ATS are not AVBL in DN CTR/CTA due to emergency evacuation of the ATC facility or other emergency, TIBA procedures apply frequency 126.35 MHz. Mandatory broadcast procedures as detailed in *AIP GEN 3.3* also apply frequency 133.1 MHz. Notification will be via 'all stations' broadcasts and ATIS.

RADIO NAVIGATION AND LANDING AIDS

NDB	BGT	308 (RWY11)	122423.9S	1305125.3E	Range 50 (HN 50)	(3)
TAC	DAR	112.4/ 71X	122447.1S	1305300.4E		(4)
DME	DN	112.6/ 73X	122523.8S	1305422.8E		(2)
VOR	DN	112.6	122523.8S	1305423.3E		(1)
DME	IDN	109.7/ 34X (RWY29)	122501.2S	1305332.0E		(6)
GP	IDN	333.2 (RWY29)	122501.4S	1305331.9E		
ILS	IDN	109.7 (RWY29)	122430.8S	1305145.7E		
LOC	IDN	109.7 (RWY29)	122430.8S	1305145.7E		(5)
(1)		283/1.8				
(2)		283/1.8 - Antenna ELEV 129FT.				
(3)		109/1.3 to ARP.				
(4)		255/0.4 to ARP.				
(5)		110/0.9 to ARP.				
(6)		Antenna ELEV 94FT.				

LOCAL TRAFFIC REGULATIONS

1. RWY INCURSION HOTSPOTS:

- a. RWY 18/36 and TWY C4.
b. Intersection of RWY 11/29 and 18/36.
c. ACFT must not vacate/enter onto the crossing RWY without ATC approval.
2. 180 DEG turns for ACFT ABV 100,000KG only permitted on THR RWY 11/29. B767 are exempt from this REQ due to their LDG gear configuration.
3. When THR RWY 11 displaced, unless operationally required, single engine ACFT can expect to depart RWY 29 FM TWY E2. Twin engine ACFT and ABV can expect to depart RWY 29 FM TWY D or A6.
4. New TWR constructed 15M E of current TWR, not commissioned. Observe current TWR for light signals.

5. TAXIWAYS

- a. TXL on S edge of Air Transport APN not AVBL to Code F ACFT.
b. TXL on southern edge of Air Transport APN behind Bay 3 not AVBL to B767 and ABV when A330-300 parked on Bay 3 unless marshaller present in CTC with SMC.
c. TWY Y1 and Y2 not AVBL to ACFT ABV 5,700KG and ABV 16M wingspan.
d. TWY V1 and Z not AVBL to ACFT ABV 22,000KG MTOW.
e. TWY V2 not AVBL to ACFT ABV 22,000KG MTOW and 24M wingspan.
f. TWY C4 not AVBL to ACFT ABV 22,000KG MTOW. Compass swing site established on TWY C4 marked at 30DEG MAG intervals. Details FM AD OPR.
g. TWY U1 not AVBL to ACFT ABV 60,000KG MTOW.
h. TWY U1 E of TWY U2 not AVBL to ACFT ABV 13,000KG MTOW, 23M wingspan and 18.9M rotor diameter.

- i. TWY V passing bay is ADJ the ARFF station. Due noise and blast TWY V passing bay may only be used for pre-flight power checks not exceeding 3MIN. TWY C4 is the preferred location for all other engine ground running and testing with prior approval REQ from AD Operator. ACFT requiring high PWR runs at TWY C4 on headings other than 180DEG must seek approval from SMC. SMC may instruct ACFT to reduce to idle PWR when ACFT pass behind on ADJ RWY and TWY. TWY Y run-up bay AVBL all PWR settings wingspan MAX 15M.
- j. TXL west of Bay 1 and behind Air Transport APN Bays 21 - 25 restricted to 36M MAX wingspan.
- k. TWY G not to be used for night OPS unless approved by Darwin ABOC.

6. CIVIL APRONS

- a. Civil AD OPR does not provide ACFT marshalling services. All requests for ACFT marshalling should be directed to the airlines or local operator by prior arrangement.
- b. Prior PRKG approval is RQ for civil Air Transport APN. OPR of non-scheduled ACFT RQ PRKG on the Air Transport APN are RQ to obtain approval 24HR prior from Airport Coordination Australia (ACA) MON-FRI 2200-0530 UTC (1HR earlier during HDS). Phone +61 2 9313 5469, Fax +61 2 9313 4210, Email: slots@airportcoordination.org SITA HDQACXH. LDG charges apply and include PRKG. Refer to website.
- c. PRKG on northern GA APN RESTR to ACFT with wingspan MAX 15M except by arrangement with Duty Operations Officer, Phone 0402 088 145. Email: dia.taoo@adgnt.com.au. Northern GA APN fully leased except for two set-down and loading positions Bays 162, 163 ADJ Waiting Room in SE corner MAX 30MIN occupation. Visitor PRKG AVBL on an opportunity basis at western GA APN ADJ TWY Y. HEL PRKG is not AVBL on GA aprons. All HEL must park at the E HEL apron. LDG and PRKG charges apply all ACFT. Refer to website for Conditions of Use.
- d. Non-scheduled ACFT above 10,000KG MAUW using the Air Transport APN are RQ to align with the nose-in bay visual PRKG guidance markings.
- e. Operators should check with their ground handling agent for push-back tow-bar availability. If a suitable tow-bar is not AVBL, operators are to carry an on-board tow-bar for their arrival.
- f. The Air Transport APN fuel hydrants preclude cross-bay PRKG.
- g. Operators will be liable for damage to property caused by prop-wash or jet blast from incorrectly parked ACFT.
- h. PVT APN NW of TWY U2 OPR by Pearl Flight Centre. ACFT marshalling is RQ for all visiting ACFT. Requests for marshalling should be directed to Pearl Flight Centre by prior arrangement. PVT APN NE of TWY U2 OPR by Airnorth.
- i. PVT aprons W side of HEL APN OPR by Top End Medical Retrieval Service, Careflight, RFDS and Police Air Wing.
- j. SE corner Southern GA APN OPR by Jet Aviation. ACFT in excess of 22,000KG and up to 42,000KG may access Jet Aviation APN via TWY Z and V1 with prior pavement concession and approval from the AD OPR.
- k. B767 ACFT for parking Bay 21 required to be marshalled to the disconnect point in the taxiway abeam Bay 1, shut down and towed onto Bay. On departure, ACFT to be pushed back tail west to the push-back limit line then towed forward to the disconnect point abeam Bay 1.

7. MILITARY APRONS

EO class 1.1, 1.2 must be off loaded from ACFT PRKG overnight.

8. SURVEY FLIGHTS

- a. ACFT conducting SVY within DN CTR or CTA must CTC ATC for approval with at least 7 days PN.
- b. OPR are to email AWK maps and flight details including timings, levels, FLT CAT, ACFT type and registration to dar.atc@defence.gov.au prior to contacting ATC on phone 08 7929 4817.
- c. OPS preferred on SAT or SUN.
- d. Image capture of Defence establishments prohibited IAW *Defence Act 1903*. Further information AVBL CTC DAR ABOC email: dar.abcp@defence.gov.au.

9. TRAINING FLIGHTS

- a. Circuit and INSTR TRNG in the DN CTR/CTA require prior ATC approval. For INSTR TRNG CTC APP, PH 08 7929 4817. For circuit TRNG CTC TWR, PH 08 7929 4816.

- b. INSTR APCH to a non-duty RWY can expect delay.
- c. Jet or turboprop ACFT above 25,000KG MTOW and all MIL jet (fighter and strike type ACFT) shall maintain RWY HDG until at circuit ALT or, for RWY 29, established over water. Circuit ALT (AMSL):
 - (i) MIL Jet 2,000FT,
 - (ii) Jet 1,500FT,
 - (iii) PROP 1,000FT,
 - (iv) HEL 1,000FT.

Note: DN circuit area is defined as the lateral confines of DN CTR plus DN CTA C1 as defined in the DAH.

10. IFR TRAINING AREA

- a. IFR training may be conducted in the North Eastern Training Area (NETA). The abbreviation NETA may be used as a remark in field 18 when flight planning.
- b. The lateral limits of the NETA are: DN 360R-050R; 15DME-30DME DN.
- c. Vertical limits will be specified in the airways clearance.
- d. PPR, CTC DN APP for approval on phone: 08 7929 4817.

11. EASTERN GRASS TRAINING AREA

- a. The Eastern Grass Training Area is an area adjacent to the E HLS. The training area is to facilitate HEL hover OPS, particularly winching OPS. The area is bounded by drainage trenches to the N, E and S, and the E HLS to the W. Entry and exit to the area is via the E HLS at ATC discretion.
- b. IWDI BRG 151 DEG MAG 114M FM E HLS.
- c. PPR, CTC DN TWR for approval on phone: 08 7929 4816.

FLIGHT PROCEDURES

1. ATC TRAFFIC MANAGEMENT SPEED

- a. When **not** on a SID or STAR (including vectoring) - civil ACFT ARR or DEP DN must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.
- b. For MIL speed restrictions refer *FIHA AD2 SUPP DAR*.
- 2. All arriving VFR ACFT are to make first contact with Darwin ACD on 126.8/237.3 to pass details, including and estimate for YPDN and obtain SSR code. Those ACFT can EXP to be transferred to Darwin APCH to obtain AWY CLR when FLT notification and SSR allocation action is complete.
- 3. Circling to RWY 11/29 not approved unless the RWY lights are at stage 2 or higher.
- 4. VFR ACFT at or below 1,000FT AMSL HJ only.
 - a. VFR ACFT arriving and departing Darwin CTR at or below 1,000FT AMSL contact TWR for arrival clearance, or SMC for departure airways and taxi clearance.
 - b. Obtain departure airways clearance prior to taxi.
 - c. Obtain arrival clearance prior to 10NM from Darwin.
 - d. For departing helicopters, contact TWR for departure instructions/line-up/takeoff clearance.
 - e. **Darwin Aviation Heritage Museum.** To ensure adequate separation with all ACFT arriving to and departing from RWY 11/29, HEL arriving to and departing from the Aviation Heritage Museum are required to remain S of the extended CL of TWY A at all times unless issued a clearance to/from a point N of TWY A or otherwise instructed by ATC.
- 5. Due system limitations, pilots are to CTC Darwin Delivery for outbound airways clearance no earlier than 30 MIN prior to notified EOBT.
- 6. Arriving ACFT RWY 36 during Lee Point parachute drop area activation.
 - a. When arriving RWY 36 for a visual approach and Darwin APP has advised Lee Point drop area is active, in the event of a go around, TWR will issue tracking instructions or a requirement to hold south of Casuarina Square Shopping Centre.
 - b. In the event of a radio failure during a go around RWY 36, hold south of Casuarina Square Shopping Centre in right hand patterns, listen out on ATIS and/or voice modulated NAVAIDS, look to the TWR for light signals.
- 7. LAHSO is used at Darwin on RWY 29 and RWY 36. See YPDN RDS for 'LDA for LAHSO' information.

8. LOW VISIBILITY OPERATIONS

- 8.1. LVP exist when RV is reported at 800M, and/or cloud ceiling is 200FT or less.
- 8.2. Secondary PWR switchover time: 1 SEC during LVP, 15 SEC OT.
- 8.3. HIAL, HIRL and SFL used in reduced visibility.
- 8.4. When VIS less than 800M, ATC will restrict vehicle movements to Airport Operations Officer (AOO) and ARFF.
- 8.5. When VIS between 800M and 550M no more than 3 ACFT on manoeuvring area; below 550M no more than 1 ACFT on manoeuvring area.
- 8.6. AOO will conduct RV assessments.
- 8.7. For CASA approved operators, RWY 11/29 capable of supporting takeoffs with RV not less than 550M.

9. REMOTELY PILOTED AIRCRAFT SYSTEM (RPAS)

- 9.1. All RPAS requests and enquiries are to be sent to 452sqndar.rpas@defence.gov.au with at least 5 business days PN. OPS are subject to MIL OPS and may be restricted or cancelled at any time.

Caution: UA (Multicopter up to 104KG) OPR HJ MON-FRI, SFC to 150FT AGL, WI 250M of PSN BRG 123 DEG MAG 3.23NM FM ARP

10. HELICOPTER CODED CLEARANCES AND OPERATING REQUIREMENTS

10.1. Talc Head - Inbound

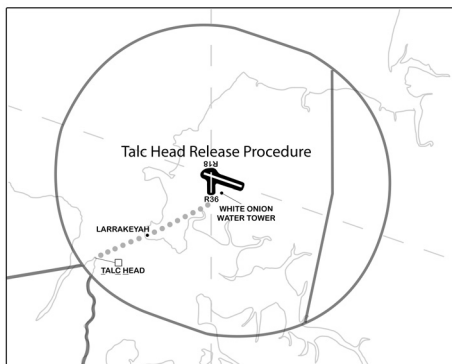
TR Talc Head (TCH) direct Larrakeyah not above 2,500FT; thence TR direct White Onion Water Tower (WOW) (white tower south and east of runway intersection); requirement to reach not above 1,000FT west of centreline RWY 18/36 and then hold at WOW until directed by ATC.

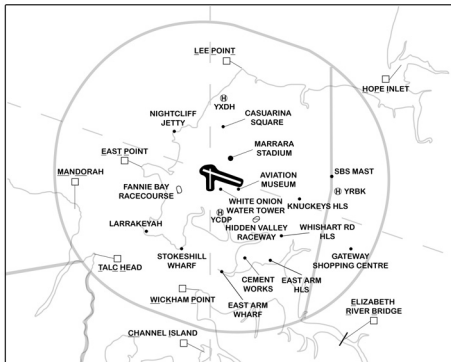
10.2. Talc Head - Outbound

TR as directed by ATC to the White Onion Water Tower (WOW) (white tower south of runway) not above 1,000FT thence direct Larrakeyah; established west of centreline RWY 18/36 climb to not above 2,500FT; thence direct Talc Head (TCH).

Refer to diagrams below for TALC Head Route and common tracking features. Refer to DAH for exact airspace dimensions.

TALC HEAD ROUTE AND COMMON VISUAL TRACKING FEATURES





11. **FIXED WING AND CODED CLEARANCE AND OPERATING REQUIREMENTS**

ATC may clear VFR ACFT on a visual approach via 'MARRARA DOWNWIND RWY 11' or 'MARRARA DOWNWIND RWY 29' coded clearance, e.g. "ALPHA BRAVO CHARLIE, CLEARED VISUAL APPROACH VIA MARRARA DOWNWIND [RWY 11 or RWY 29]".

11.1. **Visual Approach to Marrara Downwind RWY 11**

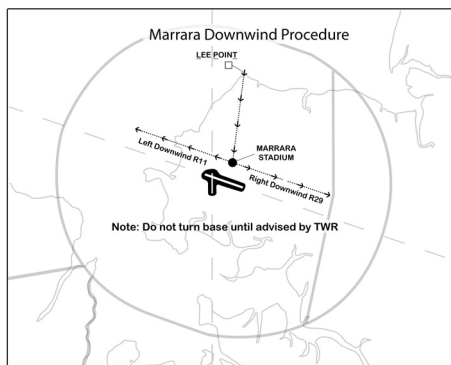
ACFT are to TR via Lee Point (LPT) to Marrara Stadium, thence from Marrara Stadium enter and maintain a left downwind RWY 11. ACFT shall maintain downwind and await ATC instruction on when to turn base for RWY 11.

11.2. **Visual Approach Marrara Downwind RWY 29**

ACFT are to TR via LPT to Marrara Stadium, thence from Marrara Stadium enter and maintain a right downwind RWY 29. ACFT shall maintain downwind and await ATC instruction on when to turn base for RWY 29.

Refer associated diagram for a depiction of the Marrara Downwind Visual Approach Procedure. Refer to DAH for exact airspace dimensions.

MARRARA DOWNWIND VISUAL APPROACH PROCEDURE



12. **VFR FLIGHT PLANNING**

Flight notification acceptance by radio is subject to ATS workload. VFR operations in Darwin Class C airspace should flight plan prior to departure. Failure to do so may result in lengthy delays. VFR ACFT departing and arriving DN, with the exception of YDLV, YMKT and those with destinations on Bathurst and Melville Islands, are required to flight plan via a DN VFR route. VFR route selection should be based on the DN radial to the destination or departure aerodrome (if inbound), and in accordance with the applicable tables below:

OUTBOUND VFR				
ROUTE	POINTS			RADIAL
VFR 1	LPT	JAC	CGR	270-044
VFR 2	LPT	JAC	ADRM	045-104
VFR 3	CHI	LAD	ADB	105-133
VFR 4	CHI	LAD	MTD	134-179
VFR 5	CHI	BYNO	-	180-269
INBOUND VFR				
ROUTE	POINTS			RADIAL
VFR 1	CGR	JAC	LPT	270-044
VFR 2	ADRM	JAC	LPT	045-104
VFR 3	ADB	LAD	CHI	105-133
VFR 4	MTD	LAD	CHI	134-179
VFR 5	-	BYNO	CHI	180-269

NOISE ABATEMENT PROCEDURES

- Unless cleared via a SID, all JET and TURBOPROP ACFT above 25,000KG are to maintain RWY heading until 2,000FT AMSL, and;
 - RWY 11 - 2DME(GPS)/3TAC BTN 2030-1230 UTC;
 - RWY 11 - 7DME(GPS)/8TAC BTN 1230-2030 UTC;
 - RWY 29 - 5DME(GPS)/3TAC.
- All jet and turboprop ACFT ABV 5,700KG (EXC designated Quiet jets) arriving FM the W to land RWY 29, or arriving from the E to land RWY 11, can expect radar vectoring N of built up areas or S OW, HN.
- DEP MIL fighter/strike ACFT refer FIHA AD2 SUPP DAR.
- Also Refer AIP DAP.

ADDITIONAL INFORMATION

- Possibility of WS/TURB on short final for all RWYs.
- Bird hazard exists in RWY strip areas as follows:
 - Whistling Kite, Bush Stone-Curlew, Masked Lapwing and Nankeen Kestrel present all year round.
 - Black Kite, present in greater numbers APR to OCT, and may be present NOV-APR if monsoon is late.
 - Australian Pratincole present in greater numbers APR to OCT.
 - Oriental Plover and Little Curlew present in greater numbers SEP to NOV.
 - Oriental Pratincole present in greater numbers NOV to MAR.
 Species specific NOTAM will be issued during periods of increased activity.
- The FLW Rifle Ranges are in the Darwin CTR, ACT for all ranges is indicated by R flags.
 - BRG 050 1.0NM FM ARP.
 - BRG 140 6.0NM FM ARP.
- Pilots of ACFT entering or exiting DN CTR to the SE are to be aware of the close proximity of YMKT AD to the CTR boundary, and make the appropriate broadcasts on CTAF 127.1.
- CAUTION: High velocity gas plumes located Bladin Point BRG 156 MAG 6.7NM FM AD, WI 0.5NM radius of 123112S 1305506E, H24.
- MIL HEL low level OPS WI 150NM of ARP formation ACFT using LGT enhancing devices and may not display external visual LGT.
- CAUTION: Model ACFT OPR at East Point (ETP) SFC to 400FT AGL 270/2.9NM FM ARP.
- MIL L-Band radar is in operation at 122457S 1305144E. Possible avionics interruptions/errors WI 150M BLW 500FT AMSL.
- Ground running of engines on all aprons requires prior approval from AD OPR PH 0402 088 145 and notification to SMC. Engine Ground Running Plan AVBL from AD OPR.
- Weather balloon launch APRX 2315 and 1115 UTC. Launches may occur at other times.


-
11. UA (fixed wing up to 25KG and 3M wingspan) OPR HJ MON-FRI, SFC to 2,000FT AMSL OCTA, WI 2.72NM of PSN BRG 102 DEG MAG 15.3NM FM ARP. Refer YBBB NOTAM for contact.
 12. Model aircraft may be flying WI 500M RAD of PSN BRG 048 DEG MAG 2.7NM FM ARP (Darwin Model Flying Club), SFC - 400FT AGL.
 13. HEL OPR on TWY U1 to exercise caution due LGT TWR obstacle.

CHARTS RELATED TO THE AERODROME

1. WAC 3109.
 2. Aerodrome Obstruction Chart Type A (RWY 11/29 only): 14th Edition (June 2024).
 3. Precision Approach Terrain Chart RWY 29 (April 2017).
 4. MIL Aerodrome Obstruction Chart Type A: November 2024.
 5. Also refer to AIP Departure and Approach Procedures.
-

FORREST

AVFAX CODE 6201

ELEV 511

WA 305017S 1280654E UTC +8 YFRT
 AD OPR Fayburn Pty Ltd, PO Box 63, Guildford, WA, 6935. AD MGR: CERT
 Forrester Airport, Forrester, WA, 6434. Email: AD Manager
 info@forresterairport.com.au. PH AD Manager 08 9022 6403: ARO 0408
 710 862. PH Fayburn Administration 0409 376 016. Email:
 admin@forresterairport.com.au. Website: www.forresterairport.com.au.

REMARKS

- AD Charges: nil when fuel purchased.
- PPR FM AD OPR for:
 - OPS ABV 20,000KG.
 - Use of the AD as an alternate.
- All RWS AVBL with PN.

HANDLING SERVICES AND FACILITIES

CTC AD Manager H24, PN required. AVGAS, JET A1 and 0125. Payment by cash, EFTPOS, MC, V or cheque. No AMEX or Carnet, invoice by arrangement.

PASSENGER FACILITIES

PT/WC/AC/RF/Meals. Fully furnished accommodation should be booked in advance to AD Manager.

AERODROME OBSTACLES

- Unlit Telstra TWR 810FT AMSL BRG 242 DEG MAG 2.48NM FM THR RWY 09.
- NDB TWR 672FT AMSL BRG 213 DEG MAG 1.2NM FM ARP.
- Unlit hangar facade 34FT AGL BRG 112 DEG MAG 137M FM THR RWY 36. Infringes transitional SFC by 4FT.

METEOROLOGICAL INFORMATION PROVIDED

- TAF CAT C, METAR/SPECI.
- AWIS PH 08 6216 2613 - Report faults to BoM.
- AWIS FREQ 128.65 (one long transmit pulse of 1 SEC to activate).

PHYSICAL CHARACTERISTICS

09/27	090	44a	PCR 170/F/A/1.10 MPa/U	WID 30	RWS 150
18/36	176	50a	PCR 170/F/A/1.10 MPa/U	WID 45	RWS 150

AERODROME AND APPROACH LIGHTING

RWY 09/27 PTBL(2)

BY PRIOR
 ARRANGEMENT
 SDBY PWR AVBL

RWY 18/36 LIRL(1) PAL 119.6

- PAL 119.6 requires three one-second pulses to activate.
- EMERG only. 90MIN PN.

RWY 18/36 edge light spacing: 90M.

OTHER LIGHTING

ABN FLG 10 W AVBL MAN activation on request

- Secondary PWR auto switch time: 15 SEC.
- TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	134.2 11000FT
UNICOM	FORREST UNICOM	126.7 (1)
(1)	CS "Forrest UNICOM".	

RADIO NAVIGATION AND LANDING AIDS

NDB	FRT	268	305117.6S	1280557.7E	Range 90 (HN 75)	(1)
(1)	033/1.2 to ARP.					

LOCAL TRAFFIC REGULATIONS

1. ACFT hangar parking AVBL.
2. RWY 18/36 transitional SFC may be infringed by ACFT parked on apron.

CTAF 126.7**CHARTS RELATED TO THE AERODROME**

1. WAC 3353.
 2. Also refer to AIP Departure and Approach Procedures.
-

GOLD COAST**ELEV 21****AVFAX CODE 4011**

QLD

UTC +10

YBCG

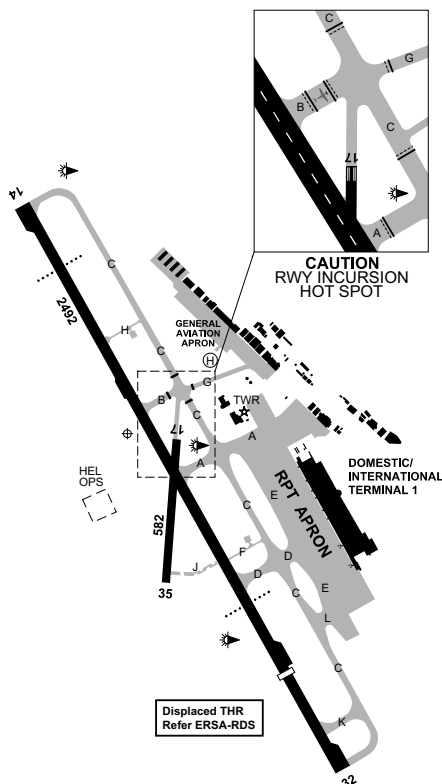
280952S

1533017E

VAR 12 DEG E

CERT

AD OPR Gold Coast Airport Pty Limited, Level 1, Airport Central, 1 Eastern Avenue, Bilinga, QLD,
4225. PH 07 5589 1100. ARO 0407 755 722 AH.

**REMARKS**

1. AD Charges: All ACFT.
2. This AD is a Security Controlled Airport.
3. All pilots and operators must possess and display a current Aviation Security Identification Card (ASIC) when airside.
4. Prior consent from Gold Coast Airport for the use as a scheduled international alternate. Gold Coast Airport may require a separate agreement as capacity is limited.

HANDLING SERVICES AND FACILITIES

Air BP: Phone 0488 429 471, 0700-1600 Local MON-SUN. AH call-out fee applies. AVGAS, JET A1, JET A1-FSII, Shell lubricants.

Platinum Business Aviation Centre: Office HR 2100-0700 UTC MON-FRI, AH 24HR PN call 07 5688 6600, call-out fee applies. VHF 131.975 MHz, JET A1, AVGAS, World Fuel Carnet, V and MC. Ramp parking/hangarage on request, full FBO facility and all associated services AVBL.

Ampol: 2100-0900 UTC DLY, Phone 07 5688 6690, AH 0439 307 259. AH by arrangement. JET A1, O125, O156. AH call-out fee \$50.

General

AD OPR does not provide ACFT marshalling services. All requests for ACFT marshalling should be directed to the Airlines or a FBO (if applicable).

All charter operators or visiting ACFT requiring marshalling, logistical support or engagement of border control agencies must engage a Fixed Base Operator or recognised ground handler and be met/escorted on arrival and departure.

PASSENGER FACILITIES

PT/TX Regent (07 5588 1234 - Tweed 07 5536 1144)/HC main terminal/BU/RF/WC/ME

RESCUE AND FIREFIGHTING SERVICES

1. CAT 8
 - a. 1945-1235 UTC DLY EXC SAT.
 - b. 1945-1220 SAT.
2. 131.0 MHz AVBL HO.
3. Water Rescue Service AVBL.

APRONS AND TAXIWAYS

1. RPT Apron - single Code E/Dual Code C MARS configuration.
2. RPT Apron - parking bays sequenced from Bay 1 at the north-eastern end of the apron through to Bay 10 at the south.
3. GA Apron HEL PRKG - 3 designated positions, paved section of GA HEL Apron:
 - a. H1 (14.1M MAX rotor diameter).
 - b. H2 (11M MAX rotor diameter).
 - c. H3 (11M MAX rotor diameter).
4. TWY H and F not AVBL to ACFT ABV 5,700KG.
5. TWY J grass not AVBL to ACFT ABV 5,700KG.
6. TWY G - ACFT ABV 5,700KG require pavement concessions and operator movement records.
7. TWY B ACFT holding for RWY 14 over 15M length infringe RWY 17.
8. ACFT Code B and ABV landing RWY 14 first AVBL TWY is A, unless otherwise advised by ATC.

AERODROME OBSTACLES

1. Glidepath mast (lit) 67.52FT AMSL BRG 315 DEG MAG 643M FM ARP.
2. Localiser antenna (lit) 19.23FT AMSL BRG 136 DEG MAG 1,831M FM ARP.
3. Fence (lit) 15FT AMSL chainage 2,350-2,492M FM SOT RWY 14 offset 80M FM RWY CL.
4. Vent pipe (lit) 19FT AMSL BRG 140 DEG MAG 1,377M FM ARP.
5. Power pole (unlit) 245FT AMSL BRG 308 DEG MAG 2,462M FM ARP.
6. Pine tree (unlit) 76.5FT AMSL BRG 323 DEG MAG 1,645M FM ARP.
7. Multiple trees within an arc BRG 142-309 DEG MAG 607M-1,129M FM ARP. Infringe the TNS.
8. Towers (lit):
 - a. 418FT AMSL BRG 293 DEG MAG 5,998M FM ARP.
 - b. 293.6FT AMSL BRG 310 DEG MAG 3,725M FM ARP.
 - c. 300.2FT AMSL BRG 103 DEG MAG 2,868M FM ARP.
 - d. 344.5FT AMSL BRG 106 DEG MAG 3,314M FM ARP.
 - e. 300.2FT AMSL BRG 309 DEG MAG 3,706M FM ARP.
 - f. 943FT AMSL BRG 210 DEG MAG 8,211M FM ARP.
 - g. 219.8FT AMSL BRG 148 DEG MAG 5,129M FM ARP.
 - h. 105FT AMSL BRG 130 DEG MAG 2,800M FM ARP.
 - i. 432.5FT AMSL BRG 238 DEG MAG 2.49NM FM ARP.
 - j. 1,045.6FT AMSL BRG 216 DEG MAG 5.88NM FM ARP.
 - k. 82FT AGL BRG 106 DEG MAG 3,314M FM ARP. Infringes inner HZS by 124FT.
9. Buildings:
 - a. John Flynn Hospital (unlit) 224FT AMSL BRG 296 DEG MAG 1,971M FM ARP.
 - b. Nirvana (unlit) 184FT AMSL BRG 088 DEG MAG 2,262M FM ARP.
 - c. 171FT AMSL BRG 078 DEG MAG 2.36NM FM ARP.
10. Buildings (lit):
 - a. 272FT AMSL BRG 085 DEG MAG 3,369M FM ARP.
 - b. 269FT AMSL BRG 085 DEG MAG 3,470M FM ARP.

- c. 285.4FT AMSL BRG 123 DEG MAG 6,002M FM ARP.
- d. 272FT AMSL BRG 085 DEG MAG 3,211M FM ARP.
- e. 1,097FT AMSL BRG 326 DEG MAG 19,015M FM ARP.
- f. 293.6FT AMSL BRG 316 DEG MAG 5,178M FM ARP.
- g. 246FT AMSL BRG 089 DEG MAG 4,176M FM ARP.
- h. 279.5FT AMSL BRG 085 DEG MAG 3,139M FM ARP.
- i. 269FT AMSL BRG 086 DEG MAG 2.06NM FM ARP.
- j. 220FT AMSL BRG 079 DEG MAG 2.43NM FM ARP.
- 11. Houses (unlit):
 - a. 245FT AMSL BRG 311 DEG MAG 2,440M FM ARP.
 - b. 152.5FT AMSL BRG 326 DEG MAG 3,066M FM ARP.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, TAF3 H24, METAR/SPECI, AD WRNG, WS WRNG.
2. AWIS Phone 07 3564 3713 - Report faults to BoM.
3. AWIS FREQ 134.5 AVBL outside TWR HR - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

14/32	139	82a	PCR 680/F/A/X/T Grooved	WID 45	RWS 300
17/35	173	19a	5700 kg/1.00 MPa	WID 18	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 14/32	HIRL			SDBY PWR AVBL
RWY 14/32	MIRL	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 14/32	RTIL			
RWY 14	PAPI	AFRU+PAL 118.7	3.0 DEG63FT	SDBY PWR AVBL
RWY 32	PAPI	AFRU+PAL 118.7	3.0 DEG53FT	SDBY PWR AVBL

RWY edge light spacing: 14/32 HIRL: 60M. White FM THR to 600M FM RWY end.

Yellow Final 600M to RWY end; MIRL: 60M. White.

OTHER LIGHTING

ABN ALTN 8 WG

1. Secondary PWR switchover time during TWR HR: 1 SEC during LVP; 15 SEC OT.
2. TWY LGT: Green CL on A, B, C, D, E, G, K and L.
3. RWY 14/32 and 17/35: RWY guard lights OPR at RWY holding points.
4. RWY guard LGT not provided on TWY J.
5. TWY centreline lighting not present along transition between:
 - a. TWY B and TWY G.
 - b. TWY B and TWY C (North).

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	119.5 On ground (outside Gold Coast TWR HR)
ACD	GOLD COAST DELIVERY	128.75 (3)
APP	BRISBANE APPROACH	123.5
ATIS	GOLD COAST	112.3 (1) 134.5 (2)
SMC	GOLD COAST GROUND	121.8
TWR	GOLD COAST TOWER	118.7

(1) H24

(2) TWR HR only

(3) ACFT DEP Gold Coast must REQ CLR or PDC readback

1. TWR HR - 1955-1300 UTC DLY.

2. Outside TWR HR, Gold Coast Class C airspace 3,500FT and BLW becomes Class G.

3. Flight details and clearance requests should be advised to Brisbane Centre well before the CTR boundary. Pilots submitting details should prefix these requests with the phrase "Flight Details". Pilots should NOT contact Gold Coast TWR to submit Inbound/Transiting details.

4. ATIS AVBL Phone 07 5599 5910.

Note: TWR and APP may operate independently, hours or airspace responsibility may change at short notice. Check status of airspace with ATS, NOTAM or Gold Coast ATIS.

RADIO NAVIGATION AND LANDING AIDS

DME	CG	112.3/ 70X	281008.1S	1533014.2E	Range 60 (HN 60)	(1)
NDB	CG	278	280953.5S	1533004.0E		
VOR	CG	112.3	281008.2S	1533014.7E		
DME	ICG	111.1/ 48X (RWY14)	280934.5S	1533004.2E		(3)
GP	ICG	331.7 (RWY14)	280934.4S	1533004.4E		(2)
ILS	ICG	111.1 (RWY14)	281042.4S	1533052.8E		
LOC	ICG	111.1 (RWY14)	281042.4S	1533052.8E		
(1) Antenna ELEV 38 FT.						
(2) Coverage limited to within 5 degrees W of the extended RWY CL, due to terrain shielding.						
(3) Poor DME coverage at or below 3000FT beyond 17NM, W of the extended RWY CL. Antenna ELEV 33FT.						

LOCAL TRAFFIC REGULATIONS

1. RWY 14 - ACFT ABV 136,000KG landing RWY 14 must roll through and exit RWY via TWY K to avoid pavement damage from heavy braking. ACFT BLW 136,000KG landing RWY 14 can exit via TWY D if heavy braking not required.
2. All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
3. Pilots are encouraged to request "detailed taxi guidance" prior to landing or taxiing for departure or request follow-me service once on ground frequency if unsure of parking bay.
4. **Runway Incursion Hotspots**
 - 4.1. RWY 17/35 at TWY B (Holding Point B RWY 17 is very close to the gable line for RWY 14).
 - 4.2. RWY 35 after landing RWY 32 (RWY 35 often mistaken for an angled TWY).
5. **Training and Airwork Flights**
 - a. Circuit training see Noise Abatement
 - b. Circuit and Western Grass helicopter bookings, pilots must book a slot online at www.bookawk.com.
 - c. IAL Training: Pilots must book a slot online at www.bookawk.com. ILS training for ACFT BLW 5,700KG MTOW will not be approved outside 0900-1700 Local. Pilots must contact Brisbane Centre 07 3866 3694 for AWK ABV 1,500FT
 - d. NDB - A and VOR - A approaches will not normally be approved.
 - e. Training operations contrary to the prevailing traffic pattern/operational runway direction will not normally be approved.
 - f. HEL with skid landing gear not permitted to complete touch and go circuit training on paved SFC due to pavement damage.
 - g. Aircraft conducting a practice instrument approach can expect to make a full stop landing due to traffic management requirements. Upon request, Brisbane Approach will advise if the traffic disposition allows for a practice missed approach. Aircraft are required to submit an arrival and departure flight plan. Failure to plan correctly may result in non-availability of a practice instrument approach.
 - h. Touch and go landings are not available. Approved circuit bookings are exempt.
6. Occasionally, TCAS advisories for ACFT operating in Gold Coast Terminal Control Area may occur due ATC procedures affecting VFR ACFT.
7. Pilots planned to BN must obtain a slot time for Brisbane prior to engine start, in accordance with BN INTL Air Traffic Flow Management Procedures (See BRISBANE INTL entry).
8. Pilots should ensure flight plan details are submitted for flight in Gold Coast Class C airspace, preferably through NAIPS or Flightwatch, well in advance of requesting SSR code allocation. Failure to do so will result in delays for airways clearance. The SSR code request is to be made on the appropriate FIA frequency.
Pilots who are squawking an assigned discrete code may call Gold Coast TWR on 118.7 directly for airways clearance at or BLW 1,500FT.
9. Flights planned to depart Gold Coast above 6,000FT can expect airways clearance at 6,000FT. Higher levels can be anticipated on APP CTL FREQ.
10. Fixed and rotary wing ACFT are not to perform engine ground runs and related static operations on the GA APN and should utilise provided run-up bays.

11. PARKING

Overnight parking is no longer AVBL for all aircraft above 5,700KG MTOW, except for RPT aircraft. Itinerant parking requirements is available for 2HR or less, this will require prior approval FM airport management with a MNM notice of one clear working day (MON-FRI). Itinerant ACFT under 5,700KG must park north of TWY G, at the northern end of the GA APN.

12. GA short term HEL parking - 3 x designated positions, paved section of GA HEL APN:
- H1 MAX 14.1M main rotor diameter.
 - H2 MAX 11M main rotor diameter.
 - H3 MAX 11M main rotor diameter.

13. TWY K DEPARTURES

ACFT departing RWY 32 must use TWY K intersection for departure. Full length AVBL if operationally required.

14. No HEL air taxi on the GA APN.
15. HEL OPS from the aiming point not available to or adjacent to TWY G, east of the air traffic control tower or south of TWY G.

FLIGHT PROCEDURES**1. ATC TRAFFIC MANAGEMENT SPEED**

When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP CG must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

2. Circuits from the Western Grass are to be conducted with upwind legs to remain inside the airport boundary fence and base turns to be made within the RWY14/32 threshold markers.

3. COASTAL TRANSIT IN CLASS G AIRSPACE

Due to high density traffic in coastal Class G Airspace between Cudgen Headland and Hastings Point, fly;

- Southbound 1,000FT AMSL.
- Northbound 500FT AMSL.

Concentrated TFC BTN Gold Coast and Southport at 500FT, see also SOUTHPORT CTAF procedures.

4. Aircraft requiring a transit of the GC CTR should plan to track via the VFR route depicted on the VTC as follows:

Northbound transit via the highway (inland) and contact Tower 118.7 approaching Cudgen Lake for ATC clearance.

Southbound transit via the highway (inland) and contact Tower 118.7 approaching Robina Town Centre for ATC clearance. Aircraft requiring to transit the CTR coastal may experience delays due high density traffic.

5. LOW VISIBILITY OPERATIONS

- LVO AVBL during TWR HR.
- No transmissometers installed for RVR. Only Runway Visibility (RV) assessment measurements are AVBL.
- Preparations for the activation of LVP are commenced when the visibility has reduced to 1,500M or less, and/or cloud ceiling is 200FT or less and further reducing. This ensures that the LVP are in force at or just prior to the visibility reducing to 800M.
- When visibility is less than 800M, ATC will limit vehicle access on the manoeuvring area to the Airport Operations Officer and RFFS/other EMERG vehicles.
- Aircraft OPS in VIS less than 800M when ATC is not operating by prior arrangement only, contact aerodrome operator.
- Low VIS DEP on RWY14/32 not AVBL BLW 550M VIS and APP not AVBL below 800M VIS.

CTAF - AFRU 118.7

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

- A Curfew and Noise Abatement Procedures apply. See AIP DAP.
- The preferred RWY for takeoff and landing is RWY 14.
- Circuit training:
 - Not permitted BTN 1200-2000 UTC;
 - Where possible circuits should be distributed equally left and right of the RWY in use.

4. Preferred flight paths for turbojet and non turbojet ACFT ABV 5,700KG MTOW are contained in AIP DAP.
5. Outside TWR HR pilots are requested to use the same RWY for DEP and ARR - if operationally acceptable.
6. RWY 14 INSTR APCH PROC for turbojet and non turbojet ACFT ABV 5,700KG MTOW - noise preferred RWY 14 APCH:
 - a. RNP W RWY 14, RNP Y RWY 14;
 - b. RNP Z RWY 14;
 - c. ILS RWY 14 (training and recency not permitted).To minimise noise, NDB or VOR RWY 14 only AVBL when operationally RQ.

ADDITIONAL INFORMATION

1. Bird Hazard exists. Increased numbers of the following species are expected during the specified times:
 - a. MAR to MAY - increased flying-fox numbers present after dark, peak activity around dusk.
 - b. JUL to MAR - flocks of small birds feeding in air above runway and short final including fairy martin, welcome swallow, tree martin and white-throated needletail.
 - c. FEB to JUN - black kite may be present. Activity focuses foraging above runway between 1000-1500 Local with increased temperatures.
 - d. APR to OCT - increased masked lapwing activity. Activity focuses NE and SE corners of airfield day or night.
 - e. Increased bird activity during and post rainfall and adverse weather events including Australian white ibis, straw-necked ibis and silver gulls.
 - f. Species specific NOTAM will be issued during periods of increased activity.
2. Potential of BLDG induced wind TURB on RWY 32 when the wind speed is greater than 28KT FM NNE to ENE.

CHARTS RELATED TO THE AERODROME

1. WAC 3357.
 2. Aerodrome Obstruction Chart Type A (October 2022).
 3. Also refer to AIP Departure and Approach Procedures.
-

GOVE

ELEV 205

AVFAX CODE 8009

NT

121609S

1364906E

UTC +9:30


VAR 3 DEG E

YPGV

CERT

AD OPR Nhulunbuy Corporation, PO Box 345, Nhulunbuy, NT, 0881. Email: mac@ncl.net.au. PH

AD 08 8987 1370 or 0448 863 903: H24 0428 962 606.



REMARKS

- 1. AD Charges: All ACFT.
- 2. This AD is a Security Controlled Airport.
- 3. PPR from AD OPR for all ACFT OPS ABV 55,000KG MTOW.

HANDLING SERVICES AND FACILITIES

Viva Energy Aviation: Aviation Fuel Services JET A1 2130-0730 UTC, 0488 707 803, AH by prior arrangement, call-out fee applies. Fuel2Sky Carnet cards or credit cards (V and MC). H24 AVGAS bowser.

PASSENGER FACILITIES

LG/HC/RF/WC/TX.

APRONS AND TAXIWAYS

- 1. TWY C WID 20M sealed and lit.
- 2. TWY A and B 13.7M WID sealed.
- 3. TWY E WID 18M sealed and lit.
- 4. TWY D WID 12M sealed.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT C, METAR/SPECI.
- 2. AWIS Phone 08 7922 2505 - Report faults to BoM.
- 3. AWIS FREQ 123.05 (requires one-second pulse to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

13/31

127 72a

PCR 210/F/A/1.15 MPa/T

WID 45

RWS 150

AERODROME AND APPROACH LIGHTING

RWY 13/31

LIRL

AFRU+PAL 127.8

SDBY PWR AVBL

RWY 13/31

PAPI(1)

AFRU+PAL 127.8

3.0 DEG52FT

SDBY PWR AVBL

(1)

Left side.

RWY edge light spacing: 13/31: 60M

OTHER LIGHTING

- 1. SDBY PWR switchover time: 20 SEC.
- 2. TWY LGT: Blue edge on C and E.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA

BRISBANE CENTRE

125.0 On ground

RADIO NAVIGATION AND LANDING AIDS

DME	GV	114.1/ 88X	121554.0S	1364858.6E	(2)
NDB	GV	380	121612.8S	1364927.6E	Range 65 (HN 65) OW 110 (OW HN110) (3)
VOR	GV	114.1	121554.1S	1364859.1E	(1)

- (1) 148/0.28 to ARP
- (2) Antenna ELEV 211FT.
- (3) 275/0.36 to ARP

LOCAL TRAFFIC REGULATIONS

1. ACFT ABV 10,000KG MTOW must use turning nodes for 180DEG turns, ACFT BLW 10,000KG must use MAX RAD turns to avoid pavement damage.
2. No parking on E sealed apron without PPR FM AD OPR except for refuelling purposes.
3. No parking on W sealed apron without PPR FM AD OPR.
4. Gate codes to access airside can be obtained by contacting the ARO.

CTAF - AFRU 127.8

ADDITIONAL INFORMATION

All pilots and operators must possess and display a current Aviation Security Identification Card (ASIC) when airside.

CHARTS RELATED TO THE AERODROME

1. WAC 3110.
 2. Also refer to AIP Departure and Approach Procedures.
-

HOBART**ELEV 13****AVFAX CODE 7001**

TAS

UTC +10

YMHB

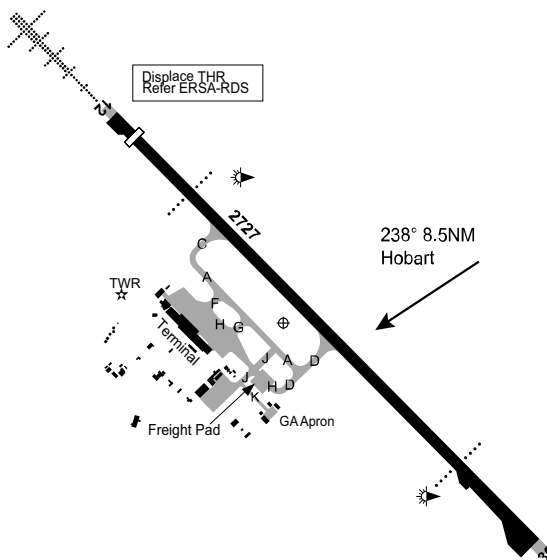
425010S

1473037E

VAR 16 DEG E

CERT

AD OPR Hobart International Airport Pty Ltd, Hobart International Airport, 6 Hinkler Rd, Cambridge, TAS, 7170. Email: operations@hobartairport.com.au. PH 03 6216 1600^, ARO 0418 120 854. Fax 6248 5540. Website: www.hobartairport.com.au.

**REMARKS**

1. This AD is a Security Controlled Airport.
2. AD Charges: All ACFT AVBL FM website.

HANDLING SERVICES AND FACILITIES

Air BP: Hobart Aviation Refuellers. 1900-1000 UTC DLY, AH call-out fee, 1HR PN.
 Phone H24 03 6248 5713, Fax 03 6248 5715, email: enquiries@hobartaviationrefuellers.com.au.
 JET A1 only.

ACFT marshalling is the responsibility of ACFT operators.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 7:
 - a. 1945-1345 UTC DLY EXC SAT.
 - b. 1945-1210 UTC SAT.

Note: All times 1HR earlier HDS.
2. 131.0 MHz AVBL HO.
3. Water Rescue Service AVBL.

APRONS AND TAXIWAYS

1. APN PRKG PSN designation number markings are not sequential.
2. TWY K not AVBL for ACFT above 5,700KG MTOW or wingspan greater than 12M.
3. GA apron HJ only.

AERODROME OBSTACLES

1. BLDG 188FT AMSL BRG 261 MAG 2.63NM FM ARP infringes conical SFC.
2. Frangible lattice weather mast 45FT AMSL BRG 113MAG 0.9NM FM ARP. Lit with steady red OBST light and marked with alternating red and white. Infringes approach SFC.
3. Fence 21FT AMSL BRG 121 MAG 1,728M FM ARP. Infringes APCH SFC by up to 3FT.
4. Towers:

- a. Lit and marked phone TWR 738FT AMSL at Single Hill BRG 177 DEG MAG 2.5NM FM ARP. Infringes HZS.
 - b. Lit and marked phone TWR 906FT AMSL at Butchers Hill BRG 310 DEG MAG 6.18NM FM ARP. Infringes HZS.
 - c. Lit and marked phone TWR 164FT AMSL at Tower Hill BRG 251 DEG MAG 0.39NM FM ARP. Infringes inner HZS.
 - d. Unlit phone TWR 710FT AMSL at Mt Augustus BRG 170 DEG MAG 7.86NM FM ARP. Infringes outer HZS by 212FT.
 - e. Communications TWR 653FT AMSL at Weston Hill BRG 011 DEG MAG 4.82NM FM ARP. Infringes outer HZS.
 - f. Mt Mather communications TWR. Lit 652FT AMSL, PSN 425541.23S 1472826.63E BRG 182 DEG MAG 5.75NM FM ARP. Infringes outer HZS.
 - g. Lit and marked TWR 755FT at Lewisham BRG 081 DEG MAG 6.2NM FM ARP. Infringes outer HZS.
 - h. Marked and lit mast 669FT AMSL at Lauderdale BRG 170 DEG MAG 5.38NM FM ARP. Infringes outer HZS by 171FT.
 - i. Lit communications TWR 1,893FT AMSL at Grasstree Hill BRG 283 DEG MAG 7.75NM FM ARP. Infringes outer HZS by 1,394FT.
5. Groups of trees:
- a. 47FT AMSL, PSN 424931.94S 1472943.28E BRG 299 DEG MAG 1,694M FM ARP. Infringes TKOF SFC by up to 3FT.
 - b. 49FT AMSL, PSN 424935.27S 1472942.39E BRG 296 DEG MAG 1,640M FM ARP. Infringes APCH SFC by up to 2FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
2. AWIS PH 03 6283 8602 - Report faults to BoM.
3. AWIS FREQ 122.375 (requires one-second transmit pulse to activate) - Report faults to AD OPR.
4. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 03 6221 2026.

PHYSICAL CHARACTERISTICS

12/30 119 89a PCR 1050/F/D/X/T Grooved

WID 45 RWS 300

AERODROME AND APPROACH LIGHTING

RWY 12/30	HIRL			SDBY PWR AVBL
RWY 12/30	MIRL	AFRU+PAL 118.1		SDBY PWR AVBL
RWY 12	HIAL-CAT I	AFRU+PAL 118.1		SDBY PWR AVBL
RWY 12	PAPI	AFRU+PAL 118.1	3.0 DEG69FT	SDBY PWR AVBL
RWY 30	PAPI	AFRU+PAL 118.1	3.0 DEG77FT	SDBY PWR AVBL

1. ALS type and length

- a. RWY 12 - distance coded CL: 850M.
2. RWY edge light spacing: 12/30: 59M.
3. RWY guard LGT (RGL) at all RWY/TWY intersections.
4. Responsible person AVBL on CTAF outside TWR HR. Report PAL faults on CTAF or Phone 03 6216 1600^, and Melbourne Centre 125.55.

OTHER LIGHTING

HBN

On nearby hills, refer to IAL charts.

1. Secondary PWR switchover time: 1 SEC during LVP; 15 SEC OT.
2. TWY LGT: Green CL. AVBL on all TWY except TWY K.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	HOBART CENTRE	(1)	125.55 On Ground
FIA	MELBOURNE CENTRE	(2)	125.55 On Ground
ACD	HOBART GROUND		121.7
APP	HOBART APPROACH	(3)	125.55
ATIS	HOBART ATIS		112.7 128.45
SMC	HOBART GROUND		121.7
TWR	HOBART TOWER		118.1

- (1) During APP HR.
 - (2) Outside APP HR.
 - (3) Automatic re-transmit when combined with LAUNY APP.
 1. TWR and APP HR: 1950-1210 UTC DLY (1HR earlier during HDS).
 2. Phone HOBART TWR: 03 6248 3096^, HB APP: 03 9235 2012^.
 3. HOBART TWR provides a non-surveillance TWR CTL service within the YMHB Class D CTR and CTA steps:
 - a. SFC to 1,500FT east of the YMHB RWY 12/30 extended CL and;
 - b. SFC to 2,500FT west of the YMHB RWY 12/30 extended CL extended to 11NM TASUM to the north-west.
 4. Hobart TWR also provides information for Cambridge AD traffic.
 5. HOBART APP provides a surveillance APP CTL service within the YMHB CTA steps (extending to 70NM TASUM), up to FL245.
 6. Outside TWR/APP HR, Class C and Class D airspace WI 35NM TASUM SFC to 8,500FT AMSL becomes Class G.
- Note: TWR and APP may operate independently, hours or airspace responsibility may change at short notice. Check status of airspace with ATS, NOTAM or Hobart ATIS.*

RADIO NAVIGATION AND LANDING AIDS

DME	HB	112.7/ 74X	424957.6S	1473038.8E	(2)
VOR	HB	112.7	424958.0S	1473038.4E	(1)
DME	IHB	109.9/ 36X	424948.4S	1473021.6E	(3)
		(RWY12)			
GP	IHB	333.8 (RWY12)	424948.7S	1473021.3E	
ILS	IHB	109.9 (RWY12)	425047.8S	1473133.5E	
LOC	IHB	109.9 (RWY12)	425047.8S	1473133.5E	
(1)	RESTRICTION: Coverage reduced by terrain shielding in all sectors.				
(2)	Antenna ELEV 28FT.				
(3)	Antenna ELEV 22FT.				

Outside TWR HR LOC, GP, VOR, DME, monitored by Melbourne Centre. All other aids pilot monitored. ILS not protected outside TWR HR.

LOCAL TRAFFIC REGULATIONS

1. ACFT ABV 36,000KG MTOW must use nodes for 180DEG turns, except B737, A220, A320, BAE146, B717, B727, C130, A319, A321, E190, GLEX and GLF6.
2. TWY C, G and H BTN Bay 22 and TWY J, and TWY J BTN TWY H and freight apron not AVBL for wide body ACFT unless approved prior by AD OPR.
3. Engine ground running of all ACFT (excluding ENG start up PROC) not permitted without prior approval FM AD OPR. CTC senior OPS office 0418 120 854 H24. ACFT OPR required to broadcast on Hobart SMC (121.7) at start and at finish of ground runs maintaining a listening watch during ENG run.
4. Wide body ACFT PRKG requires approval FM AD OPR prior to OPS.
5. PRKG of itinerant ACFT must be approved by Hobart Airport. Itinerant aircraft parking request form available via airport website.
6. ACFT ABV 36,000KG MTOW LDG RWY 30 vacate at TWY C unless otherwise advised by ATC.
7. HLS not provided.
8. During daylight OPS HEL aiming point is TWY A unless otherwise approved by the AD OPR.
9. During nighttime OPS HEL aiming point is RWY 12/30 unless otherwise approved by the AD OPR.
10. HEL TAX is via marked TWY only unless otherwise approved by the AD OPR.
11. Temporary parked ACFT on the TWY H Freight Pad will close TWY H BTN TWY D and J, TWY D BTN TWY A and H and will be marked by cones and lights at these locations.
12. Entry to Bay 1 AVBL from TWY F only.
13. **INSTRUMENT APPROACH TRAINING**

- a. Capacity for instrument APCH training at YMHB is limited and is subject to scheduled operations. Instrument APCH training availability can be found via www.bookawk.com.
- b. All ACFT planning practice instrument APCH (AVBL during APP HR only) must book a slot online at www.bookawk.com.

- c. Practice VOR approaches are restricted to ACFT below 5,700KG MTOW.
 - d. Practice approaches to the non-duty runway may not be available or subject to extensive delays.
14. **HOBART CTR AIRWORK**
- a. Capacity for AWK in the YMHB CTR is limited and priority for AWK, including circuit training at YMHB or YCBG, is allocated according to bookings made online: www.bookawk.com.
 - b. All AWK other than circuit training at YMHB and YCBG must also be coordinated with Hobart TWR by phone prior to flight planning.
15. **HOBART CTA SURVEY**
- a. Survey aircraft operating in CTA must book online via www.bookawk.com. If access to the booking page is not AVBL contact Shift Manager 1, Melbourne on 03 9235 2012 BTN 0700 and 2000 Local DLY.
 - b. For survey flights, operators must email maps to: ml.sm1@airservicesaustralia.com and call Shift Manager 1, Melbourne on 03 9235 2012 to discuss their planned operations prior to becoming airborne each day.
16. **MIL OPS**
- a. MIL ACFT require specific fuel release through Defence Fuel Services to ensure refuelling priority.
 - b. MIL ACFT must advise 29SQN of planned OPS at AD via email: hob.aboc@defence.gov.au.

FLIGHT PROCEDURES

1. **ATC TRAFFIC MANAGEMENT SPEED**

ACFT ARR or DEP YMHB (including practice instrument APCH) must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

2. Right hand circuits RWY 30.

3. During TWR HR Airways Clearance shall be requested prior to requesting a taxi clearance.

4. **COMMUNICATIONS FAILURE**

If VFR in Class G airspace.

a. Carry out general COM failure procedures.

b. Stay in VMC.

c. Proceed to CBG.

d. Broadcast intentions on 118.1.

e. Squawk 7600.

f. Enter CTR from the west between Tasman Bridge (TAS) and Droughty Point (DRP) at 1,500FT AMSL. Remain to the west of a line Seven Mile Beach Township - Hobart Airport - Radio Telescope. Proceed to overhead CBG. Ascertain landing direction and descend to 1,000FT AMSL. Proceed with a normal approach and landing with a circuit direction that will keep the aircraft to the west of CBG and clear of the Hobart runway approaches. Maintain separation from other aircraft. Listen out on ATIS for instructions. Watch for light signals from Hobart Tower.

g. Contact the tower by phone after landing.

5. **OUTSIDE TWR AND APP HR PROCEDURES**

a. Melbourne Centre provides ATS services in the Hobart Class A, C and E airspace ABV 8,500FT AMSL.

b. Melbourne Centre provides Class G services below CTA.

c. Departures

(i) Normal CTAF procedures apply.

(ii) Include RWY and preferred departure procedure (if IFR) with Taxi report to Melbourne Centre.

d. Arrivals:

(i) Advise Melbourne Centre of intended landing RWY and preferred approach (if IFR).

6. VFR Route 1: **VICTOR NORTHWEST**

Inbound: Track CBV-CPA-RCH west of the Colebrook/Richmond Road to west abeam RADT.

Outbound: Track west abeam RADT-RCH-CPA-CBV remain west of the Richmond/Colebrook Road.

VFR Route 2: VICTOR NORTHEAST

Inbound: Track CBV-CPA-Orielton-SORL remain east of Colebrook Road to CPA then via Orielton east of Tasman HWY to SORL. **Note:** Expect circuit joining instructions **OR** to orbit north of SORL depending on traffic.

Outbound: Track as directed by ATC to SORL then Orielton remain east of Tasman HWY, thence east of Colebrook Rd east of CPA to CBV.

VFR Route 3: VICTOR EAST

Inbound: Track DLY-SORL north of the Arthur HWY. **Note:** Expect circuit joining instruction **OR** to orbit southeast of SORL depending on traffic.

Outbound: Track as directed by ATC to SORL thence north of Arthur HWY to DLY.

VFR Route 4: VICTOR SOUTHWEST

Inbound: Track DRP to-CBG west of Mt Rumney.

Outbound: Track west of Mt Rumney to DRP.

VFR Route 5: VICTOR SOUTH

Inbound: Track CRM-LAUD-CBG.

Outbound: Track LAUD-CRM.

VFR Route 6: VICTOR WEST

Inbound: Track BOWB to Risdon Vale thence Cambridge township.

Outbound: Track to Risdon Vale thence BOWB.

7. LOW VISIBILITY OPERATIONS

For CASA approved operators, RWY is capable of supporting takeoffs with an RVR/RWY VIS of not less than 350M.

- a. Preparations for Low Visibility Procedures (LVP) commence when VIS has reduced to 2,300M.
- b. During conditions of less than CAT I minima, only one ACFT is permitted on the manoeuvring area.
- c. All ACFT and vehicle under positive control of ATC.
- d. Vehicle access to manoeuvring area restricted to ARO and ARFF.

CTAF - AFRU 118.1

Outside HB TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

1. Bird hazard exists. JUN-NOV black cockatoos crossing RWY during early morning and late afternoon. Bird watch reports developed by AD OPR for specific wildlife hazards if required. Email: operations@hobartairport.com.au to be included on distribution list.
2. APCH to RWY 30 in strong winds will produce temporary (less than 2 SEC) but minor vertical updrafts (+500FT/MIN) immediately above the sand dune area.
3. Immediately before the sand dune induced updraft of Note 2, a less severe downdraft could occur for a similar short duration.
4. Weather balloon launch APRX 2315 and 1115 UTC FM 1KM W ARP. Launches may occur at other times.

CHARTS RELATED TO THE AERODROME

1. WAC 3556.
2. Aerodrome Obstacle Chart Type A Revision 6: APR 2022.
Email: operations@hobartairport.com.au.
3. Also refer to AIP Departure and Approach Procedures.

KALGOORLIE-BOULDER**ELEV 1203****AVFAX CODE 6101**

WA

UTC +8

YPKG

304722S

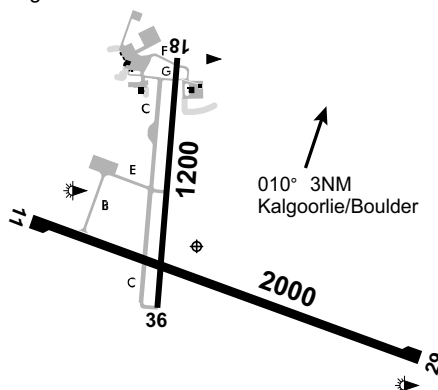
1212742E

VAR 1 DEG E

CERT

AD OPR City of Kalgoorlie-Boulder (CKB), PO Box 2042, Boulder, WA, 6432. Email:

airport.operations@ckb.wa.gov.au. ARO H24 0417 909 506. Website: www.airport.ckb.wa.gov.au.

**REMARKS**

1. AD Charges: All ACFT. Refer to website for information on landing and passenger fees.
2. All non-RPT, except diversions, requiring parking on the RPT APN or GA East require 24HR PN to the AD OPR.
3. This is a security controlled airport. Security requirements:
 - a. ASIC to be worn and clearly displayed when airside.
 - b. Security screening is required for all passengers departing from the main terminal within the period of RPT operations – 90 MIN prior to ARR and 30 MIN after DEP.
 - c. Airside security gate codes AVBL from Duty ARO or airport offices. AH access may incur call-out fees.
4. Main terminal open 2200-1100 UTC, hours may vary particularly on weekends. GA terminal adjacent to main terminal open H24.

HANDLING SERVICES AND FACILITIES

AIR BP/MOBIL: 2300-1100 UTC DLY. AH 30 MIN PN, call-out fees apply. Phone 0409 194 840.

JET A1 and AVGAS. H24 AVGAS card bowser.

VIVA Energy: JET A-1 and F34 Truck refuelling, 2200-1000 UTC daily. AH 30 MIN PN.

Call-out fees apply, Phone 0459 782 714. Fuel 2 Sky Carnet, V and MC.

PASSENGER FACILITIES

WC located within terminal, GA terminal and airside adjacent to AVGAS bowser.

APRONS AND TAXIWAYS

1. All surfaces asphalt.
2. TWY B unrated WID 18M.
3. All other TWY WID 10.5M. Not AVBL to ACFT ABV 5,700KG.
4. Main RPT APN unrated.
5. GA North not AVBL to ACFT ABV 5,700KG.
6. GA East not AVBL to ACFT above 5,700KG except when utilising Bay 6 via designated lead in and lead out lines.
7. GA APN tie-downs rated to MAX 1,000KG.

AERODROME OBSTACLES

1. COM TWR 1,606FT AMSL BRG 255 DEG MAG 2.9NM FM ARP. Infringes outer horizontal SFC by 58FT. Lit by medium intensity beacon.
2. Infringing OLS:

a. Towers:

(i) 1,357FT AMSL BRG 283 MAG 1.96NM FM ARP. Lit red mid and top hazard beacon.

(ii) On stockpile 1,345FT AMSL BRG 096 MAG 2.35NM FM ARP. Lit with white strobe.

(iii) On stockpile 1,536FT AMSL BRG 072 MAG 3.0NM FM ARP. Lit red hazard beacon infringes inner HZS.

b. Power poles:

(i) 1,365FT AMSL BRG 282 MAG 2.51NM FM ARP. Unlit.

(ii) 1,353FT AMSL BRG 281 MAG 2.33NM FM ARP. Unlit.
3. Multiple lit stockpiles 1,907FT AMSL BTN BRG 080 - 101 DEG MAG, 2.32 - 4.00NM FM ARP. Infringes conical SFC by up to 263FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI.
2. AWIS Phone 08 6216 2619 - Report faults to BoM.
3. AWIS FREQ 126.25 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

11/29	110	66a	PCR 400/F/A/X/T	WID 45	RWS 300
18/36	185	39a	PCR 80/F/A/1.00 MPa/T	WID 18	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 11/29	LIRL	AFRU+PAL 126.6		SDBY PWR AVBL
RWY 11/29	PAPI(1)	AFRU+PAL 126.6	3.0 DEG48FT	SDBY PWR AVBL
RWY 18/36	LIRL	AFRU+PAL 126.6		SDBY PWR AVBL

- (1) Left side.
1. RWY edge light spacing: 11/29: 60M; 18/36: 60M.
2. PAL 10 MIN warning light NW of RWY intersection and primary IWI.
3. PAL will activate RWY lights and PAPI during night time hours only. PAL will activate PAPI only during hours of daylight.

OTHER LIGHTING

1. Secondary PWR switchover time: 15 SEC.
2. TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	125.75 On ground
UNICOM	KALGOORLIE-BOULDER	126.6 (1)
	UNICOM	

- (1) CS "AIR BP".

RADIO NAVIGATION AND LANDING AIDS

DME	KG	114.1/ 88X	304723.4S	1212710.6E		(2)
NDB	KG	287	304743.1S	1212748.1E	Range 140 (HN 80)	(3)
VOR	KG	114.1	304723.4S	1212710.0E		(1)

- (1) Monitored by ML.
- (2) Antenna ELEV 1228FT - Monitored by ML.
- (3) Monitored by ML - 346/0.4 to ARP.

LOCAL TRAFFIC REGULATIONS

1. All Code C ACFT and ABV must use turning nodes on RWY 11/29 when executing 180 DEG turns.
2. ACFT using RWY 18 for TKOF may be unable to see ACFT on crossing RWY. ACFT are to BCST intentions before entering RWY 18.
3. ACFT taxiing from Bays 1, 2, 3 and 3A REQ to use MNM thrust when departing to reduce jet blast.
4. Ground running of turboprop ACFT on the RPT APN is to be avoided to avoid noise in the Passenger Terminal.
5. GA parking marked by green lines is private parking only. Non-approved ACFT parking in these areas may be removed at the owner's expense.

CTAF - AFRU 126.6**NOISE ABATEMENT PROCEDURES**

1. Flight over residential areas should be minimised particularly at night.
2. Ground running of turboprop ACFT on the RPT APN is to be avoided to avoid noise in the passenger terminal

ADDITIONAL INFORMATION

1. Bird hazard exists, pink and grey galahs and Australian ravens year round.
2. Hang gliding OPS NE of Kalgoorlie-Boulder at Lake Perkolilli, Kunalpi - 303422.85S 1214251.40E.
3. Weather balloon launch APRX 2315 UTC FM 950M WNW of ARP. Launches may occur at other times.

CHARTS RELATED TO THE AERODROME

1. WAC 3352.
 2. Aerodrome Obstacle Chart Type A: RWY 11/29, January 2020.
 3. Also refer to AIP Departure and Approach Procedures.
-

KARRATHA

AVFAX CODE 6802

WA

204244S

1164624E

UTC +8

VAR 1 DEG E

ELEV 33

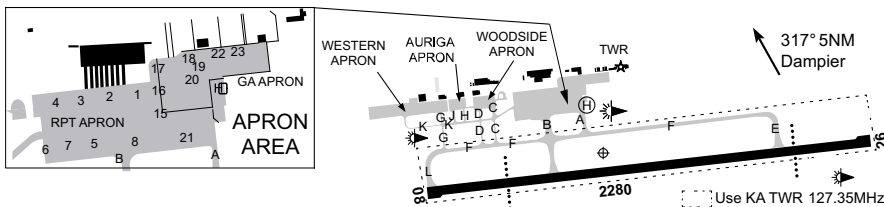
YPKA

CERT

AD OPR City of Karratha, Karratha Office, PO Box 219, Karratha, WA, 6714.

Email: airport.operations@karratha.wa.gov.au. PH Duty ARO H24 0418 799 460.

PH Airport Management Office 08 9186 8507. Website: airport.karratha.wa.gov.au.



REMARKS

1. AD Charges: All ACFT.
2. At least 72 HRS PN RQ, in writing, to the Council, by MIL ACFT and non-RPT ACFT for parking on main RPT apron positions or for pavement concessions.
3. This AD is a Security Controlled Airport.
4. For airside security gate code CTC Airport Management Office 08 9186 8507 or AD Duty ARO 0418 799 460.
5. All persons (excluding PAX operating or accessing airside) must wear high-visibility attire at all times.

HANDLING SERVICES AND FACILITIES

AIR BP: 2300-1000 UTC JO, 2300-0430 UTC SAT and SUN. AH and PH call-out fee applies.

1HR PN required AH. Mobile 0499 747 727. Fax 08 9185 6170. JET A1, AVGAS.

VIVA Energy: 2200-1000 UTC, mobile 0417 831 341, AH 1HR PN mobile 0439 655 002, JET A1.

VIVA Energy Fuel and Fly, VIVA Energy carnet and credit cards (V and MC).

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6 OPR HR:
 - a. MON and TUE - 2300-1145 UTC.
 - b. WED and THU - 2300-1235 UTC.
 - c. FRI - 2300-1125 UTC.
 - d. SAT - 0030-0915 UTC.
 - e. SUN - 0435-1125 UTC.
2. 131.0 MHz AVBL HQ.

APRONS AND TAXIWAYS

1. TWY A not AVBL to ACFT ABV 80,000KG MTOW.
2. ACFT ABV 12,100KG RQ pavement concession to use TWY C, D, G, H and K.
3. TWY C, D, H, J north of TWY K to Auriga and Woodside APN AVBL to HEL ACFT only.
4. TWY F 23M wide with lighting set at 30M.
5. GA APN tie-downs rated to MAX 5,700KG.
6. GA APN active tie-downs designated by white markings with a red stripe.
7. GA APN DCMDS tie-downs designated by a solid red marking.

AERODROME OBSTACLES

1. Tower (lit) 639FT AMSL (427FT AGL) BRG 356 DEG MAG 5.8NM (10.7KM) FM ARP.
2. Illuminated WDI PSN 204248S 1164706E 40FT AMSL. Infringes TNS by 20FT. Marked by red OBST LGT.
3. Weather radar "East Intercourse Island", lit with red LGT 207FT AMSL BRG 305 DEG MAG 6NM FM ARP.
4. Unlit pole 96FT AGL PSN 204302.29S 1164532.08E. Infringes RWY 08 NDB visual segment SFC by 2FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. WATIR Phone 08 6216 2620 - Report faults to BoM.
3. AWIS FREQ 135.85 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

08/26 083 75a PCR 380/F/A/X/U Grooved WID 45 RWS 300

AERODROME AND APPROACH LIGHTING

RWY 08/26	MIRL(2)	AFRU+PAL 127.35		SDBY PWR AVBL
RWY 08/26	PAPI(1)	AFRU+PAL 127.35	3.0 DEG62FT	SDBY PWR AVBL
RWY 08/26	PTBL(3)			BY PRIOR
				ARRANGEMENT

- (1) Both sides. Activated by AFRU+PAL outside TWR HR.
 - (2) Activated by AFRU+PAL outside TWR HR. During TWR HR, TWR has intensity control over PAPI, RWY and TWY lighting.
 - (3) EMERG only. 60MIN PN for rotary wing. 120MIN PN for fixed wing.
- Outside TWR HR PAPI, RWY and TWY lighting may switch intensity automatically subject to prevailing conditions. Outside TWR HR normal AFRU+PAL is AVBL. PAL is activated for one hour.

OTHER LIGHTING

1. SDBY PWR switchover time: 3 MIN.
2. TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	122.4 On Ground
ATIS	KARRATHA ATIS	(2) 134.55
SMC	KARRATHA GROUND	123.55
TWR	KARRATHA TOWER	127.35 (1)

- (1) Landing ACFT to remain on TWR FREQ until vacated TWY FOXTROT and then MONITOR GND unless instructed otherwise.
 - (2) Also AVBL 08 9186 8923
1. TWR HR:
 - a. MON-FRI: 2245-1130 UTC
 - b. SAT: 2245-0645 UTC
 - c. SUN: 0000-1130 UTCPhone 08 9186 8921^ or email: karratha.tower@airservicesaustralia.com
Note: TWR HR may change at short notice. Check status of airspace with ATS or Karratha ATIS.
 2. Karratha TWR provides combined TWR and APP CTL services within Class D airspace BLW 5,500FT AMSL during TWR HR. CTC TWR for clearance.
 3. Outside TWR HR, Karratha Class D airspace becomes Class G.
 4. Melbourne Centre 122.4 operates Karratha Class E airspace 5,500FT AMSL and ABV H24.

RADIO NAVIGATION AND LANDING AIDS

DME	KA	117.3/120X	204254.4S	1164626.0E	(1)
NDB	KA	404	204221.9S	1164702.3E	Range 70 (HN 70)
VOR	KA	117.3	204254.3S	1164626.2E	(2)

- (1) Antenna ELEV 41FT.
- (2) Possible excessive fluctuations BTN radials 270 and 350 due terrain.

LOCAL TRAFFIC REGULATIONS

1. Non RPT ACFT with wing span greater than 20M, at least H24 PN required for parking on GA apron.
2. 48HR PN for all ACFT ABV 5,700KG and for all pavement concessions.
3. ACFT ABV 7,000KG RQ to taxi on RCL and turn at turning nodes.
4. All turns at RWY turning nodes to be at MNM speed and MAX RAD to avoid pavement damage.
5. All SVY, practice IAL and NAVAID training within KA Class D and E airspace requires prior notice to TWR 08 9186 8921^.
6. RPT Apron Bay 1 not AVBL HN.

FLIGHT PROCEDURES

1. Outside TWR HR, fixed wing ACFT should remain S of RWY 08/26 on base circuit.
2. Circuit Direction:
Outside TWR HR, RWY 08 Right Hand circuits; RWY 26 Left Hand Circuits.
3. Extensive Helicopter OPS conducted to N of AD.
4. ACFT BAE-146 and above, when joining downwind for RWY 26 are REQ to join the circuit South of the town site to avoid overflying residential areas.
5. Low visibility operations not AVBL.
6. ATC may process SIMUL same direction independent OPS on RWY 08/26 and TWY F as a HLS, with the following conditions:
 - a. In VMC, by day.
 - b. Between HEL and single/twin engined propeller ACFT.
 - c. RWY centre line and TWY centre are spaced at 200M.
 - d. Pertinent traffic will be issued.
 - e. Both ACFT will be on the same FREQ.

CTAF - AFRU 127.35

ADDITIONAL INFORMATION

1. Bird and animal hazard exists.
2. Unannounced high velocity gas discharge may occur within D150 (APRX 002DEG MAG/7.5NM ARP).
3. D157 Karratha Dampier Firing Range may be in use without promulgation of NOTAM as indicated by flags lining the range.
4. HEL OPS WI 40NM of YPKA using night vision goggles primarily BTN the area bounded by YSBY, YCLN, YCPL, YPKA over water for maritime transfer OPS may not be displaying external LGT.

CHARTS RELATED TO THE AERODROME

1. WAC 3229.
 2. Refer to AIP Departure and Approach Procedures.
 3. Aerodrome Obstacle Chart Type A: May 2022 AVBL from AD OPR.
-

LAUNCESTON**ELEV 562****AVFAX CODE 7002**

TAS

UTC +10

YMLT

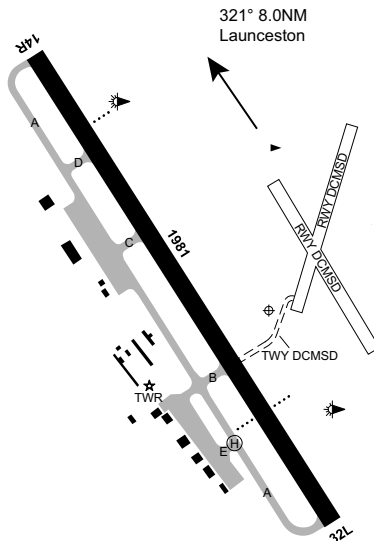
413243S

1471251E

VAR 15 DEG E

CERT

AD OPR Australia Pacific Airports (Launceston) Pty Ltd, trading as Launceston Airport, PO Box 117, Evandale, TAS, 7250. PH 0407 305 595 H24.

**REMARKS**

This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

MOBIL - Avtas Fuels Pty Ltd: 0130-2130 Local (subject to change in line with airline schedules).

Phone 03 6391 8341, AH call-out fee applies with 1HR PN. AVGAS (tanker), JET A1 (tanker).

ACFT not refuelled on unpaved areas.

AD earthing points not AVBL.

PASSENGER FACILITIES

WC/LG/RF/TX/HC.

RESCUE AND FIREFIGHTING SERVICES

CAT 7:

a. 2005-1310 UTC DLY EXC SAT.

b. 2005-1045 UTC SAT.

Note: All times 1 hour earlier HDS.

APRONS AND TAXIWAYS

- GA areas of S apron and apron TWY limited to ACFT with wingspan less than 22M.
- TWY B BTN TWY A and S apron not AVBL to ACFT larger than A320/B737-7 types.
- TWY E limited to ACFT with MTOW of 50,000KG and wingspan less than 22M.

AERODROME OBSTACLES

- Light on building 626FT AMSL BRG 295 DEG MAG 1,500M FM ARP infringes transitional SFC by 17FT.
- Glide path aerial 593FT AMSL BRG 141 DEG MAG 441M FM ARP obstructs TNS by 10FT.
Lit.
- Unlit:
 - Water tank 576FT AMSL BRG 153 DEG MAG 1,144M FM ARP infringes APCH SFC by 10FT.

- b. Railway bridge 554FT AMSL BRG 138 DEG MAG 825M FM ARP obstructs APCH SFC by 5FT.
- c. Cocked Hat Hill 737FT AMSL BRG 317 DEG MAG 3,445M FM ARP infringes APCH SFC by 33FT.
- d. Rod on building 635FT AMSL BRG 295 DEG MAG 1,503M FM ARP infringes TNS by 26FT.
- e. APN LGT 618FT AMSL BRG 277 DEG MAG 731M FM ARP infringes TNS by 8FT.
- f. APN LGT 619FT AMSL BRG 265 DEG MAG 577M FM ARP infringes TNS by 8FT.
- g. Near field monitor 578FT AMSL BRG 305 DEG MAG 1,514M FM ARP infringes APCH SFC by 4FT and TKOF by 2FT.
- 4. Power poles, unlit:
 - a. 562FT AMSL BRG 153 DEG MAG 1,042M FM ARP infringes APCH SFC by 3FT.
 - b. 584FT AMSL BRG 150 DEG MAG 1,386M FM ARP infringes APCH SFC by 2FT.
- 5. Trees:
 - a. 555FT AMSL BRG 151 DEG MAG 965M FM ARP infringes APCH and TKOF SFC by 1FT.
 - b. 560FT AMSL BRG 152 DEG MAG 1,008M FM ARP obstructs APCH SFC by 4FT.
 - c. 583FT AMSL BRG 150 DEG MAG 1,345M FM ARP. Obstructs APCH SFC by 5FT.
 - d. 591FT AMSL BRG 151 DEG MAG 1,456M FM ARP infringes TNS by 3FT.
 - e. 594FT AMSL 158 DEG MAG 907M FM ARP infringes TNS by 32FT.
 - f. 627FT AMSL BRG 294 DEG MAG 1,455M FM ARP infringes TNS by 13FT.
 - g. 628FT AMSL BRG 295 DEG MAG 1,446M FM ARP infringes TNS by 26FT.
- 6. Bush:
 - a. 555FT AMSL BRG 138 DEG MAG 831M FM ARP obstructs APCH SFC by 6FT.
 - b. 716FT AMSL BRG 316 DEG MAG 3,417M FM ARP infringes APCH SFC by 16FT.
- 7. Fences, unlit:
 - a. 580FT AMSL BRG 309 DEG MAG 1,535M FM ARP infringes APCH SFC by 4FT and TKOF SFC by 2 FT.
 - b. 567FT AMSL BRG 310 DEG MAG 1,288M FM ARP infringes transitional SFC by 6FT.
 - c. 568FT AMSL BRG 310 DEG MAG 1,318M FM ARP infringes APCH SFC by 6FT.
 - d. 578FT AMSL BRG 300 DEG MAG 1,503M FM ARP infringes APCH SFC by 7FT.
 - e. 554FT AMSL BRG 156 DEG MAG 898M FM ARP infringes APCH SFC by 5FT.
- 8. Localiser, lit:
 - a. 582FT AMSL BRG 305 DEG MAG 1,612M FM ARP infringes APCH SFC by 2FT.
 - b. Localiser BLDG 583FT AMSL BRG 302 DEG MAG 1,630M FM ARP infringes APCH SFC by 2FT and TKOF by 1FT.
 - c. Aerial 578FT AMSL BRG 305 DEG MAG 1,514M FM ARP infringes APCH SFC by 4FT.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT A, METAR/SPECI, AD WRNG.
- 2. AWIS Phone 03 6283 8604 - Report faults to BoM.
- 3. AWIS FREQ 112.6 AVBL outside TWR HR - Report faults to BoM.
- 4. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 03 6221 2026.

PHYSICAL CHARACTERISTICS

14R/32L 133 65a PCR 420/F/D/X/T Grooved WID 45 RWS 150
 W side VFR and IFR side transition infringing when ACFT parked on main apron.

AERODROME AND APPROACH LIGHTING

RWY 14R/32L	HIRL(1)	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 14R/32L	MIRL(1)	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 14R	PAPI(2)	AFRU+PAL 118.7	3.0 DEG53FT	SDBY PWR AVBL
RWY 32L	HIAL-CAT I(4)	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 32L	PAPI(3)	AFRU+PAL 118.7	3.0 DEG53FT	SDBY PWR AVBL

- (1) Operates on pre-set intensity during PAL OPS. HIRL preset dusk only, MIRL preset dark.
- (2) Left side.
- (3) Double sided.
- (4) Operates on pre-set intensity during PAL OPS - stage 4 dusk, stage 2 dark.

1. **ALS type and length**
 - a. RWY 32L - distance coded CL: 912M.
 - b. White cross bar lights installed 155M, 309M, 464M, 616M and 745M FM THR. Spaced at 2.7M intervals.
 - c. All lights in the RESA before THR are flush inset lights.
2. RWY edge light spacing: 14R/32L: 58M.
3. Outside TWR HR, RWY, PAPI and Approach lighting AVBL at preset levels.
4. AFRU+PAL 118.7 AVBL outside TWR HR.
5. Responsible person AVBL on CTAF outside TWR HR. Report PAL faults on CTAF or phone 0407 305 595, H24, and Melbourne Centre 123.8.

OTHER LIGHTING

ABN ALTN 8 WG

1. Secondary PWR switchover time: 1 SEC during LVP; 15 SEC other times.
2. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	LAUNY CENTRE	(1)	123.8 On Ground
FIA	MELBOURNE CENTRE	(2)	123.8 On Ground
APP	LAUNY APPROACH	(3)	123.8
ATIS	LAUNY ATIS		112.6 (4) 134.75 (5)
TWR	LAUNY TOWER		118.7
(1)	During APP HR		
(2)	Outside APP HR		
(3)	Automatic re-transmit when combined with HOBART APP		
(4)	During TWR and APP HR. Outside TWR and APP HR - AWIS		
(5)	H24 and by Phone 03 6391 6969		
1.	TWR and APP HR: 1950-1210 UTC DLY (1HR earlier during HDS).		
2.	Phone LT TWR: 03 6391 6992^, LT APP: 03 9235 2012^.		
3.	LAUNY TWR provide non-surveillance TWR CTL services within the YMLT Class D CTR, SFC to 1,500FT AMSL.		
4.	LAUNY APP provide surveillance APP CTL service within 30NM YMLT in Classes A, C, D and E airspace, SFC - FL245.		
5.	Outside TWR and APP HR, Class D and C airspace WI 36NM LT, SFC to 8,500FT AMSL becomes Class G.		

Note: TWR and APP may operate independently, hours or airspace responsibility may change at short notice. Check status of airspace with ATS, NOTAM or Launceston ATIS.

RADIO NAVIGATION AND LANDING AIDS

DME	ILT	109.5/ 32X	413255.9S	1471259.3E	(3)
		(RWY32L)			
GP	ILT	332.6 (RWY32L)	413256.1S	1471259.0E	
ILS	ILT	109.5 (RWY32L)	413203.2S	1471206.0E	
LOC	ILT	109.5 (RWY32L)	413203.2S	1471206.0E	
DME	LT	112.6/ 73X	413237.7S	1471247.0E	(4)
NDB	LT	242	413339.8S	1471330.3E	(2)
				Range 75 (HN 60) OW 150 (OW HN110)	
VOR	LT	112.6	413237.8S	1471247.7E	(1)
(1)	CAUTION: VOR 010 radial unreliable outside 30 NM at LSALT.				
(2)	322/1.2 to ARP.				
(3)	Antenna ELEV 560FT.				
(4)	Antenna ELEV 566FT.				

Outside TWR HR LOC, GP, VOR, DME, monitored by Melbourne Centre. All other aids pilot monitored. ILS not protected outside TWR HR.

LOCAL TRAFFIC REGULATIONS

1. **INSTRUMENT APPROACH TRAINING**
 - a. Capacity for instrument APCH training at YMLT is limited and is subject to scheduled operations. Instrument APCH training availability can be found via www.bookawk.com.
 - b. All aircraft planning practice instrument APCH (AVBL during APP HR only) must book a slot online at www.bookawk.com.

- c. Practice approaches to the non-duty runway may not be available or subject to extensive delays.
2. **CIRCUIT TRAINING**
 - a. Circuit training availability can be found via www.tas.bookawk.com.
 - b. All aircraft planning circuit training should book a slot online at www.tas.bookawk.com.
3. **CTR AIRWORK**

All aircraft planning AWK other than circuit training or instrument approach training should coordinate via phone with Launceston Tower prior to operating.
4. **LAUNCESTON CTA SURVEY**
 - a. Survey aircraft operating in CTA must book online via www.bookawk.com. If access to the booking page is not AVBL contact Shift Manager 1, Melbourne on 03 9235 2012 BTN 0700 and 2000 Local DLY.
 - b. For survey flights, operators must email maps to: ml.sm1@airservicesaustralia.com and call Shift Manager 1, Melbourne on 03 9235 2012 to discuss their planned operations prior to becoming airborne each day.
5. ACFT parking:
 - a. Main terminal APN: parking and security restrictions apply for non-RPT ACFT. Prior approval RQ FM AD OPR, H24
 - b. Southern freight APN: ACFT ABV 5,700KG and itinerant ACFT in excess of 4HR duration or HN. Prior approval RQ FM AD OPR.

FLIGHT PROCEDURES

1. **ATC TRAFFIC MANAGEMENT SPEED**

ACFT ARR or DEP YMLT (including practice instrument APCH) must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.
2. **OUTSIDE TWR AND APP HR PROCEDURES**
 - a. Melbourne Centre provides ATS in the Launceston Class A, C and E airspace ABV 8,500FT AMSL and Class E ABV 12,500FT AMSL within 30NM LT.
 - b. Melbourne Centre provides Class G services 8,500FT AMSL and BLW within LT CTA steps.
 - c. Departures:
 - (i) Normal CTAF Procedures apply.
 - (ii) Include RWY and preferred departure procedure (if IFR) with Taxi report to Melbourne Centre.
 - d. Arrivals:
 - (i) On first contact, advise Melbourne Centre of intended landing RWY and preferred approach (if IFR).
3. **LOW VIS TAKEOFFS**

CASA approved operators, RWY 14R/32L is capable of supporting takeoffs with a RWY VIS of not less than 350M (within ATC hours).

CTAF - AFRU 118.7

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

Bird hazard exists:

- a. Flocks of forest ravens prevalent on AD in the spring lambing season.
- b. Daylight and nocturnal hazard FM Masked Lapwing and Banded Lapwing on AD FM APR to the end of JUL.
- c. Flocks of common starlings prevalent on and around AD from MAY to the end of OCT.

CHARTS RELATED TO THE AERODROME

1. WAC 3556.
 2. Also refer to AIP Departure and Approach Procedures.
-

LEARMONTH**ELEV 19****AVFAX CODE 6805**

WA

UTC +8

YPLM

221408S

1140519E

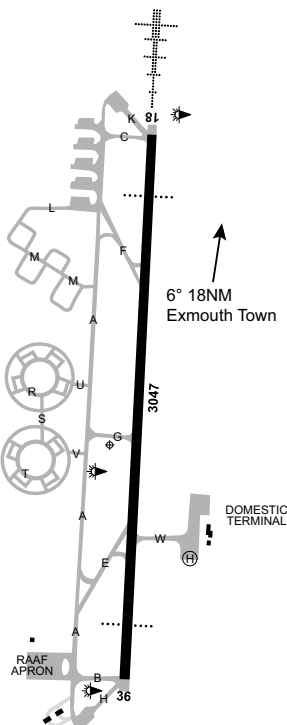
VAR 0 DEG E

MIL

AD OPR Department of Defence (Air Force Headquarters), Shire of Exmouth, PO Box 21, Exmouth or Maidstone Crescent, Exmouth, WA, 6707. PH 08 9949 3000: Fax 9949 3050.

ARO Civil AD OPR Duty ARO PH 08 9949 1326, Mobile 0407 494 419, Fax 08 9949 1840,

Email: aro@exmouth.wa.gov.au.

**REMARKS**

1. MIL ACFT request 24HR PN JO. Support REQ is to be advised to RAAF Learmonth ABOC Phone 0429 450 662 or Email: lmo.abcp@defence.gov.au.
2. MIL International flights are not to plan to enter Australia through Learmonth without prior approval of Customs and AQIS.
3. Civil ACFT require 24HR PN. and a MOV REQ must be submitted to the Shire of Exmouth, Duty ARO. MOV request form is AVBL online:
www.exmouth.wa.gov.au/aviation-services/learmonth-airport/pilot-information.aspx.
4. Civil Operators nominating Learmonth as an ALTN and INTL ALTN are to gain approval FM Air Force HQ through the ARO via formal request. INTL ALTN: Customs and AQIS PN. Refer General Planning Australia.
5. This AD is a security Controlled Airport.
6. AD Charges: All ACFT.
7. YPLM not to be used on AFTN.
8. Aircrew and Personnel airside access gate located at the northern end of terminal building. Access code can be obtained by contacting DUTY ARO.
9. Photography is prohibited (*Section 82 of the Defence Act*).

APP, TWR and Learmonth airspace activated by NOTAM.

RADIO NAVIGATION AND LANDING AIDS

- | | | | | | | |
|-----|-----|------------|-----------|------------|------------------|-----|
| DME | LM | 112.4/ 71X | 221405.4S | 1140538.3E | | (4) |
| NDB | LM | 396 | 221429.5S | 1140544.7E | Range 90 (HN 50) | (2) |
| VOR | LM | 112.4 | 221405.4S | 1140538.9E | | (1) |
| TAC | LMO | | 221328.2S | 1140532.8E | | (3) |
- (1) 082/0.3 TO ARP. VOR UNREL in Sector B at 2300FT beyond 21NM. (Sector B inbound 016 degrees clockwise to 195 degrees).
- (2) 318/0.4 to ARP.
- (3) Portable FAC, ACT as REQ by MIL authorities. Channel assignment and ACT by NOTAM.
- (4) Antenna ELEV 34FT. DME UNREL in Sector B at 2300FT beyond 23NM. (Sector B inbound 016 degrees clockwise to 195 degrees).

LOCAL TRAFFIC REGULATIONS

1. Civil ACFT not permitted to use TWY A BTN TWYs E, F or G. Civil ACFT ABV 100,000KG MTOW not permitted to use RWY for 180 turns, TWY turning loops must be used - TWYs E, A and B, or TWYs F, A and C or TWYs H or K.
2. **CIVIL APRON PARKING RESTRICTIONS**
 - a. RPT apron not AVBL to ACFT ABV code 4C.
 - b. Bays 1, 2 and 3 not AVBL for overnight PRKG without approval.
 - c. Non-RPT ACFT code B and under, park on GA APN, 24HR PN with PPR.
 - d. Helipads H1, H2 and H3 (N-S orientation) AVBL for HEL conducting offshore OPS. Heliport operated by Shire of Exmouth, phone 08 9949 1326 or 0407 494 419.
3. **GENERAL AVIATION REQUIREMENTS**
 - a. Charter GA OPS PPR 24HR PN. ARO or Ground Handling Agent to be present.
 - b. No GA OPS outside the HR of 0800-1600 Local, except Royal Flying Doctor Service (RFDS) FLT or by prior arrangement.
 - c. GA and HEL OPR must be in possession of a current Airside Identification Card (ASIC) as this is a security controlled AD.
 - d. HEL offshore OPS conducted in HJ only except for lifesaving MEDEVAC flights conducted in HN. Overnight PRKG may occur with ARO approval.
 - e. Wake turbulence categories of HEL conducting offshore OPS:
 - (i) Leonardo AW139 – Light.
 - (ii) Leonardo AW189 – Medium.
 - (iii) Sikorsky S-92A – Heavy.
 - f. MIL personnel will not act on behalf of Shire for General Aviation or Charter.
 - g. MIL TWY are restricted.
 - h. MIL hardstands and parking areas are restricted.
4. TWY A (RWY 18R/36L) is marked and can be lit as Code 2 RWY with an LDA of 1,502M (4,927FT). Only AVBL for use as a RWY by ACFT unable to divert due fuel or with declared EMERG and when RWY 18/36 not AVBL.

FLIGHT PROCEDURES

1. **HELICOPTER OFFSHORE (AIR TRANSPORT) OPERATIONS**
- 1.1. For enhanced flight safety within local area and to de-conflict with fixed wing spotter planes and microlight gliders operating over Ningaloo Reef, HEL conducting offshore OPS will:
 - a. Outbound: Fly IFR at A030, track LM DCT LM020026 (east of NW Cape and clear of R122 and R125A/B/C). HEL will then turn NW to descend towards rig/vessel.
 - b. Inbound: Fly IFR at A040 from rig/vessel and track towards LM020026. HEL will then track 200° towards LM.
 - c. Exception applies for in-flight emergency and lifesaving MEDEVAC flight where an expeditious return route via LM340020 for YPLM (clear of R125A/B/C) would be flown.
- 1.2. For offshore OPS to Scarborough Gas Field beyond local area, HEL will fly at standard IFR altitudes tracking the 340° radial from LM VOR (track variation to the west may apply). Route will remain clear of Exmouth Light Air Strip, R122 and R125A/B/C.

2. REMOTELY PILOTED AIRCRAFT SYSTEM (RPAS)

All RPAS requests and enquiries are to be sent to adf.airspace@defence.gov.au with at least 5 business days PN. OPS are subject to MIL OPS and may be restricted or cancelled at any time.

3. Due to sensitive instrumentation associated WI a solar observatory position 221309S 1140611E (BRG 042DEG MAG/1.2NM FM Learmonth ARP), ACFT are to avoid low level overflight of that site. Normal circuit height OPS permitted.

CTAF - AFRU 118.3

Except when Learmonth CTR and restricted areas are active.

NOISE ABATEMENT PROCEDURES

Due to MIL domestic areas position 221431S 1140459E (BRG 210DEG MAG/0.32NM FM Learmonth ARP) ACFT are not to overfly that area.

ADDITIONAL INFORMATION

1. Animal and increased bird hazard exists. Australian bustards WI RWS. Migratory birds around AD.
2. Weather balloon launch APRX 2315 and 1115 UTC FM 1KM E ARP. Launches may occur at other times.
3. Erosion WI RWY strip E side of RWY 18/36 N of TWY W.
4. Caution: Restraining link situated N side of TWY KILO 10FT square X 3FT deep with 230MM steel ring.

CHARTS RELATED TO THE AERODROME

1. WAC 3229.
 2. MIL Aerodrome Obstruction Chart Type A: NOV 2024.
 3. Also refer to AIP Departure and Approach Procedures.
-

MACKAY**ELEV 19****AVFAX CODE 4401**

QLD

UTC +10

YBMK

211017S

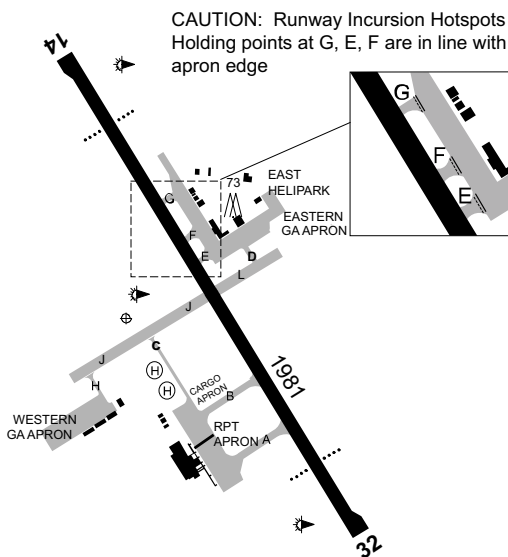
1491047E

VAR 8 DEG E

CERT

AD OPR Mackay Airport Pty Ltd, PO Box 5806, Mackay MC, Mackay, QLD, 4741. PH 07 4957

0201. ARO 0418 570 233: 0407 570 208.

**REMARKS**

- AD Charges: All ACFT.
- This AD is a Security Controlled Airport.
- RPT APN is a Security Restricted Area. Access for non RPT operators to RPT and Cargo APN by permission from Airport Management non RPT operators must obtain prior parking approval 48 HR PN from Mackay Airport Pty Ltd, Phone 0418 570 233. Parking Approval Forms are available via airport website and return by email to aso@mackayairport.com. Access from cargo APN to RPT terminal or landside is via pedestrian gate 20A, remaining clear of Security Restricted Area.
- Pedestrian Gates access code for both GA APN AVBL 0418 570 233 (2000-1100 UTC SUN-FRI, 2000-0930 UTC SAT). AH Phone 0419 757 117. Call-out fee will apply.
- ASIC must be displayed at all times whilst airside, including on GA APN. Passengers must be escorted at all times.
- Parking charges apply as per Mackay Airport Conditions of Use which can be obtained via Mackay Airport Website.

HANDLING SERVICES AND FACILITIES

Viva Energy Australia: NQ Fuels Pty Ltd. JET A1 0500-1800 Local, AH 1HR PN required, call-out fee applies. AVGAS bowser 24HR. PH 07 4957 3226 or MOB 0407 127 539. VIVA Fuel2Sky, V and MC accepted.

AVGAS not AVBL for ACFT wishing to refuel on Western GA APN of TWY J and TWY H. AVTUR only AVBL by prior arrangement with Viva refuelling agent.

RESCUE AND FIREFIGHTING SERVICES

- CAT 7:
 - SUN -THU 1940-1200 UTC.
 - FRI 1940-1150 UTC.
 - SAT 1940-0725 UTC.
- 131.0 MHz AVBL HO.
- Water Rescue Service AVBL.

APRONS AND TAXIWAYS

1. TWY A, B and RPT Apron: PCR 470/F/C/X/T.
2. TWY C not AVBL for ACFT ABV MAX 21M wingspan or ACFT ABV 12,000KG.
3. TWY C AVBL HJ only.
4. TWY D not AVBL for ACFT ABV 5,700KG.
5. TWY E not AVBL for ACFT ABV MAX 24M wingspan
6. TWY F not AVBL for ACFT ABV MAX 24M wingspan.
7. TWY G not AVBL for ACFT ABV MAX 15M wingspan.
8. TWY H PCR 80/F/D/X/T. Not AVBL for ACFT ABV 12,000KG and restricted to MAX 24M wingspan.
9. TWY J PCR 80/F/D/X/T.
10. TWY L PCR 80/F/D/X/T.
11. Eastern GA APN BTN TWY F and TWY G restricted to MAX 15M wingspan.
12. Some sections of the Eastern GA APN Surface slopes exceed the standard (east of TWY D and north of TWY G).
13. Western GA Apron PCR 80/F/D/X/T. Not AVBL for ACFT ABV 12,000KG and restricted to 24M MAX wingspan.
14. Western GA APN restrictions not AVBL to HEL OPS for ACFT ABV MTOW 1,100KG with skids EXC with prior approval FM Duty Safety Officer, Phone 0418 570 233.

SURFACE MOVEMENT GUIDANCE

1. CAUTION: Runway Holding Position for RWY 14/32 from the Eastern GA APN is marked along the western edge of the APN.
2. Movement Area Guidance sign on TWY H.
3. RWY 14 MAGS - Illuminated RWY designation MAG signs and TWY location MAG signs to RPT APN.

AERODROME OBSTACLES

1. 2 x lit smoke stacks, 262FT AMSL, BRG 272, 2.5NM FM ARP.
2. Masts:
 - a. 405FT AMSL, BRG 342, 3.3NM FM ARP. Lit.
 - b. 350FT AMSL, BRG 020, 3.5NM FM ARP. 2 x unlit.
3. Terrain:
 - a. 819FT AMSL BRG 316 DEG MAG 7.5NM FM ARP infringes RWY 14 APCH.
 - b. 508FT AMSL BRG 319 DEG MAG 6.4NM FM ARP infringes RWY 14 APCH.
4. Towers:
 - a. 1,181FT AMSL BRG 315 DEG MAG 7.7NM FM ARP infringes RWY 14 APCH.
 - b. 171FT AMSL, BRG 317 DEG MAG, 1.8NM FM ARP, lit.
5. Transient vehicles 31FT AMSL PSN 210942.44S 1491039.53E. Infringes APCH SFC by 10FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. AWIS Phone 07 3564 3724 - Report faults to BoM.
3. AWIS FREQ 133.05 (requires one-second pulse to activate) - report faults to AD OPR.

PHYSICAL CHARACTERISTICS

14/32 139 65a PCR 480/F/C/X/T Grooved WID 45 RWS 150

AERODROME AND APPROACH LIGHTING

RWY 14/32	MIRL	AFRU+PAL 124.5		SDBY PWR AVBL
RWY 14/32	PAPI(1)	AFRU+PAL 124.5	3.0 DEG53.3FT	SDBY PWR AVBL
RWY 14	RTIL	AFRU+PAL 124.5		SDBY PWR AVBL

(1) Double sided.

1. RWY edge light spacing: 14/32: 57M.
2. CAUTION: On approach to RWY 14 in poor visibility, lighting along section of Bruce Highway aligned N/S approximately 1.5NM W of AD may be mistaken for RWY.
3. RWY THR identification lighting RWY 14 are activated in conjunction with RWY lighting.
4. Lighting status confirmed on CTAF.
5. Lighting set to Stage 2 during CTAF HR.
6. SDBY PWR does NOT include WDI for RWY 14 or 32.

OTHER LIGHTING

ABN ALTN 8 WG

- Secondary PWR switchover time: 15 SEC.
- TWY LGT: Green CL on A, B, E, H and J.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	135.5
APP	CORAL APPROACH (MK)	125.65
ATIS	MACKAY	112.7 128.0
SMC	MACKAY GROUND	121.7
TWR	MACKAY TOWER	124.5

- TWR and APP HR:
 - MON-FRI 2020-1020 UTC.
 - SAT-SUN 2020-0930 UTC.
- Phone MK TWR: 07 4951 8431^ or 07 4951 8491^, BN CEN 07 3866 3224^.
- Mackay TWR provides Class D TWR services within Mackay CTR, SFC to 1,000FT AMSL. CTC TWR for CLR.
- During TWR HRS, CORAL APP provides ATS:
 - WI the CTA steps Class D ABV 1,000FT AMSL to an upper level of 4,500FT AMSL.
 - WI the Class C airspace contained within the boundaries of the Mackay and SWAMPY CTA steps 22NM north and 36NM south of YBMK ABV 4,500FT AMSL to an upper level of FL150.
 - Radar services and radar-based traffic INFO service north-west of Mackay below 6,000FT limited due radar coverage. Delays and restrictions may occur.
- Outside TWR HR Brisbane Centre provides:
 - ATS within Class C airspace ABV 4,500FT AMSL.
 - Class G service at and below 4,500FT AMSL.

Note: Outside TWR HR, CTC Brisbane Centre for TAX and on ground reports in this airspace.

Note: TWR and APP may operate independently, hours or airspace responsibility may change at short notice. Check status of airspace with ATS, NOTAM or Mackay ATIS.

RADIO NAVIGATION AND LANDING AIDS

DME	MK	112.7/ 74X	211022.9S	1491114.6E	(1)
NDB	MK	308	210944.1S	1491110.5E	Range 75 (HN 75) (2)
VOR	MK	112.7	211022.8S	1491114.0E	

(1) Antenna ELEV 40FT.
(2) 204/0.7 to ARP.

LOCAL TRAFFIC REGULATIONS

- Simulated asymmetric DEP or simulated engine failure after takeoff:
 - Not permitted RWY 32;
 - Not permitted until ACFT CLR of built-up areas;
 - DRG TWR HR, prior approval from ATC required.
- Wide bodied ACFT restricted to TWY A and parking position 1A.
- ACFT requesting PRKG on Bays 1 through to 5A, in addition to completing the 'Mackay Airport Aircraft Parking Approval', require a ground handling agency to be appointed to handle all ground OPS during their stay. Details via airport website.
- Western GA APN parking - ACFT (including HEL) BLW 12,000KG requiring access to RPT terminal to park on Western GA APN, accessed from TWY J via TWY H. Access from Western APN to RPT terminal or landside is via pedestrian Gate 21A. The northern edge of the Western GA APN parking area is restricted to DAY operations only. All other ACFT to park at Eastern GA in the parking area ADJ to TWY D via TWY E and from TWY L via TWY D.
- HEL LDG sites:
 - Southern site ADJ TWY C AVBL to HEL OPS ACFT ABV 1,100KG.
 - Northern site ADJ TWY C RESTR to aeromedical HEL OPS only.
 - All other HEL OPS RQ 48HR prior approval.
- Civil HEL Operations
 - Air taxi to/from parking at EAST HELIPARK via TWY J-L;

- b. MAX rotor diameter 15M. If diameter greater than 15M, 24HR PN required for parking allocation;
 - c. Caution: Floodlighting towers up to 45M AMSL on sporting fields in sector NE of AD.
- 7. **TRAINING FLIGHTS**
 - a. Circuit training for ACFT ABV 5,700KG restricted to 2100-1100 UTC.
 - b. All ACFT planning SVY, practice IAL and NAVAID training require prior ATC approval within Class C and D airspace. Pilots must book a slot time online at qld.bookawk.com. Phone Brisbane Centre Shift Manager on 07 3866 3306 for approval.
- 8. Landing RWY 14 - Jet ACFT ABV 30,000KG MTOW, when operationally possible, are requested to avoid excessive braking and to use full RWY length and turning nodes provided.
- 9. Run-up bay on Eastern GA located on southern side of Eastern GA APN in BTN TWY D and E.

FLIGHT PROCEDURES

Low VIS OPS

- a. Low VIS TKOF are not supported.
- b. For CASA approved operators RWY 14/32 supports reduced VIS OPS under direction of control TWR with RWY VIS of not less than 800M.
- c. Manual RV readings are provided to control TWR. Transmissometers are not installed.

CTAF - AFRU 124.5

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

- 1. Animal hazard exists year round with risk species varying depending on weather conditions. Pilots should contact ATC or ARO for real time wildlife hazard report.
 - a. Flying-fox can be a hazard at any time of the year, peaking MAR to MAY, as they may transit RWY at dusk.
- 2. Bird Hazard exists. Increased numbers of the following species are expected during the specified times:
 - a. APR to OCT; increased masked lapwing activity.
 - b. JUL to JAN; increased bush stone-curlew activity.
 - c. Increased bird activity during and post rainfall and adverse weather events, including Australian white ibis, straw-necked Ibis, magpie goose, cattle egret and whistling duck.
 - d. Increased bird activity between 0600-0900 Local and dusk daily as flocks transit BTN off-airport sites, including Australian white ibis, straw-necked ibis and magpie goose.
 - e. Adverse weather increases risk from gulls, terns and migratory waders.
 - f. Species specific NOTAM will be issued during periods of increased activity.
- 3. PJE on AD HJ - SFC-10,000FT AMSL.
- 4. In conditions of light mist or fog, high intensity floodlighting adjacent to short final on approach RWY 14 may cause distraction.
- 5. Some areas of Eastern GA and Western GA may not comply with lighting standards. Pilots should exercise caution at night.

CHARTS RELATED TO THE AERODROME

- 1. WAC 3234, 3235.
 - 2. Also refer to AIP Departure and Approach Procedures.
-

MELBOURNE**ELEV 434****AVFAX CODE 3001**

VIC

UTC +10

YMML

374024S

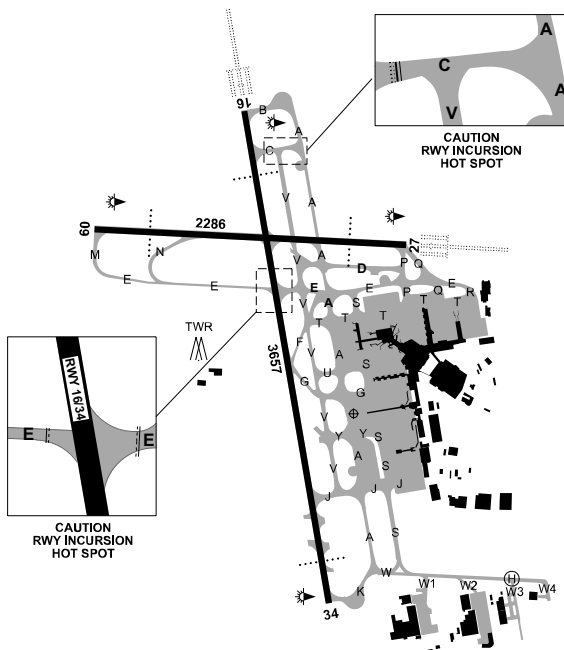
1445036E

VAR 12 DEG E

CERT

AD OPR Australia Pacific Airports (Melbourne) Pty Ltd, Locked Bag 16, Tullamarine, VIC, 3043.

Email: airfieldsupport@melair.com.au. PH 03 9297 1600. Fax 03 9297 1886.

**REMARKS**

1. AD Charges: All ACFT.
2. This AD is a Security Controlled Airport.
3. Pavement concessions to be assessed by AD OPR for in excess of published PCR 1373.
4. AD operates as public.

HANDLING SERVICES AND FACILITIES

BP: phone 0499 246 313.

Mobil: phone 03 8346 6901.

VIVA: 1900-1600 UTC DLY. Phone 03 9338 7156. JET A1 only.

Skytanking: 0500-0000 UTC DLY. Phone 0439 000 021. JET A1.

Melbourne Jet Base (MJB) - Full FBO services and VIP facilities for ACFT up to 400,000KG. H24 with 2HR PN for Civil and MIL ACFT up to 50,000KG. Short/long-term hangarage (subject to availability) and apron PRKG AVBL on private apron, direct ACFT and vehicle access. Over the counter Customs, Immigration and Quarantine available H24 with PN. Apron Hangar located off W2. Phone +61 3 8370 9640. Email: ops@melbournejetbase.com.au or shane.collings@melbournejetbase.com.au. VHF 129.75 CS 'Melbourne Jet Base'.

General

AD OPR does not provide ACFT marshalling services. All requests for ACFT marshalling should be directed to the airlines or FBO (if applicable).

RESCUE AND FIREFIGHTING SERVICES

1. CAT 9.
2. 131.0 MHz AVBL H24. Request via ATC.

APRONS AND TAXIWAYS

1. Terminal 1 apron area BTN pier B and C, not AVBL to ACFT ABV 47.6M wingspan.
2. Terminal 3 apron area BTN pier E and F, not AVBL to ACFT ABV 60.3M wingspan.
3. RUNWAY INCURSION HOTSPOT
RWY 16/34 and TWY E.

SURFACE MOVEMENT GUIDANCE

RWY touchdown zone and fixed distance markings on RWY 16/34 and RWY 09/27.

AERODROME OBSTACLES

1. RVR transmissometers (unlit) (frangible) within RWS all RWY, 14FT AGL.
2. RWY 27 HIAL 409FT AMSL BRG 013 DEG MAG 1,343M FM ARP. Infringes RWY 09 TKOF SFC by 2FT.
3. RWY 16 HIAL 440FT AMSL PSN 373905.60S 1445004.6E. Infringes RWY 34 TKOF SFC by 3FT.
4. IWI (unlit) 431FT AMSL BRG 301 DEG MAG 2,378M FM ARP. Infringes transitional SFC by 4FT.
5. GP Apparatus (lit):
 - a. Tower 450FT AMSL BRG 352 DEG MAG 1,409M FM ARP. Infringes transitional SFC by 42FT.
 - b. Aerial 421FT AMSL BRG 353 DEG MAG 1,410M FM ARP. Infringes transitional SFC by 14FT.
 - c. Tower 475FT AMSL BRG 324 DEG MAG 2,034M FM ARP. Infringes transitional SFC by 49FT.
 - d. Aerial 443FT AMSL BRG 324 DEG MAG 2,154M FM ARP. Infringes transitional SFC by 15FT.
6. DME antenna (lit) 434FT AMSL BRG 344 DEG MAG 1,476M FM ARP. Infringes transitional SFC by 2FT.
7. BLDG (lit) 424FT AMSL BRG 320 DEG MAG 1,697M FM ARP. Infringes transitional SFC by 9FT.
8. Control TWR (lit) 582FT AMSL BRG 280 DEG MAG 1,292M FM ARP. Infringes inner horizontal SFC by 70FT.
9. Antennas (lit):
 - a. 759FT AMSL BRG 038 DEG MAG 3,544M FM ARP. Infringes inner horizontal SFC by 242FT.
 - b. 562FT AMSL BRG 054 DEG MAG 3,482M FM ARP. Infringes inner horizontal SFC by 45FT.
10. Radio mast (lit) 1,000FT AMSL BRG 213 DEG MAG 7,406M FM ARP. Infringes outer horizontal SFC by 139FT.
11. Towers (lit):
 - a. 619FT AMSL BRG 312 DEG MAG 5,570M FM ARP. Infringes inner horizontal SFC by 103FT.
 - b. 643FT AMSL BRG 312 DEG MAG 5,723M FM ARP. Infringes conical SFC by 67FT.
12. Spire (unlit) 524FT AMSL PSN 373834.60S 1444941.08E. Infringes transitional SFC by 7FT.
13. Stockpiles:
 - a. Unlit, 679FT AMSL BRG 308 DEG MAG 7,247M FM ARP. Infringes conical SFC by up to 26FT.
 - b. Lit, 829FT AMSL BRG 352 DEG MAG 6,807M FM ARP. Infringes conical SFC by up to 223FT.
14. Shed (unlit) 543FT AMSL PSN 373745.90S 1444850.01E. Infringes inner HZS by 26FT.
15. Water tanks (unlit) 951FT AMSL PSN 373608.40S 1444215.59E. Infringes outer HZS by 90FT.
16. Temporary obstacles (trees):
 - a. 441FT AMSL PSN 373938.23S 1445109.42E. Infringes transitional SFC by 6FT.
 - b. 439FT AMSL PSN 373947.83S 1445117.64E. Infringes RWY 09 TKOF SFC by 1FT.
 - c. 439FT AMSL PSN 373940.15S 1445112.46E. Infringes RWY 27 APCH SFC by 1FT.
 - d. 463FT AMSL PSN 373927.16S 1444845.00E. Infringes RWY 27 TKOF SFC by 4FT.
 - e. 360FT AMSL PSN 374127.00S 1445025.85E. Infringes RWY 16 TKOF SFC by 2FT.

- f. 369FT AMSL PSN 374129.93S 1445024.82E. Infringes RWY 34 APCH SFC by 1FT.
- g. 375FT AMSL PSN 374129.17S 1445022.50E. Infringes RWY 34 APCH SFC by 9FT.
- h. 385FT AMSL PSN 374112.00S 1445017.46E. Infringes transitional SFC by 3FT.
- i. 553FT AMSL PSN 373832.23S 1444943.00E. Infringes inner horizontal SFC by 37FT.
- j. 505FT AMSL PSN 373836.13S 1444950.11E. Infringes RWY 16 APCH SFC by 3FT.
- k. 500FT AMSL PSN 373848.56S 1444949.28E. Infringes transitional SFC by 3FT.
- l. 451FT AMSL PSN 373931.20S 1444935.48E. Infringes transitional SFC by 6FT.
- m. 538FT AMSL PSN 373852.27S 1444945.74E. Infringes inner horizontal SFC by 21FT.
- n. 534FT AMSL PSN 373854.96S 1444947.27E. Infringes inner horizontal SFC by 17FT.
- o. 543FT AMSL PSN 373855.45S 1444945.12E. Infringes inner horizontal SFC by 26FT.
- p. 535FT AMSL PSN 373858.97S 1444946.62E. Infringes inner horizontal SFC by 18FT.
- q. 518FT AMSL PSN 373854.37S 1444948.03E. Infringes inner horizontal SFC by 2FT.
- r. 521FT AMSL PSN 373902.35S 1444949.43E. Infringes inner horizontal SFC by 5FT.
- s. 517FT AMSL PSN 373859.47S 1444948.94E. Infringes inner horizontal SFC by 1FT.
- t. 541FT AMSL PSN 373844.73S 1444943.63E. Infringes inner horizontal SFC by 24FT.
- u. 550FT AMSL PSN 373852.75S 1444943.09E. Infringes inner horizontal SFC by 33FT.
- v. 550FT AMSL PSN 373831.62S 1444943.64E. Infringes inner horizontal SFC by 33FT.
- w. 536FT AMSL PSN 373836.34S 1444941.76E. Infringes inner horizontal SFC by 19FT.
- x. 562FT AMSL PSN 373844.20S 1444942.80E. Infringes inner horizontal SFC by 45FT.
- y. 433FT AMSL PSN 373939.57S 1445111.39E. Penetrates RWY 27 APP SFC by 1FT.
- z. 362FT AMSL PSN 374128.91S 1445028.84E. Penetrates RWY 16 TKOF SFC by 1FT.
- aa. 492FT AMSL PSN 373838.43S 1445003.71E. Penetrates RWY 34 TKOF SFC by 1FT.
- ab. 553FT AMSL PSN 373832.33S 1444942.99E. Penetrates inner HZS by 37FT.
- ac. 549FT AMSL PSN 373836.21S 1444940.46E. Penetrates inner HZS by 32FT.
- ad. 550FT AMSL PSN 373831.57S 1444943.77E. Penetrates inner HZS by 33FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
2. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 03 9669 4850.
3. AWIS PH 03 8470 3214 - Report faults to BoM.

PHYSICAL CHARACTERISTICS

- | | | | | |
|-------|----------|---------------------------|--------|---------|
| 09/27 | 082 75a | PCR 1373/F/D/X/T Grooved. | WID 45 | RWS 300 |
| 16/34 | 160 120a | PCR 1373/F/D/X/T Grooved. | WID 60 | RWS 300 |
1. Concrete ends RWY 16, 27 and 34.
 2. OFZ exists on all RWY.

AERODROME AND APPROACH LIGHTING

- | | | | |
|-----------|-----------------|-------------|---------------|
| RWY 09/27 | MIRL | | SDBY PWR AVBL |
| RWY 09/27 | PAPI(5) | 3.0 DEG74FT | SDBY PWR AVBL |
| RWY 27 | HIAL-CAT II(4) | | SDBY PWR AVBL |
| RWY 27 | HIAL-CAT III(4) | | SDBY PWR AVBL |
| RWY 27 | HIRL | | SDBY PWR AVBL |
| RWY 27 | RCLL | | SDBY PWR AVBL |
| RWY 27 | RTZL | | SDBY PWR AVBL |
| RWY 16/34 | HIRL | | SDBY PWR AVBL |
| RWY 16/34 | PAPI(5) | 3.0 DEG74FT | SDBY PWR AVBL |
| RWY 16/34 | RCGL | | SDBY PWR AVBL |
| RWY 16/34 | RCLL | | SDBY PWR AVBL |
| RWY 16 | HIAL-CAT II(3) | | SDBY PWR AVBL |
| RWY 16 | HIAL-CAT III(3) | | SDBY PWR AVBL |
| RWY 16 | RTZL | | SDBY PWR AVBL |
| RWY 34 | HSL(1) | | SDBY PWR AVBL |
| RWY 34 | RTIL(2) | | SDBY PWR AVBL |
- (1) Landing RWY 34 the Hold Short Line is marked with red and white runway Intersection Signs and is indicated by six occulting white flush fitted lights across RWY 34.
 - (2) RTIL installed to aid RWY ident.

- (3) Associated SFL 600M. Not AVBL when cloud base is greater than 1000FT AGL and VIS greater than 5000M.
- (4) Associated SFL 420M. Not AVBL when cloud base is greater than 1000FT AGL and VIS greater than 5000M.
- (5) Both sides coincide with RWY Aim Point Markings.
1. **ALS type and length**
 - a. RWY 16 - barrette CL: 900M.
 - b. RWY 27 - barrette CL: 720M.
2. RCLL: full length of RWY, white in colour at 15M spacing to a point of 900M FM RWY end, thence alternating red/white to a point of 300M FM RWY end, thence red in colour.
3. HIRL: RWY edge light spacing full length of RWY, white in colour at 60M spacing to a point of 600M FM RWY end, thence yellow in colour.
4. RCGL: RWY edge light spacing full length of RWY, white in colour at 60M spacing.
5. MIRL: RWY edge light spacing full length of RWY, white in colour at 60M spacing.
6. RWY threshold lighting is green in colour and is supplemented by wingbars on RWY 16/34 only.
7. RWY end lighting is red in colour and not supplemented by wingbars.
8. RTZL extends 900M FM threshold.
9. RWY 09/27 MIRL may be partially obscured when downwind RWY 09.
10. Stopbars and Runway Guard Lights (RGL) at all RWY/TWY intersections.

OTHER LIGHTING

1. Secondary PWR switchover time: 1 SEC during LVP; 15 SEC OT.
2. **TWY LIGHTING**
 - 2.1. G centre line lights on all TWY.
 - 2.2. Where RQ yellow intermediate holding point lighting.

ATS AND AERODROME COMMUNICATION FACILITIES

ACD	MELBOURNE DELIVERY	127.2
APP	MELBOURNE APPROACH	132.0
ATIS	MELBOURNE ATIS	114.1 118.0
DEP	MELBOURNE	118.9 (2) 129.4 (3)
	DEPARTURES	
SMC	MELBOURNE GROUND	121.7
TWR	MELBOURNE TOWER	120.5
VOLMET	AUSTRALIA	6676 (1) 11387 (1)

- (1) H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.
- (2) Routes 264 radial through N to 092 radial.
- (3) Routes 263 radial through S to 093 radial.

RADIO NAVIGATION AND LANDING AIDS

GBAS	G09A	CH 21118 (RWY09)	374005.7S	1444959.1E	(6)
GBAS	G16A	CH 21940 (RWY16)	374005.7S	1444959.1E	(6)
GBAS	G27A	CH 21529 (RWY27)	374005.7S	1444959.1E	(6)
GBAS	G34A	CH 20707 (RWY34)	374005.7S	1444959.1E	(6)
DME	IMS	109.7/ 34X (RWY16)	373924.1S	1445001.2E	(3)
GP	IMS	333.2 (RWY16)	373924.1S	1445001.5E	
ILS	IMS	109.7 (RWY16)	374119.1S	1445029.5E	(4)
LOC	IMS	109.7 (RWY16)	374119.1S	1445029.5E	
DME	IMW	109.3/ 30X (RWY27)	373938.2S	1445040.4E	(5)
GP	IMW	332 (RWY27)	373938.5S	1445040.3E	
ILS	IMW	109.3 (RWY27)	373936.2S	1444836.4E	

LOC	IMW	109.3 (RWY27)	373936.2S	1444836.3E	
DME	ML	114.1/ 88X	373936.3S	1445031.8E	(2)
VOR	ML	114.1	373936.5S	1445031.2E	(1)

(1) Scalloping may occur beyond 50NM in sectors 270 to 290 DEG

(2) Antenna ELEV 399FT.

(3) Antenna ELEV 435FT.

(4) ILS RWY 16 Performance Classification III/E/4.

(5) Antenna ELEV 418FT.

(6) Between 50NM and 23NM from the GBAS site, GLS course deviation information is advisory only. Within 23NM from the GBAS site, GLS course deviation information is approved for the conduct of an Instrument Approach.

Other DME, ILS, MKR and no idents or ident XP, intermittently on test.

LOCAL TRAFFIC REGULATIONS

1. All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
2. All tugs and vehicles repositioning ACFT and/or equipment via the TWY must make initial CTC with Melbourne Delivery on 127.2 and state their current location, destination and aircraft type (if applicable). Melbourne Delivery will advise the tug or vehicle to standby for Ground on 121.7.
3. HEL must ARR and DEP from the RWY or TWY W HELIPAD. Exemptions may be provided by the Senior Airside Safety Officer, Car 2 0418 335 985.
4. Engine ground runs permitted - restrictions may apply. CTC Senior Airside Safety Officer, Car 2 0418 335 985.
5. For A380 ACFT DEP RWY 09/27 only, 10MIN PN must be given to ATC for all approvals.
6. Refer to *AIP DAP* for A380 and B748 for Aerodrome Ground Movement Charts.
- 7.

RESTRICTIONS DUE JET BLAST

- a. ACFT operating on INTL, Domestic and Freight aprons are subject to the FLW limitations:
 - (i) Engine starts using more than idle power are prohibited, unless authorised by ATC.
 - (ii) ACFT must not start more than two engines until pushback procedure is complete.
 - (iii) Arriving ACFT with wingspan ABV 36M must not apply power ABV ground idle on TXL or APN. If required, power application ABV ground idle on TXL or APN is subject to approval from Senior Airside Safety Officer (Car 2) (clauses *iv* and *v* applies). ACFT may be required to tow onto bay due jet blast (clause *vi* applies).
 - (iv) ACFT with wingspan ABV 36M must not taxi ABV idle power on TXL or APN Uniform, Papa and arrival onto Bay H3.
 - (v) ACFT with wingspan ABV 36M must not conduct single engine taxi on TXL or APN Uniform, Papa and arrival onto Bay H3.
 - (vi) If ACFT with wingspan ABV 36M has stopped on TXL or APN prior to docking on Bays D1, D4, D5, D6, D8, D12, D13, D15, H1, H2 or H3, shut down engines, docking must be completed under tow.
 - (vii) If ACFT with wingspan ABV 36M has stopped on TXL or APN prior to docking on Bays D7, D9, D10 or D11, ACFT may continue to taxi onto bay at idle power with approval of Senior Airside Safety Officer (Car 2).
- b. A380 and B747 ACFT must exercise caution when applying power on outboard ENG whilst taxiing to prevent erosion of TWY shoulders.
- c. A380 ACFT taxiing to Bays D13 and D15 must stop and shut down all engines on TWY T. ACFT must proceed to the bay under tow.
- d. Right turns from TWY T northbound onto TWY P, pilots are to exercise caution when applying power.
8. **TURNING**
 - a. Left turns from TWY G Rapid Exit Taxiway (RET) into TWY V not AVBL to ACFT ABV 36M wingspan.
 - b. Right turns from TWY V into TWY G (RET) not AVBL to ACFT ABV 36M wingspan.
 - c. Right turns from TWY F (RET) into TWY V not AVBL to ACFT ABV 36M wingspan.
 - d. Left turns from TWY V into TWY F (RET) not AVBL to ACFT ABV 36M wingspan.
 - e. Right turns FM TWY E (via TWY R) into TWY T not AVBL to ACFT ABV 36M wingspan.

- f. Left turns FM TWY S into TWY W not AVBL to ACFT ABV 36M wingspan, unless under tow.
- g. Right turns FM TWY W into TWY S not AVBL to ACFT ABV 36M wingspan, unless under tow.
- h. Pilots of B777-300, A340-600, A340-500, A350-900, A350-1000 and type ACFT should exercise caution during turns as normal clearances to TWY edge may not be AVBL. Contact AD OPR for details of preferred taxi routes.
- i. Left turns FM TWY T into TWY S not AVBL to A380 ACFT right turns FM TWY S into TWY T not AVBL to A380 ACFT.
- j. Right turns FM TWY D via TWY P to TWY E, and left turns from TWY E via TWY P to TWY D not permitted, including under tow.

9. TAXIWAY RESTRICTIONS

- a. Any deviations from taxiway/taxilane centre lines is prohibited unless advised to ATC and the Senior Airside Safety Officer (Car 2) and approved by a company engineer in attendance during the manoeuvre.
- b. TWY S BTN TWY T and TWY U not AVBL to through TFC.
- c. TWY S BTN TWY U and TWY G not AVBL to through TFC ABV 36M wingspan. OPS under tow are permitted for ACFT wingspan ABV 36M and BLW 65M via TWY S between TWY G and TWY U.
- d. Pilots of A340-600 and B747-8 ACFT taxiing for Southern APN Bays H1, H2 and H3 must enter and exit the Southern APN via TWY J, or alternatively via TWY Y and TWY S.
- e. TWY T BTN TWY R and TWY Q restricted to MAX wingspan of 60.3M and MAX taxi speed of 5KT for ACFT greater than 36M.
- f. Taxilane Q not AVBL for ACFT ABV 36M wingspan.
- g. Restrictions of simultaneous use of TWY V extension and TWY F BTN TWY V and TWY A are as follows:
 - (i) Any ACFT taxiing southbound on TWY V and holding short of TWY F, restricts movements on TWY F between TWY V and TWY A to MAX Code C ACFT (A320/B737).
 - (ii) A Code C ACFT (A320/B737) taxiing northbound on TWY V and holding short of TWY E, restricts movements on TWY F BTN TWY V and TWY A to MAX Code E ACFT (A350/B777).
 - (iii) A Code E ACFT (A350/B777) taxiing northbound on TWY V and holding short of TWY E, restricts movements on TWY F BTN TWY V and TWY A to MAX Code C (A320/B737).

Note: in points i-iii above there are no wingspan restrictions on an ACFT which vacate RWY 34 onto rapid exit TWY F and subsequently taxi onto TWY T.

- h. TWY F not AVBL for ACFT ABV 5,700KG LDG RWY 16.
- i. TWY G not AVBL for ACFT ABV 5,700KG LDG RWY 34.
- j. ACFT restrictions for TWY W are as follows:
 - (i) W1 tow only unless exemption provided. CTC Senior Airside Safety Officer, Car 2 0418 335 985.
 - (ii) W2 tow only to ACFT ABV 36M wingspan.
 - (iii) TWY W east of W2 tow only to ACFT ABV 36M wingspan.
 - (iv) W3 tow only unless exemption provided. CTC Senior Airside Safety Officer, Car 2 0418 335 985.
- k. Taxilane APN 8 and taxilane APN 9 operate as dual taxilanes, restrictions apply:
 - (i) Taxilane APN 8 services Bays F12, F14, F16, F18, F20 and F22A.
 - (ii) Taxilane APN 9 services Bays G41, G43, G45, G47 and G49.
 - (iii) Bay F12A AVBL for ACFT with wingspan ABV 36M under tow operation. Tow BTN Bay F12A and TWY S via secondary bay lead-in line. TXL APN 8 and TXL APN 9 not AVBL while tow operation is in progress. Tow operation into or out of Bay F12A not AVBL during HN.

- l. TWY D AVBL to ACFT BLW 65M wingspan and outer main gear wheel span BLW 15M.

10. PARKING

- a. Parking of itinerant ACFT must be approved by the Integrated Operations Centre, 03 9297 1624, Fax 03 9297 1652. Email: sacc@melair.com.au at least 24HR prior to ETA.

- b. International Concourse Delta, when Visual Docking Guidance System (VDGS) or Advanced Visual Docking Guidance System (A-VDGS) is switched off, the screen reads "STOP STOP". This will remain illuminated until the VDGS is switched on.
 - c. ACFT must not continue docking if VDGS or A-VDGS is not activated or calibrated for their ACFT type unless a marshaller is present. If docking cannot proceed, hold PSN advise SMC.
11. **TRAINING, SURVEY AND AIRWORK FLIGHTS**
- a. All ACFT planning practice instrument APCH (AVBL HR 2000-1300 UTC), survey or airwork WI the ML Terminal Airspace require prior ATC approval.
 - b. For training and airwork, pilots must contact the ML Traffic Manager on 03 9235 7337 to book a time slot. For ARR ACFT a request must be made to ML Centre by 120NM from Melbourne or on first contact for ACFT entering CTA within 120NM.
 - c. Training circuits are not permitted.
 - d. For survey flights, pilots must contact the ML Traffic Manager on 03 9235 7337 to discuss the planned operation prior to becoming airborne. Operations WI the lateral confines of the ML CTR should be conducted ABV A060. Lower altitudes may not be AVBL or will incur extensive delays. Preferred operating times for extended surveys are SAT afternoon and SUN morning.

FLIGHT PROCEDURES

1. ESTIMATED AIRBORNE TRAFFIC DELAYS

- 1.1. For ARR ACFT
- a. May be expected due to terminal area traffic density and/or single RWY operations:
 - (i) MON-FRI 2100-0000 UTC and 0600-1100 UTC: 20MIN
 - (ii) SAT 2100-0000 UTC: 20MIN
 - (iii) SUN 0600-1100 UTC: 20MIN
 - (iv) DLY 0000-0600 UTC: 10 MIN

Note: All times 1HR earlier during HDS. Actual holding times may differ from holding estimates. Historical data on actual holding is available from the NOMC.

2. ATC TRAFFIC MANAGEMENT SPEED

When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP ML must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

3. ARRIVAL PROCEDURES

By day, ATC may use 2,400M RWY separation between ACFT ARR to RWY 16/34. Both ACFT may occupy the RWY during application of the standard.

4. DEPARTURE PROCEDURES

Start clearance is required by ACFT DEP Melbourne for:

- a. Essendon or Moorabbin; or
- b. Practice instrument approach prior to DEP; or
- c. AWK in terminal area.

5. HELICOPTER ACCESS CORRIDOR

'The Sunbury Corridor' established within 1NM either side of a line between SWT and Melbourne RWY 16/34 - 09/27 intersection. Vertical limit SFC - 2,000FT AMSL. The corridor includes a VFR tracking point, Powerline Crossing (PWLC). Refer to Melbourne VTC. Corridor available HJ subject to weather, Melbourne TWR workload and traffic disposition. To request the Sunbury Corridor contact:

- a. Northbound - Essendon ground or TWR.
- b. Southbound - Melbourne TWR approaching SWT.

When operating in the corridor turn on landing lights. If required to hold at PWLC helicopters should hover. Do not orbit unless instructed by ATC.

6. LOW VISIBILITY OPERATIONS

- 6.1. For CASA APV operators, RWY 16 and RWY 27 are capable of supporting low VIS take-offs without limit, however only:

- a. RWY 16 and 27 are normally used for low VIS departures; and
- b. RWY 16 is capable of supporting localiser guided takeoffs.

Note: Flight crew must inform ATC at start up about an intention to conduct a takeoff that requires localiser guidance.

- 6.2. Access to RWY 27 is via TWY P or TWY Q. Access to RWY 16 is via TWY B. Intersection departures are not permitted.
- 6.3. RWY 16 is the arrival RWY for low VIS operations and is capable of supporting Category II and III approaches.
- 6.4. Approved TWY exits are TWY G, TWY J and TWY K
- 6.5. The following TWY are NOT suitable for use in RVR conditions of less than a value of 350M:
 - a. TWY T between TWY P and TWY R.
 - b. TWY S between TWY Y and TWY J.
 - c. TWY W east of TWY S.
- 6.6. All TWY are suitable for use in conditions of greater than RVR 350M.
- 6.7. Refer to *AIP DAP* for Aerodrome Ground Movement Charts.
- 7. LOW VISIBILITY PROCEDURES**
- 7.1. Preparations for the initiation of Low Visibility Procedures (LVP) are commenced when VIS has reduced to 1,000M and/or the cloud ceiling is at or below 500FT and is further reducing or VIS on any part of the AD is insufficient to exercise control on the basis of visual surveillance. LVP initiation may occur earlier if conditions deteriorate rapidly.
- 7.2. When RVR is at or below 550M (less than 800M if RVR not AVBL) or when the cloud ceiling is at or below the CAT I minima, the ILS critical and sensitive areas are protected and 'LOW VISIBILITY PROCEDURES IN FORCE' is declared.
- 7.3. LVP are progressively lifted when the cloud ceiling is above the CAT I minima and the visibility reaches 850M and is increasing.
- 7.4. In the event of failure of RVR equipment, RWY visibility assessments will be provided.
- 7.5. ATC uses Advanced Surface Movement Guidance Control System (A-SMGCS) to monitor ACFT and vehicles on the Manoeuvring Area.
- 7.6. If A-SMGCS is unserviceable during LVP:
 - a. ATC will further restrict operations on the Manoeuvring Area.
 - b. Position reporting procedures may be implemented.
- 8. FOLLOW ME SERVICE**
- 8.1. Flight Crew must notify ATC if a 'Follow Me' service is required.
- 9. LAND AND HOLD SHORT OPERATIONS (LAHSO)**
- 9.1. LAHSO is used at Melbourne. See the YMML RDS for 'LDA for LAHSO' information.
- 9.2. In the event of a go-around, ATC may assign an avoiding action turn to either ACFT.
- 9.3. A turn commenced at the minimum turn HGT for the ACFT, together with a climb at normal go-around climb rates, will provide adequate OBST clearance.
- 10. RWY 09 ARRIVALS AND RWY 16 DEPARTURES SIMULTANEOUS OPERATIONS**
- 10.1. Simultaneous operations will be conducted with ACFT landing on RWY 09 and departing on RWY 16 from TWY E (370M FM RWY INT).
- 11. AIR TRAFFIC FLOW MANAGEMENT (ATFM)**
- 11.1. Ground Delay Program (GDP)
 - a. Melbourne GDP is run on demand and promulgated by NOTAM BTN 2000-1400 UTC (1HR earlier HDS). Melbourne GDP are applicable to all fixed wing, non-priority flights departing from all Australian domestic airports, and arriving at Melbourne.
 - b. Except as specified in the note below, flights from all Australian airports are required to operate in accordance with COBT. The COBT can be obtained through their company or the NOMC Phone: 1800 020 626^.
 - c. Flights departing within a 60NM radius of Melbourne must also obtain a start clearance from the departure airport when active or from Melbourne ATC Phone: 03 9235 7337^
- 11.2. Airport Collaborative Decision Making (A-CDM)
 - A-CDM at Melbourne is run continuously H24 and is applicable to all IFR fixed wing non-priority flights departing Melbourne, who are required to comply with A-CDM in accordance with procedures outlined in *AIP ENR 1.9*. Compliance with a Target Off Blocks Time (TOBT) is required. All flights departing Melbourne airport are required to submit a TOBT through a local Designated Ground Handling Agent (DGHA) or local Fixed Base Operator (FBO). Further enquiries can be made via your company or designated ground handler or Melbourne Airport Integrated Operations Centre 03 9297 1624.

11.2.1. Start and Pushback Procedures

- a. Departing aircraft with ground power must contact Melbourne Delivery ready for pushback or start. Aircraft will be instructed to standby for Ground once compliant with any applicable ATFM procedures. Melbourne Ground will approve pushback or start clearance when able.
- b. Departing aircraft without ground power are approved to start at own discretion, advising Melbourne Clearance Delivery when start complete. Aircraft for pushback will be instructed to standby for Ground once compliant with any applicable ATFM procedures. Aircraft for taxi from the bay will be instructed to contact Ground for taxi clearance once compliant with any applicable ATFM procedures. Ground will approve pushback or taxi when able.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

1. Wildlife hazard exists.
 - a. The following species are present all year round:
 - (i) Australian Magpies - may transit across RWS.
 - (ii) Wedge-tailed eagles during HJ in thermal above N and W ends of the aerodrome.
 - (iii) Ibis and ducks following MOD RA, thunderstorms and adverse WX.
 - (iv) Little Raven – flocks may forage inside RWS.
 - (v) Feral Pigeon – may transit across south end of aerodrome.
 - (vi) Rainbow lorikeet – may transit E end of aerodrome.
 - b. A seasonal increase in the numbers of the following species can be EXP:
 - (i) Common starling – increase EXP within 2 hours of first and last light, BTN JAN and JUL. Transit across east end of RWY 27.
 - (ii) Grey-headed Flying-fox during HN. Increase EXP BTN JAN and APR.
 - (iii) Flocks of small birds feeding in air above RWS and short final EXP JUL to MAR including Fairy Martin, Welcome Swallow and Tree Martin.
 - (iv) Brown Falcon - increase EXP BTN JUN and NOV.
 - c. Increased bird activity during and post rainfall and adverse weather events including Australian White Ibis, Straw-necked Ibis, Silver Gull, and ducks.
 - d. Species specific NOTAM will be issued during periods of increased activity.
2. Security screening is required for all passengers from all passenger ACFT, irrespective of size, departing from any of the Domestic, International or Freight Apron areas at Melbourne Airport. A charge is applicable for this service and a schedule of charges can be obtained from the Aerodrome Operator on 03 9297 1024. Any queries should also be directed to the Aerodrome Operator on the same number.
3. ACFT carrying Dangerous Goods Class 1 explosives require approval from AD OPR at least 48HR prior to ETA.
4. Model ACFT OPR WI 500M RAD of PSN 374042.1S 1444723.1E BRG 251 MAG 2.4NM FM ARP. SFC to 300FT AGL.
5. Blasting may occur BRG 353 DEG MAG 3.6NM FM ARP. SFC to 500FT AGL. Blasting times are coordinated with ATC.

CHARTS RELATED TO THE AERODROME

1. WAC 3469, 3470.
2. Aerodrome Obstruction Chart Type A: June 2024.
3. Aerodrome Obstruction Chart Type B: July 2009.
4. Precision Approach Terrain Charts AVBL from AD OPR.
5. Also refer to AIP Departure and Approach Procedures.

MILDURA**ELEV 167****AVFAX CODE 3026**

VIC

UTC +10

YMIA

341345S

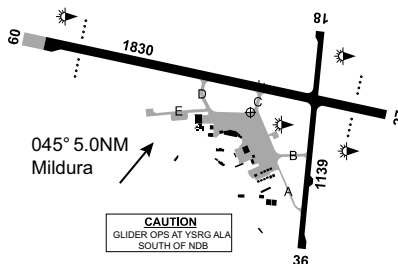
1420508E

VAR 9 DEG E

CERT

AD OPR Mildura Airport Pty Ltd, PO Box SM356, Mildura South, VIC, 3501.

Email: aro@milduraairport.com.au. PH Administration: 03 5055 0500. ARO 0428 596 871.

**REMARKS**

1. AD Charges: aircraft landing and parking charges may apply, refer to AD website terms of use.
2. This AD is a Security Controlled Airport. A valid ASIC is to be displayed at all times while airside.
3. TWY E PPR. 15 MIN PN RQ to AD OPR. CTC by phone or CTAF.

HANDLING SERVICES AND FACILITIES

World Fuel Services (WFS): JET A1 and AVGAS tanker refueller and 24HR AVGAS carnet and cardswipe bowser WFS cardswipe or V and MC via smartphone APP.

Attended 0530-1500 Local MON-FRI and 1300-1700 Local SAT/SUN. Call-out fee may apply AH. Phone: 0409 736 530 Email: mildurawfs@gmail.com.

PASSENGER FACILITIES

PT/TX/HC/LG/RF/WC.

APRONS AND TAXIWAYS

1. Two TWY leading to S end of RWY 18/36 not AVBL to ACFT ABV 5,700KG MTOW.
2. TWY E not AVBL to ACFT with wingspan greater than 17.5M.

AERODROME OBSTACLES

1. Tower BRG 122 DEG MAG 1,500M FM ARP, 264FT AMSL.
2. LGT BRG 247 DEG MAG 249M FM ARP. Infringes transitional SFC by 10FT.
3. COM TWR BRG 223 DEG MAG 391M FM ARP. Infringes transitional SFC by 6FT.
4. APN LGT:
 - a. BRG 229 DEG MAG 219M FM ARP. Infringes transitional SFC by 16FT.
 - b. BRG 212 DEG MAG 170M FM ARP. Infringes transitional SFC by 19FT.
 - c. BRG 193 DEG MAG 147M FM ARP. Infringes transitional SFC by 19FT.
 - d. BRG 178 DEG MAG 180M FM ARP. Infringes transitional SFC by 19FT.
 - e. BRG 167 DEG MAG 197M FM ARP. Infringes transitional SFC by 10FT.
5. Trees:
 - a. BRG 068 DEG MAG 894M FM ARP. Infringes transitional SFC by 10FT.
 - b. BRG 067 DEG MAG 924M FM ARP. Infringes transitional SFC by 5FT.
 - c. Two trees grouped 184FT AMSL BRG 078 MAG 1,021M FM ARP.
6. Illuminated WDI 198FT AMSL BRG 126 DEG MAG 162M FM ARP. Infringes transitional SFC by 16FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. AWIS Phone 03 8470 3215 - Report faults to BoM.
3. AWIS FREQ 128.675 (requires one one-second pulse to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

09/27	092	60a	PCR 200/F/C/1.57 MPa/T Grooved	WID 45	RWS 300
18/36	176	37a	PCR 61/F/C/0.75 MPa/U	WID 30	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 09/27	LIRL(1)	PAL+AA 119.6		SDBY PWR AVBL
RWY 09	PAPI(1)	PAL+AA 119.6	3.0 DEG53FT	SDBY PWR AVBL
RWY 27	PAPI(1)	PAL+AA 119.6	3.0 DEG48FT	SDBY PWR AVBL
RWY 18/36	LIRL(1)	PAL+AA 119.6		SDBY PWR AVBL

(1) PAL+AA requires three pulses of APRX one second duration WI five seconds to ACT.

RWY edge light spacing:

- a. RWY 09/27 - 60M;
- b. RWY 18/36 - 80M.

OTHER LIGHTING

1. Secondary PWR switchover time: 15 SEC.
2. TWY LGT: Blue edge, TWY C and D only.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	122.1 On Ground
-----	------------------	-----------------

RADIO NAVIGATION AND LANDING AIDS

DME	IMI	110.9/ 46X	341341.7S	1420437.1E	(4)
		(RWY09)			
GP	IMI	330.8 (RWY09)	341341.7S	1420437.1E	
ILS	IMI	110.9 (RWY09)	341349.1S	1420548.2E	(3)
LOC	IMI	110.9 (RWY09)	341349.1S	1420548.2E	
DME	MIA	113.7/ 84X	341330.2S	1420438.3E	(1)
NDB	MIA	272	341452.1S	1420426.1E	(2)
VOR	MIA	113.7	341330.7S	1420438.2E	

Range 100 (HN 85)

- (1) Antenna ELEV 186FT.
- (2) 024/1.2 to ARP.
- (3) Private ILS - Fees apply - Operated by AD OPR.
- (4) Antenna ELEV 189FT.

LOCAL TRAFFIC REGULATIONS

1. Very limited PRKG for ACFT ABV 5,700KG MTOW. Contact AD OPR for parking.
2. Additional grassed parking with tie-down facility available for ACFT below 5,700KG adjacent to TWY A and B entrance via TWY A.
3. ACFT are not directly visible to each other on THR RWY 09, THR RWY 27 and THR RWY 36. Mandatory rolling call required from all ACFT immediately prior to take-off due increased risk of ACFT not being aware of each other.
4. ACFT LDG RWY 18/36 at night - taxi via RWY 09/27 and use TWY C or D.

FLIGHT PROCEDURES

Right hand circuits RWY 27 and 36.

CTAF - AFRU 118.8**ADDITIONAL INFORMATION**

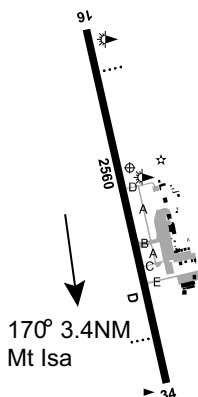
1. Birds may be present on SFC and approaches to RWYs.
2. Caution: training airfield. Multiple RWY may be in use with significant TFC within circuit at any time.
3. Caution: frequent movements of high capacity RPT ACFT occur at AD.
4. Gliding OPS HJ JF and NOTAM from grass airstrip 2NM SSW of AD. Wire launching. Gliders monitor CTAF.

CHARTS RELATED TO THE AERODROME

1. WAC 3458.
2. Also refer to AIP Departure and Approach Procedures.

MOUNT ISA**ELEV 1121****AVFAX CODE 4301**

QLD YBMA
 203950S 1392919E VAR 5 DEG E CERT
 AD OPR Mount Isa Airport Pty Ltd, PO Box 2305, Mount Isa, QLD, 4825.
 Email: aro@isaairport.com.au. PH 07 4409 3000. ARO 0428 030 409 H24.
 Website: www.mountisaairport.com.au.

**REMARKS**

1. Conditions of Use and AD Charges apply to Mount Isa Airport, details available on website (navigate Regulatory > Charges).
2. This AD is a Security Controlled Airport.
3. All pilots and operators must possess and display a current Aviation Security Identification Card (ASIC) when in all areas airside unless under escort. Passengers must be escorted at all times.
4. Parking for ACFT ABV 5,700KG MTOW requires 48HR PN. Email ARO with request.
5. For airside access CTC ARO. Access from GA to RPT terminal and landside through Gate 7, remaining clear of Security Restricted Area.
6. Operating hours: H24.

HANDLING SERVICES AND FACILITIES

BP - Air Fuel Isa: H24. PH/Fax 07 4743 4843, 0419 735 998, VHF 129.9. AVGAS 24HR AIR BP
 Carnet cardswipe bowser, JET A1, O117, O125, MC and V. AVFAX Briefing Facilities AVBL.
 VIVA Energy Australia - NQ Fuel Services MON-FRI 0700-1900 Local, SAT 0800-1200 Local, SUN
 0830-1900 Local. PH 07 4743 7211, MOB 0407 961 355, Email: mtisa@nqfuelservices.com.au.
 AH 1HR PN (call-out fee applies).
 Airside Logistics: PH 07 4744 8500, 0407 111 211 (H24). Ground handling services - marshalling,
 baggage/freight, check-in, crew and PAX transfers, Email: isaops@airsidelogistics.com.au,
 Website: www.airsidelogistics.com.au

General

The OPR does not provide ACFT marshalling services. All requests for ACFT marshalling should be directed to the airlines or FBO (if applicable).

AERODROME OBSTACLES

1. Lit stack 2,129FT AMSL BRG 179 DEG MAG 3.6NM FM ARP. Infringes COS by 690FT.
2. Fence 1,115FT AMSL BRG 162 DEG MAG 0.9NM FM ARP. Infringes TNS by 3FT.
3. Power pole 1,157FT AMSL BRG 159 DEG MAG 1.1NM FM ARP. Infringes TNS by 5FT.
4. Towers:
 - a. Lit 1,585FT BRG 142 DEG MAG 3.1NM FM ARP infringes COS by 305FT.
 - b. Lit 1,545FT BRG 156 DEG MAG 4.6NM FM ARP.
 - c. Powerline TWR 1,254FT AMSL BRG 339 DEG MAG 2.1NM FM ARP.
 - d. Powerline TWR 1,281FT AMSL BRG 342 DEG MAG 2.4NM FM ARP.
 - e. Powerline TWR 1,257FT AMSL BRG 334 DEG MAG 1.9NM FM ARP.
5. Trees on hill:
 - a. 1,282FT AMSL BRG 141 DEG MAG 1.1NM FM ARP. Infringes inner HZS by 24FT.
 - b. 1,306FT AMSL BRG 155 DEG MAG 2.2NM FM ARP. Infringes inner HZS by 47FT.
 - c. 1,292FT AMSL BRG 156 DEG MAG 2.2NM FM ARP. Infringes inner HZS by 34FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. AWIS PH 07 3564 3729 - Report faults to BoM.
3. AWIS FREQ 135.8 (requires one-second pulse to activate). Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

16/34 162 84a PCR 305/F/A/1.47 MPa/U Grooved WID 45 RWS 150

AERODROME AND APPROACH LIGHTING

RWY 16/34	MIRL	AFRU+PAL 126.5		SDBY PWR AVBL
RWY 16/34	PAPI(1)	AFRU+PAL 126.5	3.0 DEG53.3FT	SDBY PWR AVBL
RWY 16/34	PTBL(2)			BY PRIOR
				ARRANGEMENT

(1) Left side.

(2) 120MIN PN. CTC ARO.

RWY edge light spacing: 16/34: 60M.

OTHER LIGHTING

ABN FLG 8 WG

1. Secondary PWR switchover time: 15 SEC.

2. TWY LGT: Blue edge on B.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE 122.4 On Ground

RADIO NAVIGATION AND LANDING AIDS

DME	MA	117.5/122X	203952.7S	1392908.9E	(1)
NDB	MA	338	204031.5S	1392911.6E	Range 100 (HN 60) (2)
VOR	MA	117.5	203952.6S	1392908.3E	

(1) Antenna ELEV 1,138FT.

(2) Antenna ELEV 1,185FT

TACAN also AVBL. PTBL facility, deployed as required by MIL authorities. IDENT code, channel assignment and activation by NOTAM.

LOCAL TRAFFIC REGULATIONS

- Local helicopter OPS are to be conducted from/to the eastern grass helicopter APN, which is the area contained by the blue cone markers off the E end of TWY C.
The eastern grass helicopter APN is not a designated HLS and separation is not provided BTN ACFT and/or obstructions on the ground while operating within the confines of the eastern grass helicopter APN.
- Skid mounted ACFT are not permitted to park on any sealed or asphalt surface, including bowsters, TWY, APN, run-up bay, etc.
- Air taxi to/from the eastern grass helicopter APN to the RWY via TWY C is to be avoided unless necessary. If necessary, air taxiing is to be conducted as high and as quickly as practical, to minimise dispersion of debris into hangars and workshops.
- Training flights permitted BTN 2100-1200 UTC only.
- No turns permitted in the overrun beyond RWY THR.
- All turns to be MNM speed, MAX RAD.
- Due to the grades on RWY 16/34, the opposite ends of the RWY are not visible when TKOF. Mandatory CTAF BCST required before OPR on RWY.
 - From the TWY holding point, ACFT at THR RWY 16 may not be visible.
 - ACFT at THR 16 and 34 may not be visible to one another.
 - CTAF BCST FM ACFT at the TWY holding point may not be received by ACFT at THR RWY 16.
- TWY E limited to Royal Flying Doctor Service (RFDS) and LifeFlight ACFT.

FLIGHT PROCEDURES

Right hand circuits RQ when OPR on RWY 34.

CTAF - AFRU 126.5

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

- Blasting will be conducted at various sites WI 6NM RAD of Mount Isa AD. SFC - 2,500FT.
- A wildlife hazard exists year round at this AD.
 - Bird activity is significantly increased after rainfall events.
 - Whistling kite, magpie lark, bustard and nankeen kestrel present all year round.
 - Black kites occur year round and occur in very high numbers during insect swarms, NOTAM will be issued in these events.

-
- d. Australian pratincole present in greater numbers OCT to APR but may occur seasonally year round.
For current information refer to NOTAM.
 - 3. Flying foxes are a seasonal risk at dawn and dusk on the APCH to the RWY (on and off airfield). Peak risk period is AUG through until FEB although potential risk exists year round.
 - 4. Multiple gas turbine facilities emit high velocity plume rise at locations APRX 7NM S of AD.
 - 5. Weather balloon launch APRX 2315 FM 1.5KM S ARP. Launches may occur at other times.

CHARTS RELATED TO THE AERODROME

- 1. WAC 3233.
 - 2. Also refer to AIP Departure & Approach Procedures.
-

NORFOLK ISLAND**ELEV 371****AVFAX CODE 2402**

OTH

UTC +11

YSNF

290233S

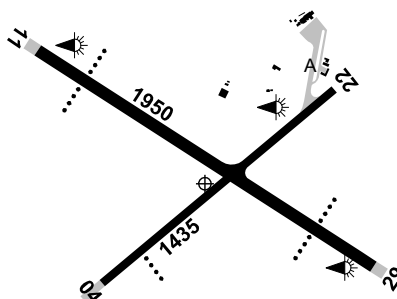
1675617E

VAR 15 DEG E

CERT

AD OPR Norfolk Island Regional Council, PO Box 149, Norfolk Island, NSW, 2899.

Email: info@airport.gov.nf. PH Primary +6723 22445; Secondary: +6723 23666.

**REMARKS**

1. This AD is a Security Controlled Airport.
2. All non air transport operational ACFT must obtain prior approval from the Airport Manager, Norfolk Island AD. 24HR PN required.
3. Local OPR MNM 60MIN advice of intention to OPR. YSNF.
4. ACFT movement and parking fees apply. See council fees and charges schedule.
5. 30MIN on call ARO response time to the airport for an emergency situation.

HANDLING SERVICES AND FACILITIES

Fuel: Burnt Pine Fuel - Phone 24 HR +6723 22188, Company FREQ 131.9. Limited stocks of AVGAS and JET A1, confirm availability before DEP for Norfolk Island. V, MC and Cash only.
 Ground Handling: Burnt Pine Travel Airport Services - Phone 24 HR +6723 22188, Company FREQ 131.9.

RESCUE AND FIREFIGHTING SERVICES

CAT 6 - CTC +6723 22049:

- a. 2100-0600 UTC TUE
- b. 2130-0600 UTC WED and FRI
- c. 0130-0530 UTC THU and SUN
- d. 2200-0530 UTC SAT

SURFACE MOVEMENT GUIDANCE

THR - green; RWY ends - red; pavement ends - blue.

AERODROME OBSTACLES

1. AD HBN and ABN located on Mount Pitt, 1,090FT AMSL APRX BRG 344 DEG MAG 1.4NM FM AD.
2. Secondary lit WDI:
 - a. 345FT AMSL APRX BRG 99 DEG MAG 713M FM ARP. Infringes TNS.
 - b. 93FT AMSL APRX BRG 304 DEG MAG 1,008M FM ARP. Infringes TNS.
3. Trees:
 - a. 410FT AMSL PSN 290300.76S 1675659.85E, infringes TNS RWY 11/29.
 - b. 469FT AMSL PSN 290245.59S 1675628.90E, infringes TNS RWY 11/29.
 - c. 467FT AMSL PSN 290243.84S 1675628.09E, infringes TNS RWY 11/29.
 - d. 368FT AMSL PSN 290258.32S 1675549.99E, infringes APCH to RWY 04 by 5FT.
 - e. 395FT AMSL PSN 290301.91S 1675547.91E, infringes APCH to RWY 04 by 20FT.
 - f. 376FT AMSL PSN 290301.37S 1675547.00E, infringes APCH to RWY 04 by 1FT.
 - g. 481FT AMSL PSN 290207.27S 1675644.71E, infringes TNS RWY 04/22.
 - h. 473FT AMSL PSN 290207.00S 1675702.28E, infringes TNS RWY 04/22.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, AD WRNG.
2. AWIS Phone 02 9353 6443 - Report faults to BoM.

PHYSICAL CHARACTERISTICS

04/22	035	47a	PCR 90/F/B/0.60 MPa/U	WID 30	RWS 90
11/29	107	64a	PCR 390/F/B/1.10 MPa/T Grooved	WID 45	RWS 150

Both side of RWY 04/22 TNS infringed.

AERODROME AND APPROACH LIGHTING

RWY 04/22	LIRL			SDBY PWR AVBL
RWY 04/22	PTBL(2)			BY PRIOR
				ARRANGEMENT
RWY 04	PAPI(1)	3.0	DEG50FT	SDBY PWR AVBL
RWY 04	RTIL			SDBY PWR AVBL
RWY 11/29	MIRL			SDBY PWR AVBL
RWY 11/29	PAPI(3)	3.0	DEG50FT	SDBY PWR AVBL
RWY 11/29	PTBL(2)			BY PRIOR
				ARRANGEMENT
				SDBY PWR AVBL
RWY 11/29	RTIL			

- (1) Right side only
 - (2) EMERG only. 90MIN PN.
 - (3) PAPI provides special MNM wheel clearance for ACFT in 5M to 8M eye-to-wheel group.
- RWY edge light spacing: 11/29: 60M; 04/22: 60M.

OTHER LIGHTING

ABN	ALTN 8 WG	On Mount Pitt (ELEV 1090FT AMSL) 344DEG/1.4NM from ARP.
HBN	OCC R	MIOL - Located Mount Pitt (ELEV 1090FT AMSL) 344DEG/1.4NM from ARP.

1. Secondary PWR switchover time: 11 SEC.
2. TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIS	AUCKLAND SP6 INTL HF	3467 5643 8867 13261 17904
	WI SELCAL	
UNICOM	NORFOLK ISLAND	118.1 (1)
	UNICOM	

- (1) CS "Norfolk UNICOM". OPR HO.

RADIO NAVIGATION AND LANDING AIDS

DME	NF	112.4/ 71X	290250.8S	1675553.3E		(2)
NDB	NF	260	290026.1S	1675515.0E	OW 70 (OW HN70)	(3)
VOR	NF	112.4	290250.4S	1675555.8E		(1)

- (1) Pilot monitored
- (2) Antenna ELEV 331FT - Pilot monitored.
- (3) 144/2.3 to ARP - Pilot monitored

LOCAL TRAFFIC REGULATIONS

1. All ACFT must use RWY end turning nodes. Any backtracking turns made prior to the RWY end turning nodes may encounter fees due SFC damage.
2. Operators of jet ACFT are requested to use MNM power when turning or taxiing on apron and MAX radius turn on exiting PRKG bays.
3. RWY 04/22 OPS restricted to ACFT 5,700KG or BLW with the FLW exceptions.
 - a. ACFT up to and including DH8C may use RWY 04/22 if RWY 11/29 is operationally unsuitable; and
 - b. The section of RWY 04/22 BTN the apron exit and the intersection of the RWY is AVBL as a TWY by all ACFT using RWY 11/29.

FLIGHT PROCEDURES

1. Pilots are reminded that NZ altimetry setting PROC are applicable when OPR into and out of Norfolk Island.
2. NZ regulations require aircraft flying within the Auckland Oceanic FIR to maintain vertical position with reference to standard pressure 1,013 HPA, with the exception that within proximity to the Norfolk Island AD aircraft must maintain altitude with reference to aerodrome QNH.
3. Right hand CCTS RQ when OPR on RWY 04 and 11 due to high terrain and obstacles to the north of the ARP.

CTAF 118.1**ADDITIONAL INFORMATION**

1. Significant bird hazard at Philip Island (160DEG/5NM from AD, ELEV 913FT AMSL), and Nepean Island (131DEG/2.5NM from AD, ELEV 108FT AMSL).
2. Weather balloon launch APRX 2315 UTC FM 420M SW ARP. Launches may occur at other times.
3. SARWATCH: The responsibility of SAR for ACFT movements at Norfolk Island belongs with New Zealand.
4. Actual weather conditions can change rapidly and vary from forecasts.

CHARTS RELATED TO THE AERODROME

1. WAC 3359.
 2. Aerodrome Obstruction Chart Type A: RWY11/29, 3rd Edition (August 2025).
 3. Also refer to AIP Departure and Approach Procedures.
-

PEARCE**ELEV 150****AVFAX CODE 6006**

WA

UTC +8

YPEA

314004S

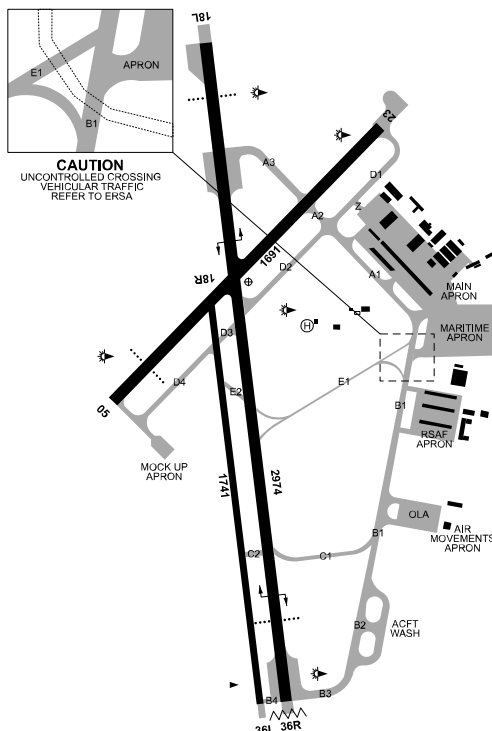
1160054E

VAR 2 DEG W

MIL

AD OPR RAAF, Airbase Operations Centre - RAAF Base Pearce, Bullsbrook, WA, 6084.

Email: pea.aboc@defence.gov.au. PH 08 9571 7888. Mobile 0419 273 062.

**REMARKS**

- 0000-0900 UTC MON-THU; 0000-0700 UTC FRI EXC PH. FAC may be unmanned during promulgated HR. Flight Planning FAC AVBL at Air Movements.
- Customs, Health and Immigration on 24 HR PN.

HANDLING SERVICES AND FACILITIES

Air movements section available 2330-0830 UTC MON-THU, 2330-0600 FRI EXC PH.

All unscheduled movements require 24HRS PN stating operational and technical requirements.

AMS Phone 08 9571 7542 during working hours, 0417 183 823 after hours.

INBD ACFT RQ AMS assistance CTC "AIR MOVEMENTS PEARCE" on 361.6, 15MIN prior to ETA.

F34, NIL AVGAS held (AVBL with 14 days PN). Refuellers 08 9571 7002 or 0403 341 245.

ACFT crew or SQN maintenance will be required to refuel ACFT as only tanker driver provided.

No liquid oxygen AVBL.

RESCUE AND FIREFIGHTING SERVICES

- CAT 5 DRG HR of local OPS. OT CAT 4. **24HR PN** RQ for RFFS higher than CAT 4 AH. CTC Fire Watch Room 08 9571 7666.
- RFFS vehicles carry water and foam. Complementary agent carried is up to 36KG dry chemical powder.
- RFF MNT Pearce TWR FREQ 118.3 outside ATS HR.

APRONS AND TAXIWAYS

1. Strength/PCR:
 - a. Maritime visitors apron PCR 600/C
 - b. Air Movements Apron PCR 500/C
 - c. Main Apron PCR 500/C
 - d. RSAF Apron PCR 130/D
 - e. ACFT wash facility, compas swing OLA 2 PCR 600/C
 - f. TWY A1, A2, A3, B1, B2, C1 PCR 600/C
 - g. TWY D1, D2, D3, D4 PCR 500/C
 - h. TWY E1, E2 PCR 55/C
2. CAUTION:
 - a. ACFT with wingspan greater than 90FT are not to taxi BTN hangars and Hawk carports on Main Apron.
 - b. TWY E 30FT wide. No shoulders. Unlit. RESTRICTION: Not AVBL to ACFT ABV 3,300KG or to ACFT ABV 690kPa tyre pressure.
 - c. TWY D4 HLDG point lights ADJ to RWY 18R/36L are not coincident with the HLDG point lines. HLDG point lights are correctly LCA outside the RWY strip.

AERODROME OBSTACLES

Various OBST infringing OLS. CTC AD OPR for details.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI, TAF3 AVBL during MO HR (2300-0900 UTC MON-THU, 2300-0600 UTC FRI, EXC PH, OT by TAF RMK/NOTAM), AD and WS WRNG during MO HR.
2. AWIS Phone 08 6216 2632 - Report faults to BoM.
3. AWIS FREQ 316.1 - Report faults to 0409 098 925.
4. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM Defence MO 08 9571 7125 when staffed. AH AVBL FM MWO 08 9263 2255.

PHYSICAL CHARACTERISTICS

05/23	046	55a	PCR 500/F/C/X/T C130	WID 45	RWS 230
18L/36R	175	98a	PCR 600/F/C/X/T C5A	WID 45	RWS 230
18R/36L	175	57a	PCR 130/F/C/1.00 MPa/U	WID 30	

1. RWY 18R/36L AVBL to ACFT BLW 5,700KG.
2. DIST to run marker boards left hand side only RWY 05/23. No 2,000FT DIST to run marker L side of RWY 36.
3. RWY 23, non-controlled vehicular TFC WI 1,000FT FM NE end of RWY THR. Building and trees 180FT to 220FT AGL WI S side of APCH plane to RWY 23.
4. RWY 18L nil RESA AVBL due M34B Barrier System infrastructure infringement.

ARRESTING GEAR

- | | | | |
|---------|-------|---------------------------|---------|
| RWY 18L | ----- | M34B (R)
30 (100) OVRN | RWY 36R |
|---------|-------|---------------------------|---------|
1. BAK 12/14 Hookcable system removed (arrester not AVBL). Arrester infrastructure (steel sheave/CONC Kerb) in place 1FT high ADJ RWY edge LOC 400M (1,312FT) FM THR 18L and 460M (1,509FT) FM THR RWY 36R. Marked by yellow discs.
 2. Routine servicing for M34B Arrester System:
MON-THU - 2200-2330 UTC
FRI - 2200-2345 UTC
WAE will require 15 MIN notice to vacate RWY.
 3. M34B arrester equipped with FLG R lights LCA either side of barrier. If lights are VIS on final, APCH LDG is being attempted over a raised barrier.
 4. M34B arrester system is only made AVBL on request (24HR PN), and operated when TWR is active.

AERODROME AND APPROACH LIGHTING

RWY 05/23	MIRL		SDBY PWR AVBL
RWY 05/23	PTBL(1)		
RWY 05	PAPI	3.0 DEG39.3FT	SDBY PWR AVBL
RWY 18L/36R	MIRL		SDBY PWR AVBL
RWY 18L/36R	PTBL(1)		
RWY 18L	PAPI(2)	3.0 DEG47FT	SDBY PWR AVBL
RWY 36R	PAPI(2)	3.0 DEG68FT	SDBY PWR AVBL

- (1) Electric. 15MIN PN.
- (2) Aligned with ILS GP.
1. AD LGT intensity fixed and cannot be varied when tower is not ACT.
2. Handheld LGT signal FM TWR not AVBL for ACFT tracking straight in RWY 36L and 36R due new control TWR.
3. New ATC TWR not commissioned. Observe old ATC TWR for handheld LGT signals in case of COM failure.
4. RWY 05/23 THR end LGT visible FM 150M at 3M eye height. This is a known non-compliance as it does not meet the 600M at 3M eye height standard.
5. RWY 18L/36R edge light spacing: 60M.
6. 15 SEC switchover period during PWR outage for SDBY PWR.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	PERTH CENTRE		135.25 On Ground (Outside PEA TWR HR)
ACC	PEARCE CENTRE	(1)	123.3 (2) 135.9 (8) 243.0 (5) 285.55 (9)
ACC/RSR	MELBOURNE CENTRE		125.2 133.9
ACD	PEARCE DELIVERY		134.1
APP	PEARCE APPROACH		130.2 243.0 (5)
APP	PERTH APPROACH		123.6 132.95
ATIS	PEARCE	(4)	136.4 316.1 340
DEP	PERTH DEPARTURES		118.7
SMC	PEARCE GROUND		127.25 (7)
SMCV	PEARCE GROUND		121.6 (7)
TWR	PEARCE TOWER	(3)	118.3 243.0 (5) 257.8 340 (6)

- (1) OPS in D193 will be ADZ on REQ by Pearce Centre 135.9, COM and ATC workload permitting.
- (2) MIL JET OPS in D198 will be ADZ on REQ by Pearce Centre 123.3, COM and ATC workload permitting. Retransmit FAC exists BTN FLW FREQ 123.3/135.9/285.55, when concentrated on CENTRE 123.3.
- (3) Automatic retransmit FAC exists BTN FLW FREQ: 118.3/257.8
- (4) ATIS BCST 136.4 316.1 DRG ATS HR. AWIS OT. ATIS AVBL H24 phone 08 9570 2257. AWIS AVBL H24 phone 08 6216 2632.
- (5) EMERG FREQ guarded.
- (6) Transmits voice on NDB to ACFT with COM failure.
- (7) Automatic retransmit FAC exists BTN 127.25/121.6.
- (8) Retransmit FAC exists BTN FLW FREQ 123.3/135.9/285.55, when concentrated on CENTRE 123.3.
- (9) Ocean RNP OPS.
1. General ATC enquiries email pea44wg.aprspr@defence.gov.au or phone 08 9476 8513. Time critical ATC enquiries phone 08 9476 8622.
2. MIL radar OPR at 346 DEG MAG 17NM FM Pearce ARP. Possible avionics interruptions or errors WI 150M of radar BLW 1,300FT AMSL.
3. For ACFT ARR and DEP YPEA AH, a portion of R155A may be activated by NOTAM. AFIS is provided in this TRA. This service requires MNM 7 days notice via email: pea.aboc@defence.gov.au. Always check ATIS 316.1, PEA NDB 340, PH Centre 135.25 or ATC for status of airspace prior to entry.

RADIO NAVIGATION AND LANDING AIDS

DME	IPC	111.9/ 56X (RWY36R)	314051.8S	1160104.3E	(4)
GP	IPC	331.1 (RWY36R)	314051.8S	1160104.3E	
ILS	IPC	111.9 (RWY36R)	313917.3S	1160045.8E	

LOC	IPC	111.9 (RWY36R)	313917.3S	1160045.8E	
DME	IPE	110.7/ 44X (RWY18L)	313937.9S	1160043.1E	(5)
GP	IPE	330.2 (RWY18L)	313937.9S	1160043.1E	
ILS	IPE	110.7 (RWY18L)	314112.6S	1160101.1E	(3)
LOC	IPE	110.7 (RWY18L)	314112.6S	1160101.1E	
NDB	PEA	340	313915.8S	1160108.1E	Range 100 (HN 75) (1)
TAC	PEA	112.8/ 75X	314026.0S	1160103.0E	(2)

(1) ATIS and voice AVBL for EMERG use only - 197/0.8 to ARP - Antenna ELEV 144FT.

(2) 343/0.39 to PEARCE ARP, 329/14.79 to GINGIN ARP - LIMITATION: Reception unreliable BTN 020-150 BLW 12000FT due to terrain shielding and signal reflections. Range and BRG unlocks 325 to 350 at 35NM and at 45NM BTN 3000-4000FT. Limited due BRG oscillations of up to +/- 6 DEG BTN 35NM and 45NM at 2600FT on 190 radial. SUBJ INTRP cone of silence 067 DEG instead of 060 DEG. Information loss may be longer than expected.

(3) ILS Critical Area not protected outside TWR HR.

(4) Antenna ELEV 138FT.

(5) Antenna ELEV 133FT.

All NAVAIDS Pilot monitored outside TWR HR.

LOCAL TRAFFIC REGULATIONS

1. Locally briefed MIL ACFT operating IFR will be separated from other IFR ACFT and be provided with a SIS on VFR ACFT.

2. C17 or larger ACFT DEP RWY 18L/36R, request line-up at least 200FT FM THR to minimise effects on arrestor nets.

3. ILS TRAINING - CIVIL ACFT

RWY 18 ILS is AVBL for training outside TWR HR. The following limitations apply:

a. All NOTAMs for Pearce must be obtained at the planning stage immediately prior to DEP;

b. The procedure including the overshoot must be conducted in Class G airspace.

c. AVBL in VMC by day.

d. SUBJ approval of Pearce TWR if a portion of R155A is active AH.

e. Full stop and touch and go landings are not permitted, unless prior authorisation has been obtained from Pearce OPSCOORD1; and

f. Landing, Strobe and NAV lights are to be on whilst carrying out approaches at all times.

Caution: The procedure is close to the Perth CTR. The published missed approach procedure must not be used as it infringes controlled airspace. Pilots must conduct a visual missed approach ensuring that the aircraft remains north of the PH CTR and below the overlying CTA at all times.

4. OPERATIONAL READINESS PLATFORMS (ORP)

a. ORP WI RWS E and W of THR RWY 36R may contain vehicles or MIL ACFT at any time. ACFT/vehicles in ORP will be no closer than 8M FM RWY edge. ACFT with wingspan of 40.5M (133FT) or less permitted to TKOF and land with ORP in use. TWR will advise visiting arriving ACFT through the phraseology "Approach or departure end ORP in use". Visiting departing ACFT will be advised that the DEP end ORP is in use. ACFT captains may refuse to use the RWY until ORP is vacated. In such instances delays can be expected.

b. Northern ORP E and W not AVBL. Southern ORP AVBL - dimensions 565FT x 150FT.

c. ORP not AVBL when CIV ACFT occupy RWS 18/36.

5. All known heavy (wake turbulence category) ACFT movements requiring reversing to gain maximum length must be notified to ABOC on (08) 9571 7888. This should be done as soon as practicable to facilitate removal and prevent damage to barrier nets.

6. Outside TWR HR: ACFT taxiing from AIR MOVEMENTS must taxi for DEP via TWY B and A to RWY 18 or via TWY B, A and D to backtrack for RWY 36. All other ACFT must taxi for DEP via TWY D to backtrack RWY 36 and via TWY C to backtrack RWY 18.

7. RWY 05/23 ARR and DEP not AVBL when ACFT above Code C (Wingspan 36M) OPR on TWY D due RWS infringement.

FLIGHT PROCEDURES

1. Right hand circuits RQ when OPR on RWY 18 or 23.
2. **ATC TRAFFIC MANAGEMENT SPEED**
When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP PE via Class C airspace must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.
3. **PEARCE PARALLEL RWY POLICY**
Parallel RWY OPS are to cease while a non-local aircraft is occupying the RWS 18/36.
4. **NON-LOCAL AIRCRAFT ARR AND DEP**
 - a. 15 MIN holding fuel RQ for visiting ACFT ARR at Pearce.
 - b. All visiting ACFT are to PLN via Perth for ARR and DEP. ARR - Expect STAR with vectors for Pearce WI 10DME Perth. DEP - on CLR issue expect tracking via Perth TFC Management RTE. Tracking is dependent on RWY in use at Perth.
 - c. **REJOINS.** The preferred APCH for visiting ACFT (including fast jets) is via base leg or 5NM straight-in final to the duty RWY. ACFT rejoining via initial are to restrict speed to not ABV 350KT IAS.
5. **MILITARY AIRSPACE - ACCESS PROCEDURES**
 - 5.1. Access to MIL airspace is available as follows:
Non pressurised flights 5,000FT and BLW (levels up to 10,000FT may be available on request) may plan to transit R156/R163/M166/M171A via a track established on W14 route from OTKUN (YRTI) - UPTEK - BUVEL (YJUR) or reverse. All ACFT planning this route are to be equipped with a serviceable transponder. A Class D radar service will be provided by Pearce ATC on this route. If M147 is active, ACFT are to plan via the following diversion routes:
 - a. IFR ACFT are to plan UPTEK - OTLED - OPONA - BUVEL or reverse.
 - b. VFR ACFT are to plan UPTEK - LANC - YCVS - BUVEL (YJUR) or reverse, and track via VFR route 1 or 2 as appropriate.
 - c. ACFT can expect to transit at 4,000FT and below in Class G airspace (levels up to 10,000FT may be AVBL on request and provided with a Class C radar service).
 - 5.2. Flights other than those wishing to track via the transit areas are to obtain prior authority as FLWS:
 - a. VFR operators wishing to transit PEA restricted areas are to contact PEA ATC at least 10MIN prior to the restricted area boundary and request clearance. The availability of the clearance will be determined by MIL flying activity. Clearance to transit R155AB will not normally be available.
 - b. Tracking via the COT is AVBL outside of Pearce Restricted Areas.
 - c. Separation will be provided for VFR flights in Pearce Restricted Areas in accordance with a Class C radar service.
 - d. ACFT wishing to operate in PEA Restricted Areas during normal PEA OPR HR are required to obtain prior authority by telephoning Approach Supervisor (08 9476 8622) not later than 0700 UTC on the last normal working day prior to the activity.

Note: Authority to OPR WI these areas does NOT constitute an AWY Clearance. SPECIFIC AWY Clearance for individual flights must be obtained prior to OPR WI these areas.
6. **ATC CLEARANCES TO OPERATE IN CTA/R**
 - a. If active, contact Pearce APP 130.2 MHz for entry into R153A-D, R155AB, R156, M171AB, M166, R163, M170AB, M182A-G and M161 at least 10NM prior to training area entry point to confirm flight details and obtain clearance.
 - b. **Survey/Photography Aircraft**
ACFT requesting to conduct survey or photography work within PEA restricted airspace are to email a survey map detailing: area of operation(s), date(s), time(s), level(s), flight category, ACFT type and registration. File size should be kept to a minimum, APRX 2MB in size. Email requests to Pearce Approach Supervisor: pea44wg.aprspr@defence.gov.au. With a minimum of 48HR PN to avoid denial of airborne clearances.
7. **REMOTELY PILOTED AIRCRAFT SYSTEMS (RPAS)**
 - a. All RPAS requests are to be emailed to: pearce.rpas@defence.gov.au.
 - b. A minimum of 7 days notice is required. Approval subject to nature and location of flight, ATC workload and MIL traffic.

c. The following information shall be provided in the request email:

- (i) Date (with alternate if applicable).
- (ii) Time.

Note: That requests for operations outside airfield hours have a higher chance of being approved.

- (iii) RPAS type, weight, and brief description (required for NOTAM).
 - (iv) Operating height.
 - (v) Area of operations, including LAT/LONG. Include a map or screenshot where possible.
 - (vi) Operator certificate.
 - (vii) Contact details including a primary and secondary contact.
- d. ATC approval of operation does not constitute approval for photography of any defence installation. CTC ABOC 08 9571 7888 for photographic approval.

8. **AIR TRAFFIC SERVICES**

- a. Class D ATS provided to state ACFT and AUTH CIV ACFT within Pearce RA and CTR.
- b. Other ACFT receive class C ATS with respect to all ACFT in Pearce RA. Class C VMC applies for all ACFT in Pearce RA, excluding Pearce and Gingin circuit area where class D VMC applies to MIL and AUTH CIV ACFT.

9. **OUTSIDE TWR HR**

- a. Aircrew OPR FM Pearce AH are to notify Fire Section on phone 08 9571 7666 to advise EOBT/ETA and for ACT of AD LGT if required. Airborne ACFT must CTC "Base Fire" on TWR FREQ 118.3 to advise accurate ETA 20MIN BFR ARR.
- b. Flights planned to enter PH CTR/CTA must contact Perth centre 135.25 for clearance.

CTAF - AFRU 118.3

Outside TWR HR.

ADDITIONAL INFORMATION

- 1. Civil Pearce Flying Club OPR from Greenside AD APRX PEARCE 337/8.9NM (313148S 1155648E), APRX 4NM north of Muchea township outside TWR HR. Greenside AD circuit ACFT MNT 118.3 and 135.25.
- 2. RWY 23 THR may be occupied by ACFT conducting compass swings H24.
- 3. Visiting MIL aircrew planning to OPR FM Pearce CTC Air Operations Coordinator on 08 9571 7004, 0417 181 456, Fax 08 9571 7457 or pea.airopscoord@defence.gov.au prior to or on ARR at Pearce.
- 4. Model ACFT OPR FM PSN 314430.00S 1160236.00E (APRX 4.8NM SSE of AD), may be active outside TWR HR JF in VMC up to 1,000FT AGL.
- 5. Model ACFT may OPR WI 500M of PSN 313630.85S 1154713.48E (APRX 13NM WNW of AD) up to 400FT AGL during periods of R155A activation. Outside of TWR HR model ACFT may OPR up to 1,500FT AGL HJ.
- 6. Animal hazard exists. Increased kangaroo and bird hazard (corella) in VCY of AD BTN 0800 - 0900 UTC in addition to dawn and pre dusk.
- 7. Caution:
 - a. RWY sweeper and barrier crew may be OPR AD.
 - b. Due to terrain shielding taxiing ACFT and/or ground vehicles operating at one end of the airfield cannot hear taxiing ACFT and/or ground vehicles operating at the other end on the CTAF.
 - c. Uncontrolled Intersection: TWY B1 and TWY E1 intersect with a vehicle access road. Carriage of a radio is not required by vehicles crossing at this INT. Watch for vehicles approaching FM both sides. Exercise caution during CTAF HR and during periods of low VIS
- 8. An airfield inspection service can be requested from ARFF on the CTAF if required to establish the presence of other operators. ACFT with multiple antennae must use upper antennae in preference.
- 9. ACFT wash facility AVBL for select MIL ACFT only. CTC PEA ABOC PH: (08) 9571 7888 for activation instructions.

CHARTS RELATED TO THE AERODROME

- 1. WAC 3351, 3462.
- 2. MIL Aerodrome Obstruction Chart Type A: DEC 2024.
- 3. Also refer to AIP Departure and Approach Procedures.

Airflite: FBO services, ground handling, lounge, fuel sales and hangar facilities. PVT ACFT. OPS H24. Phone 0487 818 599 or 08 9478 9087. Email: perthops@airflite.com.au.
Website: www.airflite.com.au.

GA and itinerant operators must appoint a ground handling agent 48HR prior to OPR at Perth. Limited power out OPS AVBL to general aviation. Refer to:
www.perthairport.com.au/Home/corporate/work-with-us/operating-at-perth-airport/aeronautical-charges.

General

The AD OPR does not provide ACFT marshalling services. Where ACFT marshalling is required, the pilot should confirm arrangements with Ground Handlers prior to landing.

RESCUE AND FIREFIGHTING SERVICES

- 1. CAT 9 H24.
- 2. 131.0 MHz AVBL H24.

AERODROME OBSTACLES

- 1. Antenna 144FT AMSL, BRG 035 DEG MAG 0.78NM FM ARP, infringing TNS.
- 2. RWY 06/24 TNS may be infringed by ACFT tails parked on Bays 901-904 by MAX 5.75M.
- 3. Lit (LIOL) and marked TWR at positions:
 - a. Control TWR 328FT AMSL, PSN 315636.33S 1155830.44E.
 - b. Western PWR TWR 1,191FT AMSL, PSN 315907.15S 1160404.30E.
 - c. Optus TWR 282FT AMSL, PSN 315816.48S 1155949.35E.
 - d. 6IX TWR 266FT AMSL, PSN 315605.06S 1155456.01E.
- 4. Lit BLDG:
 - a. Central Park Building (Rio Tinto) 859FT AMSL, PSN 315713.55S 1155119.94E.
 - b. Palace Tower (Bank West) 813FT AMSL, PSN 315716.17S 1155125.38E.
 - c. EQ West (Elizabeth Quay) 614FT AMSL, PSN 315730.98S 1155118.47E.
- 5. Lit (HIOL HJ and MIOL HN) and marked TV 10 TWR 1,654FT AMSL, PSN 320045.39S 1160342.10E.
- 6. Lit (MIOL) and marked TWR at positions:
 - a. Broadcast ABW 2 TWR marked 1,594FT AMSL, PSN 320038.63S 1160504.27E.
 - b. TV 7 TWR 1,598FT AMSL, PSN 320030.02S 1160503.10E.
- 7. Unmarked floodlight poles. Infringes RWY 06/24 TNS by MAX 6.4M:
 - a. Bays 901-911, in a line centred at PSN 315618.24S 1155730.96E.
 - b. Bay 915 in a line centred at PSN 315613.51S 1155746.15E.
- 8. Crane 639FT AMSL PSN 315701.06S 1155117.39E. Infringes outer HZS by 85FT.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
- 2. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 08 9263 2255.
- 3. AWIS PH 08 6216 2633 - Report faults to BoM.

PHYSICAL CHARACTERISTICS

03/21	016	113a	PCR 700/F/A/1.70 MPa/T Grooved	WID 45	RWS 300
06/24	061	71a	PCR 700/F/A/1.70 MPa/T Grooved	WID 45	RWS 300

- 1. All RWY ends ungrooved start of TKOF through to 100M.
- 2. RWY 03/21 transitional SFC infringed W side 300M FM RWY 03 THR. OBST is illuminated WDI 94FT AMSL.

AERODROME AND APPROACH LIGHTING

RWY 03/21	HIRL		SDBY PWR AVBL
RWY 03/21	MIRL		SDBY PWR AVBL
RWY 03/21	PAPI(2)	3.0 DEG71FT	SDBY PWR AVBL
RWY 03/21	RCLL(1)		SDBY PWR AVBL
RWY 03	HIAL-CAT I		SDBY PWR AVBL
RWY 21	HIAL-CAT III(4)		SDBY PWR AVBL
RWY 21	RTZL		SDBY PWR AVBL
RWY 06/24	HIRL		SDBY PWR AVBL
RWY 06/24	MIRL		SDBY PWR AVBL

RWY 06	PAPI(3)	3.0 DEG64FT	SDBY PWR AVBL
RWY 24	HIAL-CAT I		SDBY PWR AVBL
RWY 24	PAPI(2)	3.0 DEG71FT	SDBY PWR AVBL

- (1) 15M spacing.
- (2) Both sides and coincide with RWY Aim Point Markings.
- (3) Left side only and coincide with RWY Aim Point Markings.
- (4) Associated SFL 600M.
1. **ALS type and length**
 - a. RWY 21 - HIAL ASFL III barrette CL: 900M.
 - b. RWY 24 - distance coded CL: 900M.
 - c. RWY 03 - distance coded CL: 900M.
2. RWY edge light spacing: 03/21: 60M; 06/24: 60M.
3. Stop Bars and RGL at all RWY/TWY INT.

OTHER LIGHTING

TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	PERTH CENTRE	135.25 (4)
ACD	PERTH DELIVERY	118.55 (5)
APP	PERTH APPROACH	123.6 132.95
ATIS	PERTH (2)	113.7 (3) 123.8
DEP	PERTH DEPARTURES	118.7
SMC	PERTH GROUND	121.7 (6) 122.2 (7)
TWR	PERTH TOWER	127.4
VOLMET	AUSTRALIA	6676 (1) 11387 (1)

- (1) H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.
- (2) ATIS AVBL H24 via telephone 08 9476 8800.
- (3) Perth VOR.
- (4) Call for ATC Clearances for DEP HLS/ALA WI Perth CTR or Pearce AD (when Pearce deactivated) or IFR/VFR by night DEP Jandakot directly into Perth CTA/CTR. VFR ACFT intending to enter PH TMA CTA/CTR areas call this FREQ with flight details prior to requesting ATC clearance (see Special Procedures section).
- (5) Call for ATC Clearances for DEP FM Perth AD.
- (6) W of RWY 03/21.
- (7) E of RWY 03/21.

RADIO NAVIGATION AND LANDING AIDS

DME	IGD	109.5/ 32X (RWY21)	315553.0S	1155809.8E	(7)
GP	IGD	332.6 (RWY21)	315553.0S	1155809.5E	(9)
ILS	IGD	109.5 (RWY21)	315742.9S	1155731.6E	(2)
LOC	IGD	109.5 (RWY21)	315742.9S	1155731.6E	
DME	IPH	109.9/ 36X (RWY24)	315601.1S	1155836.9E	(8)
GP	IPH	333.8 (RWY24)	315600.7S	1155836.6E	
ILS	IPH	109.9 (RWY24)	315631.9S	1155724.6E	(5)
LOC	IPH	109.9 (RWY24)	315631.9S	1155724.6E	
DME	IPN	110.1/ 38X (RWY03)	315722.0S	1155742.6E	(4)
GP	IPN	334.4 (RWY03)	315721.9S	1155742.3E	(10)
ILS	IPN	110.1 (RWY03)	315533.5S	1155809.2E	(6)
LOC	IPN	110.1 (RWY03)	315533.5S	1155809.2E	
DME	PH	113.7/ 84X	315642.2S	1155734.4E	(3)
VOR	PH	113.7	315642.2S	1155733.2E	(1)

- (1) Voice AVBL for EMERG use.
- (2) TCH 50FT. Close proximity to PEA ILS. ILS RWY 21 Performance Classification IIII/E/4.
- (3) Antenna ELEV 84FT.
- (4) Antenna ELEV 75FT.
- (5) Close proximity to PEA ILS. TCH 51FT.

- (6) TCH 50FT, ILS RWY 03 Performance Classification I/T/1.
- (7) Antenna ELEV 61FT.
- (8) Antenna ELEV 72FT.
- (9) Caution GP false indications due ACFT lining up from the East TWY W.
- (10) Caution GP false indications due ACFT lining up from TWY C11.

LOCAL TRAFFIC REGULATIONS

1. RUNWAY INCURSION HOT SPOTS

- a. TWY J1 and A due ACFT slow to vacate RWY 24 after misidentifying exit, intersection complexity and distance of holding points from RWY.
- b. TWY C, N and S due intersection complexity and distance of holding points from RWY.

2. RUNWAY MISALIGNED TAKEOFF HOT SPOTS

- a. When lining up on RWY 06 from TWY V (from the north or south), ensure the aircraft is on the runway centreline to prevent misaligned TKOF due wider runway end. RWY 06 has no centreline lights.

3. TAXIWAY AND APRON RESTRICTIONS

- a. ACFT 19,000KG/24M MAX wingspan and BLW
 - (i) GA Taxilane.
- b. Code C ACFT and BLW, MAX 50,000KG MTOW and E-190.
 - (i) TWY W west of TWY R and W Lane.
- c. Code C ACFT and BLW
 - (i) Intermediate hold point of TWY A6;
 - (ii) Link 4 BTN Bay 146 and Bay 202;
 - (iii) Link 5, 6, 7, 8 and 9;
 - (iv) Terminal 3 Taxilane;
 - (v) TWY C and TWY W for RWY 24 behind Code E ACFT or ABV at Holding Point for RWY 21;
 - (vi) Via TWY C, TWY S and TWY N intersection when ACFT holding on TWY C or TWY N short of RWY 06/24;
 - (vii) TWY R.
- d. Code C ACFT and BLW except A321
 - (i) TWY H3 and H4;
 - (ii) Hotel Lane;
 - (iii) 500 Lane;
 - (iv) Link 1 and 2.
- e. ACFT A330 and BLW
 - (i) Link 4 BTN TWY C and Bay 147;
 - (ii) Intermediate hold point of TWY D BTN RWY 03/21 and TWY A.
- f. Code E ACFT and BLW
 - (i) APN TWY BTN TWY B and V;
 - (ii) TWY V BTN RWY 06/24 and APN TWY;
 - (iii) TWY D, B, A and J1;
 - (iv) Terminal 1 APN taxilane BTN Bay 154 and 156.

4. TURNING LIMITATIONS

- a. Code C ACFT and BLW
 - (i) Left turn FM TWY J1 to APN TWY;
 - (ii) Right turn to TWY J1 FM APN TWY;
 - (iii) Exit RWY 21 left via TWY P HJ only.
- b. 5,700KG MTOW and BLW due to no turn fillets
 - (i) Exit RWY 06 left into TWY S;
 - (ii) Exit RWY 21 left into TWY N;
 - (iii) Exit RWY 24 right into TWY C;
- c. Code C ACFT and BLW except A321
 - (i) Left turn FM TWY H3 via TWY B to southbound on APN TWY (and this RTE in reverse) HJ only.
 - (ii) Right turn FM TWY H3 via TWY D to northbound on APN TWY (and this RTE in reverse) HJ only.

5. TWY/TAXILANE INFRINGEMENTS

- a. Taxilane W by pushback from Bay 601.

- b. TWY W by pushback from Bay 701.
 - c. TWY B by pushback and tow forward from Bay 703.
 - d. Link 2 by pushback from Bay 7.
 - e. TWY H4 by pushback from Bay 604.
 - f. Terminal 3 APN TWY BTN Bay 911 and Bay 915 infringed when ACFT holding Northbound on TWY J1. Terminal 3 APN TWY BTN Bay 911 and Bay 915 reduced to Code C ACFT and BLW when Code C ACFT at RWY holding point on TWY J1, Terminal 3 APN TWY BTN Bay 911 and Bay 915 not AVBL when Code D and E ACFT at RWY holding point on TWY J1.
 - g. Holding on TWY H3 and H4 may be required due TWY strip convergence. ACFT OPR on TWY H3 may be instructed to hold at the HLDG PSN located on TWY H3 (abeam Bay 13 marked by intermediate holding point and yellow cones) in the FLW cases:
 - (i) Taxiing of Code D or ABV ACFT OPS with any other OPS;
 - (ii) Any other OPS when ACFT are pushed tail north or south from Bay 12, except Code C and BLW pushed behind Bay 10; and
 - (iii) Any other OPS when ACFT are pushed tail north from Bay 13.
 - h. Simultaneous OPS between TWY H4 and B to/from the north not AVBL with:
 - (i) ACFT pushed back into TWY B mouth from Bay 12; and
 - (ii) ACFT OPS BTN APN TWY and TWY H3 via TWY B.
 - i. A380 may use TWY A, A9, A11 and D subject to AD OPR approval due to an unserviceability of TWY C. TWY A6, A7 and A9 must be vacant for A380 taxiing on TWY A.
 - j. ACFT to use MNM power when entering, exiting and operating on all aprons.
 - k. Engine ground running on aprons only permitted by approval from AD OPR and to be conducted not above ground idle power setting.
 - l. RWY 21 holding point on TWY W eastern side, is located 210M FM RWY 21 centre-line.
 - m. All aircraft must provide their parked position/gate number to ATC on airways clearance readback.
 - n. All OPS on Perth Airport APN areas must be in accordance with relevant ACFT PRKG plans. Plans to be obtained from AD OPR.
 - o. ACFT ENG overhanging TWY edges where no blast protection is provided are requested to be OPR at low PWR to prevent erosion and ENG damage.
 - p. OPS not AVBL due jet blast hazard:
 - (i) BTN TWY H4 and B when Code D and ABV taxi after tail north push-back Bay 13;
 - (ii) BTN TWY H3 and B or H4 when Code D and ABV taxi after tail north push-back Bay 14; and
 - (iii) ACFT Code B and BLW must hold abeam Bay 703 when Code D ACFT and ABV push-back into TWY B from Bay 12.
 - q. CAUTION: Jet blast hazard may exist for light ACFT OPR on TWY H3 from ACFT OPR on apron edge TWY.
 - r. Reversing of ACFT under own power is not permitted without prior approval of AD OPR.
6. Refer to *AIP DAP* for A380 Ground Movement Chart.

FLIGHT PROCEDURES

1. ESTIMATED AIRBORNE TRAFFIC DELAYS

- 1.1. Estimated airborne traffic delays for ARR ACFT may be expected due to terminal area traffic density:
MON to FRI
- a. 0100-0500 UTC: 20 MIN.
 - b. 0500-0900 UTC: 10 MIN.
 - c. 0900-1300 UTC: 20 MIN.

Note: Actual holding times may differ from holding estimates. Historical data on actual holding is available from the NOMC.

2. ATC TRAFFIC MANAGEMENT SPEED

When not on a SID or STAR (including vectoring) - ACFT ARR or DEP PH must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

3. **ARRIVAL PROCEDURES**

By day, ATC may use 2,400M RWY separation between ACFT ARR to RWY 03/21. Both ACFT may occupy the RWY during application of the standard.

4. **AIR TRAFFIC FLOW MANAGEMENT PROCEDURES**

4.1. **Strategic ATFM:**

Strategic International Air Transport Association (IATA) slot management is applicable to all airline and ACFT operators using Perth airport. All flights operating into and out of Perth must obtain an IATA slot from the Capacity Optimisation Group (COG) in accordance with *AIP ENR 1.9*.

4.2. **Ground Delay Program Arrival (GDP-A) Perth**

- 4.2.1. GDP-A is run on demand for Perth and promulgated by NOTAM between 0030-1400 UTC MON-FRI. GDP-A is applicable to all fixed wing, non-priority flights departing from all Australian domestic airports, and arriving at Perth. In addition, flights departing from Jandakot for a landing at Perth must contact Perth Centre on 135.25 prior to starting engines. All flights to Perth must obtain both an COG IATA slot and a GDP-A Calculated Off Blocks Time (COBT) in accordance with *AIP ENR 1.9*. Details including the allocation and use of Calculated Off Blocks Time (COBT), can be found in *AIP ENR 1.9*.

4.3. **Airport Collaborative Decision Making (A-CDM)**

- 4.3.1. Perth A-CDM is run continuously H24. A-CDM is applicable to all IFR fixed wing non-priority flights departing Perth, who are required to comply with A-CDM in accordance with procedures outlined in *AIP ENR 1.9*. Compliance with a Target Off Blocks Time (TOBT) is required. All flights departing Perth Airport are required to submit a TOBT through a local Designated Ground Handling Agent (DGHA) or local Fixed Base Operator (FBO). Further enquiries can be made via your company or designated ground handler.

4.4. **Start and Pushback Procedures:**

- a. Departing aircraft with ground power must CTC Perth Delivery ready for pushback or start. ACFT will be instructed to stand-by for Perth Ground once compliant with any applicable ATFM procedures. Perth Ground will approve pushback or start clearance when able.
- b. Departing ACFT without ground power are approved to start at own discretion, advising Perth Delivery when start complete. ACFT for pushback will be instructed to stand-by for Perth Ground once compliant with any applicable ATFM procedures. ACFT for taxi from bay will be instructed to CTC Perth Ground for taxi clearance once compliant with any applicable ATFM procedures. Perth Ground will approve pushback or taxi when able.

5. **TRAINING FLIGHTS**

- a. IFR training flights inbound to Perth to conduct aerial work from the Northeast through East to Southeast shall plan via either VILIN - PH or VEMON - PH at or BLW 8,000FT.
- b. Practice Instrument APCH and circuit training is permitted BTN 2300-1400 UTC.
- c. All training flights RQ prior ATC approval. Pilots must book a slot at www.wa.bookawk.com.

6. **TRAINING, SURVEY AND AWK FLIGHTS**

- a. Before submitting a Flight Notification for training, survey and airwork flights WI CTA, pilots/operators are RQ to contact the appropriate ATS unit BTN 0700-1900 Local on the preceding day for pre-flight briefing and approval.
- b. Contact numbers are:
Perth TCU - 08 9476 8620^; Fax 08 9476 8614;
Email: perth.tcu@airservicesaustralia.com
RAAF Pearce Approach: 08 9476 8622; Fax 08 9476 8614.
- c. Training, survey and AWK are at the discretion of ATC and TFC as workload permit.
- d. Punctuality with allocated time for training is critical and availability of multiple IAL limited.
- e. AWK and training will not normally be accepted for the following peak periods at PH: MON-FRI 0100-0500 and 0900-1300 UTC.
- f. Additional AWK restrictions may apply, refer to training flight restrictions.

7. **Survey operations MON-FRI may be subject to delays and, where practicable, should be conducted outside the notified periods of traffic holding and/or on weekends.**

8. ATC CLEARANCES TO OPERATE IN CTA/R

- a. DEP ACFT must request clearance on the following VHF FREQ:
 - (i) ACFT DEP Perth Airport contact Perth Delivery on 118.55 for clearance.
 - (ii) ACFT DEP HLS/ALA within Perth CTR, or PEA AD when deactivated, or IFR/VFR by night DEP Jandakot directly into CTA/CTR, contact Perth Centre on 135.25 for clearance.
- b. Airborne VFR ACFT wishing to enter Perth controlled airspace within 36NM Perth, contact Perth Centre on 135.25 MHz.
- c. ACFT wishing to conduct airwork within Pearce Training Areas, see Pearce Aerodrome entry. Transit ACFT wishing to enter Pearce Restricted Areas directly from Class G airspace:
 - (i) check NOTAM for status;
 - (ii) if deactivated, contact appropriate civil ATC FREQ (See para a and b above) prior to civil CTA boundary;
 - (iii) if active, contact Pearce APP 130.2 MHz for entry into R153A-D, R155AB, R156, M171AB, M166, R163, M170AB, M182A-G and M161 at least 10NM prior to training area entry point to confirm flight details and obtain clearance.
- d. There may be delays for IFR arrivals at Jandakot due to higher priority traffic at Perth airport. See Jandakot entry.

9. LOW VISIBILITY OPERATIONS

- a. For CASA approved operators:

RWY 21 is capable of supporting localiser guided take-offs with an RVR not less than 75M.
RWY 03 is capable of supporting take-offs with an RVR not less than 125M.
RWY 06/24 is capable of supporting take-offs with an RV of not less than 350M.
- b. For CASA approved operators:

RWY 21 is capable of supporting CAT IIIb approaches (and is normally used for low VIS arrivals);
No arrivals will be allowed when RVR is less than 75M at TDZ.
- c. For CASA approved operators:
 - (i) RWY 03 is capable of supporting SA CAT I approaches;
 - (ii) RWY 24 is capable of supporting CAT I approaches.
- d. No intersection departures permitted.
- e. Approved TWY exits in RVR conditions below 350M are TWY A9, C9, A11, C11 and TWY D.
- f. During RVR/RV conditions below 350M, the following TWY are not AVBL: A6, A7, C6, P, N and H3.
- g. TWY W BTN TWY C and RWY 06/24 AVBL in RV not less than 350M.
- h. Secondary PWR switchover time: 1 SEC during LVP 15 SEC OT.
- i. Refer to *AIP DAP* for Aerodrome Ground Movement Charts.

10. LOW VISIBILITY PROCEDURES

- a. Instrumented RVR is provided for RWY 03/21. In the event of failure of RVR, or non-availability of RWY 03/21, manual RWY visibility assessments will be provided.
- b. ATC uses Advanced Surface Movement Guidance Control System (ASMGCS) to monitor ACFT and vehicles on the manoeuvring area. In the event ASMGCS is unserviceable, ATC will restrict OPS on the manoeuvring area.
- c. In the event that Stop Bars are unserviceable, ATC will restrict OPS on the manoeuvring area.
- d. Preparations for activation of LVP commence when meteorological conditions prevent all or part of the manoeuvring area from being visually monitored by ATC.
- e. LVP must be fully implemented when cloud ceiling is 300FT or less, visibility for take-off is below 550M RV/RVR, visibility for approaches is below 550M RV/RVR RWY 03/21 or 800M RV RWY 06/24.
- f. Only one RWY will be nominated when LVP is in progress, normally RWY 21.
- g. When LVP are in force, ATC will limit vehicle access on the manoeuvring area to ARFF and airfield OPS. ACFT position reporting procedures may also be implemented.
- h. Flight Crew must notify ATC if a follow me service is RQ.
- i. LVP measures are progressively lifted when the Cloud Ceiling reaches 300FT and the VIS reaches 800M and is increasing.

11. HELICOPTER OPERATIONS

- a. There are no helipad facilities. HEL parking AVBL.
- b. ENG Ground running with rotors turning is not permitted WI 20M of other aircraft, motor vehicles or BLDGs.
- c. TAXIING: Pilots shall MNTN a continuous listening watch on Perth Ground (SMC), or, when instructed, Perth TWR FREQ. Where SFC taxiing is involved, existing TWY system is to be utilised to avoid pavement contamination by grass. Air taxiing is not permitted WI 20M of other ACFT, motor vehicles or BLDGs. This DIST may be increased when taxiing over unsealed SFC.
- d. **DEPARTURES/ARRIVALS:** TKOF or LDG from outside airport manoeuvring area will not be permitted without prior approval. The point of TKOF or LDG will be specified by ATC, however, pilots may REQ alternative LCA WI the manoeuvring area. Initial DEP or final approach instructions will be provided by Perth TWR. Whenever DEP or ARR into prevailing wind is RQ the pilot should REQ such ARR or DEP.

12. VFR OPERATIONS IN PERTH CTR

- a. VFR ACFT departing Perth, or transiting Perth CTA, to Jandakot can expect to vacate Perth CTA via Class G for Class D arrival. See Jandakot entry.
- b. VFR transits within the vicinity of Perth Airport are not normally permitted. Alternative clearances may be AVBL via Victor 65 or Victor 66
- c. When AVBL, scenic flights over Perth City can expect clearance via the VICTOR 65 route i.e. CTE-PCTY-HKE.
- d. Flights ARR Perth for Overshoot
 - (i) AVBL as per Flight Procedures para 3 and 4 for Training and AWK flights;
 - (ii) ATC will process outbound leg to Observation City (OBC);
 - (iii) RWY24 Not AVBL for overshoot.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

1. SEV TURB may be experienced BLW 3,000FT in the terminal area during summer months when easterly wind gradients prevail.
2. Low-level windshear may exist for arriving ACFT on RWY 06 when wind is from the N to NW at 37KT or greater.
3. Bird Hazard exists as follows:
 - a. Galah and corella present in large flocks DRG Spring.
 - b. Flocks of Ibis species periodically overflying airfield in large flocks DRG Winter and Spring.
 - c. Nankeen kestrels present in RWY strip areas year round peaking in the Spring and Summer.
 - d. Duck species present DRG winter and spring with peak ACT DRG winter and following extended periods of heavy rain.
 - e. Black cockatoos present DRG January to May with historical data peak ACT DRG January to May. These species overflying the airfield east to west in the mornings and west to east in the afternoons.
4. Weather balloon launch APRX 2315 and 1115 UTC FM 1.5KM NE ARP. Launches may occur at other times.

CHARTS RELATED TO THE AERODROME

1. WAC 3351, 3462.
 2. Aerodrome Obstruction Chart Type A:
 - a. RWY 03/21 Version 32 (DEC 2025).
 - b. RWY 06/24 Version 31 (DEC 2025).
 3. Also refer to AIP Departure and Approach Procedures.
 4. Precision Approach Terrain Charts AVBL for RWY 03/21.
-

PORT HEDLAND**ELEV 33****AVFAX CODE 6801**

WA

UTC +8

YPPD

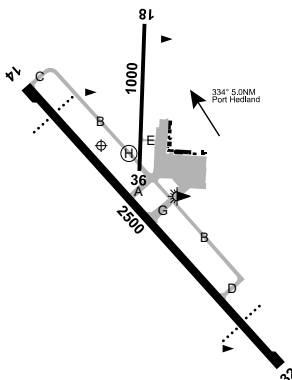
202240S

1183735E

VAR 1 DEG E

CERT

AD OPR PHIA Operating Company Pty Ltd, Port Hedland International Airport, PO Box 356, Port Hedland, WA, 6721. Email: operations@phia.com.au. ARO 0417 108 850 (H24). Website: www.porthedlandairport.com.au.

**REMARKS**

1. All non-RPT arrivals and departures must be notified to AD OPR prior to OPS, refer to website.
2. AD charges: ALL ACFT. Refer to website for latest information for landing and parking fees.
3. This is a security controlled airport. Security requirements:
 - a. All pilots are required to maintain the safety and security of passengers airside at all times.
 - b. ASIC to be worn and clearly displayed when airside.
 - c. Irrespective of size of ACFT, security screening is required for all passengers departing from the Terminal within the operational period of RPT - 90 MIN prior to arrival and 30 MIN after DEP.
4. Air Terminal AVBL 2200-1100 UTC, PPR AH contact ARO.
5. Emergency gate access contact ARO.
6. GA access via terminal electronic doors not AVBL.
7. All persons excluding PAX operating or accessing airside must wear high VIS attire at all times.

HANDLING SERVICES AND FACILITIES

AIR BP: 0700-1800 Local JO, AH 1HR PN - out of hours fees apply. Phone: 0429 031 306, Email: airbpporthedland@mssgroup.com.au, Fax: 08 7109 0050. H24 AVGAS card bowser, JET A1.

AERO REFUELLERS: JET A1 plus FSII refuellers, single point and overwing, Aeroshell lubricants. 0600-1800 Local MON-FRI, AH 1HR PN - out of hours fees apply. PH 0436 360 061. Aero Refuellers Carnet, MC and V.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6
 - a. MON - FRI: 2315-1130 UTC.
 - b. SAT: 2315-0500 UTC
 - c. SUN: 0415-1130 UTC.
2. 131.0 MHz AVBL HO.

APRONS AND TAXIWAYS

1. TWY B, C and D not AVBL to ACFT ABV 20,000KG MTOW.
2. All ACFT ABV 20,000KG must use TWY A or G.
3. TWY E not AVBL to ACFT ABV 5,700KG.
4. Northern APN not AVBL to ACFT ABV 5,700KG.

5. Main APN PRKG Bays 1-6 and 8, 48HR PN to AD OPR for PRKG ACFT other than RPT.
6. ACFT taxiing or holding on TWY A for RWY 14/32 may infringe ACFT APP SFC for RWY 36 or TKOF on RWY 18.
7. The following TWY are not lit, and are suitable for daylight OPS only:
 - a. TWY C;
 - b. TWY B BTN TWY A and TWY D;
 - c. TWY B BTN TWY C and RWY 18/36;
 - d. TWY D;
 - e. TWY E.
8. TWY A restrictions: ACFT ABV 50,000KG MTOW to use TWY G H24, TFC flow permitting.
9. GA APN: TWY and TXL MNM separation DIST FM parked ACFT and fixed obstacles not guaranteed for Code B ACFT.

AERODROME OBSTACLES

1. LIOL BRG 103 DEG MAG 0.73NM FM ARP, 162FT AMSL.
2. Unlit masts:
 - a. BRG 222 DEG MAG 2.6NM FM ARP, 224FT ABV AD ELEV.
 - b. BRG 120 DEG MAG 1.1NM FM ARP, 171FT AGL.
 - c. BRG 297 DEG MAG 0.56NM FM ARP, 74FT AGL. Infringes transitional SFC by 10FT.
3. Cranes in area (Wedgefield) 330FT AMSL BTN BRG 258 and 294 DEG MAG, 1 to 2.4NM FM ARP.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI.
2. AWIS Phone 08 6216 2634 - Report faults to BoM.
3. AWIS FREQ 133.2 (requires one-second pulse to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

14/32	137	82a	PCR 390/F/A/X/T 60M either end not grooved.	WID 45	RWS 300
18/36	182	33a	PCR 80/F/A/Z/U	WID 18	RWS 90

AERODROME AND APPROACH LIGHTING

- | | | | |
|-----------|---------|----------------|---------------------------|
| RWY 14/32 | MIRL(1) | AFRU+PAL 119.9 | SDBY PWR AVBL |
| RWY 14/32 | PAPI(2) | AFRU+PAL 119.9 | 3.0 DEG49FT SDBY PWR AVBL |
| RWY 18/36 | LIRL | AFRU+PAL 119.9 | |
- (1) ACT DRG AFIS HR. PAL will ACT outside of AFIS HR.
 - (2) Double sided. ACT DRG AFIS HR. PAL will ACT outside AFIS HR.
 1. Also AVBL by key operated switching for scheduled RPT OPS and EMERG.
 2. RWY 14/32 longitudinal LGT spacings 60M.
 3. PAL activates stage 2 lighting. All other stages operated manually by AFIS or Duty Airport Operations Officer.

OTHER LIGHTING

1. Secondary PWR switchover time: 15 SEC.
2. PAL activates main APN lighting.
3. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	118.6 On Ground (Outside AFIS HR)
AFIS	HEDLAND INFORMATION	119.9 (2)
ATIS	HEDLAND ATIS	133.65 (1)

- (1) Also AVBL 08 9158 5995.
 - (2) Callsign HEDLAND INFORMATION.
 1. AFIS HR:
 - a. MON-FRI: 2330-1040 UTC
 - b. SAT: 2330-0615 UTC
 - c. SUN: 0400-1040 UTC
- Phone: 08 9158 5940^ or email: hedland.tower@airservicesaustralia.com

Note: AFIS HR may change at short notice. Check status of airspace with ATS or Port Hedland ATIS.

- Hedland provides a TFC INFO service in the PD Broadcast Area, 20NM radius of PD to 8,000FT AMSL.
- Outside AFIS HR the PD Broadcast Area remains Class G, with non-towered aerodrome PROC applying and FIS provided by ML Centre.

RADIO NAVIGATION AND LANDING AIDS

DME	PD	114.1/ 88X	202242.5S	1183722.3E		(1)
NDB	PD	260	202316.2S	1183837.6E	Range 100 (HN 75) OW 140 (OW HN110)	(2)
VOR	PD	114.1	202242.5S	1183721.8E		
(1)	Antenna ELEV 46FT.					
(2)	298/1.2 to ARP					

LOCAL TRAFFIC REGULATIONS

- Pilots are REQ to minimise ground running of turboprop ACFT in the vicinity of parking Bays 1-5 to reduce noise levels in terminal.
- 48HR PN to AD OPR REQ for PRKG of ACFT ABV 5,700KG MTOW.
- All ACFT ABV 20,000KG LDG RWY 14/32 must roll through to RWY end prior to executing 180 DEG turn using turning nodes. Full back track to TWY A or G.
- Skid equipped HEL restricted to authorised helipads only.
- Wide body ACFT to use yellow dash lines when taxiing from RWY 14/32 onto TWY A.
- Departing ACFT from Bays 1-8 must use turn out lines.
- No DCT APCH LDG or DEP from the APN areas. All ARR and DEP to be conducted from designated TWY or RWY.

CTAF - AFRU 119.9

ADDITIONAL INFORMATION

- CAUTION: significant wildlife hazard exists. Corella, ibis, and gulls flocking OHD AD. SFC to 100FT AGL, with ACT peaking around dawn and dusk.
- Port Hedland Heliport (YHIP) BRG 321MAG 4.7NM FM ARP.
- HEL OPS WI 30NM of YHIP using night vision goggles primarily over water for maritime transfer may not be displaying external lighting.
- Weather balloon launch APRX 2315 UTC FM 240M E RWY 18 THR. Launches may occur at other times.

CHARTS RELATED TO THE AERODROME

- WAC 3229.
- Also refer to AIP Departure and Approach Procedures.
- Type A Chart: RWY 14/32: November 2023.

PROSERPINE/WHITSUNDAY COAST**ELEV 82****AVFAX CODE 4405**

QLD

UTC +10

YBPN

202942S

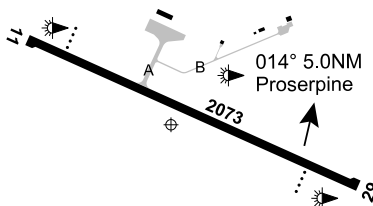
1483308E

VAR 8 DEG E

CERT

AD OPR Whitsunday Regional Council, PO Box 104, Proserpine, QLD, 4800.

Email: wca@wrc.qld.gov.au. ARO 0417 762 235. Website: www.whitsundayrc.qld.gov.au.

**REMARKS**

1. AD Charges: All ACFT.
2. This AD is a Security Controlled Airport.
3. High VIS clothing required for pilots and crew.
4. A valid ASIC must be displayed by pilots, crew and staff at all times while airside.
5. For all itinerant aircraft operations using the main ATO APN, passenger access to the terminal building and facilities is via pedestrian Gate 4A.
6. For all itinerant aircraft operations using the GA APN, passenger access to the terminal building and facilities is via pedestrian Gate 7A.

HANDLING SERVICES AND FACILITIES

VIVA Energy: HR vary with airline RPT schedule. AH call out fee applies, PN advised.

PH 0428 269 457. JET A1 and AVGAS 100LL. Viva Fuel2Sky card, Universal Aviation Australia, World Fuel Services (Australia) and credit cards (V and MC).

IOR Aviation Pty Ltd. JET A1 AVBL truck over-wing and under-wing. AVGAS 100LL AVBL H24

7 days 0800 - 1600 Local. AH call-out AVBL, fees apply \$275 plus GST. Payment method via IOR Aviation account holders, V and MC and EFTPOS. PH: 0409 193 513 or 1300 457 467.

*Note: AVGAS not AVBL at night due to no lighting on TWY B (see Local Traffic Regulations Note 6). Limited Vodafone coverage in vicinity of bowser.***General**

AD OPR does not provide marshalling services. For ground handling support, contact Precision Aviation Services 0436 030 262.

PASSENGER FACILITIES

WC. Located landside adjacent to the airport management building and also within the passenger terminal building during operational hours. For General Aviation users, access to these toilet facilities is via Gate 7A. For access assistance PH 0417 762 235.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6 OPR HR:
2130-0635 UTC MON, TUE, THU and SAT.
2130-0820 UTC WED, FRI and SUN.
2. EMERG FREQ 131.0MHz AVBL HO.

AERODROME OBSTACLES

Unlit fence 8.5FT AGL 114M N of THR RWY 11 extend CL infringes 300M APCH inner edge. GRAD 71.6.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. AWIS Phone 07 3564 3732 - Report faults to BoM.
3. AWIS FREQ 126.25 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

11/29 106 68a PCR 520/F/A/X/T

WID 45 RWS 150

AERODROME AND APPROACH LIGHTING

RWY 11/29	LIRL	AFRU+PAL 126.7		SDBY PWR AVBL
RWY 11/29	PAPI	AFRU+PAL 126.7	3.0 DEG50FT	SDBY PWR AVBL
RWY 11	RTIL(1)	AFRU+PAL 126.7		SDBY PWR AVBL

(1) Activated in conjunction with PAPI H24 in three stages: Day, Twilight and Night.

1. RWY edge light spacing: 11/29: 60M.

2. For EMERG activation Phone 0417 762 235.

OTHER LIGHTING

1. SDBY PWR switchover time: 15 SEC.

2. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE 135.5

For on GND COM contact Brisbane centre on 134.7.

RADIO NAVIGATION AND LANDING AIDS

DME	PN	113.7/ 84X	202948.7S	1483310.2E	(2)
-----	----	------------	-----------	------------	-----

VOR	PN	113.7	202948.8S	1483310.7E	(1)
-----	----	-------	-----------	------------	-----

(1) UNREL BTN 260-270 radials.

(2) Antenna ELEV 97FT.

LOCAL TRAFFIC REGULATIONS

1. All local and charter ACFT requiring access to main RPT apron must park on Bay 1.

Notification is required in advance for permission to park on main apron.

2. **RPT operations on Bay 2, 3 and 4 only**

a. Deplaning local commuter and charter ACFT. While RPT operations are in progress pilots of all other ACFT will escort their passengers directly to gate 4A not mixing with RPT passengers.

b. Emplaning local commuter and charter ACFT. While RPT operations are in progress pilots of all other ACFT will escort passengers directly through gate 4A ensuring passengers do not mix with RPT passengers.

c. Whitsunday Regional Council as airport operator reserves the right to change these conditions at any time.

3. All itinerant ACFT BLW 5,700KG are to park in the designated light ACFT PRKG area via TWY B unless prior approval obtained for main apron. Safety officer (0417 762 235).

4. Parking of non RPT ACFT ABV 5,700KG is AVBL after approval from Safety Officer (0417 762 235) or AD OPR.

5. Confine OPS to paved surfaces only, unless specifically approved by the AD OPR.

6. Light ACFT TWY B night OPS not permitted.

7. Use of airport by ultralight and non-VH registered ACFT requires the submission of a completed Conditional Agreement Form AVBL from website.

CTAF - AFRU 126.7**ADDITIONAL INFORMATION**

Wildlife activity increases following sustained rainfall, call ARO on CTAF for real time activity report.

a. Year round: crow, kite and ibis activity present.

Ibis, magpie goose, Australian pelican and black swan in vicinity of AD, particularly E of RWY 29.

b. JAN-MAR: duck and lorikeet activity increases.

c. APR-JUN: egret and eagle activity increases.

d. JUL-SEP: lapwing (plover), cormorant, martin and swallow activity increases.

e. OCT-DEC: eagle and lorikeet activity increases.

CHARTS RELATED TO THE AERODROME

1. WAC 3234, 3235.

2. Also refer to AIP Departure and Approach Procedures.

RICHMOND (NSW)**ELEV 67****AVFAX CODE 2004**

NSW

UTC +10

YSRI

333602S

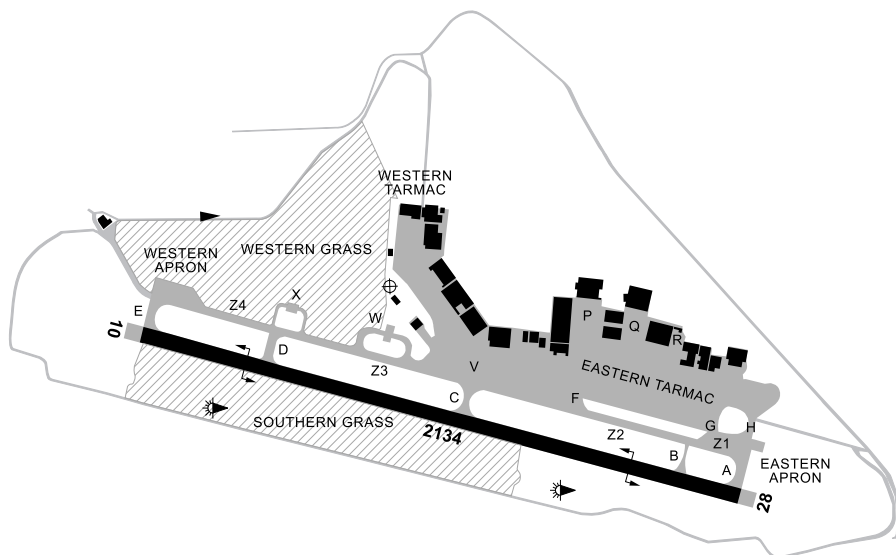
1504651E

VAR 13 DEG E

MIL

AD OPR RAAF, Airbase Operations Centre - RAAF Base, Richmond, NSW, 2755. Email:

ric.aboc@defence.gov.au cc ric.atc@defence.gov.au. PH 02 4587 2888, CS RICCOM 261.7 MHz.

**REMARKS**

- 24HR PN. CTC RIC TWR on either: ric.atc@defence.gov.au or ric.aboc@defence.gov.au or 02 4587 1201 for notification of AH movements.
- Airbase Operations Centre HR: 2100-1300 UTC JO and 2130-0530 UTC JF (1 hour earlier during HDS) OT CTC Duty Member 0409 650 341.
- PPR for civil ACFT OPS. RAAF approval number to be quoted in FPL RMK.

HANDLING SERVICES AND FACILITIES

F34 O128 O133 O135 O142 H515 H576 H578 S737 S738 S747 SKD5 MMX45 WTA HPOX LHOX LOX LPOX. Other services AVBL are: E5 E6 E10 E11 E12 E13 E14 A1.

Movements section: Aviation fuel services and MIL ACFT handling services RQ 24HR PN for non-scheduled and AH services. Alternate CTC: Duty Air Movements Officer 0408 481 655 or RIC22SQNAMS.OPS@defence.gov.au

Regular MIL handling services (duty crew, GSE, stairs, cargo, PAX etc.) AVBL BTN 2130-0930 UTC DLY (1HR earlier during HDS). CTC RIC ABOC 02 4587 2888, 1300 333 362 or ric.aboc@defence.gov.au

Fuel

- Regular aviation fuel service AVBL 2130-1100 UTC DLY (1HR earlier during HDS).
- Refuelling by tanker only (in-ground refuelling not AVBL)- EXP delays.
- CTC Duty Aviation Fuel Operator 0417 274 704 or UHF channel 8.

General

- CUST, IMG and Biosecurity RQ 48HR PN for any service.

2. Regular MIL handling services (Duty crew, GSE, Stairs, Cargo, PAX etc.) AVBL BTN 2130-0930 UTC DLY (1HR earlier during HDS). CTC RIC ABOC 02 4587 2888, 1300 333 362 or ric.aboc@defence.gov.au.
3. Movement sections (CS "Movements Richmond" 361.6, 15MIN prior to ARR) HS, Check NOTAMs or UHF channel 11.
4. ACFT potable water SER not AVBL.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6: 2100-1300 UTC DLY (1HR earlier during HDS). CAT 4: OT.
2. ARFF vehicles carry water, foam and complementary agents recommended by ICAO.

APRONS AND TAXIWAYS

1. TWY B not AVBL to ACFT ABV 20,000KG.
2. APN areas infringe Z2 and Z3 TWY strip for Code E ACFT with wingspan of 52M (170.6FT) or greater. Code E and higher ACFT taxi via RWY to avoid Z2 and Z3.
3. APN TWY do not provide RQ OBST CLR for code D ACFT and ABV (wingspan 36M and greater).
4. TWY D. The TWY D/TWY Z intersection does not have TWY guideline markings or centre line lighting to facilitate a left turn from TWY D onto TWY Z4 and vice versa.
5. TWY F. Only C130, P3, C27J and other ACFT MTOW 7,000KG or less may enter the Eastern Tarmac via TWY F.
6. TWY G. When APN PRKG position 12 is occupied TWY G affords inadequate wingtip clearance to Code E ACFT (wingspan 52M or greater). Do not use.
7. TWY H. Code E ACFT proceeding to position 2/3 shall use TWY A and H.
8. TWY B and TWY X are unlit.
9. Strength/PCR:
 - a. TWY A, E, F, G, H, P, Q, R, V, W, Z1, Z3, Z4, Eastern Apron, Western Apron, eastern tarmac and western tarmac PCR 470/R/C.
 - b. TWY C, D and Z2 PCR 470/F/C.
 - c. TWY B PCR 50/F/C.
 - d. TWY X PCR 300/F/D.

AERODROME OBSTACLES

1. GP Antenna 50FT AGL S of RWY, 305M FM THR RWY 28, offset 115M FM CL. Infringes TNS.
2. Six PERM tower cranes centred on PSN BRG 228 DEG MAG 1.9NM FM THR RWY 10. The radius of the six towers about this point is 210M. MAX HGT of the six tower cranes is 43M (141FT), MAX ELEV AMSL 65.8M (216FT). Infringes inner HZS.
3. NBN tower 132FT AGL (880FT AMSL) PSN BRG 289 DEG MAG 7.8NM FM ARP. Infringes OLS.
4. Lighting mast 102FT AMSL BRG 193 DEG MAG 527M FM ARP (southern grass). Infringes OLS.
5. TACAN marked and lit 92FT AMSL BRG 078 DEG MAG 527M FM THR RWY 28.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, AD WRNG.
2. AWIS Phone 02 9353 6448 - Report faults to BoM.
3. AWIS FREQ 126.3 and 274.55 AVBL outside TWR HR - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

- 10/28 095 70a PCR 470/F/C/X/T WID 45 RWS 150
1. 91M (300FT) concrete ends. Distance to Run Marker Boards each RWY.
 2. RWY 10/28 bitumen surface grooved. 180 DEG turns should be done wherever possible on the concrete THR for all ACFT. If a 180 DEG turn is RQ on the bitumen SFC, turns should be at MAX radius possible and locked wheel turns are not permitted.

ARRESTING GEAR

RWY 10	BAK 12/14 (R)(B) 374 (1,226)	-----	BAK 12/14 (R)(B) 374 (1,226)	RWY 28
--------	------------------------------------	-------	------------------------------------	--------

Recessed bi-directional BAK 12/14 hookcables INSTL 374M (1,226FT) FM THR RWY 10/28. Marked by dayglo orange disks. DIST BTN cables 1,386M (4,547FT). NML OPR PSN: arrestable ACFT OPR - DEP end up, APCH end - down, no arrestable ACFT OPR or outside TWR HR - both ends down. No crossing restriction in down PSN. In the event of a PWR failure, cables will rise to a HGT of 10CM until PWR restored - recommend ACFT not approved to trample hookcables OPR BTN cables during CTAF HR. CONC absorber housing 1FT high ADJ RWY edge.

AERODROME AND APPROACH LIGHTING

RWY 10/28	HIRL	AFRU+PAL 135.5		SDBY PWR AVBL
RWY 10/28	PTBL(1)			BY PRIOR
				ARRANGEMENT
RWY 10	PAPI	AFRU+PAL 135.5	3.0 DEG47FT	SDBY PWR AVBL
RWY 28	HIAL-CAT I	AFRU+PAL 135.5		SDBY PWR AVBL
RWY 28	PAPI	AFRU+PAL 135.5	3.0 DEG48FT	SDBY PWR AVBL
RWY 28	SFL	AFRU+PAL 135.5		SDBY PWR AVBL

(1) 15MIN PN

1. **ALS type and length**

- a. RWY 28 - distance coded CL: 902M.
2. AFRU+PAL AVBL during CTAF HR.
3. Fixed LGT INTST settings when PAL in use. Fixed LGT INTST settings may RQ increased ILS LDG VIS minima.
 - a. PAL day mode LGT INTST PAPI stage 6, HIRL/HIAL/SFL/TWY off.
 - b. PAL evening mode LGT INTST PAPI/HIRL/HIAL stage 4, SFL/TWY stage 2.
 - c. PAL night mode LGT INTST HIRL/HIAL/PAPI stage 2, SFL off, TWY stage 1.
 - d. Modes are based on automatic sensors and may not coincide with first/last light.
4. PAL override/manual activation: For manual activation or change of AD LGT INTST, CTC 'RICHMOND BASE FIRE' FREQ 135.5 and REQ 'PAL OVERRIDE'.
5. RWY 10/28 no RWY CL LGT INSTL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	SYDNEY CENTRE	124.55 On Ground
APP	RICHMOND APPROACH (1)	135.9 363.8P
ATIS	RICHMOND	126.3 274.55
SMC	RICHMOND GROUND	128.25
SMCV	RICHMOND GROUND	121.65
TWR	RICHMOND TOWER	135.5 243.0 257.3

(1) R479 ABV 1500FT, R480 and R481.

1. TWR HR: 2200-1300 UTC MON-THU (1HR earlier during HDS), 2200-0830 UTC FRI-SUN and PH. 0830-1300 UTC O/R (1HR earlier during HDS) 24HR PN.
2. EMERG FREQ, guarded, MNT by RI TWR when active.
3. ATIS BCST on 126.3 and 274.55 DRG ATS HR. AWIS OT. ATIS/AWIS AVBL phone ATIS 02 4587 2589; AWIS 02 9353 6448.
4. Retransmit BTN FREQ: 135.5 and 257.3; 128.25 and 121.65 DRG ATS HR.

RADIO NAVIGATION AND LANDING AIDS

DME	IRI	111.9/ 56X	333626.9S	1504723.3E	(4)
		(RWY28)			
GP	IRI	331.1 (RWY28)	333626.9S	1504723.3E	(3)
ILS	IRI	111.9 (RWY28)	333601.8S	1504600.8E	(2)
LOC	IRI	111.9 (RWY28)	333601.8S	1504600.8E	
TAC	RIC	110.7/ 44X	333626.2S	1504756.1E	(1)

- (1) RESTRICTION: Terrain shielding BLW 4,000FT beyond 25NM and BLW 7,500FT beyond 40NM in the sector 260 to 355 - TACAN check boards: RWY 28, 270/0.3: RWY 10, 275/1.4.
- (2) ILS critical areas not protected outside TWR hours.
- (3) Restriction: Use within 7DEG of CL.
- (4) Antenna ELEV 50FT.
1. All NAV AID Pilot MNT outside TWR HR.
2. Radar coverage UNREL BLW 2000FT W and NW of RI.

LOCAL TRAFFIC REGULATIONS

1. RWY 28 is the preferred RWY at Richmond.
2. Parking position advice will be passed to ARR ACFT by RI SMC during ATC hours. Outside ATC hours aircraft are to proceed to pre-coordinated parking area or taxi for parking position 5 and look out for AMS marshaller in that vicinity.
3. PRKG position 29 not AVBL due OBST.
4. PRKG positions 20 to 31 not AVBL for HVY wake turbulence ACFT EXC with YSRI approved marshaller.
5. ACFT DEP for SY, NAV aid training SY or AWK WI S SY TMA, RQ start approval.
6. ACFT RQ pushback, prior to taxi, are to advise SMC.
7. ACFT on INSTR FNA TR are to display LDG LGT and strobes in visual COND.
8. INSTR APCH TRAINING SUBJ ATC approval under the FLW COND:
 - a. CIV ACFT: Do not phone Richmond TWR requesting availability of instrument APCH training.
 - b. MIL ACFT priority.
 - c. FPL with AMDT for DEP DLA greater than 30 MIN RQ.
 - d. YSRI NOTAM RQ.
 - e. LDG and strobe LGT must be displayed on FNA TR when in visual COND.
 - f. ATC may RQ DLA/HLDG prior to APCH.
 - g. ATC may RQ full stop LDG, touch and go or HLDG in circuit prior to DEP. Full stop LDG, touch and go not AVBL to civil aircraft (RRFC excepted) outside TWR HR.
9. DEP RTE RESTR (refer ERSa GEN Route Flight Planning Requirements).
10. Low initial/flypasts, low passes and unusual manoeuvres. The low initial run in shall be to the northern side of RWY 10/28.
11. ACFT REQ transit of R479/R480/R481 should submit FPL. Transit SUBJ DLA due MIL OPS.
12. ACFT conducting airwork within Richmond Airspace (e.g. circuits, MIL INSTR APCH training, local training area, drop zone OPS and survey) are to book via: www.raaf.bookawk.com. Bookings are not AVBL for civil INSTR APCH training, except on an ad hoc basis and SUBJ to conditions in para 9. All survey requests are to contact Richmond Tower prior to becoming airborne for briefing and approval.
13. Where the requirement for special VFR exists (*AIP ENR 1.2*) Special VFR clearances may be issued WI R479, R480 and R481.
14. **RICHMOND FLYING CLUB**
 - a. ACFT may operate in the circuit or training areas in R479 and R480 (Northern Training Area and Southern Training Area are defined in *FIHA AD2 SUPP YSRI*) subject to ATC priorities, military operations and other traffic.
 - b. ACFT must have serviceable VHF radio. CTAF procedures apply outside TWR HR.
 - c. ACFT shall remain above 400FT AGL and will not overfly houses, buildings or livestock during:
 - (i) Practice forced landing training.
 - (ii) Practise engine failure after take-off training.
 - d. No circuit or INSTR APCH training prior to 0700 Local without prior approval from ABOC.
 - e. No circuit or INSTR APCH training after 2300 Local (1HR earlier during HDS).

FLIGHT PROCEDURES

1. **GENERAL AVIATION ROUTE THROUGH RICHMOND TERMINAL AIRSPACE**
 - a. Applicable during TWR HR. Refer ATS Communications section and NOTAM.
 - b. Expect to transit GA RTE at A015.
 - c. Routes (marked on VTC):
 - d. **Northbound:**
 - (i) Approaching the boundary of R479 at Penrith Lakes contact Richmond Tower on 135.5 for airways clearance.
 - (ii) Only when in receipt of a clearance, enter R479 tracking north via the main powerlines.
 - (iii) Report at 'KURMOND' (KRMD); the intersection of the main north/south powerlines and the Bells Line of Road, with an EST for 'WISEMANS FERRY' (WSFR).

- (iv) Thence TR 043 DEG MAG to WSFR.
- e. **Southbound:**
 - (i) At 'WISEMANS FERRY' (WSFR) contact Richmond Tower on 135.5 for airways clearance.
 - (ii) Only when in receipt of a clearance, enter R479/R480 and advise EST for KRMD.
 - (iii) TR 223 DEG MAG to KRMD; the intersection of the main north/south powerlines and the Bells Line of Road.
 - (iv) Report at KRMD then TR S via the powerlines to the boundary of R479 at Penrith Lakes.
- 2. RWY visibility assessments may not be AVBL during low visibility procedures.
- 3. The activation of restricted airspace R560A-B and R570A-H affects routes to/from YSRI. Refer *GEN-FPR paragraph 1.4 Richmond Departures*, and check airspace status WWX (Williamtown) prior to FLT planning.
- 4. **UNMANNED AIRCRAFT OPERATIONS (INCLUDING RPAS)**
 - a. All operators must hold the appropriate certifications endorsed by CASA.
 - b. Requests for approval must be sent with all essential information at least 48 hours prior to commencement time.
 - c. Contact the airspace arbiter via email: ric.atc@defence.gov.au.
 - d. Approval remains at the discretion of the airspace arbiter.
- 5. Richmond circuit area defined as 6NM radius of Richmond ARP, SFC to 1,500FT AMSL. Standard circuit direction is left. All 'low level' circuits shall be conducted to the north and require ATC approval.
- 6. The initial points are 5NM downwind of active RWY, displaced deadside, left pitch/circuit.
- 7. Outside TWR HR ACFT planning to enter CTA IMT after DEP, CTC Sydney Centre 124.55 MHz prior to ENG start to REQ AWY CLR.
- 8. ACFT with EMERG CTC RFFS CS "Richmond Base Fire" FREQ 135.5 MHz. Civil aircraft with declared emergency that have not previously coordinated to land at RIC should vacate onto TWY Charlie if able, shut down and wait for military escort.

CTAF - AFRU 135.5

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

All ACFT EXC those OPR via SID are to comply with the FLW PROC:

- 1. Do not turn before DER.
 - a. Visual DEP RWY 10 - to avoid Windsor township, MNTN RWY track 095 MAG. At 1,000FT adopt DEP instructions;
 - b. Visual DEP RWY 28 - to avoid Richmond township, turn right track 285 MAG. At 1,000FT adopt DEP instructions.
- 2. HEL ARR FM S are to remain visually CLR of the racecourse and associated stables.
- 3. To avoid stud farm and Hawkesbury University, ACFT are not to fly BLW 1,000FT AGL, EXC in EMERG when OPR WI 1NM S of RWY 10/28.
- 4. All low LVL CCTS to be conducted to the N.

ADDITIONAL INFORMATION

- 1. Bird hazard exists BTN 2 to 3NM on final RWY 28.
- 2. 25 Metre Ground Firing Range. APRX position 315DEG M/460M from ATC Tower. Active on display of red flags. NIL lateral or vertical safety limits.
- 3. Southern Grass. The 'Southern Grass' is bounded by the perimeter road to the south, the RWY 10/28 gable markers to the north and the two unnamed bitumen roads east and west. Caution unmarked obstructions.
- 4. Western Grass. The 'Western Grass' located in the North-West quadrant of the aerodrome is bounded by TWY Zulu, the Perimeter Rd, concrete barriers and the Western Apron. Caution unmarked obstructions.
- 5. Model ACFT OPR WI 400M RAD of PSN 333512.00S 1505054.00E at Pitt Town, New South Wales, BRG 064 MAG 3.5NM FM ARP. SFC to 400FT AGL.
- 6. Model ACFT OPR WI 500M RAD of PSN 333426.4S 1504620.4E BRG 330 MAG 1.5NM FM ARP. SFC to 400FT AGL.
- 7. UA (model ACFT) OPR HJ WI 400M RAD of PSN 333548.00S 1504748.00E (Rickabys Drop Zone) BRG 052 MAG 0.076NM FM Richmond (NSW) AD (YSRI) SFC to 400FT AGL.

-
8. New ATC TWR not commissioned - observe old TWR for light signals.
 9. RAAF Richmond Flying club typically operate to RWY 10 in light variable winds.
 10. GLD OPS parallel RWY 10/28 S side of RWY or FM grass area NW of TWR.
 11. Caution:
 - a. R479/R480 SUBJ activation at short notice. CK status with SY CENTRE (124.55 MHz).
 - b. WAE may be operating on or near RWY and other ACFT MOV areas.
 - c. A high voltage transmission line crosses the approach path to RWY 28 N to S at 3.2NM TACAN at the closest point and 317FT high on QNH at the highest point.

CHARTS RELATED TO THE AERODROME

1. WAC 3456.
 2. MIL Aerodrome Obstruction Chart Type A: FEB 2018.
 3. Also refer to AIP Departure and Approach Procedures.
-

ROCKHAMPTON**ELEV 36****AVFAX CODE 4024**

QLD

UTC +10

YBRK

232255S

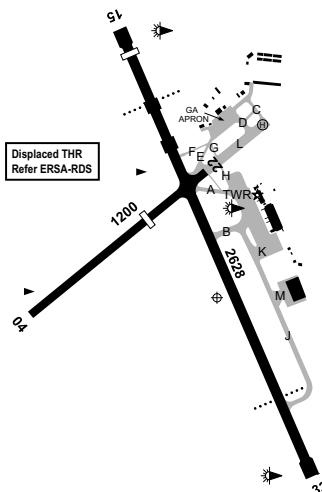
1502831E

VAR 9 DEG E

CERT

AD OPR Manager, Rockhampton Airport, Rockhampton Regional Council, PO Box 1860,
Rockhampton, QLD, 4700. ARO 24HR Duty ARO 0409 368 314: 0448 619 596.

Council PH 07 4936 8018. Website: www.rockhamptonairport.com.au.

**REMARKS**

- AD Charges: Current schedule of fees and conditions of use can be obtained FM AD OPR or website.
- Customs AD by prior approval for each flight.
- This AD is a Security Controlled Airport.
- For airside access CTC AD OPR. OPR hours 0500-2000 Local. Call-out fee will apply AH.

HANDLING SERVICES AND FACILITIES

Ampol: L.D and H.M Day: 2000-0800 UTC DLY, AH 1HR PN. Phone 0411 163 210, 07 4927 3181, AH 0411 163 210. JET A1.

Viva: 2000-0800 UTC DLY, AH 1HR PN. Phone 0411 163 210, 07 4927 3181, AH 0411 163 210. JET A1.

World Fuel: 2000-0800 UTC DLY, AH 1HR PN. Phone 0411 163 210, 07 4927 3181, AH 0411 163 210. JET A1.

Air BP: Bob Crewe and Tim Rayner 2100-0700 UTC MON-FRI, AH 1HR PN. Phone 0408 764 070, 0417 624 422 (AH). JET A1.

AVGAS: H24 self-serve bowser.

RESCUE AND FIREFIGHTING SERVICES

- CAT 6:
 - 1945-1125 UTC MON-FRI.
 - 2015-1125 UTC SAT.
 - 2045-1125 UTC SUN.
- 131.0 MHz AVBL HO.

AERODROME OBSTACLES

- Lit (HN) building 200FT AMSL BRG 069 DEG MAG 2NM FM ARP. Infringes inner HZS.
- Towers:
 - Unlit 895FT AMSL BRG 016 DEG MAG 6.88NM FM ARP. Infringes outer HZS.
 - Unlit 2,123FT AMSL BRG 056 DEG MAG 6.2NM FM ARP. Infringes HZS.
 - Marked and lit (HN) 410FT AMSL BRG 208 DEG MAG 2.8NM FM ARP. Infringes COS.
 - Lit (HN) 568FT AMSL BRG 184 DEG MAG 4.3NM FM ARP. Infringes outer HZS.

- e. Lit (HN) 340FT AMSL BRG 094 DEG MAG 1.0NM FM ARP. Infringes inner HZS.
 - f. Lit (HN) 144FT AMSL BRG 034 DEG MAG 0.83NM FM ARP. Infringes inner HZS.
 - g. Lit (HN) 2,114FT AMSL BRG 054 DEG MAG 6.2NM FM ARP. Infringes outer HZS.
 - h. Lit (Red) Communications TWR 2,086FT AMSL BRG 055 DEG MAG 6.2NM FM ARP. Infringes outer HZS.
3. Masts:
- a. At hospital - lit by steady red LGT (HN) 284FT AMSL BRG 073 DEG MAG 1.1NM FM ARP. Infringes inner HZS.
 - b. Lit (HN) 2,084FT AMSL BRG 054 DEG MAG 6.2NM FM ARP. Infringes outer HZS.
 - c. Lit (HN) 283FT AMSL BRG 097 DEG MAG 1.09NM FM ARP. Infringes inner HZS.
4. Primary IWI lit by steady red light (HN). Infringes TNS (E side).
5. Unlit trees 247FT AMSL BTN BRG 128 and 136 DEG MAG 1.6NM FM ARP. Infringes inner HZS.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT A, METAR/SPECI, AD WRNG.
- 2. AWIS Phone 07 3564 3734 - Report faults to BoM.
- 3. AWIS FREQ 133.325 - (requires 1 SEC pulse to ACT) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

04/22	043	39a	PCR 230/F/C/1.00 MPa/T	WID 23	RWS 80
15/33	148	86a	PCR 740/F/C/1.60 MPa/T Grooved.	WID 45	RWS 300

- 1. BAK 12 bi-directional, removable, hook cable, 100MM high, installed 487M (1,600FT) FM THR RWY 33, rigged for MIL OPS only. Notified by TWR/NOTAM.
- 2. **CAUTION:** Permanent concrete y-absorber housings 0.3M (1FT) high located each side of RWY, 14M (46FT) FM RWY edge.

AERODROME AND APPROACH LIGHTING

RWY 15/33	MIRL(1)	AFRU+PAL 118.1		SDBY PWR AVBL
RWY 15/33	PAPI(2)	AFRU+PAL 118.1	3.0 DEG70FT	SDBY PWR AVBL
RWY 15/33	RTIL(3)	AFRU+PAL 118.1		SDBY PWR AVBL

- (1) AFRU+PAL outside TWR HR.
- (2) Both sides
- (3) AFRU+PAL outside TWR HR. Non-standard RTIL configuration RWY 15. RWY 15 RTILS located 75M in front of threshold.

- 1. RWY 15/33 edge light spacing 60M.
- 2. AFRU+PAL lighting status confirmed on AFRU+PAL FREQ. PAL cycle 30MIN. Last 10MIN Primary IWI flashing continuously.

OTHER LIGHTING

ABN ALTN 6 WG On TWR - AVBL with AFRU+PAL. OPS continuous HN.

- 1. Secondary PWR switchover time: 1 SEC during LVP; 15 SEC other times.
- 2. TWY LGT: Green CL on A, B, E, F, J and K.
- 3. Blue edge lighting on RWY 15/33 turning node.
- 4. RWY guard lights on RWY 15/33 TWY intersections.
- 5. Green CL on THR turn pad line RWY 15/33.
- 6. Blue taxiway edge lighting west of Bay 4 and 5 around grassed island.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	119.55
APP	CORAL APPROACH (RK)	123.75
ATIS	ROCKY	116.9 128.5
SMC	ROCKY GROUND	121.8
TWR	ROCKY TOWER	118.1

- 1. TWR HR:
 - a. MON-FRI: 2030-1035 UTC.
 - b. SAT: 2030-0930 UTC.
 - c. SUN: 2100-1035 UTC.
- 2. Phone RK TWR: 07 4931 5205^, BN CEN: 07 3866 3224^.
- 3. Rocky TWR provides Class D TWR services within Rockhampton CTR, SFC to 1,000FT AMSL. CTC TWR for CLR.
- 4. During TWR HRS, CORAL APP provides ATS:

- a. WI the CTA steps Class D ABV 1,000FT AMSL to an upper level of 4,500FT AMSL.
 - b. WI the Class C airspace contained within the boundaries of the Rockhampton CTA steps 36NM north and 36NM south of YBRK ABV 4,500FT AMSL to an upper level of FL150.
 - c. Radar services and radar-based traffic information service within 20NM of Rockhampton below 6,000FT limited due radar coverage. Delays and restrictions may occur.
5. Outside TWR HR Brisbane Centre provides:
- a. ATS within Class C airspace ABV 4,500FT AMSL.
 - b. Class G service at and below 4,500FT AMSL.
- Note: Outside TWR HR, CTC Brisbane Centre for TAX and on ground reports in this airspace.*
- Note: TWR and APP may operate independently, hours or airspace responsibility may change at short notice. Check status of airspace with ATS, NOTAM or Rocky ATIS.*

RADIO NAVIGATION AND LANDING AIDS

DME	RK	116.9/116X	232258.1S	1502818.0E		(1)
NDB	RK	257	232215.3S	1502831.1E	Range 65 (HN 65)	
VOR	RK	116.9	232258.1S	1502817.5E		
(1)	Antenna ELEV 57FT.					

LOCAL TRAFFIC REGULATIONS

1. Circuit training for ACFT ABV 5,700KG permitted 2100-1200 UTC.
2. TWY B, J and K - ACFT TAX with engines overhanging TWY edge must avoid using power above idle thrust to prevent shoulder erosion and ENG damage.
3. TWY A and APN edge TAX lane BTN TWY A and TWY K restricted to 36M MAX wingspan.
4. ACFT ABV 5,700KG MTOW RQ pavement concession to use light ACFT TWYs and refuelling areas.
5. RPT APN is a Security Restricted Area. Access for non RPT operators by permission from Airport Management only.
6. All SVY, practice IAL and NAVAID training within Class C and D airspace requires prior notice. Phone RK TWR DRG TWR HR for approval.
7. A340-600, A380-800 and B777-300 ACFT OPS: ACFT should exercise caution during turns as normal CLR to TWY edge may not be AVBL. Pilots should apply judgemental oversteer when negotiating TWY to TWY and RWY to TWY turns. Where the aircraft's ground manoeuvring cameras are not AVBL, the pilot should request marshalling assistance from the company's agent.
8. Primary PRKG bays on the RAAF APN are marked for standard type F/A-15E. ACFT type designators are not marked at the stop lines. PRKG on this APN is only AVBL by prior permission from airport management.
9. Parallel TWY separation for TWY J and RPT APN TWY is restricted to code C separation. Simultaneous OPS not permitted if one ACFT is greater than 36M wing span.
10. ACFT ABV MTOW 22,000KG to execute turns at RWY ends or turning node. THR RWY 15 anti-clockwise marked by green CL lighting and THR RWY 33 clock-wise not lit.
11. ACFT ABV 5,700KG CTC AD OPR 48HRS prior for PRKG approval.
12. TWY E RESTR to 24M MAX wingspan.
13. No turn AVBL FM TWY F to TWY E or TWY E to TWY G.

FLIGHT PROCEDURES

1. Flying Training in D706 and Radio Failure Procedures

1.1. ATC Requirements

ACFT proceeding to, from or operating within D706 up to 4,500FT AMSL shall:

- a. Do so in accordance with the Airways Clearance issued (see below).
- b. Report when established in D706.
- c. Report on 123.75 at the OPS NORMAL time/s nominated by CORAL approach.
- d. Report on 123.75 when ready to depart D706 for CLR.

1.2. Operating Clearance.

A CLR to "Track to and operate within the Training Area not above A045", will mean:

- a. Enter the Training Area (D706) tracking direct to the Stanwell Power Station.
- b. Operate within D706 not above A045, leaving and re-entering CTA as required.

1.3. Radio Failure

IF an ACFT is unable to report arrival in D706 or make a nominated OPS NORMAL call, THEN the ACFT must:

- a. Remain within D706 until 10 minutes after either,
 - (i) the missed Arrival Report Time, or
 - (ii) the expiry of the OPS NORMAL Time,
- b. Squawk SSR Code 7600.
- c. Attempt to contact Rocky Tower by mobile.
- d. Make "blind" transmissions of intentions.
- e. Listen out on ATIS for any instructions.
- f. Return to Rockhampton tracking via Gracemere Hill at 1,500FT.
- g. From Gracemere Hill, make a visual APCH to the preferred RWY via:
 - (i) Straight-in for RWY 04, or
 - (ii) Right Base for RWY 15, or
 - (iii) Left Base for RWY 33 or 22,
- h. On final, look for a light signal from the tower.
- i. Proceed in accordance with the light signal from the tower.

Note: In the event of a missed APCH, make a Left Circuit for the same or appropriate alternative runway.

2. Low Visibility Procedures

- a. LOW VIS TKOF are not supported by manual RV assessments.
- b. Transmissometers are not installed.
- c. ARO will assist pilots to access RWY for RV assessments.
- d. RWY 15/33 is capable of supporting TKOF with RWY VIS not less than 800M.
- e. Procedure AVBL for LVP from AD OPR.

3. Outside TWR HR, ACFT in the circuit are to operate as follows:

- a. RWY 15 and 22 - Right hand CCTS;
- b. RWY 04 and 33 - Left hand CCTS.

4. Initial and Pitch Procedures

- a. Initial and Pitch (I&P)/Military Stream Arrival procedures are subject to ATC approval.
- b. **Initial point.** The Rockhampton initial point (IP) is located at 5NM Final for the assigned runway. Aircraft shall be at 2,000FT AMSL straight and level prior to IP.
- c. **Traffic.** ACFT will receive relevant traffic at the IP.
- d. **Go-around procedure.** ACFT conducting a go-around must initially climb on runway track and remain in the CTR, remain visual and await instructions from ATC. If the aircraft cannot clear obstacles on runway track, the aircraft may turn.

CTAF - AFRU 118.1

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

1. Hang gliding at Mt Helen 155/28NM FM Rockhampton AD, HJ JF. MAX 4,000FT AMSL.
2. Significant bird hazard exists:
 - a. Waterfowl (ibis, duck, pelican and cormorant) hazard significantly increases on airfield and in vicinity after period of rainfall.

Note: Increased in the undershoot of RWY 33.

- b. Seasonally migratory species increase in the terminal airspace in spring to summer (SEP-JAN).
- c. Flying-fox, micro-bat and waterfowl risk increased after sunset due to increased activity and decreased detectability.

Note: Flying fox hazard increased before first light and in the vicinity of the AD.

- d. Check the Bird Watch reports and NOTAM for real-time wildlife hazard information.

CHARTS RELATED TO THE AERODROME

1. WAC 3235.
2. Aerodrome Obstruction Chart Type A: 7th Edition (September 2021). Can be obtained FM AD OPR or website.
3. Also refer to AIP Departure and Approach Procedures.

SUNSHINE COAST**ELEV 15****AVFAX CODE 4005**

QLD

UTC +10

YBSU

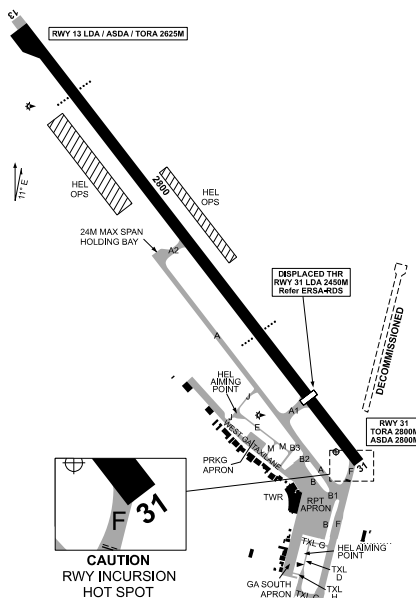
263612S

1530528E

VAR 11 DEG E

CERT

AD OPR Sunshine Coast Airport Pty Ltd, PO Box 9535, Pacific Paradise, QLD, 4564. PH 1300 993 543. ARO 0419 658 272. PH AH 07 3830 5251. Website: www.sunshinecoastairport.com.au.

**REMARKS**

- AD Charges and Conditions of Use apply to any use of the AD - see website or contact AD OPR for details.
- Airside access AH requires a call-out (fees apply).
- This AD is a security controlled airport. All pilots and operators must possess and display a current Aviation Security Identification Card (ASIC) whilst airside unless under escort.
- GA pilot and pedestrian access/egress via Gate 4 only, 30M north of the fuel bowser. Access to terminal not permitted via Regular Public Transport (RPT) Apron.
- Limited PRKG for overnight GA ACFT, CTC ARO for PRKG approval.

HANDLING SERVICES AND FACILITIES

Viva Energy Australia (Airport Refuelling Services): DLY 1900-1000 UTC. JET A1 30 MIN PN.

PH 0408 711 968 AH surcharges apply. AVGAS 24HR via outdoor payment terminal bowser.

Carnet, V and MC.

MACHJET - FBO H24 DLY. PH 0447 182 351 or 07 5457 0778. Email: fbo@machjet.com.au. Full FBO services.

SWISSPORT - FBO email: charters@swissport.com.au or info@skycare.co.nz. PH 0403 455 443.

FLIGHT OPTIONS - FBO PH +61 488 603 132 H24. Email: fbo@flightoptions.com.au.

General

AD OPR does not provide marshalling services.

PASSENGER FACILITIES

PT/TX/HC/BU/LG/RF/WC/ME

RESCUE AND FIREFIGHTING SERVICES

- CAT 7
 - DLY 1945-1055 UTC EXC MON.

- b. MON 1945-1320 UTC.
2. 131.0 MHz AVBL HO.
3. Water Rescue Service AVBL.

AERODROME OBSTACLES

1. Mt Coolum lit 710FT AMSL BRG 340 DEG MAG 2.53NM FM ARP. Infringes inner HZS by 551FT.
2. TWR:

a. Lit 834FT AMSL BRG 258 DEG MAG 5.38NM FM ARP.

b. Lit communications 212FT AMSL BRG 324 DEG MAG 2.52NM FM ARP. Infringes inner HZS by 49FT.
3. B737/A321 ACFT tail when positioned at TWY F holding point RWY 13/31. Infringes RWY 31 APCH SFC by 14.7FT.
4. Roof unlit 36FT AMSL BRG 084 DEG MAG 240M FM ARP. Infringes RWY 13 TKOF SFC by 4FT.
5. Trees (lit) 257FT AMSL BRG 272 DEG MAG 2.22NM FM ARP. Infringes inner HZS by 95FT.
6. Trees (unlit):

a. 179FT AMSL BRG 257 DEG MAG 2.44NM FM ARP, infringes inner HZS by 17FT.

b. 56FT AMSL BRG 309 DEG MAG 3,170M FM ARP, infringes transitional SFC by 16FT.

c. 76FT AMSL BRG 315 DEG MAG 3,662M FM ARP, infringes RWY 13 APCH SFC by 8FT.

d. 75FT AMSL BRG 314 DEG MAG 3,530M FM ARP, infringes RWY 13 APCH SFC by 15FT.

e. 74FT AMSL BRG 316 DEG MAG 3,577M FM ARP, infringes RWY 13 APCH SFC by 11FT.

f. 71FT AMSL BRG 313 DEG MAG 3,528M FM ARP, infringes RWY 13 APCH SFC by 10FT.

g. 72FT AMSL BRG 313 DEG MAG 3,544M FM ARP, infringes RWY 13 APCH SFC by 11FT.

h. 563FT AMSL BRG 317 DEG MAG 5.65NM FM ARP, infringes horizontal section RWY 13 APCH SFC by 50FT.

i. 62FT AMSL BRG 129 DEG MAG 542M FM ARP, infringes RWY 13 TKOF SFC by 6FT.

j. 63FT AMSL BRG 136 DEG MAG 545M FM ARP, infringes RWY 13 TKOF SFC by 6FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, AD WRNG.
2. AWIS PH 07 3564 3738 - Report faults to BoM.
3. AWIS FREQ 119.8 AVBL outside TWR HR - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

13/3113192aPCR 690/F/B/X/T Grooved

WID 45RWS 300

AERODROME AND APPROACH LIGHTING

RWY 13/31MIRLAFRU+PAL 124.4

RWY 13/31PAPIAFRU+PAL 124.43.0 DEG67FT

RWY 13/31RTILAFRU+PAL 124.4

SDBY PWR AVBL

SDBY PWR AVBL

SDBY PWR AVBL

1. RWY edge light spacing: 13/31: 58M.
2. RGL at all RWY/TWY intersections.

OTHER LIGHTING

1. Secondary PWR switchover time: 15 SEC. Does not support TKOF BLW 800M.
2. TWY LGT: Green CL on TWY A, A1, A2, B, B1, B2, J, M, F BTN TWY B1 and RWY 13/31 and Western GA Taxilane.

ATS AND AERODROME COMMUNICATION FACILITIES

FIABRISBANE CENTRE

129.0 CCT area - on GND COM CTC 135.2 (outside TWR HR)

ATIS	SUNSHINE COAST	(3)	114.2 (1) 119.8 (2)
SMC	SUNSHINE COAST		121.1
	GROUND		
TWR	SUNSHINE COAST		124.4
	TOWER		

(1) H24.

(2) TWR HR only.

(3) Also AVBL on PH 07 5458 2955.

1. TWR HR:

2100-0940 UTC DLY. Phone: 07 5458 2953^.

Note: TWR HR may change at short notice, check status of airspace with ATS or Sunshine Coast ATIS.

2. Sunshine Coast TWR provides combined TWR and APP CTL services within Class D airspace 4,500FT AMSL and BLW DRG TWR HR. CTC TWR for a clearance.

3. Outside TWR HR, Sunshine Coast Class D airspace 4,500FT AMSL and BLW becomes Class G.

4. Brisbane Centre operates Sunshine Coast Class C airspace H24.

5. FIA on ground COMS may be AVBL with ATS dependent on ACFT location and building shielding.

RADIO NAVIGATION AND LANDING AIDS

DME SU 114.2/ 89X 263551.7S 1530525.1E (2)

NDB SU 380 263531.9S 1530530.2E Range 50 (HN 50) (3)

VOR SU 114.2 263551.7S 1530525.1E (1)

(1) Coverage reduced in minor arc 169 to 340 due terrain shielding. Radial 169 not to be used outside 40NM. DME ARR is not AVBL on SU VOR 340 radial. Bending and scalloping on 224 radial at low altitudes.

(2) Antenna ELEV 36FT.

(3) 172/0.67 to ARP.

LOCAL TRAFFIC REGULATIONS

1. RWY 31: ACFT ABV 80,000KG MTOW to make 180DEG MAX RAD turns following yellow line at RWY end turning node.

2. TWY A BTN TWY A1 and TWY A2, and TWY A2 restricted to MAX wingspan 36M.

3. ACFT Holding Bay AVBL to ACFT MAX wingspan 24M (e.g. E35L), located northern side TWY A2.

4. TRAINING FLIGHTS

a. All ACFT training practice instrument APCH and NAVAID training require ATC approval, pilots must book a slot online at www.bookawk.com.

b. Circuit training requires ATC approval, pilots must book a slot online at www.bookawk.com. Circuit training permitted only BTN HR of 2100 and 1200 UTC.

5. APRONS AND TAXIWAYS

a. TWY M and J: restricted to MAX 20M wingspan and 10,000KG.

b. TXL D, TXL G and TXL H: restricted to MAX wingspan 15M and 5,700KG (EXCL Cessna 208).

c. TWY B2 and APN TWY B BTN TWY B1 and TWY B3: restricted to MAX B737/A321.

d. TWY B3: restricted to MAX 24M wingspan and 10,000KG.

e. TWY F south of TWY B1 and TWY C: restricted to MAX 36M wingspan (B737/A320).

f. GA PRKG APN, TWY B3, TWY F BTN TWY B1 and TXL C and TXL C, TXL D, TXL H, TXL G: unlit and restricted to HJ OPS only.

g. Code D and Code E ACFT restricted to TWY A1, TWY A BTN TWY A1 and F, TWY B1, APN TWY B BTN TWY B1 and TWY G, TWY F north of TWY B1.

h. TXL G invert into TWY B closed.

i. TWY E restricted to helicopter OPS. Access to western taxiway is via TWY M or J unless otherwise instructed by ATC.

6. PARKING

a. Due to security requirements, all GA light jet and turbine ACFT which are not RPT, must obtain prior approval FM AD OPR if they are programmed to stage through or remain at Sunshine Coast. To obtain such approval 48HR notice is required; PH 0419 658 272, AH 07 3830 5251.

- b. GA ACFT BLW 5,700KG not permitted on main RPT APN without prior approval from AD OPR. Access to the Southern GA APN is via TXL G. Access to the Western GA APN is via TWY J, B3 or M.
 - c. Bay 19A and 20A: restricted to ACFT MAX 32M wingspan.
 - d. Bay 19, 19A, 20 and 20A not AVBL to ACFT without prior approval from the AD OPR.
 - e. For any itinerant/GA ACFT requiring to park on the RPT APN, a ground handler/FBO is required to be engaged by the ACFT operator prior to ACFT parking being allocated by AD OPR (exceptions: RFDS/medical/emergency operations).
7. ACFT ABV 5,700KG RQ prior approval of AD OPR to OPR BTN HR of 2300 and 0530 Local. PN for HEL OPS RQ (non EMERG).
8. Ground Running of engines for maintenance purposes RQ prior approval FM ARO.
9. RPT APN Bays pushback RQ.
10. CTAF pushback procedures:
 - a. During CTAF, all ACFT on RPT APN Bays RQ to pushback.
 - b. Additional mandatory CTAF ACFT broadcast. ACFT shall broadcast intention to pushback to nominated disconnect point prior to pushback, followed by TAX broadcast when ready as per *AIP GEN*.
11. Pilots to exercise caution on TWY E, BTN TWY M and TWY J due to lack of VIS FM control TWR.
12. MAX Code C ACFT to occupy TWY F RWY hold point when ACFT on APCH to RWY 31.
13. Code D and E ACFT to hold short at INT hold PSN located on APN TWY B south of TWY B1 to inform ATC ready when RWY 31 duty RWY.
14. TWY F RWY holding PSN not AVBL during low VIS OPS.
15. HEL OPS:
 - a. Southern GA APN - APCH and depart via TWY F or as directed by ATC.
 - b. Western GA precinct - to avoid construction zone, APCH and depart via TWY A or as directed by ATC.

FLIGHT PROCEDURES

1. ATC TRAFFIC MANAGEMENT SPEED

When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP SU via Class C airspace must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

Note: Pilots must also comply with Class D airspace speed limits. Cancellation of ATC traffic management speeds does not cancel Class D airspace speed limits.

2. Outside TWR HR - ALL ACFT OPR in circuit area are to BCST position and RWY being used when an inbound call is received FM an ACFT joining the circuit or a call is received FM an ACFT about to taxi.
3. Right hand circuits required when OPR RWY 13 except as directed by ATC.

CTAF - AFRU 124.4

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

1. RWY18/36 decommissioned.
2. Southern end of decommissioned RWY 18/36 – TWY F.
3. TWY F RWY holding position located 145M from start of take-off RWY 31.
4. Class D airspace is in close proximity to aerodromes in Class G airspace.
5. Fuel/oil clean-up/disposal are chargeable and must meet Government Environmental standards.
6. Bird and animal hazard exists:
 - a. Flying fox transiting south to north - HN only.
 - b. Nankeen kestrel (birds of prey) present on airfield.
 - c. Australian white ibis flocking on airfield HJ.
 - d. Increased ducks in VCY of AD, HN.
 - e. Increased Fairy martins and Welcome swallows in VCY of RWY 13/31 strip early morning and late afternoon.
7. PJE OPS:

-
- a. Occasional operations HJ within 1NM of Maroochydore Sporting Complex Oval
BRG 194 DEG MAG 3.3NM from ARP, up to FL150.
 - b. DLY HJ at Coolum Beach located BRG 351 DEG MAG 4.0NM from ARP, up to FL150.
8. Model ACFT OPR WI 300M radius of PSN 264005.61S 1530048.34E, BRG 216 DEG MAG 5.7NM FM ARP, SFC to 1,000FT AGL. OPS not ABV 400FT AGL WI Sunshine Coast CTR.

CHARTS RELATED TO THE AERODROME

1. WAC 3340.
 2. Also refer to AIP Departure and Approach Procedures.
 3. Aerodrome Obstruction Chart Type A: October 2025.
-

SYDNEY/KINGSFORD SMITH

ELEV 21

AVFAX CODE 2001

NSW

UTC +10

YSSY

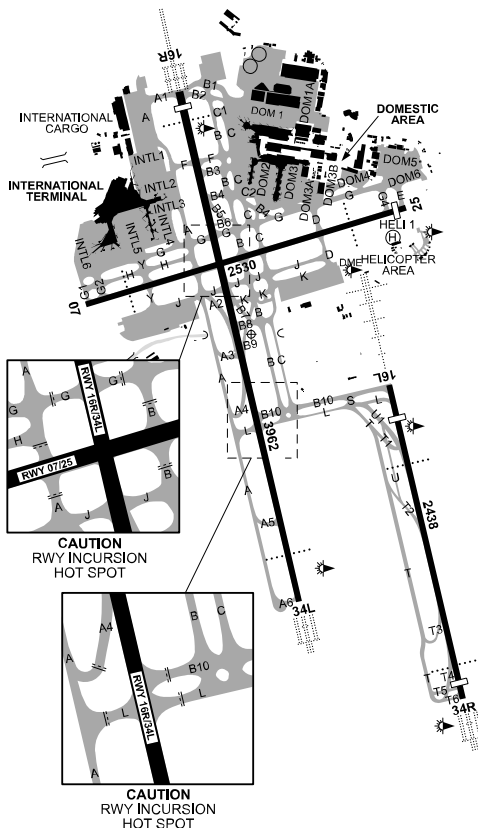
335646S

1511038E

VAR 13 DEG E

CERT

AD OPR Sydney Airport Corporation Ltd, Locked Bag 5000, Sydney International Airport, NSW, 2020. PH 61 2 9667 9111 (BH). ARO OPS (24HR): Aerodrome Operations Supervisor 02 9667 9824 MOB: 0419 278 208; Email Car2@syd.com.au. Website: www.sydneyairport.com.au.



REMARKS

1. AD Charges: All ACFT - Phone +61 2 9667 9111 (BH), Email: aeroquery@syd.com.au.
2. This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

For information regarding refuellers hours, fuel types available and acceptable payments methods contact the following:

AIR BP – Air Refuel: PH: +61 2 9313 4241 or 0418 619 365, VHF 129.9.

Viva Energy: PH: +61 2 9667 4044 (office), +61 2 9667 1920 or 0418 962 294. 0400-2300 Local.

Execujet: FBO services and VIP Lounge H24. Civil and MIL ACFT. IS-BAH Stage II.

PH +61 2 9693 0888 Email: fbo.vssv@execujet.com.au; VHF: 131.95MHz.

Additional contact details for fuel companies, FBO, catering, ramp and other associated services are available from Sydney's Airport web address:

www.sydneyairport.com.au/corporate/partner-with-us/services

RESCUE AND FIREFIGHTING SERVICES

1. CAT 10.
2. 131.0 MHz AVBL H24. Request via ATC.
3. Water Rescue Service AVBL H24.

AERODROME OBSTACLES

1. RWY 16R GP transmitter building located ADJ the RWY 16R GP antenna infringes the 5 percent plane of RWY 16R/34L flyover area by APRX 2.6FT.
2. Anemometers co-located with each IWDI and obstacle lit where required.
3. Telecommunications TWR 223FT AMSL BRG 263 DEG MAG 2.28NM FM ARP. Unlit.
4. Cargo container trains OPR BTN the following points:
 - a. BRG 037 MAG 1.05NM FM ARP and BRG 047 MAG 1.09 FM ARP cause a transient infringement of RWY 25 APCH and RWY 07 takeoff surfaces.
 - b. The surfaces are infringed by a maximum of 15FT AGL and the highest point of the containers as they transit is 56FT AMSL.
5. RWY 25 Visual Segment Surface (VSS) penetrated by five trees:
 - a. 97FT AMSL BRG 049 MAG 2,083M FM ARP.
 - b. 97FT AMSL BRG 047 MAG 2,111M FM ARP.
 - c. 97FT AMSL BRG 047 MAG 2,112M FM ARP.
 - d. 98FT AMSL BRG 047 MAG 2,118M FM ARP.
 - e. 107FT AMSL BRG 047 MAG 2,178M FM ARP.*Note: Trees remain clear of VSS obstacle clearance surface.*
6. For information regarding temporary or other obstacles refer to NOTAM and/or CTC AD OPR.
7. Trees:
 - a. 33FT AMSL BRG 095 DEG MAG 1,260M FM ARP.
 - b. 35FT AMSL BRG 327 DEG MAG 2,212M FM ARP.
 - c. 73FT AMSL PSN 335638.82S 1511117.89E.
 - d. 74FT AMSL PSN 335638.09S 1511116.96E.
 - e. 69FT AMSL PSN 335637.49S 1511107.01E.
 - f. 72FT AMSL PSN 335637.08S 1511115.75E.
 - g. 60FT AMSL PSN 335639.85S 1511115.99E.
 - h. 56FT AMSL PSN 335639.10S 1511115.13E.
 - i. 75FT AMSL PSN 335637.41S 1511116.14E.
8. Low Level Windshear Alerting Service (LLWSAS) equipment 9FT AMSL BRG 317 DEG MAG 693M FM ARP.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
2. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 02 9296 1526.
3. AWIS PH 02 9353 6450 - Report faults to BoM.

PHYSICAL CHARACTERISTICS

07/25	061	83a	PCR 1430/F/A/X/T Grooved	WID 45	RWS 280
16L/34R	155	80a	PCR 750/F/A/X/T Grooved	WID 45	RWS 280
16R/34L	155	130a	PCR 797/F/A/X/T Grooved	WID 45	RWS 280
1.	All RWY have CL markings.				
2.	RWY 16R/34L and RWY 07/25 RWY shoulders asphalt sealed WID 15M.				
3.	RWY 16L/34R RWY shoulder asphalt sealed WID 7.5M.				
4.	TWY are asphalt, concrete or a combination of both.				

AERODROME AND APPROACH LIGHTING

RWY 07/25	HIRL		SDBY PWR AVBL
RWY 07/25	PAPI(2)	3.0 DEG64FT	SDBY PWR AVBL
RWY 07	RTIL		SDBY PWR AVBL
RWY 16L/34R	HIRL		SDBY PWR AVBL
RWY 16L/34R	PAPI(2)	3.0 DEG53FT	SDBY PWR AVBL
RWY 16L/34R	RCLL(1)		SDBY PWR AVBL
RWY 16L	HIAL-CAT I		SDBY PWR AVBL
RWY 34R	HIAL-CAT II(3)		SDBY PWR AVBL

RWY 34R	RTZL		SDBY PWR AVBL
RWY 16R/34L	HAL-CAT II		SDBY PWR AVBL
RWY 16R/34L	HIRL		SDBY PWR AVBL
RWY 16R/34L	MIRL		SDBY PWR AVBL
RWY 16R/34L	PAPI(2)	3.0 DEG64FT	SDBY PWR AVBL
RWY 16R/34L	RCLL(1)		SDBY PWR AVBL
RWY 16R/34L	RTZL		SDBY PWR AVBL

- (1) 15M spacing
- (2) Both sides
- (3) Special Authorisation
1. **ALS type and length**
 - a. RWY 16L distance coded CL: 900M layout (951M).
 - b. RWY 16R – LED type HAL ALSF II barrette CL 900M layout (816M).
 - c. RWY 34L - HAL ICAO compliant reduced length, 420M layout (415M length) ALSF II barrette CL array.
 - d. RWY 34R - HAL reduced length of 347M ALSF II barrette CL array.
 - e. FM the THR RWY 34R:
 - (i) Two side rows of barrettes are provided extending 260.1M.
 - (ii) The first side row barrette is located 28.9M.
 - (iii) A crossbar is provided at 144.5M that fills the gaps BTN the CL and the side row barrettes.
 - (iv) A crossbar is provided at 289M that extends on both sides of the CL barrettes to a distance of 15M FM the CL, the CL barrettes are at longitudinal intervals of 28.9M, with the first CL light 28.9M.
2. RWY edge LGT spacing: 07/25: 57M; 16L/34R: 59M; 16R/34L: 59M.
3. RWY THR LGT: green.
4. RWY end LGT: red.
5. Stop Bar lighting (LED type red with green lead on lights) operating H24 at all RWY/TWY INT.
6. RWY 16L/34R, 16R/34L and 07/25 HIRL, including THR and end lighting are LED type.
7. South west microwave stop bar barrier devices on 1.06M high frangible support posts installed within the obstacle restricted area either side of the following RWY/TWY intersections:
 - a. RWY 16R/34L, TWY A1, A6, B1, B2, B3, B4, B10, F, G and L.
 - b. RWY 07/25, TWY A, B South, C North, D, E, G1, G4 and Y.
 - c. RWY 16L/34R, TWY B10, T5 and T6.
8. On RWY 07/25 INT with RWY 16R/34L marked Pattern A RWY HOLD POINT and Stop Bar LGT.
9. The following IWI are in non-standard locations:
 - a. Left-hand side of RWY 16R, approximately 220M upwind from the RWY 16R THR.
 - b. Right-hand side of RWY 34L, approximately 270M upwind from the RWY 34L THR.
 - c. Right-hand side of RWY 07, approximately 180M upwind from the RWY 07 THR.
 - d. Left-hand side of RWY 25, approximately 310M upwind from the RWY 25 THR.
 - e. Left-hand side of RWY 16L, approximately 210M upwind from the RWY 16L THR.
10. RWY 07 illuminated WDI located on the Southern side of the RWY. For winds outside the range of NNE to ESE indications may be affected by terrain.
11. Wheel clearance over the THR for PAPI all RWY use CASA Manual of Standards special minimum of 6M over the THR. Wheel clearance over all RWY ends is not less than 6M.
12. RWY exit and rapid exit TWY lead off CL lighting ALTN green/yellow until clear of ILS areas. Rapid exit TWY 15M spacing; other TWY exits 7.5M spacing.
13. Heliport:
 - a. Helipad H1 circle has white omni-directional lights.
 - b. Helipad H1 has omni-directional white final approach lights located 110M FM the centre of helipad H1 on BRG 084DEG, 264DEG and 354DEG.
 - c. Green taxiway CL lights are provided at the heliport.
 - d. All lights have 3 stages of intensity.
 - e. An illuminated WDI is installed to the E of helipad H1.

14. LIGHTING COLOUR CODING**14.1. RWY 07 and RWY 25**

- 14.1.1. RWY edge lighting - THR to RWY end.
a. HIRL - white with last 600M yellow.

14.2. RWY 16R and RWY34L

- 14.2.1. Edge lighting THR to RWY end:
a. MIRL - intensity white.
b. HIRL - white with last 600M yellow.
- 14.2.2. Centre line lighting THR to RWY end:
a. White to 900M FM end, 900M-300M FM end alternating 2 red 2 white, 300M FM end red.

14.3. RWY 16L and RWY 34R

- 14.3.1. Edge lighting THR to RWY end:
a. HIRL - white with last 600M yellow.
- 14.3.2. Centre line lighting THR to RWY end:
a. White to 900M FM end, 900M-300M FM end alternating 2 red 2 white, 300M FM end red.

OTHER LIGHTING

- Standby PWR switchover time: 1 SEC during LVP: 15 SEC OT.
- TWY LGT: LED type green CL spaced 30M straight sections, 15M on curved sections.
Where RQ yellow intermediate hold point lighting and blue TWY edge and APN edge lights.
- Runway guard lights (LED type) flashing yellow at all RWY/TWY intersections.
- Standby PWR generators are alerted when LVP are imminent.
- LIOL for obstacles on the AD.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	SYDNEY CENTRE	124.55 (14)
ACD	SYDNEY DELIVERY	133.8
APP	BANKSTOWN APPROACH	125.8 (15)
APP	RICHMOND APPROACH	135.9 (16) 363.8
APP	SYDNEY APPROACH	124.4 (11)
	NORTH	
APP	SYDNEY APPROACH	128.3 (8)
	SOUTH	
APP	SYDNEY DIRECTOR E	125.3
APP	SYDNEY DIRECTOR W	126.1
APP	WALTON APPROACH	119.35 (17)
ATIS	SYDNEY ATIS (2)	118.55
COORD	SYDNEY COORDINATOR	127.6 (19)
DEP	SYDNEY DEPARTURES	123.0 (5)
	NORTH	
DEP	SYDNEY DEPARTURES	129.7 (4)
	SOUTH	
DEP	WALTON DEPARTURES	118.4 (18)
PRM	SYDNEY PRM E	133.95 (9)
PRM	SYDNEY PRM W	119.45 (10)
SMC	SYDNEY GROUND (3)	121.7 (12) 126.5 (13)
TFC	SYDNEY APPROACH	135.1 (20)
TWR	SYDNEY TOWER	120.5 (6) 124.7 (7)
VOLMET	AUSTRALIA	6676 (1) 11387 (1)
(1)	H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.	
(2)	AVBL by phone 02 9556 6566 or 02 9556 6567. MAX BCST 5 MIN.	
(3)	All ground checks to be carried out on 126.5. Callsign "Sydney Ground" when unable to contact ACD.	
(4)	Routes S, W & NW	
(5)	Routes N & E. Low level city coverage unreliable.	
(6)	RWYs 16R/34L, 07/25	
(7)	RWYs 16L/34R	
(8)	BTN 45NM S and 10NM N	

- (9) RWY 16L/34R
- (10) RWY 16R/34L
- (11) BTN 45NM N and 10NM S.
- (12) E of RWY 16R/34L.
- (13) W of RWY 16R/34L.
- (14) Class G in the Sydney basin.
- (15) BK CTA D and Western Sydney CTA D (excluding BK CTR).
- (16) RI CTR ABV 1,500FT.
- (17) WS APP CTR ABV 1,500FT outside 20NM SY associated with YSWs airport.
- (18) WS DEP CTR ABV 1,500FT outside 20NM SY associated with YSWs airport.
- (19) For CDM and related ground OPS.
- (20) ALTN for Sydney TMA frequencies as advised by ATC.

PRM FREQ is to be pilot monitored - not for pilot transmission. PRM FREQ not guarded outside HR of PRM OPS.

RADIO NAVIGATION AND LANDING AIDS

GBAS	G07A	CH 22790 (RWY07)	335748.0S	1511105.2E	(11)
GBAS	G16A	CH 21146 (RWY16R)	335748.0S	1511105.2E	(11)
GBAS	G16B	CH 20735 (RWY16L)	335748.0S	1511105.2E	(11)
GBAS	G25A	CH 21557 (RWY25)	335748.0S	1511105.2E	(11)
GBAS	G34A	CH 21968 (RWY34L)	335748.0S	1511105.2E	(11)
GBAS	G34B	CH 22379 (RWY34R)	335748.0S	1511105.2E	(11)
DME	IKN	109.3/ 30X (RWY34R)	335805.8S	1511129.1E	(1)
GP	IKN	332 (RWY34R)	335805.8S	1511129.3E	
ILS	IKN	109.3 (RWY34R)	335651.4S	1511116.1E	(10)
LOC	IKN	109.3 (RWY34R)	335651.4S	1511116.1E	
DME	IKS	109.5/ 32X (RWY16R)	335558.5S	1511015.8E	(12)
GP	IKS	332.6 (RWY16R)	335558.5S	1511016.1E	
ILS	IKS	109.5 (RWY16R)	335801.0S	1511052.8E	(7)
LOC	IKS	109.5 (RWY16R)	335801.0S	1511052.8E	
DME	ISN	110.1/ 38X (RWY34L)	335741.1S	1511053.4E	(6)
GP	ISN	334.4 (RWY34L)	335741.1S	1511053.0E	
ILS	ISN	110.1 (RWY34L)	335539.1S	1511016.0E	(8)
LOC	ISN	110.1 (RWY34L)	335539.1S	1511016.0E	
DME	ISS	110.9/ 46X (RWY16L)	335715.0S	1511127.3E	(2)
GP	ISS	330.8 (RWY16L)	335715.0S	1511127.0E	
ILS	ISS	110.9 (RWY16L)	335824.1S	1511140.2E	(3)
LOC	ISS	110.9 (RWY16L)	335824.1S	1511140.2E	
DME	ISW	109.7/ 34X (RWY25)	335622.9S	1511109.5E	(4)
GP	ISW	333.2 (RWY25)	335622.6S	1511109.4E	
ILS	ISW	109.7 (RWY25)	335638.9S	1510943.0E	
LOC	ISW	109.7 (RWY25)	335638.9S	1510943.0E	

DME	ISY	109.9/ 36X (RWY07)	335638.7S	1511002.8E	(5)
GP	ISY	333.8 (RWY07)	335638.5S	1511002.7E	
ILS	ISY	109.9 (RWY07)	335613.4S	1511131.2E	
LOC	ISY	109.9 (RWY07)	335613.4S	1511131.2E	
DME	SY	112.1/ 58X	335637.6S	1511057.4E	(9)

- (1) Antenna ELEV 24FT.
- (2) ELEV 31FT
- (3) Antenna ELEV 30FT. ILS RWY 16L Performance Classification II/D/3.
- (4) Antenna ELEV 34FT.
- (5) Antenna ELEV 26FT.
- (6) Antenna ELEV 25FT.
- (7) ILS RWY 16R Performance Classification II/D/3.
- (8) ILS RWY 34L Performance Classification II/D/3.
- (9) DME range limited to 90NM. Antenna ELEV 191FT.
- (10) ILS RWY 34R Performance Classification II/D/3.
- (11) Between 50NM and 23NM from the GBAS site, GLS course deviation information is advisory only. Within 23NM from the GBAS site, GLS course deviation information is approved for the conduct of an Instrument Approach.
- (12) Antenna ELEV 22FT.

LOCAL TRAFFIC REGULATIONS

1. All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
2. One ENG only permitted to start prior to push back. ACFT with rear mounted ENG 52M wingspan and above not permitted to start on taxiway where a building is located behind ACFT. ACFT permitted to start second ENG at commencement of tow forward or when LCA at tow bar disconnect point.
3. ACFT to use MNM PWR whilst entering and exiting aprons.
4. MD11 type ACFT under PWR not permitted to turn FM TWY C to TWY F or TWY B3 due to jet blast on apron.
5. Intersection DEP RWY 16R/34L FM TWY B3, B4 and B10 restricted to 36M MAX wingspan.
6. Access to corporate aviation apron restricted to 22,000KG MTOW/32M MAX wing span and BLW. ACFT in excess of this are to contact AD OPR prior to arrival for parking arrangements.
7. Pilots of ACFT larger than B737/A320 types to exercise caution at all TWY intersections when taxiing on TWY B between B3 and RWY 07/25 or on TWY A. When ACFT larger than B737/A320 types are holding short of the associated RWY, no ACFT larger than B737/A320 types should taxi behind due to insufficient wingtip clearance.
8. A340-600, A380-800, A350-1000, B777-300, Antonov AN124 and B748 ACFT OPR RESTR and specific taxi routes apply. Contact AD OPR on +61 2 9667 9824 for ACFT OPR RESTR document.
9. B777-300/ER and A350-1000 OPR RESTR. RWY 16L/34R is AVBL.
 - a. TWY routes:
 - (i) Landing RWY 16L vacate onto TWY T6, TWY T, TWY L, right turn onto TWY A.
 - (ii) Landing RWY 34R vacate onto TWY L, right turn onto TWY A or vacate onto TWY B10, TWY S, TWY L, right turn onto TWY A.
 - (iii) TKOF RWY 16L TWY A, TWY L, TWY S, right turn TWY B10 or continue on TWY L for DEP.
 - (iv) TKOF RWY 34R TWY A, TWY L, TWY T, TWY T6.
10. Pilots of 4 engine ACFT are to exercise caution when applying PWR on outboard ENG whilst taxiing.
11. When ACFT exiting RWY 34L on TWY A2, ACFT northbound on TWY A must hold short of TWY A2 at intermediate holding position marking and ACFT southbound on TWY A must hold short of TWY J or N of RWY 07/25.
12. Compass anomaly for turboprop ACFT on intersection DEP RWY 16R at TWY F East, B-3 and TWY G East.

-
13. Fixed wing ACFT landing or taking off must confine operations to sealed runways.
14. ACFT turning FM TWY G into TWY G2 use MNM PWR.
15. **TURNING**
- a. TWY A - heading N right turn onto TWY A2, TWY A3, TWY A4, TWY A5 not AVBL.
 - b. TWY A2 - No entry FM TWY A or TWY J.
 - c. TWY A2 - left turn onto RWY 16R/34L not AVBL.
 - d. TWY A2, TWY A3, TWY A4, TWY A5 - left turn onto TWY A not AVBL.
 - e. TWY B - heading S - right turn onto TWY B2 not AVBL.
 - f. TWY B - Turning into TWY B9 not AVBL.
 - g. TWY B - Turning west into TWY B3, TWY B4 and TWY B10 restricted to MAX 36M wingspan.
 - h. TWY B1 - W end - left turn onto TWY B2 not AVBL.
 - i. TWY B2 - W end - right turn onto TWY B1 not AVBL.
 - j. TWY B2 - heading E - left turns onto TWYs B and C not AVBL.
 - k. TWY B4 - right turn onto TWY G restricted to MAX 36M wingspan.
 - l. TWY B4 - heading N - left turn onto TWY C restricted to MAX 36M wingspan.
 - m. TWY B5 - right turn onto TWY B6 not AVBL.
 - n. TWY B5 - left turn onto RWY 16R/34L not AVBL.
 - o. TWY B6 - left turn onto TWY B5 not AVBL.
 - p. TWY B7 - left turn onto TWY K not AVBL.
 - q. TWY B7 - right turn onto TWY B8 not AVBL.
 - r. TWY B7 - turning onto TWY B9 not AVBL.
 - s. TWY B8 - Turning into TWY B7 and TWY B9 not AVBL.
 - t. TWY B9 - Turning into TWY B7 and TWY B8 not AVBL.
 - u. TWY C - heading S - right turn onto TWY B2 not AVBL.
 - v. TWY C - heading N - right turn onto TWY B4 restricted to MAX 36M wingspan.
 - w. TWY DOM2 - heading N - right turn onto TWY B4 not AVBL.
 - x. TWY DOM2 - left turn onto TWY G restricted to MAX 36M wingspan.
 - y. TWY G - left turn onto TWY B4 restricted to MAX 36M wingspan.
 - z. TWY G - right turn onto TWY DOM2 restricted to MAX 36M wingspan.
 - A. TWY L, TWY T1, TWY T2, TWY T3 and TWY T5 - left turn onto TWY T not AVBL.
 - B. TWY T - heading N right turn onto TWY L, TWY T1, TWY T2, TWY T3 and TWY T5 not AVBL.
 - C. TWY T1 - turning onto TWY U not AVBL.
 - D. TWY T1 - is not AVBL to ACFT exiting RWY 34R.
 - E. TWY T1 - is not AVBL to ACFT on TWY Tango.
 - F. TWY T3 and TWY T4 right turn onto RWY 16L/34R not AVBL.
 - G. TWY T4 - turning onto TWY T5 not AVBL.
 - H. TWY T4 - left turn onto TWY T6 not AVBL.
 - I. TWY T5 - turning onto TWY T4 not AVBL.
 - J. TWY T6 - right turn onto TWY T4 not AVBL.
 - K. TWY U1 - turning onto TWY U not AVBL.
 - L. RWY 16R - heading S right turn onto TWY A2 not AVBL.
 - M. RWY 16L - heading S right turn onto TWY T5 not AVBL.
 - N. RWY 16L - heading S right turn onto TWY L, TWY T2 and TWY U1 not AVBL except T2 HJ only to non-jet ACFT with 30M MAX wingspan.
 - O. RWY 34R - left turn onto TWY T4, TWY T5 or TWY T3 not AVBL.
 - P. RWY 34L - right turn onto TWY B5 not AVBL.
16. **TAXIWAY RESTRICTIONS**
- a. TWY B and TWY C, BTN RWY 07/25 and TWY B10 not AVBL to A380 ACFT due to weight limitations.
 - b. TWY T1 restricted to 52M MAX wingspan.
 - c. TWY B5 and B6 not AVBL to ACFT ABV 22,000KG MTOW. MAX tyre pressure 1,400kPa.
 - d. TWY C BTN TWY B2 and TWY F is restricted to ACFT with MAX 52M wingspan when an ACFT with 65M or greater wingspan operating on TWY B BTN TWY B2 and TWY F.
-

- e. TWY C BTN TWY F and TWY B4 speed restriction MAX 20KTS applies to all ACFT ABV 52M wingspan.
 - f. TWY C BTN TWY F and TWY B4 restricted to 60.4M MAX wingspan.
 - g. TWY C2 restricted to MAX 36M wingspan.
 - h. TWY DOM2 N of TWY B4 restricted to MAX 36M wingspan.
 - i. TWY DOM3 restricted to MAX 36M wingspan.
 - j. TWY F west restriction - B747/B767 type ACFT - TWY not AVBL for INT DEP or taxiing east towards RWY 16R/34L. ACFT under tow permitted.
 - k. TWY K run-up bay RESTR to MAX 23M wingspan.
 - l. TWY T2, T3, T5, U restricted to ACFT with less than 18M wheel base and MAX 36M wingspan due 15M wide TWY.
 - m. OPS on DOM 1A at night when VIS is less than 1,200M are not permitted.
 - n. When an A380 is on TWY B2, TWY B1 restricted to ACFT MAX wingspan 52M.
 - o. ACFT entering and exiting APN using TWY INTL 1 and INTL 2 are RQ to use MNM PWR.
 - p. Due to jet blast hazard to OPS on Bays 11 and 12, ACFT with wingspan greater than 52M entering Bays 8, 9, 10, 24 and 25 must not apply breakaway or greater thrust.
 - q. ACFT with wingspan greater than 52M that have pushed back from Bay 25 and RQ a return to bay will be allocated a new bay and will not be permitted to return to Bay 25.
 - r. TWY H not AVBL for A380 ACFT when RWY 07/25 in use.
 - s. TWY H not AVBL during the following:
 - (i) RWY 07 arrivals.
 - (ii) RWY 25 arrivals when VIS is less than 5,000M or cloud base less than 1,500FT.
 - t. ACFT travelling westbound on TWY L must not proceed beyond the intermediate holding point short of TWY C until contacting Ground on 121.7 MHz for clearance.
17. For standard taxiway routes refer to AIP DAP.
18. Simultaneous access to INTL bays 9, 10 and 24 by all ACFT types not permitted.
19. INT DEP RWY 16L FM TWY T1 not AVBL.
20. INT DEP RWY 34R FM TWY T3 not AVBL.
21. DOM1A restricted to MAX 28.5M wingspan. Special PROC apply. OPS WI DOM1A require prior approval CTC Qantaslink movements 134.525.
22. Qantas Bays 64 to 70 use of pilot stop line permitted only when marshaller not AVBL during thunderstorm activity.
23. To prevent jet blast issues on opposite ACFT parking bays where visual docking guidance system or marshaller is not AVBL, ACFT must hold on the taxiway/taxilane until visual docking guidance system or marshaller is AVBL before proceeding onto bay.
24. **U-TURNS ARE NOT PERMITTED AS FOLLOWS:**
 - a. RWY 16L/34R all ACFT.
 - b. RWY 16R/34L ACFT greater than 36M wingspan.
 - c. RWY 07/25 ACFT greater than 36M wingspan.
25. When B747-8 is parked on International ACFT PRKG Bay 25 and an A380-800 is arriving or departing International ACFT PRKG Bay 24 wingtip clearance is reduced by 0.9M from 7.5M to 6.59M.
26. If the visual docking guidance system on International ACFT PRKG Bay 24 is not serviceable and ACFT PRKG Bay 25 is occupied by a B748 ACFT, A380 ACFT will not be permitted to use ACFT PRKG Bay 24. If the visual docking guidance system on International ACFT PRKG Bay 25 is not serviceable and ACFT PRKG Bay 24 is occupied by a A388 ACFT, B748 ACFT will not be permitted to use ACFT PRKG Bay 25.

FLIGHT PROCEDURES

1. ESTIMATED TRAFFIC DELAYS

- 1.1. Estimated airborne traffic delays for ARR ACFT may be expected due to terminal area traffic density and/or single RWY operations:

DLY: 20MIN

EXC 2100-0100 UTC MON-FRI (1HR earlier during HDS), all ACFT that do not meet the requirements for precision RWY monitor (PRM) OPS: 30 MIN.

Note 1: Actual holding times may differ from holding estimates. Historical data on actual holding is available from the NOMC.

Note 2: Outside the hours of daylight saving, FLT SKED BTN 2000-2059 UTC that are earlier than SEMAP arrival fix time - 30 MIN may expect further DLA associated with curfew restrictions.

2. **ATC TRAFFIC MANAGEMENT SPEED**

- 2.1. When not on a SID or STAR (including vectoring) - ACFT ARR or DEP SY must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

- 2.2. At Sydney, a go-around from a visual approach in VMC must be carried out:

- a. in accordance with the GLS or ILS missed approach procedure for the RWY the ACFT is using, or
- b. as directed by ATC.

- 2.3. Circling APCH PROC to RWY 16L/34R at night is not permitted.

3. **AIR TRAFFIC FLOW MANAGEMENT PROCEDURES**

3.1 **Slot Management Scheme**

Sydney Slot Management Scheme is applicable to all airline and ACFT operators using Sydney Airport. All flights operating into and out of Sydney must obtain an Airport Coordination Limited (ACL) slot in accordance with *AIP ENR 1.9*.

3.2 **Ground Delay Program (GDP) Inbound**

Sydney GDP is run on demand and promulgated by NOTAM BTN 2000-1300 UTC (1HR earlier during HDS). GDP is applicable to all fixed wing, non-priority flights departing from all Australian domestic airports, arriving at Sydney. Flights to Sydney during the operation of GDP must obtain an ACL slot and Calculated Off Blocks Time (COBT) in accordance with *AIP ENR 1.9*. The COBT can be obtained through their company or the National Operations Management Centre on 1800 020 626[^]. In addition, flights departing from Bankstown or Camden for a landing in Sydney must contact ATC on 02 9556 6515 prior to starting engines.

3.3. **Tactical Slot Confirmation for Arrivals from YSBK, YSCN, YSHL**

Flights departing from Bankstown, Camden or Shellharbour for a landing in Sydney must contact SY Flow on 02 9556 6515 prior to starting engines.

3.4. **Airport Collaborative Decision Making (A-CDM)**

Sydney A-CDM is run continuously H24. A-CDM is applicable to all IFR fixed wing non-priority flights departing Sydney, who are required to comply with A-CDM in accordance with procedures outlined in *AIP ENR 1.9*. Compliance with a Target Off Blocks Time (TOBT) is required. All flights departing Sydney Airport are required to submit a TOBT through a local Designated Ground Handling Agent (DGHA) or local Fixed Base Operator (FBO). Further enquires can be made via your company or designated ground handler or Sydney Airport. Contact on +61 2 9667 9921 (option 6).

3.5. **Start and Push Back Procedures**

- a. Departing aircraft with ground power must contact Sydney Coordinator FREQ 127.6 MHz ready for pushback or start. Aircraft will be instructed to stand by for Ground on 121.7 MHz or 126.5 MHz once compliant with any applicable ATFM procedures. Do not contact Ground, monitor only. Ground initiate contact and approve pushback or start clearance when able.
- b. Departing aircraft without ground power are approved to start at own discretion, advising Sydney Coordinator FREQ 127.6 MHz when start complete. Aircraft for pushback will be instructed to stand by for Ground 121.7 MHz or 126.5 MHz once compliant with any applicable ATFM procedures. Do not contact Ground, monitor only. Ground initiate contact and approve pushback when able. Aircraft for taxi from bay will be instructed to contact Ground for taxi clearance once compliant with any applicable ATFM procedures. Ground will approve pushback or taxi when able.

3.6 **GDP Outbound**

After receiving Airways Clearance, all aircraft subject to GDP are required to report when ready for pushback/taxi on Sydney Coordinator FREQ 127.6 MHz. If required, Sydney Coordinator will check compliance with COBT and apply relevant ATFM procedures. Sydney Coordinator will advise aircraft to monitor Ground on 121.7 MHz or 126.5 MHz as appropriate. Do not contact Ground, monitor only. SMC will initiate contact with the aircraft when able to process.

4. **PRECISION RUNWAY MONITOR (PRM) OPERATIONS**

- 4.1. When PRM OPS is nominated on the ATIS, pilots must advise ATC prior to 120DME SY (or on first CTC with ATC if departing WI 120DME SY) if unable to participate.

Note 1. Refer to DAP EAST SY PRM User Instructions.

Note 2: During PRM OPS, PRM-capable ACFT will be afforded priority over ACFT that are not PRM capable.

Note 3: A serviceable Mode S transponder is required to participate in PRM operations.

5. **RADIO FAILURE PROCEDURES - INDEPENDENT VISUAL APPROACHES**

5.1 In the event of a radio failure (or blocked FREQ) on the DIRECTOR FREQ, pilots must comply with the following actions:

a. ON PILOT NAVIGATION (IF VISUAL)

SQUAWK 7600 immediately.

Track to intercept final at a MAX 30DEG prior to the IAF of the nominated RWY.

DO NOT PASS THROUGH FINAL FOR THE NOMINATED RWY.

b. ON A RADAR ASSIGNED HEADING

SQUAWK 7600.

Maintain assigned vector for no longer than 2 minutes. Track as required to join final for the nominated RWY at a MAX 30DEG intercept to commence final.

DO NOT PASS THROUGH FINAL OF THE NOMINATED RWY.

5.2 Pilots should attempt to contact the alternate DIRECTOR FREQ (126.1/125.3). Attempts should also be made on the TWR FREQ.

6. **ARRIVAL PROCEDURES**

6.1. By day, ATC may use 2,400M RWY separation between ACFT ARR to RWY 16R/34L. Both ACFT may occupy the RWY during application of the standard.

6.2. ACFT up to and including A330/B787/B772 type may be processed to land on either of the parallel RWY 16L/R or 34L/R.

6.3. ACFT landing RWY 16R RQ approval to vacate to the left on TWY F, B3 and B4.

6.4. ACFT landing RWY 16L/34R are to remain on TWR frequency 124.7 until W of TWY S and then contact Ground frequency 121.7.

6.5. ACFT landing RWY 34R and vacating TWY T2 are to TAX via TWY U and TWY U1 unless otherwise advised.

6.6. ACFT landing RWY 07/25 RQ approval to vacate on TWY C.

6.7. All ARR ACFT are required to advise PRKG bay on first contact with SY GND.

7. **DEPARTURES**

7.1. Departures shall normally be cleared in the order in which they are ready for takeoff, except that deviations may be made from this order to facilitate the maximum number of departures with the least average delay.

a. Intersection DEP by jet ACFT on RWY 34L are NOT PERMITTED, except for medical priority flights. In the event TWY A6 is not available for DEP due TWY or RWY availability, TWY A5 may be used for jet ACFT DEP on RWY 34L.

b. RWY 16R for DEP to S, W and NW, and DEP FM the INTL terminal.

c. RWY 16L for DEP to N and E.

d. RWY 34L for DEP to the W, NW and non-jets to the S, and DEP FM the INTL terminal.

e. RWY 34R for DEP to the N and jets to the S.

Note 1: ACFT which operationally require to use RWY 16R/34L or RWY 07/25 must notify ATC at Clearance Delivery Stage.

Note 2: DEP ACFT up to and including A330/B787/B772 type may request or be offered DEP from RWY 16L/34R at Clearance Delivery Stage.

Note 3: JET DEP to South may be assigned RWY 16L for traffic management purposes.

8. **GROUND CONTROL**

8.1 Unless directed otherwise by ATC, the following taxiway routes apply:

TWY B - northbound

TWY C - southbound

TWY B10 - eastbound between TWY C and RWY 16L/34R

TWY L - westbound between RWY 16L/34R and TWY B

8.2 **Tug Operations**

All tugs requesting clearance for pushback and/or tow, must make initial contact with Sydney Coordinator on 127.6 MHz.

Sydney Coordinator will advise the tug to stand by for Ground on 121.7 MHz or 126.5 MHz as appropriate.

Do not contact Ground, monitor only.

SMC will initiate contact with the tug when able to process their operation.

8.3 **Repositioning Aircraft**

All aircraft requesting repositioning must make initial contact with the Sydney Coordinator on 127.6 MHz.

Sydney Coordinator will advise the repositioning aircraft to stand by for Ground on 121.7 MHz or 126.5 MHz as appropriate.

Do not contact Ground, monitor only.

SMC will initiate contact with the repositioning aircraft when able to process their operation.

8.4 **Engine Runs**

All aircraft requiring engine runs must make initial contact with the Sydney Coordinator on 127.6 MHz, and advise the relevant engine run approval number (Refer *Additional Information Note 5*).

Sydney Coordinator will advise the aircraft to stand by for Ground on 121.7 MHz or 126.5 MHz as appropriate.

Do not contact Ground, monitor only.

SMC will initiate contact with the aircraft when able to process the engine run.

9. **LOW VISIBILITY**

9.1 **Operations**

9.1.1 For CASA approved operators, RWY 16R/34L and 16L/34R are capable of supporting takeoffs with an RVR of not less than 125M.

9.1.2 For CASA approved operators, RWY 07/25 is capable of supporting takeoffs with an RVR of not less than 350M.

9.2. **Procedures**

9.2.1 Preparations for the activation of Low Visibility Procedures (LVP) are commenced when visibility has reduced to 2,000M. This ensures that the LVP are in force at or just prior to the visibility reducing to 800M.

9.2.2 When visibility reduces to 2,000M or below and/or observed cloud base is BKN or OVC at or below 600FT, ATC will protect the ILS by using the CAT I/II RHP at TWY A and CAT I RHP at TWY T.

9.2.3 All aircraft required to depart from the full length of the assigned runway.

9.2.4 Aircraft under tow during LVP require SYD Safety Vehicle escort. Contact Car 2 on 02 9667 9824 to request Safety Vehicle attendance.

9.2.5 Any pilot unsure of their position whilst operating on the Manoeuvring Area must Hold Position (STOP) and immediately advise ATC.

9.2.6 Radio failure - Aircraft must hold position and await further guidance from a Follow Me vehicle.

9.2.7 Instrument RVR provided at touchdown zone, midpoint zone and end zone for each RWY.

9.2.8 ATC uses Advanced Surface Movement Guidance Control System (A-SMGCS) to monitor ACFT and vehicles on the Manoeuvring Area.

9.2.9 If A-SMGCS is Unserviceable during LVP:

- a. ATC will further restrict aircraft and vehicles access to and movements on the Manoeuvring Area.
- b. Position reporting procedures will be implemented as required by ATC.

9.2.10 **A380 ACFT during Low Visibility**

- a. During LVP the following TWY RESTR apply to A380 ACFT:
 - (i) A380 ACFT to DEP FM TWY A1 and A6 when OPR RWY 16R/34L.
 - (ii) TWY F not AVBL for INT DEP.
 - (iii) A380 ACFT under TOW not permitted to cross RWY 16R/34L.
- b. Additional RESTR apply to A380 ACFT during LVP as the ILS critical and sensitive areas are obstructed by A380 ACFT tail when holding at RWY hold points. For INFO on the RESTR CTC AD OPR on 61 2 9667 9888 (BH) or 61 2 9667 9824 (24HR) for ACFT OPR RESTR DOC.
- c. Refer to *AIP DAP* for Aerodrome Ground Movement Chart.

10. **AIRWORK IN THE SYDNEY TERMINAL AREA**

10.1 Pilots intending to conduct airwork within 45NM of YSSY must obtain approval from Sydney ATC, PH 02 9556 6853[^]. Survey or airwork maps should be submitted at least 30MIN prior to making contact. Survey flights are subject to TFC and ATC workload. Operational restrictions can be expected, including possible delays.

10.2 Helicopter banner towing is not permitted to or from the aerodrome.

10.3 Flight notification acceptance by radio is subject to ATS workload. VFR operations in Sydney Class C airspace must flight plan prior to departure. Failure to do so may result in lengthy delays.

11. TRAINING FLIGHTS

- 11.1 Training is not permitted at SY except as set out in the following paragraphs.
- 11.2 At any time, ARR Scheduled ACFT may be permitted to carry out a PILS or LOC APCH at the conclusion of each leg of flights to SY, provided that:
- the pilot in command has stated that the APCH is RQ for licence renewal purposes; or
 - the ACFT lands straight ahead and does not use a RWY other than the RWY currently in use, merely for the purpose of carrying out the practice.
- 11.3 All training is at the discretion of ATC as TFC and workload permit.
- 11.4 ILS training is also AVBL at RI. See separate entry for conditions.
- 11.5 Flying Operations Inspector test and check flights are permitted on any of the aids in the SY Terminal Area, subject to appropriate warning and ATC TFC handling capacity.
- 11.6 No helicopter training is permitted to or from the heliport.
- 11.7 Airline companies may carry out ACFT checking and testing flights, other than under asymmetric COND, but these will be limited to 2 circuits by any company in one day.
- 11.8 MIL ACFT on PILS or LOC APCH must intercept the LOC at or ABV 3,000FT.

12. LOW LEVEL POLICE HELICOPTER OPERATIONS

- 12.1 Random low level police HEL OPS will occur in Sydney Class C Airspace.
- 12.2 HEL will operate outside an exclusion area based on each RWY THR at SY and not ABV 700FT.
- 12.3 Mutual traffic information will not be passed BTN police HEL and fixed wing ACFT arriving and departing SY unless ATC considers TFC information is REQ.
- 12.4 TFC information will be passed to police HEL about AD HOC OPS and other HEL in SY Class C Airspace.
- 12.5 Police HEL will be responsible for sighting and avoiding TFC or moving away FM the area of conflict.

13. HELICOPTER GROUND OPERATIONS

- 13.1 Operating procedures helicopter facility:
- Helipad H1 restricted to 16.4M rotor diameter and BLW.
 - Helipad H2 and company parking pads restricted to 14.7M rotor diameter and BLW.
 - HEL with rotor diameter greater than 14.7M will require special parking position. HEL OPR to contact AD OPR for parking position. Minimum 24HR notice.
 - ATC are required to apply wake turbulence separation standards between simultaneous operations on RWY 07/25 and helipad H1.
 - When parked, no part of a helicopter shall be within 3M of a marked roadway.
 - Helicopter PRKG on paved areas is restricted to marked PRKG positions only.
- 13.2 **HJ Operations**
- 13.3 HEL shall arrive and depart H1 as directed by ATC. If H1 is unsuitable for safety reasons, or due to extended occupancy of H1, HEL with MAX rotor diameter of 14.7M may use H2 or company parking positions subject to the following requirements:
- INBOUND.** Pilots should advise SY TWR (FREQ 120.5 or 124.7) of their intended landing position (if not H1) prior to descent.
 - OUTBOUND.** Pilots should advise current parking position and intended departure position (if different) on first contact with Sydney Tower (FREQ 120.5 or 124.7). Movements to and from company parking positions shall be conducted only by pilots employed by or otherwise operating under the OPS manual of a helicopter organisation based at Sydney Airport and who are experienced in such operations. HEL to remain on TWR (AD CTL) FREQ when DEP SY until instructed to call on a discrete FREQ.
- 13.4 **HN Operations**
- INBOUND** HEL required to use H1 and TAX to parking position via H2. For final approach omni directional LGT located 110M FM centre H1 on bearing 084 DEG MAG, 264 DEG MAG, 354 DEG MAG.
 - OUTBOUND** HEL required to TAX via H2 for DEP FM H1.
- 13.4.1 TWY for air taxiing HEL FM H1 to RWY 07/25 AVBL H24.
- 13.4.2 Access to corporate aviation apron as approved by AD OPR, restricted to wheeled HEL and BLW 14.7M rotor diameter. Ground taxiing via the 30M MAX wing span TWY DOM5.
- 13.4.3 **Parking Facilities**
- H3 - Public. AVBL for short term PRKG - MAX 2HR limit.
- H4/H5/H6/H7/H8/H9/H10 - Leased.
- Due to security restrictions, access to and from area must be arranged with local FBO.

13.4.4 No helicopter OPS permitted near INTL or DOM terminals or on INTL or DOM aprons.

14. **HELICOPTER ROUTE OPERATIONS**

General

14.1 Procedures are promulgated using coded designators and clearances for routes regularly flown by HEL operating in SY terminal airspace. The route coded clearances and operating requirements are as identified hereunder:

14.2 HEL routes are to be considered as access lanes for the purpose of *CASR 91.265(4)(g)* and *91.267(3)(j)*.

14.3 **Coded Clearances**

14.4 The routes have been given geographical designators and a direction which must be used in all radio communication. Clearance via a specific route authorises a pilot to fly the route at the altitudes specified.

14.5 The clearances are used for flights both inbound to and outbound FM SY Airport, or within designated geographical areas within the Control Zone.

Note 1: The clearance contains route and altitude instructions. If landing at SY Airport, a frequency transfer and clearance limit are specified.

Note 2: If the instruction "MAINTAIN..." is included in the clearance, the descent clearance included within the designated clearance is cancelled.

Note 3: ATC may amend the altitudes specified.

14.6 **Coded Route Clearances and Operating Requirements**

BONDI 5 - SOUTHBOUND

At ALT not above 1,000FT TR from Sydney Heads E of the coast to Ben Buckler (northern headland of Bondi Beach); descend to 500FT by Ben Buckler; thence TR E of the coast to Long Bay headland (southern headland of Maroubra Beach); ALT 500FT. If intending to land at SY Airport contact SY Tower 124.7 approaching Maroubra Beach.

BONDI 5 - NORTHBOUND

TR E of the coast from Long Bay headland (southern headland of Maroubra Beach) to Ben Buckler (northern headland of Bondi Beach); ALT 500FT; thence climb to not above 1,000FT and remain E of the coast to Sydney Heads.

Special Procedures for Use With BONDI 5

The following should be noted in relation to BONDI 5:

A. The route is designated principally for single engine HEL. Delays may occur when RWY 07 is in use for DEP, or RWY 25 for ARR at YSSY Airport; and

B. The route is not AVBL in either direction when RWY 16 PRM approaches are being conducted at YSSY Airport; and

C. In addition to the ATC FREQ, pilots should maintain a listening watch on 120.8 for information on traffic operating on route VICTOR ONE (V1).

ROSEHILL 5 - INBOUND

TR FM Rosehill Racecourse to Rookwood Cemetery, then via the Cooks River and Canterbury Racecourse to the Novotel (Sydney International Airport) Hotel; ALT 1,000FT. At Canterbury Racecourse descend to 500FT.

Clearance Limit: Novotel (Sydney International Airport) Hotel.

Contact TWR 120.5 at Canterbury Racecourse.

ROSEHILL 5 - OUTBOUND

TR via the Novotel (Sydney International Airport) Hotel and the Cooks River to Rookwood Cemetery, then direct to Rosehill Racecourse; ALT 1,000FT. FREQ change at Rookwood Cemetery approved, control service terminated at Rookwood Cemetery.

HARBOUR BRIDGE 5 - INBOUND (for arrival from R407B)

TR South Pylon of the Harbour Bridge to Darling Harbour thence Central Railway thence via the railway line to Redfern Railway Station, thence via Erskineville Oval; ALT 1,000FT; thence DCT to The Stamford on descent to 500FT.

Clearance Limit: The Stamford.

Contact TWR 124.7 at Erskineville Oval.

HARBOUR BRIDGE 5 - OUTBOUND (for entry to R407B)

TR via The Stamford to Erskineville Oval thence via Redfern Railway Station and the railway line to Central Railway thence DCT to Darling Harbour thence over water to South Pylon of the Harbour Bridge to enter R407B; ALT 1,000FT. FREQ change at Central Railway approved, control service terminated at Central Railway.

BARRACKS 5 - INBOUND

TR FM Rushcutters Bay to Victoria Barracks; ALT 1,000FT; then via the SCG to Moore Park Supa Centre (corner Dacey Avenue and South Dowling Street), thence E of South Dowling Street and Southern Cross Drive via Gardeners Road thence Wentworth Avenue overpasses on descent to 500FT.

Clearance Limit: Road junction overpass at the intersection of Southern Cross Drive and Wentworth Avenue.

Contact TWR 124.7 at the SCG.

BARRACKS 5 - OUTBOUND

TR E of Southern Cross Drive and South Dowling Street to the Moore Park Supa Centre (corner Dacey Avenue and South Dowling Street); ALT 1,000FT, thence via Victoria Barracks to Rushcutters Bay. FREQ change at Rushcutters Bay approved, control service terminated at Rushcutters Bay.

MAROUBRA 5 - INBOUND

TR FM Maroubra Beach via Fitzgerald Avenue to Bunnerong Road (Heffron Park) to East Gardens Shopping Centre; ALT 1,000FT (climb over water), thence N of Wentworth Avenue to the intersection with Southern Cross Drive on descent to 500FT.

Clearance Limit: Road junction overpass at the intersection of Wentworth Avenue and Southern Cross Drive.

Contact TWR 124.7 at Heffron Park.

MAROUBRA 5 - OUTBOUND

TR via Southern Cross Drive and N of Wentworth Avenue to East Gardens Shopping Centre; ALT 1,000FT, thence via Fitzgerald Avenue to Maroubra Beach. E of the coast descend to 500FT. FREQ change at Maroubra Beach approved if entering V1, control service terminated at Maroubra Beach if entering V1.

CAPE BANKS 5 - INBOUND

TR FM Cape Banks, thence via the eastern shore of Botany Bay to the Port Botany Container Terminal; ALT 500FT.

Clearance Limit: Container Terminal.

CAPE BANKS 5 - OUTBOUND

TR via the road junction overpass at the intersection of General Holmes Drive and Foreshore Road, thence via the Mill Stream and the eastern shore of Botany Bay to Cape Banks; ALT 500FT. FREQ change at Cape Banks approved, control service terminated at Cape Banks.

WANDA 5 - INBOUND

TR FM Wanda Beach, thence DCT to Towra Point to Dolls Point, thence via the W shore of Botany Bay to ABM the Brighton Novotel, remaining over water; ALT 500FT.

Clearance Limit: The Brighton Novotel.

WANDA 5 - OUTBOUND

TR via the western shore of Botany Bay to Dolls Point, remaining over water at all times, thence Towra Point to Wanda Beach; ALT 500FT. FREQ change at Wanda Beach approved, control service terminated at Wanda Beach.

15. **HELICOPTER INBOUND/OUTBOUND PROCEDURES**

15.1 The procedures promulgated in *AIP ENR 1.1* for OPS within HEL access corridors apply.

15.2 **Inbound to Sydney Airport:**

- a. Contact ATC approximately five (5) minutes before the prescribed entry gate and advise intentions, e.g. "HOTEL ECHO LIMA, REQUEST ROSEHILL 5 INBOUND"; and
- b. For the following designated routes, pilots must contact SYDNEY CENTRE 124.55:
 - BONDI 5 - SOUTH or NORTHBOUND
 - ROSEHILL 5 - INBOUND
 - HARBOUR BRIDGE 5 - INBOUND
 - BARRACKS 5 - INBOUND
 - MAROUBRA 5 - INBOUND

Note 1: SYDNEY CENTRE will direct the pilot to call the appropriate APP or DEP frequency for clearance.

Note 2: Contact TWR at the frequency transfer point, unless advised otherwise.

- c. For CAPE BANKS 5 INBOUND, pilots must contact TWR 124.7 for airways clearance.
- d. For WANDA 5 INBOUND, pilots must contact TWR 120.5 for airways clearance.

15.3 **Outbound FM Sydney Airport:**

Contact Sydney Delivery 133.8, advise intentions and request clearance for designated routes:

ROSEHILL 5 - OUTBOUND
HARBOUR BRIDGE 5 - OUTBOUND
BARRACKS 5 - OUTBOUND
MAROUBRA 5 - OUTBOUND
CAPE BANKS 5 - OUTBOUND
WANDA 5 - OUTBOUND

Note: Receipt of this clearance does not constitute a takeoff clearance.

If DEP FM Airport Heliport, contact TWR 120.5 for takeoff clearance for:

ROSEHILL 5 - OUTBOUND
WANDA 5 - OUTBOUND

or contact TWR 124.7 for takeoff clearance for:

HARBOUR BRIDGE 5 - OUTBOUND
BARRACKS 5 - OUTBOUND
MAROUBRA 5 - OUTBOUND
CAPE BANKS 5 - OUTBOUND.

Note: FM elsewhere on the airport contact SYDNEY GND 121.7.

15.4 **Terminal Airspace Sectors for Helicopter Operations:**

- a. To reduce FREQ congestion, the following six commonly used geographically defined areas are designated with lateral and vertical limits:

- (i) The CITY EAST SECTOR defined as the area bounded by Rushcutters Bay, Sydney Cricket Ground, Southern pylon Sydney Harbour Bridge, Fort Denison, Clark Island, Rushcutters Bay. ALT - not ABV 2,000FT.

Note: "CITY EAST SECTOR" means that the ACFT is cleared to operate within the lateral boundaries of the CITY EAST Sector, not ABV 2,000FT, in compliance with CASR 91.265(4)(g) and 91.267(3)(j).

- (ii) The CBD Sector: defined as the area bounded by Rushcutters Bay, Sydney Cricket Ground, Cleveland Street, Regent Street, George Street, Southern pylon Sydney Harbour Bridge, Fort Denison, Clarke Island, Rushcutters Bay. ALT - not ABV 2,000FT.

Note: "CLEARED CBD SECTOR" means that the ACFT is cleared to operate (and leave and re-enter CTA) within the boundaries of the CBD Sector, not ABV 2,000FT, in compliance with CASR 91.265(4)(g) and 91.267(3)(j).

- (iii) The NORTH HARBOUR Sector: defined as the area NE of a line Roseville Bridge, Sydney Harbour Bridge North Pylon then via the northern shore of Sydney Harbour to Middle Head then Manly, coincident with R407B. ALT - not ABV 1,500FT.

Note: "CLEARED NORTH HARBOUR SECTOR" means that the ACFT is cleared to operate within the lateral boundaries of the NORTH HARBOUR Sector, not ABV 1,500FT, in compliance with CASR 91.265(4)(g) and 91.267(3)(j).

- (iv) The NORTHERN BEACHES Sector: defined as the area east of a line Spit Bridge, Sydney Harbour Bridge North Pylon then via the northern shores of Sydney Harbour to Middle Head then Manly coincident with R407B. ALT - not ABV 1,500FT.

Note: "CLEARED NORTHERN BEACHES SECTOR" means that the ACFT is cleared to operate (and leave and re-enter CTA) within the lateral boundaries of the NORTHERN BEACHES Sector, not ABV 1,500FT, in compliance with CASR 91.265(4)(g) and 91.267(3)(j).

- (v) The SOUTH HARBOUR Sector: defined as the area bounded by lines joining Sydney Harbour Bridge North Pylon, Sydney Harbour Bridge South Pylon, then via the southern shoreline of Sydney Harbour to South Head then Manly to Middle Head, then via the northern shoreline of Sydney Harbour to Sydney Harbour Bridge North Pylon. ALT - not ABV 1,500FT.

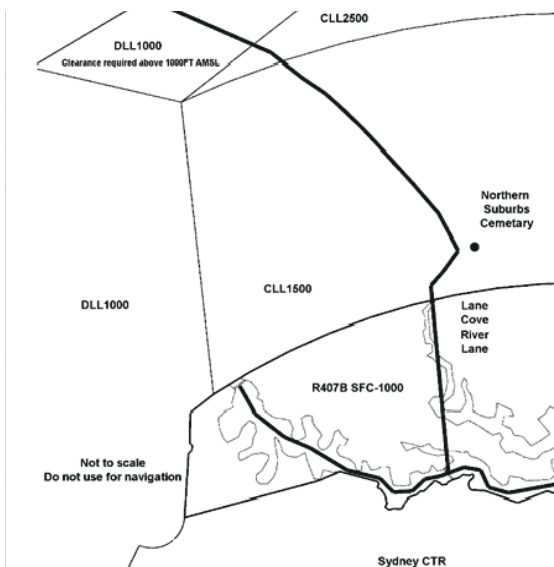
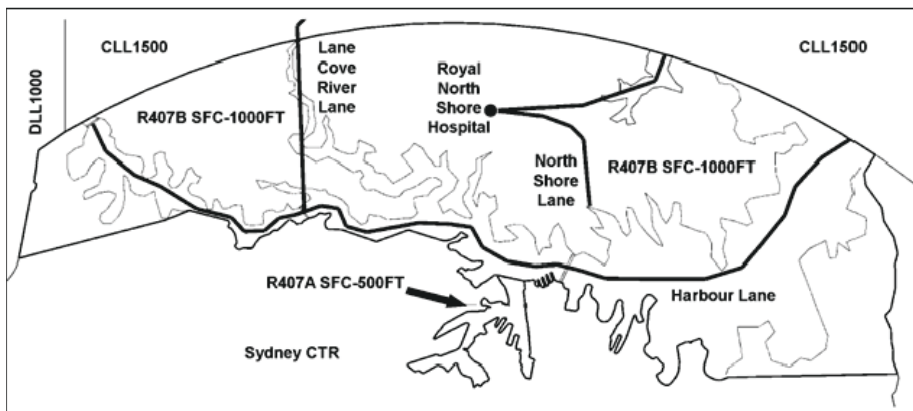
Note: "CLEARED SOUTH HARBOUR SECTOR" means that the ACFT is cleared to operate within the lateral boundaries of the SOUTH HARBOUR Sector, not ABV 1,500FT, in compliance with CASR 91.265(4)(g) and 91.267(3)(j).

- b. HEL (to/FM SY Airport or overfly SY Airport) not cleared via 'coded' routes will normally be cleared as follows:

15.5 When RWY 16 or RWY 34 are in use:

- a. via East Lakes Golf Course FM the NE or SE quadrant; or
b. via St George Hospital FM NW or SW quadrant;

- 15.6 When RWY 07 or RWY 25 are in use:
- via SCG in the NE quadrant; or
 - via BBH in the SE quadrant; or
 - via CBY in the NW quadrant; or
 - via GRB in the SW quadrant.
16. **OPS IN R407 A AND B (Refer associated diagram)**
- GENERAL**
- 16.1 R407 is established for use by SEAPLANES and HEL with MTOW not above 2,500KG; or have been shown by tests of a standard acceptable to the CASA/Airservices Australia, to not exceed the noise limits specified in:
- (for HEL) ICAO Annex 16 Volume 1 Chapter 8 for a HEL of 2,500KG MTOW, or Chapter 11; or
 - (for SEAPLANES) ICAO Annex 16 Volume I Chapter 6 or Chapter 10.
- 16.2 The *CASR Part 91, 133 and 138* minimum height rules apply to all operations in R407.
- 16.3 Operations are restricted to VMC by day. Unless specifically authorised by CASA, HEL operations at night are permitted only by AOC, *Part 141* certificate or aerial work certificate holders conducting NVIS operations in accordance with the relevant rules in *CASR Part 91, 133 or 138*.
- 16.4 SSR PROCEDURES. All ACFT operating in R407 are to squawk CODE 1200.
- 16.5 HEL LANES. HEL transit and access lanes are established within R407 A and B details of which are provided BLW. Except as authorised by CASA, OPS by HEL WI R407 A and B must be confined to the HEL lanes, and SEAPLANES must be confined to transit lanes, for other than climb and descent to landing sites immediately adjacent to the lanes.
- 16.6 MIL HEL ABV 2,500KG MTOW may transit R407B E of Fort Denison over water, not ABV 1,000FT on QNH, for access to MIL establishments WI R407.
- 16.7 SEAPLANES may operate in R407 A and B as follows:
- over water at all times;
 - WI R407A not above 500FT on QNH;
 - WI R407B not above 1,000FT on QNH;
 - no OPS beneath the Sydney Harbour Bridge or Gladesville Bridge except as authorised by CASA and the Sydney Harbourmaster.
- 16.8 BROADCAST intentions entering and leaving R407 on FREQ 120.8 MHz. This FREQ is not monitored by Airservices Australia.
- Entry into R407B from the east, and departure from R407B to the east, must be made over water via Sydney Heads. Transit from Victor 1 overland into R407B is not permitted.
17. **HEL TRANSIT AND ACCESS LANE PROCEDURES (Refer associated diagram)**
- The ALT specified for each lane shall be maintained during lane transit.
 - Pilots are to keep to the right when flying along a HEL lane.
 - Pilots unfamiliar with the HEL lanes and PROC shall obtain a briefing FM a local HELOPR or Flying School.
 - HEL transit lanes are to be considered as access lanes for the purpose of *CASR 91.265(4)(g)* and *91.267(3)(j).(3A)*.



HARBOUR LANE

The harbour lane FLW the Parramatta River FM Silverwater to Ryde Road bridge, Gladesville Bridge, the southern pylon of Sydney Harbour Bridge, ABM Bradley's Head, ABM Middle Head, Sydney Heads and thence coastal to Long Reef. The lane is over water. The ALT to be flown are:

- e. Not BLW 700FT on QNH from Silverwater to Ryde road bridge;
 - f. 500FT on QNH BTN Ryde road bridge and the Harbour Bridge;
 - g. 1,000FT on QNH BTN the Harbour Bridge and Middle Head, Climb and descent to be conducted east of the Harbour Bridge.
 - h. Not ABV 1,000FT on QNH, over water, BTN ABM Middle Head and Long Reef.
18. **HELICOPTER ACCESS LANES**
- a. **LANE COVE RIVER LANE.** An access lane from Gladesville Bridge to Pennant Hills via Northern Suburbs Cemetary follows the Lane Cove River valley to Pennant Hills. The ALT to be flown are:
 - (i) 500FT on QNH between Gladesville Bridge and Delhi Rd;
 - (ii) 700FT on QNH between Delhi Rd and Pennant Hills.

- b. NORTH SHORE LANE. An access lane for the HLS near the Royal North Shore Hospital is shown on the expanded diagram ABV. The ALT to be flown is 1,000FT on QNH.

19. VFR COASTAL ROUTE VICTOR 1

19.1 General

Transit of the Sydney area is available via a VFR Coastal Route within the Class G airspace east of the Sydney Control Zone and Control Area. The route comprises **Victor 1 NORTH** and **Victor 1 SOUTH** which are differentiated by the lower limits of the overlying Class C airspace and by their tracking requirements.

- a. The Coastal Route is depicted on the SY VTC and Sydney General Flying Guide (SY GFG) and may be flown in either direction. Operations are restricted to VMC by day only.
- b. Pilots are required to use SY Local QNH, available on the SY ATIS. If transponder equipped, squawk code 1200 with ALT.
- c. The carriage and use of radio is mandatory.
- d. Operations in the Coastal Route share a common VHF broadcast frequency (120.8 MHz) with helicopter and floatplane operations in R407A and R407B over Sydney Harbour.
- e. Pilots should broadcast joining the Coastal Route, stating position and intentions. Pilots of opposite direction aircraft should respond with position and intentions. Landing lights and strobes should be activated and pilots should be alert for opposite direction traffic. If possible, keep opposite direction traffic to your left.
- f. Broadcast frequency 120.8 MHz is not monitored by SY ATC. In the event of an emergency, pilots are advised to call Sydney Centre on 124.55 MHz, or to make an emergency broadcast on 121.5 MHz. This frequency is usually monitored by domestic and international transport aircraft.
- g. All occupants of single-engine aircraft must wear approved life jackets for the duration of the overwater portions of the Coastal Route.
- h. High speed military aircraft are requested to remain clear of the Coastal Route.

19.2 Procedures for Operations in Victor 1 South

- a. **Victor 1 SOUTH** extends East of the coast between the South Head of Sydney Harbour and Jibbon Point (the southern Headland of Port Hacking) and includes three coastal HLS at Wanda Beach, Cape Baily and Cape Banks. Pilots are required to maintain an altitude of exactly 500FT on Sydney Local QNH when operating in this airspace.
- b. The requirement in **Victor 1 SOUTH** is to contain your aircraft in Class G airspace and clear of the SY CTR.
- c. To avoid the SY CTR you must NOT Coastal Fly the Sydney southern beaches between Ben Buckler (the northern headland of Bondi Beach) and Long Bay headland (the southern headland of Maroubra Beach), and fly east of a straight line between the eastern most point of Cape Banks and the lighthouse on Cape Solander (the north and south heads of Botany Bay).
- d. The term 'Coastal Flying' refers to the practice of flying close to the beach and following the contours of the coastline. This practice is NOT permitted when flying in **Victor 1 SOUTH** between Ben Buckler and Cape Solander.
- e. Some helicopters and beach patrol aeroplanes may have been cleared to coastal fly between Bondi and Maroubra and may not continuously monitor 120.8 MHz.
- f. The CTA lower limit south of Jibbon Point and east of the coast is 1,000FT. North of Jibbon Point the lower limit of the CTA is 500FT.

19.3 Wake Turbulence Risk in Victor 1 South

- a. Runway information is available on the SY ATIS and will assist pilots to anticipate aircraft overflying **Victor 1 SOUTH** to or from Sydney Airport and to determine the wake turbulence risk.
- b. The wake turbulence standard of 1,000FT vertical separation from heavy aircraft may not always be achievable when flying in **Victor 1 SOUTH**.

- c. Under normal circumstances, aircraft arriving and departing Sydney airport will be at least 500FT higher than the CTA step (500FT higher than traffic on **Victor 1 SOUTH**). However, there is always the possibility of an aircraft departing Sydney airport experiencing impaired performance and, under these circumstances, the 500FT vertical separation design buffer might be infringed. Pilots flying in **Victor 1 SOUTH** should be aware of the possibility of this occurrence, and of the requirement to see and avoid all other aircraft.
 - d. Because of the unpredictable nature of wake turbulence, pilots must remain vigilant of the proximity of a heavy aircraft, and on becoming aware of the presence of such an aircraft, adjust their flight path to remain well clear of the affected airspace.
 - e. The recommended wake turbulence separation standard behind and below a medium or heavy aircraft is 6NM or 3 minutes.
- 19.4 **Procedures for Operations in Victor 1 North**
- a. **Victor 1 NORTH** extends east of the coast between Dee Why (12DME SY) and the South Head of Sydney Harbour and has a maximum altitude of 1,000FT on SY Local QNH.
 - b. All operations in **Victor 1 NORTH** must be conducted between 500FT and 1,000FT.
 - c. Operations in **Victor 1 NORTH** below 1,000FT must remain over water at all times.
 - d. South Head is the northern limit of **Victor 1 SOUTH** and pilots should ensure that their aircraft remains clear of Class C airspace when transiting from **Victor 1 NORTH** to **Victor 1 SOUTH**.
 - e. Ensure that you reach 500FT before passing South Head southbound.
20. **SIGHTSEEING FLIGHTS OVER SYDNEY HARBOUR**
- 20.1 **Harbour Scenic Flights**
- a. The airspace above Sydney Harbour is Class C and availability of an airways clearance to enter it will depend on traffic levels, controller workload and VMC.
 - b. You must submit flight notification before your flight and you may be cleared for the scenic flight route, Harbour Scenic as described below.
 - c. The routes is flown at an altitude of 1,500FT on Sydney Airport Local QNH, which is available on the SY ATIS.
- 20.2 **Airways Clearance Requests**
- a. Track via Class G airspace to Long Reef. Contact Sydney Centre prior to reaching Long Reef and request a 'Harbour Scenic'.
 - b. You must remain in Class G airspace until in receipt of a clearance, which will be in the form, 'Cleared Harbour Scenic'.
- 20.3 **Coded Clearances**
- a. A 'Harbour Scenic' clearance authorises you to fly the nominated route at 1,500FT.
 - b. Your read back of 'Cleared Harbour Scenic' acknowledges that you will track via the nominated route and maintain 1,500FT.
- 20.4 **Harbour Scenic**
- a. At 1,500FT AMSL, track Long Reef direct to the Harbour Bridge.
 - b. Remain east of the Harbour Bridge and commence a left turn, remaining North of the Opera House.
 - c. Conduct 2 left orbits, remaining east of the Harbour Bridge, north of the Opera House and west of Garden Island.
 - d. On completion of the second orbit track to North Head. Report at North Head.
- 20.5 **Entry into Victor 1 South Following a Harbour Scenic**
- a. Request descent into **Victor 1 SOUTH** approaching Manly Beach.
 - b. Subject to traffic, and when established east of the coast, you may be cleared to leave the control area on descent.
 - c. Report to ATC leaving 1,500FT then broadcast position and intentions on 120.8 MHz. In aircraft with a single radio you will need approval to leave the ATC frequency to make this broadcast.
 - d. You must reach 500FT before passing South Head southbound.
 - e. Report to ATC when established at 500FT in **Victor 1 SOUTH**.
- 20.6 **Additional Information**
- Expanded details and a diagrammatic representation of these procedures are provided on the Sydney General Flying Guide.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) and Curfew applies. Refer AIP DAP.

ADDITIONAL INFORMATION

1. SECURITY REQUIREMENTS - All fixed wing and HEL crew operating at SY, must hold either Australian or SYD Aviation Security Identity Card (ASIC). Operations must be facilitated through a SY based Fixed Base Operator (FBO) or ground handler to be met on arrival or departure to be escorted to and from the ACFT. Contact details for FBO and Ground Handling Services are available from Sydney Airport Web site: <https://www.sydneyairport.com.au/corporate/partner-with-us/services>.
2. Animal hazard exists. Increased numbers of the following species are expected during the specified periods: Grey headed flying fox exist after last LGT and numbers can be high DEC-JUN. Peak activity APR-JUN. Australian white ibis numbers can be high JUN-NOV with flocks transiting across RWY 16R/34L BTN TWY B8 and TWY L. Silver gull numbers will be high during periods of rain with flocks transiting across runways in any direction.
3. ACFT carrying dangerous goods Class 1 explosives excluding 1.4 and 1.6 require prior approval from AD OPR. Minimum 48HR notice. Phone 61 2 9693 3290.
4. ACFT carrying livestock require prior approval FM AD OPR. Minimum 24HR notice. Phone 61 2 9667 9921.
5. All ACFT, unless associated with the NORMAL preparation for flight, are not permitted to conduct engine runs, including idle power, without prior authorisation from AD OPR, Phone 61 2 9667 9824 or 0419 278 208.
6. Caution: due to the nature of OPS at YSSY, possible wake turbulence may exist when the wind is from the W to NW at 5KT or greater, during parallel RWY 34 OPS.
7. Weather balloon launch APRX 0545 Local FM 80M W ARP. Launches may occur at other times.

CHARTS RELATED TO THE AERODROME

1. WAC 3456.
2. Aerodrome Obstacle Chart Type A: RWY 07/25, 16R/34L, 16L/34R and 16L (15 DEG divergence) - the latest issue is accessible via the Sydney Airport website.
3. Also refer to AIP Departure and Approach Procedures.
4. Precision Approach Terrain Charts RWY 16R/34L and RWY 16L/34R AVBL via the Sydney Airport website.

Note: For any issues with the Sydney Airport website links contact the Aerodrome Operations Supervisor via phone: 02 9667 9824 or email: car2@syd.com.au.

SYDNEY/NANCY-BIRD WALTON**ELEV 308****AVFAX CODE 2101**

NSW

UTC +10

YSWS

335327S

1504306E

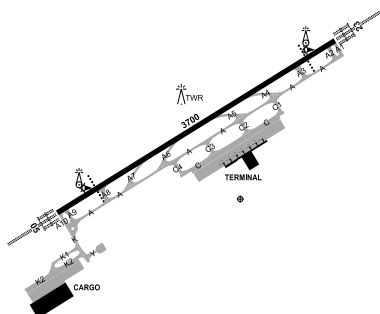
VAR 13 DEG E

CERT

AD OPR WSA Co, 40 Nancy Drive, Luddenham, NSW, 2745. Email: aocc@wsairport.com.au.

PH 02 4762 8500. ARO 0461 596 925. PH AH Airport Services Manager 02 4762 8114.

Website: www.wsairport.com.au.

**REMARKS**

1. PPR.
2. AD Charges: CTC AD OPR.
3. AD is security controlled.
4. ACFT carrying dangerous goods Class 1 (explosives) RQ approval FM AD OPR. MNM 48HR prior to ETA.
5. Cargo APN Controlled by AD OPR. CTC Walton APN FREQ 126.575 on entry to TXL K1.

HANDLING SERVICES AND FACILITIES

AD OPR does not provide ACFT marshalling. All requests to be directed to airline or ground handling agent.

RESCUE AND FIREFIGHTING SERVICES

CAT 8: H24.

EMERG FREQ 131.0 MHz AVBL H24. Request via ATC.

APRONS AND TAXIWAYS

1. TWY A: Asphalt and 400M Concrete each end PCR 692/F/A/W/T WID 23
2. TWY A1 and A2: Concrete PCR 827/R/A/W/T WID 23
3. TWY A3, A8, C1, C2, C3, C4, K, Y: Asphalt PCR 692/F/A/W/T WID 23
4. TWY A4, A5 and A6: Asphalt PCR 520/F/A/W/T WID 23
5. TWY A7: Asphalt PCR 529/F/B/W/T WID 23
6. TWY A9 and A10: Concrete PCR 1182/R/C/W/T WID 23
7. TWY C: Concrete PCR 826/R/A/W/T WID 23
8. TXL K1, K2: Concrete, unrated WID 23
9. Passenger Apron: Concrete PCR 833/R/A/1.62MPa/T
10. Aircraft Isolation Bay: Concrete PCR 791/R/A/W/T
11. Cargo Apron: Concrete PCR 1200/R/C/W/T

SURFACE MOVEMENT GUIDANCE

1. PAX APN: A-VDGS AVBL on all stands EXC 16A, 17A and 18A. Marshalling RQ for 16A, 17A and 18A.
2. Cargo Apron: A-VDGS AVBL on all positions.
3. Movement area guidance sign INSTL on all TWY EXC TWY A3. RWY exit sign for TWY A3 not AVBL when vacating RWY 23.
4. Stop Bar microwave barrier devices (SW MW model 316-33457) on 1.2M frangible support posts installed at all RWY/TWY INT within OBST restricted area.

ATIS	NANCY-BIRD WALTON	127.0
	ATIS	
DEP	WALTON DEPARTURES	118.4
SMC	WALTON GROUND	124.05
TWR	WALTON TOWER	128.1

(1) APN service on cargo APN only.

RADIO NAVIGATION AND LANDING AIDS

DME	IWN	109.1/ 28X	335320.2S	1504154.2E	(2)
		(RWY05)			
GP	IWN	331.4 (RWY05)	335320.5S	1504154.4E	
ILS	IWN	109.1 (RWY05)	335225.0S	1504359.5E	
LOC	IWN	109.1 (RWY05)	335225.0S	1504359.5E	
DME	IWS	111.5/ 52X	335230.5S	1504336.4E	(1)
		(RWY23)			
GP	IWS	332.9 (RWY23)	335230.7S	1504336.5E	
ILS	IWS	111.5 (RWY23)	335335.8S	1504134.0E	
LOC	IWS	111.5 (RWY23)	335335.8S	1504134.0E	

(1) Antenna ELEV 264FT.

(2) Antenna ELEV 310FT.

LOCAL TRAFFIC REGULATIONS

1. ACFT PRKG requests email or PH AD OPR.
2. All ACFT must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
3. GA ACFT PRKG not AVBL.
4. ACFT ENG runs on the stand are restricted to ground idle power only. GND run of ENG above idle requires prior approval via phone.
5. Cross bleed engine starts must be conducted on TWY C.
6. **APN and TWY AVBL and Restrictions:**
 - a. TXL K1 is the designated inbound TXL for cargo APN ARR and TXL K2 is the designated outbound TXL unless otherwise instructed.
 - b. RET have WT limit of 394,000KG for aborted TKOF, RWY CHG, or taxi via RWY.
 - c. ACFT isolation pad AVBL. Pilot stop lines and marshaller stop lines provided.
 - d. MNM thrust REQ when turning FM:
 - (i) TWY C onto TWY C1, C2, C3 and C4 due jet blast on APN.
 - (ii) TXL K2 onto TWY K due jet blast on APN.
 - (iii) TWY K onto TWY A due jet blast on airside roadway.
 - e. Code F ACFT not permitted to vacate via TWY A8 from RWY 05.
 - f. Right turn from TWY K2 to Bay 86 not AVBL.
 - g. 180 DEG turns not permitted on RWY or TWY.
 - h. APN configuration: Bays 17 to 24 and Bays 27 and 28 single Code E and dual Code C multiple ACFT ramp system. Bays 16, 25 and 26 single Code F and dual Code C multiple ACFT ramp system.
 - i. Bays 16A, 17A, and 18A not AVBL to ACFT with wingspan ABV 29M. Secondary parking position markings in use.
Note: BAE146 ARR on PAX APN required to park on Bays 16L, 16R, 17L, 17R, 18L or 18R only. No PWR-out OPS permitted.
 - j. Due noise abatement PROC, BTN 2300–0530 Local, pilots are REQ to minimise use of reverse thrust where OPS acceptable.
 - k. TWY K and A10 - sight DIST is at a MNM of 227.1M, affecting VIS of low-profile objects on TWY surfaces from a STD 3M observer height.
7. Training flights:
 - a. Circuit training not AVBL.
 - b. Instrument approach training other than flights arriving to YSW not AVBL.

FLIGHT PROCEDURES

1. ESTIMATED AIRBORNE TRAFFIC DELAY

- 1.1. Estimated airborne traffic delays for ARR ACFT may be expected due to terminal area traffic density: 2000 to 1400 UTC arrival 20MIN; 1400 to 2000 UTC arrival 10MIN, departure 10 MIN (1HR earlier during HDS).

2. AIR TRAFFIC MANAGEMENT SPEED

- 2.1. When not on a SID or STAR (including vectoring) - ACFT ARR or DEP YSWs must not exceed 250KT IAS when BLW 10,000FT. Advise ATC if a higher speed is operationally required

3. PUSHBACK AND START PROCEDURES

- 3.1. Departing ACFT with ground power must contact delivery ready for pushback or start. ACFT will be instructed to contact/stand by for apron/ground (as appropriate) once compliant with any applicable ATFM procedures. Apron/Ground will approve pushback or start CLR when able.
- 3.2. Departing ACFT without ground power are approved to start at own discretion, advising delivery when start complete. ACFT for pushback will be instructed to contact/stand by for apron/ground (as appropriate) once compliant with any applicable ATFM procedures. ACFT for taxi from bay will be instructed to contact apron/ground for taxi clearance once compliant with any applicable ATFM procedures. Apron/Ground will approve pushback or taxi when able.

4. ARRIVAL PROCEDURES

- 4.1. All ARR ACFT are required to advise PRKG bay on first contact with GND.

5. DEPARTURES

- 5.1. Departures shall normally be cleared in the order in which they are ready for takeoff, except that deviations may be made from this order to facilitate the maximum number of departures with the least average delay.
- 5.2. Aircraft departing for aerodromes located within the Sydney basin may require start approval.

6. STANDARD INSTRUMENT DEPARTURE (SID) PROCEDURES

- 6.1. SID Assignment

- 6.1.1. DEP ACFT should expect to be cleared on the following SID:

- a. Jet - Procedural SID applicable to their cleared route
- b. Non Jet:
 - (i) By day – non-jet SID
 - (ii) By night – Procedural SID applicable to their cleared route.

- 6.1.2. WALTON Radar SID may be issued by ATC when required due weather or operational requirements.

- 6.2. SID Designators

- 6.2.1. The following SID Designators are used at YSWs:

SID	Use	Expected Timings
D	Day Use - Default SID issued during "Day" mode operations	0530-2300 Local (Outside of YSSY curfew hours)
H	Hot/Heavy - AVBL for ACFT planned via NWA or LEECE at Pilot Request (if unable to meet level restrictions on TONTO Day SID) or issued by ATC when YSWs TEMP $\geq$ 35 DEG C	
N	Night - issued during 'night' mode operations when Reciprocal Runway Operations (RRO) are not in use.	2300-0530 Local
Q	RRO - issued during 'night' mode when RRO are in use .	2300-0530 Local

7. GROUND CONTROL

- 7.1. Tug Operations

- 7.1.1. All tugs requesting clearance for pushback and/or tow, must make initial contact with Delivery on 118.65 MHz. Tugs will be instructed to contact/stand by for apron/ground (as appropriate). Any tug request confined to the Cargo apron should contact Apron direct on 126.575 MHz.

- 7.2. Repositioning Aircraft
- 7.2.1. All aircraft requesting repositioning, must make initial contact with Delivery on 118.65 MHz. Aircraft will be instructed to contact/stand by for apron/ground (as appropriate).
- 8. LOW VISIBILITY OPERATIONS**
- 8.1. For CASA approved operators, RWY 05/23 is capable of supporting take-offs with an RVR of not less than 125M for the runway being used.
- 9. LOW VISIBILITY PROCEDURES**
- 9.1. Instrument RVR provided at touchdown zone, midpoint zone, and end zone for each RWY. Transmissometers and frangible support posts WI OBST restricted area.
- 9.2. Preparations for the activation of Low Visibility Procedures (LVP) are commenced when visibility has reduced to 2,500M. This ensures that the LVP are in force when:
- The cloud ceiling is at or below the CAT I minima; or
 - The RVR is at or below 550M.
- 9.3. LVP initiation and implementation may occur earlier if conditions deteriorate rapidly.
- 9.4. When RVR is at or below 550M or when the cloud ceiling is at or below the CAT I minima, the ILS critical and sensitive areas are protected and "low visibility procedures in force" is declared.
- 9.5. All aircraft must depart from the full length of the RWY.
- 9.6. Aircraft under tow during LVP require WSI Safety Vehicle escort.
Contact Car 2 on +61 461 596 925 to request Safety Vehicle attendance.
- 9.7. Any pilot unsure of their position whilst operating on the Manoeuvring Area must Hold Position (STOP) and immediately advise ATC.
- 9.8. Radio failure - Aircraft must hold position and await further guidance from a Follow Me vehicle.
- 9.9. All TWY are suitable for use in RVR conditions less than 350M.
- 10. FOLLOW ME SERVICE**
- 10.1. Flight crew must notify ATC if a "Follow Me" service is required.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

- Species-specific NOTAM will be issued during periods of increased wildlife activity.
- ACFT REQ nose tethering, nose loading OPS, or carrying livestock must obtain approval FM AD OPR MNM 48HR prior to ETA.

CHARTS RELATED TO THE AERODROME

- WAC 3456.
- Aerodrome Obstacle Chart Type A RWY 05/23 first edition AVBL via the WSI website.
- Precision Approach Terrain Chart RWY 05/23 first edition AVBL via the WSI website.
- Also refer to AIP Departure and Approach Procedures.

TAMWORTH

ELEV 1335

AVFAX CODE 2025

NSW

1505048E

UTC +10

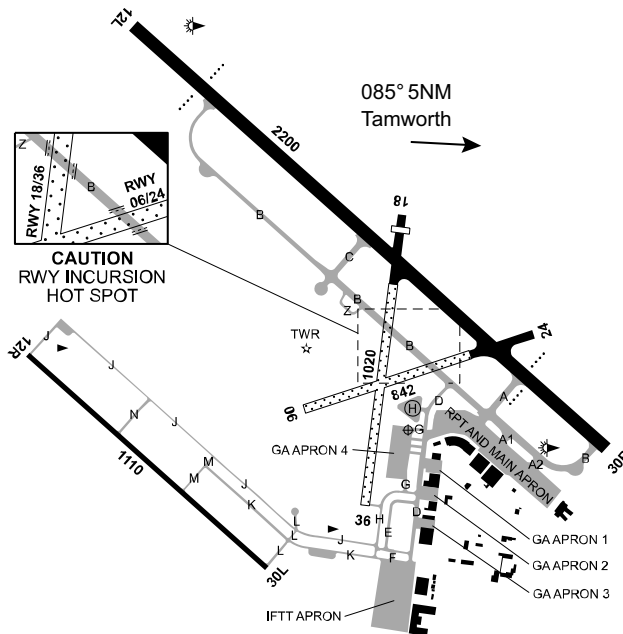
VAR 12 DEG E

YSTW

CERT

AD OPR Tamworth Regional Council, PO Box 555, Tamworth, NSW, 2340. Email:

airportops@tamworth.nsw.gov.au. ARO H24 02 6767 5546 (Primary CTC). EMERG 0429 582 400.



REMARKS

1. AD Charges: AVBL on Tamworth Regional Council website - Fees and Charges.
2. Private ILS. Charges apply for ILS approaches as per Tamworth Regional Council published fees and charges.
3. Captains of visiting military aircraft are to contact Airport Management at least 48HR prior to arrival. MIL ACFT requiring civil hardstand are to forward requests to airportops@tamworth.nsw.gov.au for parking allocation.
4. This AD is a Security Controlled Airport:
 - a. RPT APN Bays 1 to 4 are Security Restricted Areas. Pilots and crew must display a valid ASIC when airside. Non RPT operators must exit and enter via coded entry gates located adjacent all GA APN.
 - b. Direct access FM the main APN into the terminal building is not permitted for MIL, GA or CHTR aircrew or passengers. Security restricted APN may not be traversed by persons excluded under regulations 3.13 and 3.16 of the ATS Act 2004.
 - c. ACFT which require PRKG on the main APN outside the Security Restricted Area must obtain prior approval from AD OPR. Bays 8 and 9 are restricted to aeromedical ACFT unless specific approval is granted.
5. GA users use coded exit gates provided adjacent GA PRKG APN. Pilots must note displayed code for re-entry.

HANDLING SERVICES AND FACILITIES

Viva Energy Australia – Northwest Aviation Fuels Pty Ltd: 2030-0630 UTC MON-FRI, AVGAS H24 Viva swipe card/credit card bowser. AH 1HR PN, JET A1 available 24HR. AH call-out fees apply: PH 0419 424 834, 02 6761 5640, VHF 126.4 JO. AVGAS, JET A1, 0125. Viva fuel and fly, carnet and credit cards (V and MC) (NSW and QLD government contract, Department of Defence contract).

PASSENGER FACILITIES

LG/RF/WC/ME

APRONS AND TAXIWAYS

1. ACFT ABV 5,700KG MTOW limited to TWY A, A1, A2, B, C, D and G.
2. TWY B west of TWY C limited to 8,000KG AUW and 23M MAX wing span.
3. Run-up bays for ACFT to 5,700KG and MAX wing span limitations of 12 and 16M.
4. TWY D MAX wingspan 17.65M. ACFT with wingspans ABV 15M and up to 17.65M, accessing the GA parking areas, may only do so via TWY D.
5. 3 sealed GA parking bays are AVBL for MAX 24HR parking. They are length limited. P1 limit 14.5M (47FT), P2 limit 13.5M (44FT), P3 limit 12.5M (41FT).
6. Bays 6 - 9 MAX wing span 23M.
7. IFTT APN covered parking restricted to MAX 12M wingspan.
8. TWY D and G and GA Bays 10-14 MAX AUW 12,500KG.

AERODROME OBSTACLES

1. LIOL ILS GP 1,369FT AMSL BRG 051 MAG 585M FM ARP infringes TNS RWY12L/30R by 16FT and TNS RWY 06/24 by 39FT.
2. LIOL Primary IWI 1,357FT AMSL BRG 089 MAG 429M FM ARP infringes TNS RWY 12L/30R by 6FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI, AD WRNG.
2. AWIS Phone 02 9353 6451 - Report faults to BoM.

PHYSICAL CHARACTERISTICS

06/24	061	28c	Unrated. Grassed brown clay	WID 30	RWS 90
12L/30R	121	72a	PCR 180/F/C/Y/T Grooved.	WID 45	RWS 150
12R/30L	121	36a	5700 kg/0.50 MPa	WID 18	RWS 90
18/36	177	33c	Unrated. Grassed brown clay	WID 30	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 12L/30R	MIRL(1)	AFRU+PAL 119.4	SDBY PWR AVBL
RWY 12L/30R	PAPI(2)	AFRU+PAL 119.4	3.0 DEG49FT
(1)	Outside TWR HR.		
(2)	Both sides.		

RWY edge light spacing: 12L/30R: 59M.

OTHER LIGHTING

1. SDBY PWR switchover time: 1 SEC during LVP; 8 SEC other times.
2. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	127.1 Circuit Area (Outside TWR HR)
ATIS	TAMWORTH	116.0 123.8 (1)
SMC	TAMWORTH GROUND/ DELIVERY	121.9 (2)
TWR	TAMWORTH TOWER	118.25 (3) 119.4
(1)	or Phone 02 6764 5288	
(2)	Taxi clearance required on all TWY.	
(3)	HJ only.	

1. TWR HR:
 - a. MON-FRI: 2100-1015 UTC (1HR earlier during HDS.)
 - b. SAT-SUN: 2200-0530 UTC (1HR earlier during HDS.)
 Phone: 02 6764 5271^
Note: All times 1HR earlier during HDS. TWR HR may change at short notice, check status of airspace with ATS or Tamworth ATIS.
2. Tamworth TWR provides combined TWR and APP CTL services within Class C and D airspace 6,500FT AMSL and BLW DRG TWR HR. CTC TWR for a clearance.
3. Outside TWR HR, Tamworth Class D airspace 4,500FT AMSL and BLW and Class C airspace 8,500FT AMSL and BLW becomes Class G.

RADIO NAVIGATION AND LANDING AIDS

DME	ITW	109.9/ 36X (RWY30R)	310453.0S	1505108.2E	(4)
GP	ITW	333.8 (RWY30R)	310453.0S	1505108.2E	
ILS	ITW	109.9 (RWY30R)	310412.1S	1505008.5E	(3)
LOC	ITW	109.9 (RWY30R)	310412.1S	1505008.5E	(1)
DME	TW	116.0/107X	310357.8S	1504948.3E	(2)
NDB	TW	341	310416.2S	1504952.2E	Range 50 (HN 50)
VOR	TW	116.0	310357.9S	1504948.9E	

- (1) Pilot monitored outside TWR HR.
- (2) Antenna ELEV 1285FT.
- (3) Private ILS - Fees apply - Operated by AD OPR.
- (4) Antenna ELEV 1329FT.

LOCAL TRAFFIC REGULATIONS

1. HEL PRKG ADJ to SGS enclosure. Design ACFT SH-60/MRH 90. Pilots and passengers to exit via gate 15. No direct access into terminal due to security restricted apron.
2. All ACFT above 5,700KG which are not RPT must obtain prior approval of AD OPR if they are programmed to stage through or remain at Tamworth Regional Airport. To obtain such approval 48HRS notice is required. Phone Duty Airport Officer 02 6767 5546 and email airportops@tamworth.nsw.gov.au with details of your request. ACFT must follow lead-in lines.
3. GA ACFT BLW 5,700KG (EXC aeromed) not permitted on main apron. Limited sealed parking and tie-downs for ACFT BLW 5,700KG are AVBL in GA areas. Parking bays P1, P2, P3 MAX 24HR only. Fees apply for parking in excess of 24HR.
4. Bays 1 to 4 on the main apron for RPT services only.
5. Bay 5 pre-flight engine running limited to 5MIN at idle power due noise restrictions. HRS 0630-2300 Local.
6. IFTT APN. All ACFT wishing to park on the IFTT APN require prior permission from AD OPR. Personnel airside on the IFTT APN are to wear high visibility vests at all times.
7. Bays 8 and 9 pilots are requested to minimise ground running with reference exhaust blast directed towards the Westpac hangar facility.
8. Tamworth Airport does not support OPS below 800M RWY VIS.
9. RWY Incursion Hotspots at the intersection of TWY B and grass RWY 18/36 and 06/24.
10. GA parking positions 10-14 are AVBL for ACFT up to 12,500KG AUW. Fees apply in excess of 48HR.
11. RWS not AVBL for ACFT OPS.
12. Night OPS AVBL - PRKG Bays 1-21 one-way access only via TWY D.
13. TWY G1 closed.

FLIGHT PROCEDURES

1. RUNWAYS

Circuit Direction

HJ	RWY 12R	right hand circuit	FREQ 118.25 (119.4 Outside TWR HR)
	RWY 30L	left hand circuit	FREQ 118.25 (119.4 Outside TWR HR)
	RWY 12L	left hand circuit	FREQ 119.4
	RWY 30R	right hand circuit	FREQ 119.4
HN	RWY 12L	right hand circuit	FREQ 119.4
	RWY 30R	left hand circuit	FREQ 119.4

2. LOCAL PROCEDURES - HJ DRG TWR HR

If unfamiliar, contact TW ATC prior to departure for clarification.

The following procedures must be read in conjunction with the TW VTC.

3. RUNWAY NOMINATION

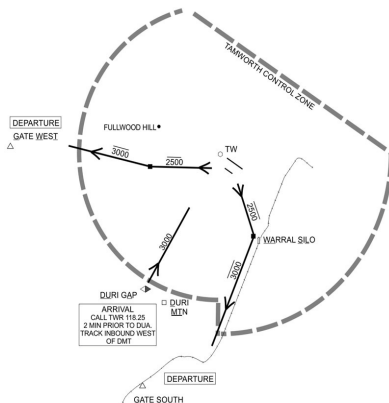
3.1. RWY12R/30L on FREQ 118.25 shall be used for:

- ALL single engine VFR ACFT ARR and DEP from the 160R through west to the 295R:
 - ARRIVALS via Duri Gap (DUA) (see para B)
 - DEPARTURES via GATE SOUTH (GST) or GATE WEST (GWT) (see para 4)
- single engine ACFT circuit training.

3.2. RWY12L/30R on FREQ 119.4 shall be used for all other OPS.

4. ARRIVALS VIA DURI GAP (DUA)

- Route for single engine VFR ACFT from the 160R through west to the 295R;
- FREQ 118.25;
- RWY12R/30L;
- CAUTION: Pilots can mistake Mt Terrible and Soma MTN for Duri MTN. Pilots should confirm Duri MTN with the location of Currabubula and the Tamworth-Werris Creek railway line. Mis-identification will lead to conflict with any opposite direction traffic outbound via Gate South (GST);



- Clearance required prior to DUA at **3,000FT AMSL**;
 - CAUTION: D523 is a high traffic density flying training area. ACFT recovering D523 track via DUA at 3,000FT. ACFT approaching DUA must be alert to increased traffic density and visually maintain separation from other ACFT;
 - Report at 5NM for circuit entry instructions;
 - DO NOT CROSS N OF RWY12R/30L CENTRE LINE** due to operations on the parallel RWY 12L/30R;
 - In the unlikely event of frequency congestion or radio failure after receiving clearance, **MAINTAIN 3,000FT AMSL** and join upwind overhead the duty RWY (12R/30L) threshold. Maintain separation with other aircraft and descend to circuit altitude.
5. **DEPARTURES VIA GATE SOUTH (GST) OR GATE WEST (GWT)**
- Route for single engine VFR ACFT from the 160R through west to 295R,
 - FREQ 118.25,

- c. When number one at the holding point, pilots must report “READY” with intended route; “**READY GATE SOUTH [or WEST]**”.
 - d. **VIA GATE SOUTH (GST)**
 - (i) RWY 12R - from right crosswind; or
 - (ii) RWY 30L - from left downwind;

track to ABM Warral Silo (WASL) NOT ABOVE 2,500FT AMSL and remain west and within 1NM of the Werris Creek railway line. From ABM WASL, remain NOT ABV 3,000FT AMSL until clear of controlled airspace.
 - e. **VIA GATE WEST (GWT)**
 - (i) RWY 12R - from right downwind; or
 - (ii) RWY 30L - from left crosswind;

track to become established to the south of the East-West power line NOT ABOVE 2,500FT AMSL. From 5NM (ABM Fullwoods Hill) remain NOT ABV 3,000FT AMSL and track to Gate West remaining south of the power line until clear of controlled airspace.
 - f. a departure report is not required and pilots should automatically change to the appropriate FREQ when clear of controlled airspace.
6. **CIRCUIT OPERATION**
- a. Report 'ready' in the run-up bay for instructions.
 - b. ALT not ABV 2,500FT AMSL.
 - c. PPR from AD OPR for NGT CCTS.
7. **INSTRUMENT TRAINING AND AWK**
- a. All ACFT planning practice instrument APCH, NAVAID training or AWK require prior ATC approval. Pilots must book a slot online at www.bookawk.com.
 - b. Bookings may be subject to cancellation by ATC:
 - (i) on daily review of forecast MET conditions.
 - (ii) due to OPR restrictions.
 - c. Pilots requesting an APCH to the non-duty RWY may expect extended delay. Conduct of an APCH to the non-duty RWY is not guaranteed.
8. **SIMULTANEOUS PARALLEL RWY OPS**
- 8.1. During TWR HR, ATC may conduct simultaneous parallel runway operations provided that:
- a. operations are conducted in VMC by day only;
 - b. conditions permit continuous visual monitoring by ATC of ACFT on base and during the turn onto final; and
 - c. continuous two way communications are maintained between the ACFT and ATC.
- 8.2. Notification of simultaneous parallel runway operations will be broadcast on ATIS or by directed broadcast to aircraft; “SIMULTANEOUS PARALLEL RUNWAY OPERATIONS IN USE. EXPECT TRAFFIC ON FINAL AND OPPOSITE BASE OF THE PARALLEL RUNWAY”.
- 8.3. Simultaneous parallel RWY operations will normally be conducted utilising separate frequencies.
- 8.4. When simultaneous parallel runway operations are being conducted, pilots are responsible for:
- a. ensuring that the runway centre line is not crossed during intercept of final;
 - b. accurately tracking the centre line on final and upwind; and
 - c. maintaining a visual lookout for ACFT approaching and departing the parallel RWY.
9. **LOW VISIBILITY OPS**
- 9.1. RWY 12L/30R supports takeoffs down to 800M RV during TWR HR only.
- 9.2. ATC will initiate Low Visibility Procedures when RV is below 800M or ceiling is 200FT or less.
- 9.3. Outside TWR HR - CTAF procedures apply.

CTAF - AFRU 119.4


Outside TWR HR.

ADDITIONAL INFORMATION

- 1. Bird hazard exists.
- 2. Significant increases in wildlife hazards will be notified by NOTAM.

CHARTS RELATED TO THE AERODROME

- 1. WAC 3357.
- 2. Also refer to AIP Departure and Approach Procedures.

THE MONUMENT**ELEV 949****AVFAX CODE 4318**

QLD
214843S
AD OPR Incitec Pivot Ltd (Southern Cross Fertilisers), L3, 19 Stanley Street,
Townsville, QLD, 4810. Email:
au_ipi_pho_aviation_aros@incitecpivotlimited.onmicrosoft.com. PH Site 07
4747 0997: AD Manager 0408 297 265: AH 0438 603 224. ARO 0407 967 029.

UTC +10
VAR 6 DEG E
YTMO
CERT

REMARKS

Restricted OPS. PPR for all OPS.

HANDLING SERVICES AND FACILITIES

Ground handling and fuel by prior arrangement with ARO.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT C, METAR/SPECI.
2. AWIS PH 07 3564 3741 - Report faults to BoM.
3. AWIS FREQ 129.2 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

14/32 140 62a PCR 280/F/D/1.01 MPa/U

WID 30 RWS 150

AERODROME AND APPROACH LIGHTING

RWY 14/32 LIRL PAL 119.65

SDBY PWR AVBL

RWY 14/32 PAPI(1) PAL 119.65

3.0 DEG49FT

SDBY PWR AVBL

(1) Left hand side only.

RWY edge light spacing: 14/32: 90M.

OTHER LIGHTING

1. SDBY PWR switchover time: Manually activated - 1HR PN.
2. TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE

122.4 5500FT

FLIGHT PROCEDURES

All pilots are required to BCST their intentions inbound on company FREQ 129.45.

CTAF - AFRU 127.3

CHARTS RELATED TO THE AERODROME

1. WAC 3233.
2. Also refer to AIP Departure and Approach Procedures.

TINDAL**ELEV 443****AVFAX CODE 8002**

NT

UTC +9:30

YPTN

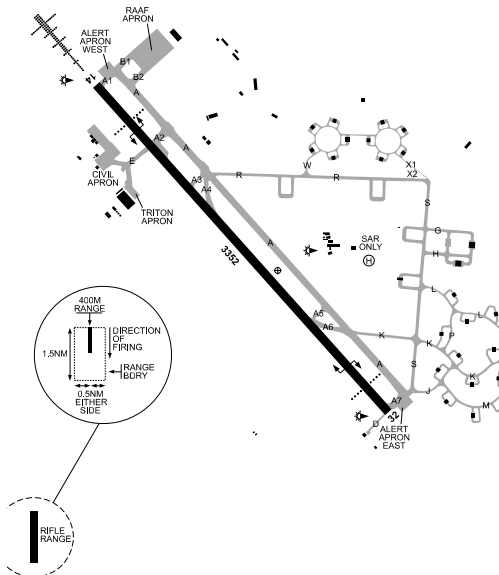
143116S

1322240E

VAR 3 DEG E

MIL

AD OPR RAAF, Airbase Operations Centre - RAAF Base, Tindal, NT, 0853. PH 08 8973 6888 (H24).

**REMARKS**

1. Katherine civil airport OPR: Katherine Town Council, PO Box 1071, Katherine, NT 0851. Civil airport manager phone 0448 821 745, Email: yptnado@ktc.nt.gov.au. ARO on call: 0448 821 745.
2. INTL emergency diversion AD. Availability of ATS for ACFT requiring Tindal as an emergency diversion AD can be ascertained through Tindal ABOC.
3. AD Charges: Parking charges for civil ACFT - Katherine Town Council.
4. 24HR PN required for parking of all ACFT ABV 5,700KG. On call officer Phone 08 8972 5500.
5. Air movements ADMIN (ACFT to AMS (MIL) FREQ 364.6 APRX range 115NM.
6. ATC enquiries phone 08 8973 6705 or 0408 221 783.
7. This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

All AVGAS fuelled ACFT to embark/disembark all PAX at terminal before moving to fuel bowsters for refuelling.

Military Airport.

AMS Handling enquiries to be directed through TINDAL Airbase Operations Centre (ABOC) in the first instance as manned H24.

RAAF: Air movements not AVBL, Mobile Air Load Team REQ required. 2200-0700 MON-THU, 2200-0500 FRI. Refuelling SER not AVBL weekends and AH EXC with 72HR PN. Approval RQ for MIL transits. F34, LHOX, LOX. Contact ABOC.

ABOC General Enquiries: PH AD OPR.

AMS General Enquiries: AVBL through ABOC on FREQ 364.6 or PH AD OPR.

Internet, weather and phone services are AVBL in Flight Planning room contained within main AMS terminal facility.

CIVIL ACFT: VIVA Energy Aviation/Air BP - Oz Airports: 0600-1800 Local JO. PH 0467 778 606.

Email: yptnado@ktc.gov.au. JET A1, AVGAS H24 bowser. AH PH RQ H24 notice (call out fee applies).

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6 JO DRG Home Base MIL JET OPS. CAT 4 OT.
2. CAT 6 AVBL OT 72HR PN.
3. Higher RFFS CAT up to CAT 8 AVBL 72HR PN through ABOC subject to staffing.
4. Outside TWR HR CTC RFFS via CTAF.

APRONS AND TAXIWAYS

1. TWY A, A1, A2, A7 and E WID 23M.
2. TWY K, R, S, A3, A4, A5 and A6 WID 15M.
3. TWY W, X1 and X2 WID 9M.
4. Civil APN AVBL to ACFT up to 25,000KG MTOW. Code B ACFT.
5. TWY E - PCR 260/F/C/1.93 MPa/U.
6. TWY E not AVBL to ACFT ABV 25,000KG MTOW.
7. TWY K - PCR 300/F/C/1.93 MPa/U.

SURFACE MOVEMENT GUIDANCE

Lit DIST to run markers OVRN 1,000FT.

AERODROME OBSTACLES

1. TWR (lit) 640FT AMSL PSN 143033.76S 1322331.44E. Infringes OLS by 62FT.
2. Sinkholes of varying size can occur anywhere on the Tindal airfield and may be a hazard during a runway excursion. Not all sinkholes will be marked and may also be hidden by vegetation.
3. Radar TWR (lit) 642FT AMSL PSN 142934.36S 1322331.01E. Infringes OLS by 63FT.
4. Antennas:
 - a. 603FT AMSL PSN 142934.95S 1322348.48E. Infringes OLS by 24FT.
 - b. 614FT AMSL PSN 142934.31S 1322348.70E. Infringes OLS by 35FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 issued hourly AVBL during MO HRS, AD WRNG.
2. AWIS PH 08 7922 2514 - Report faults to BoM.
3. AWIS FREQ 316.3 - Report faults to AD OPR.
4. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM Defence MO 08 7978 2257 when staffed. AH AVBL FM MWO 08 8920 3833.

PHYSICAL CHARACTERISTICS

14/32 136 110a PCR 630/F/C/1.93 MPa/T Grooved. B747. WID 45 RWS 230

ARRESTING GEAR

RWY 14 (5)	BAK 12/14	-----	BAK 12/14	RWY 32
	451 (1,480)		462 (1,515)	

1. Recessed bi-directional BAK 12/14 Hookcables INSTL 451M (1,480FT) FM THR RWY 14 and 462M (1,515FT) FM THR RWY 32. Marked by dayglo orange disks.
2. DIST BTN Cables 2,440M (8,005FT).
3. NML OPR PSN for arrestable ACFT:
 - a. LDG (dry RWY) - both ends down.
 - b. LDG (wet RWY or tailwind component) - DEP end up, APCH end down.
 - c. DEP (wet/dry RWY) - DEP end up, APCH end down.
 - d. DEP end up on pilot REQ at anytime.
4. Non-arrestable ACFT or during CTAF HR, both ends down. In the event of PWR failure, cables will rise to a HGT of 10CM until restored. Recommend ACFT not approved to trample hookcables OPR BTN cables during CTAF HR.
5. CONC absorber housing 1FT high ADJ RWY edge.

AERODROME AND APPROACH LIGHTING

RWY 14/32	MIRL	SDBY PWR AVBL
RWY 14/32	PTBL	
RWY 14	HAL-CAT I	
RWY 14	PAPI(1)	3.0 DEG57FT
RWY 14	SFL	
RWY 32	PAPI	3.0 DEG57FT

- (1) Small ACFT may experience harmonisation separation from ILS GP prior to THR.
1. **ALS type and length**
 - a. RWY 14 - distance coded CL: 900M.
2. PTBL AVBL for CIV ACFT outside TWR HR. 15MIN PN.
3. AD LGT (including PAPI) AVBL outside TWR HR. Fixed LGT settings outside TWR HR
4. For AD LGT (including PAPI) outside TWR HR, CTC base fire on 119.7 at 30NM Tindal or on TAX.
5. Ambient light detector determines day/evening/night modes.
6. Settings for day/evening/night modes are changed with REF to long term seasonal conditions.
7. Possible 15-30 SEC switchover period during PWR outage for SDBY PWR.
8. RWY 14/32 edge light spacing: 60M.

OTHER LIGHTING

1. CIV terminal flood LGT switch located outside terminal building on 1HR timer.
2. RPT APN LGT can be turned on by phoning 08 8971 1970, once connected press #2, LGT stay on for 1HR.
3. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	122.6 On Ground (Outside TWR HR)
ACD	TINDAL DELIVERY	128.1 241.2
AFIS	TINDAL INFORMATION	119.7 (2)
APP	TINDAL APPROACH	120.95 243.0 261.4
ATIS	TINDAL	112.3 124.0 (1) 316.3 (1)
SMC	TINDAL GROUND	135.85 264.3
SMCV	TINDAL GROUND	127.25
TFC	TINDAL TRAFFIC	125.8 254.7
TWR	TINDAL TOWER	119.7 243.0 257.3

- (1) ATIS BCST 124.0, 316.3 DRG ATS HR. ATIS AVBL H24 on phone 08 7978 2183, AWIS OT. AWIS AVBL H24, see MET.
- (2) AFIS may be operating at Tindal outside TWR HR. Activation notified on ATIS, CS "Tindal Information". Procedures and services IAW AIP GEN 3.3 Flight Information Service, plus control of AD LGT, arrestor cables and callout of EMERG services. During hours of operation CTC 08 8973 6740.
 1. Automatic retransmit FAC exists BTN FLW FREQ: 120.95/261.4; 119.7/257.3; 125.8/254.7; 135.85/264.3; 130.1/342.5; 128.1/241.2.
 2. FREQ 243 - Guarded DUR ATS HR. Test TRANS of 10 SEC DUR 2330-2340 MO.
 3. ATS/AD hours as required in support of local MIL and exercise operations. Other ACFT requesting ATS must coordinate requirements through Tindal ABOC (08 8973 6888), tdl.aboc@defence.gov.au, or nominate requirements in Air Tasking Order. Availability of ATS for ACFT requiring Tindal as an emergency diversion aerodrome can be ascertained through Tindal ABOC.
 4. CTR may be activated at any time. Pilots RQ to confirm status by monitoring ATIS or through Brisbane Centre 122.6.

RADIO NAVIGATION AND LANDING AIDS

DME	ITN	110.7/ 44X	143039.3S	1322157.6E	(5)
		(RWY14)			
GP	ITN	330.2 (RWY14)	143039.3S	1322157.5E	
ILS	ITN	110.7 (RWY14)	143159.0S	1322315.2E	(3)

LOC	ITN	110.7 (RWY14)	143159.0S	1322315.2E	
TAC	TDL	112.3/ 70X	143124.4S	1322222.8E	(2)(4)
VOR	TN	112.3	143109.1S	1322215.6E	(1)

- (1) 101/0.41 to ARP - Voice modulated - Transmits voice to ACFT with COM failure.
- (2) TACAN cone of silence 61.7DEG, associated tolerance:
- 2000FT AGL - 0.004NM
 - 5000FT AGL - 0.1NM
 - 10000FT AGL - 0.21NM
 - 20000FT AGL - 0.42NM
- (3) ILS critical area not protected outside ATS HR. Pilot Monitored outside TN ATC HR of SER.
- (4) No azimuth guidance inbound and outbound DIST.
- (5) Antenna ELEV 426FT.

New intermediate holding point installed on TWY E associated with ILS critical area.

LOCAL TRAFFIC REGULATIONS

- TWY A (14L/32R), TWY R (09/27) & TWY S (18/36) are marked and can be lit as RWY. Only AVBL for use as a RWY by ACFT unable to divert due fuel or with declared EMERG AND when RWY 14/32 not AVBL.
- Taxiways East of TWY A not AVBL to CIV ACFT. When ATC active, CIV ACFT may be directed to taxi via TWY R and TWY S.
- Light ACFT REQ not to conduct engine run-ups on RPT apron.
- Multi ENG propeller ACFT are not to conduct full PWR ENG runs on paved hardstand due to creation of Foreign Object Debris (FOD).
- To preserve RWY grooving, ACFT with MTOW of 25,000KG or more RQ 180 DEG turns on RWY, must execute turns at THR ends of RWY (beyond grooved section) unless directed by ATC or NOTAM. ACFT RQ to use MAX radius turns.
- Parking ACFT on the MIL hardstand is not AVBL unless prior approval has been sought from the Executive Officer, RAAF Base Tindal, 08 8973 6888. Civil ACFT parking is AVBL on Civil Apron. GA ACFT to remain clear of stands 1 & 2.
- All DEP ACFT are to make first CTC with Tindal ACD to pass details if RQ and obtain AWY CLR. For all arriving and transiting VFR ACFT if FLT details are not known by Tindal make first CTC with Tindal ACD to pass details and obtain SSR code.
- ATC will not provide the status of Arrestor Systems when they are in the NML OPR PSN.
- RWY 14/32 runway strip (clear of sealed SFC) not AVBL due to multiple unmarked sinkholes.

FLIGHT PROCEDURES

- All ACFT REQ circuit CLR shall CTC Tindal SMC on 135.85/264.3 to pass FLT details and obtain SSR code and AWY CLR. Circuits (Circuit Area defined as 5NM radius based on ARP):
 - Jet - 2,000FT AMSL.
 - PROP and HEL - 1,500FT AMSL.
 - Choppers East. An area contained WI the following boundaries. E of TWY A, W of the Old Stuart Highway and not beyond THR RWY 14 or THR RWY 32. HEL area for conducting winch CCTS not above 1,000FT AMSL.
- CCTS are to be conducted to the W side of 14/32, unless directed otherwise by ATC.
- General Aviation Route through the Bradshaw Field Training Area (BFTA)**
ACFT may transit through R269/R270 via D236A/B, without notification to or clearance FM Dept of Defence. See Darwin/Tindal VNC for depiction. SFC-3,000FT.
- Katherine Helicopter Corridor.**
The Katherine Helicopter Corridor is established for helicopters transiting between the following locations: Katherine Railway Station, Springvale Homestead, Moonraker, Katherine Showgrounds, Katherine Hospital, Katherine Museum, Kumbidgee Lodge Helipad, Maude Creek Airstrip and Katherine Gorge Helipad.
The corridor is defined as 1NM either side of the Victoria Highway between the Katherine Railway Station and the intersection of the Victoria Highway and Stuart Highway, thence 1NM either side of the Katherine River between the Stuart Highway Bridge and the Katherine Gorge Helipad.

ACFT east bound will keep to the north of the Katherine River/Victoria Highway. ACFT west bound will keep to the south of the Katherine River/Victoria Highway.

When Tindal CTR is active, ACFT must CTC Tindal APP prior to becoming airborne. ACFT requesting clearance to any other locations within the corridor will be cleared as such:

Radio Phraseology:

ATC "(callsign) clearance via the HEL corridor not ABV 1,000FT".

ACFT read back "HEL corridor not above 1,000FT".

5. **Victoria Highway Corridor**

- a. The Victoria Highway Corridor is a danger area corridor that has been established for civil transits of R250.
- b. The corridor extends 1-2NM either side of the Victoria Highway between the 30NM ARP and 100NM ARP TN, not above 2,500FT.
- c. Aircraft are not required to obtain a clearance from ATC when transiting within the Victoria Highway Corridor (D209).
- d. Eastbound aircraft intending to transit R249 or enter the TN CTR must request clearance on 128.1 MHz leaving the corridor at the Research Centre (30NM TN) and before commencing climb.
- e. Within the corridor, separation will not be provided from other transiting traffic or from MIL aircraft operating within adjacent restricted areas. Traffic information, if time permits, may be passed.
- f. While in the corridor pilots must maintain a listening watch on 130.2 MHz and broadcast their intentions.
- g. Aircraft tracking west within the corridor are to remain north of the Victoria Highway, and aircraft tracking east are to remain south of the Victoria Highway.

6. **Fly Neighbourly Advice 9 and 10**

- a. When operating in the 'wedge' refer to Special Procedures FN 9 Nitmiluk (Katherine Gorge) - National Park – Fly Neighbourly Advice.
- b. For Tindal CTR refer to Special Procedures FN 10 – Nitmiluk (Edith River Falls) - National Park – Fly Neighbourly Advice.

7. **Remotely Piloted Aircraft Systems (RPAS)**

- a. Requests are to be sent to the RPAS Liaison Officer (LO) email address: 452sqntdl.fltrpaslo@defence.gov.au.
- b. Three business days PN required. Approval subject to the nature and location of activity.
- c. The following information shall be included in the request:
 - (i) Operator information, with at least two contact numbers.
 - (ii) Date and timings of operation.
 - (iii) RPAS details, including: type, weight and description.
 - (iv) Area of Operation (AO) using LAT/LONG or reference to a known location.
 - (v) Operating height (FT AGL).
- d. Individual approval is required for each RPAS operation. Letter of agreement may be available to ongoing or complex operations. ATC approval does not constitute approval for photography of RAAF Base Tindal. Contact the Airbase Operations Centre for photography approval.

8. In the event of an EMERG, ACFT OPR at Tindal on an unattended airfield basis are to declare the EMERG to Brisbane Centre on 122.6, then advise details to the RFFS Watch Attendant (callsign 'Base Fire'). When active, ACFT may declare the EMERG to 'Tindal Information' AFIS on FREQ 119.7, who will notify RFFS and Brisbane Centre.

9. **Restricted Operating Zones (ROZS) within R250**

- a. To facilitate civil operations within R250, civil ACFT may request Tindal ATC establish ROZS. These are low level, TEMP areas in which ACFT will be segregated (not separated) from MIL ACFT.
- b. Requests are to be sent to Tindal airspace cell email address: tdl.airspacecell@defence.gov.au.
- c. Two business days PN required. Approval subject to MIL TFC requirements. Priority may be given to OPS for the preservation of life or property.
- d. The following details are required:
 - (i) Operator name and CTC information.
 - (ii) Nature of OPS.

4. Demolition Range, position 143106.7S 1322423.1E (085/1.7NM FM YPTN ARP). Check NOTAM for TEMPO Restricted Area activation.
5. RFF SER will conduct AD FOD inspection twice DLY.
6. WAE may be OPR at the hook cable hut sites, inside the RWS - callsign "Cable Party". Cable Party will be on CTAF and will vacate if required for ACFT movements.
7. MIL radar in operation PSN 142934S 1322331E.
 - a. Possible avionics interruptions/errors WI 125M BLW 750FT AMSL.
 - b. ACFT transporting MIL ordnance to MNTN the FLW separation FM the radar PSN unless ordnance manufacturers specify shorter DIST.
 - (i) Hazards of Electromagnetic Radiation to Ordnance (HERO) susceptible WI 250M/BLW 850FT AMSL.
 - (ii) HERO unsafe WI 900M/BLW 850FT AMSL.
 - c. PPR by ACFT planning to carry HERO susceptible or HERO unsafe ordnance into Tindal 24HR prior to ARR. Contact Tindal ABOC.

CHARTS RELATED TO THE AERODROME

1. WAC 3109.
 2. MIL Aerodrome Obstruction Chart Type A: DEC 2024.
 3. Also refer to AIP Departure & Approach Procedures.
-

TOWNSVILLE/TOWNSVILLE INTL**ELEV 18****AVFAX CODE 4402**

QLD

UTC +10

YBTL

191509S

1464555E

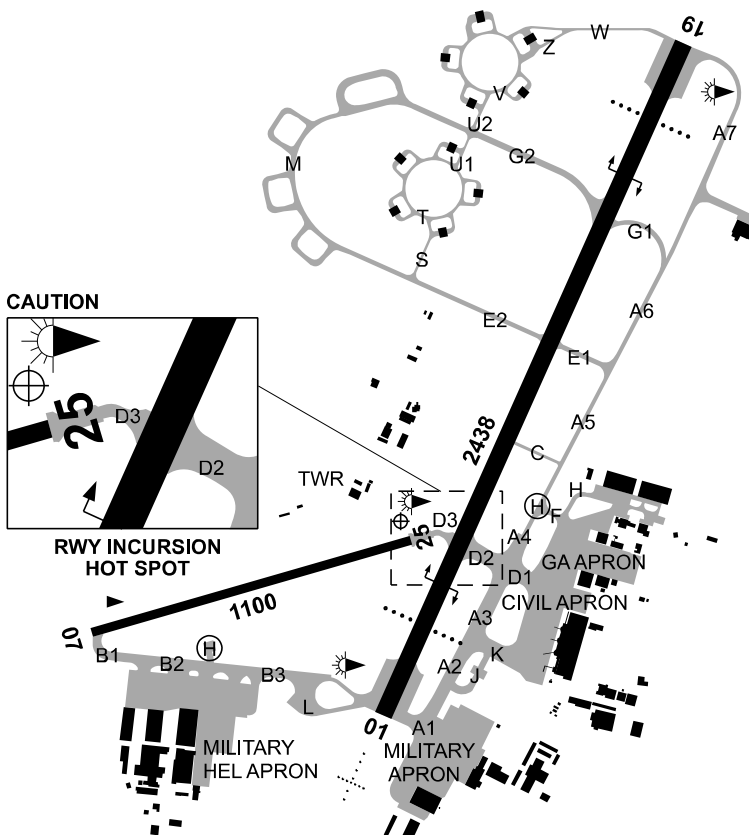
VAR 7 DEG E

JOINT

AD OPR RAAF, Garbutt/Townsville Airport Pty Ltd, PO Box 7636, Garbutt, Townsville, QLD, 4814.

Email: aviation@tsvairport.com.au. PH 07 4727 3211. ARO H24 0418 771 999.

Website: www.townsvilleairport.com.au.

**REMARKS**

1. Conditions of Use and AD charges apply at Townsville International Airport, AVBL FM website.
2. ATS HR 2000-1200 UTC DLY. CTAF PROC apply AH. AH ATS AVBL SUBJ staffing. Require 48HR PN for approval. Email: tvl.atc@defence.gov.au.
3. This AD is a Security Controlled Airport.
4. All pilots and operators must possess and display a current Aviation Security Identification Card (ASIC) when in all areas airside unless under escort.

HANDLING SERVICES AND FACILITIES

Civil

The Airport Operator does not provide an ACFT marshalling service. All requests for ACFT marshalling should be directed to the airlines or Fixed Base Operations (if applicable).

BP - Air Fuel Townsville: 2130-0730 UTC MON-FRI, SAT-SUN 2200-0800 UTC.

PH (Office) 0420 896 241, for fuel H24 0412 777 160, VHF 126.4 Callsign "AIR BP".

AVGAS, JET A1, O117, O125, O156. AVGAS BP Carnet bowser. EFTPOS and BP Carnet.

Skyfuel/Viva: 0430-1930 Local MON-FRI, 0445-1830 Local SAT, 0445-1830 Local SUN. AH 60MIN

PN. PH 0411 423 955 (office), PH 0407 167 346 (all fuel orders). JET A1, Viva Carnet card accepted.

Military

LHOX and LOX AVBL. First point of contact is Airbase Operations Centre.

Duty Crew and 27 Squadron Air Movements Townsville AVBL MON-THU 2130-0630 UTC,

FRI 2130-0400 UTC excluding PH. CTC 361.6 MHZ.

Airbase Operations Centre: Phone 07 4752 1888, Mobile 0418 405 948,

email: tvl.aboc@defence.gov.au.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 7 H24.
2. AVBL H24 FREQ 131.0. Request via ATC.

APRONS AND TAXIWAYS

1. **Civilian Aircraft Apron Pavement Ratings**
 - a. Concrete APN unrated.
 - b. Asphalt APN unrated.
 - c. GA APN unrated.
2. **TWY Restrictions**
 - a. TWY A, N of TWY D reduced to 15M width. Not AVBL to ACFT with wingspan greater than 36M or wheel base greater than 18M. MIL ACFT up to C-17A permitted.
 - b. TWY B not AVBL to ACFT with wingspan greater than 36M or wheel base greater than 18M.
 - c. TWY C not AVBL to ACFT with MTOW greater than 5,700KG.
 - d. TWY D1 not AVBL to ACFT with wingspan greater than 36M.
 - e. TWY E1 not AVBL to ACFT with wingspan greater than 29M. E-7A ACFT permitted.
 - f. TWY E2 limited to ACFT no larger than C130. Pavement concession required for C-17, BBJ, P-8A and E-7A.
 - g. TWY G1 not AVBL to ACFT with wingspan greater than 36M or wheel base greater than 18M. MIL ACFT up to C-17A permitted.
 - h. TWY G2 21M wide. No shoulders. KC-30A requires pavement concession.
 - i. TWY J not AVBL.
 - j. TWY L not AVBL to ACFT with wingspan greater than 36M or wheel base greater than 18M.
 - k. TWY M restriction between TWY G2 and Military Ordnance Loading Area (MOLA) 11, see TWY G2. For TWY M restriction between E2 and MOLA 12, see TWY E2.
 - l. TWY S, T, U, V, W and Z limited to MIL fast jets.
 - m. TWY A7 and G: ACFT outer main gear wheel span clearances may not be achieved on TWY curves and pilots must use judgemental oversteer to maintain edge clearance.
 - n. TWY E1 centreline lighting not AVBL HN for existing RWY 01/19.
 - o. TWY G1: Entry from RWY 01/19 when taxiing south not AVBL.

SURFACE MOVEMENT GUIDANCE

1. RWY 01/19 Distance-to-run markers installed.
2. RWY 07 300M and 600M to RWY end markers installed left of RWY.

AERODROME OBSTACLES

1. Lit WDI:
 - a. 13FT AMSL PSN 191422.82S 1464631.08E. Infringes TNS by 13FT.
 - b. 10FT AMSL PSN 191524.55S 1464548.76E. Infringes TNS by 10FT.
2. Lit buildings:
 - a. 28FT AMSL PSN 191538.97S 1464557.33E. Infringes TNS by 28FT.
 - b. 10FT AMSL PSN 191413.76S 1464623.53E. Infringes RWS and TNS by 10FT.

3. Lit masts:
 - a. TACAN, 669FT AMSL PSN 191644.35S 1464433.16E. Infringes HZS by 84FT.
 - b. COM TWR, 535FT AMSL PSN 191459.11S 1464758.84E. Infringes HZS by 364FT.
 - c. COM TWR, 980FT AMSL PSN 191530.73S 1464808.70E. Infringes HZS by 816FT.
 - d. 53FT AMSL PSN 191518.63S 1464552.72E. Infringes TNS by 53FT.
 - e. 1,683FT AMSL on Magnetic Island PSN 190817.80S 1464937.57E. Infringes TKOF/APCH by 870FT.
 - f. Radar dome, 705FT AMSL PSN 191119.41S 1464553.56E. Infringes HZS by 311FT.
 - g. Mt Stuart TWR, 2,345FT AMSL PSN 192036.50S 1464650.27E. Infringes outer HZS by 1,840FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 issued hourly AVBL during MO HRS (2100-0700 UTC MON-THU, 2100-0500 UTC FRI, EXC PH, OT by TAF RMK/NOTAM), AD WRNG, WS WRNG.
2. AWIS PH 07 3564 3743 - Report faults to BoM.
3. AWIS FREQ 133.5 AVBL outside TWR HR - Report faults to AD OPR.
4. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MO 07 3239 8731 when staffed. AH AVBL FM MWO 07 3239 8721.

PHYSICAL CHARACTERISTICS

01/19	017	80a	PCR 710/F/C/X/T Grooved. N and S ends concrete ungrooved.	WID 45	RWS 300
07/25	067	36a	PCR 200/F/C/1.05 MPa/T Asphalt.	WID 30	RWS 90

ARRESTING GEAR

- | | | | | |
|--------|------------------------------------|-------|------------------------------------|--------|
| RWY 01 | BAK 12/14
(R)(B)
445 (1,460) | ----- | BAK 12/14
(R)(B)
445 (1,460) | RWY 19 |
|--------|------------------------------------|-------|------------------------------------|--------|
1. Recessed bi-directional BAK 12/14 hookcable infrastructure remains 445M (1,460FT) FM THR RWY 01/19. Marked by yellow disks. DIST BTN empty cable housings 1,540M (5,080FT).
 2. RWY 01 and RWY 19 hookcable arrestor systems not AVBL (cable removed).

AERODROME AND APPROACH LIGHTING

- | | | | | |
|-----------|---------|----------------|-------------|---------------|
| RWY 01/19 | MIRL | AFRU+PAL 118.3 | | SDBY PWR AVBL |
| RWY 01/19 | PTBL(2) | | | |
| RWY 01 | PAPI | AFRU+PAL 118.3 | 3.0 DEG49FT | SDBY PWR AVBL |
| RWY 01 | SALS | AFRU+PAL 118.3 | | SDBY PWR AVBL |
| RWY 19 | PAPI | AFRU+PAL 118.3 | 3.3 DEG49FT | SDBY PWR AVBL |
| RWY 07/25 | PTBL(1) | | | |
- (1) AVBL EMERG only
 - (2) 30 MIN PN
 1. **ALS type and length**
 - a. RWY 01 - distance coded CL: 340M.
 2. PTBL LGT - Emergency flare path AVBL H24, laid by ARFFS.
 3. PAPI RWY 19 should not be used beyond 5NM FM THR as it does not provide CLR over Magnetic Island.
 4. RWY 01 PAPI AZM restricted to 8DEG either side of CL.
 5. AFRU+PAL AVBL outside ATS HR. REQ for LGT can also be made THRU Brisbane ATC 120.55. Expect a 10MIN DLA.
 6. RWY 01 and RWY 19 RTIL activated when threshold displaced during daylight hours only. RTIL located on both sides of RWY at 574M FM permanent THR position.
 7. RWY 01/19 edge light spacing: 60M.

OTHER LIGHTING

- | | | |
|-----|-------|---------------------------------|
| HBN | OCC R | Mt Louisa, Mt Stuart, Mt Cook. |
| HBN | R | CONS - Castle Hill, Many Peaks. |
1. Standby PWR generators are activated when LOW VIS procedures are imminent.
 2. Standby PWR switchover time: 15 SEC.
 3. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	120.55 On Ground (Outside TWR HR)
ACD	TOWNSVILLE DELIVERY (4)	128.1 236.1
APP/DEP	TOWNSVILLE APPROACH (2)	126.8P 134.1S 243.0 276.0 (5) 282.4S 307.8P 335.8S
ATIS	TOWNSVILLE ATIS (3)	114.1 133.5 276
SMC	TOWNSVILLE GROUND (ACFT)	121.8 264.6
SMCV	TOWNSVILLE GROUND (VEHICLES)	119.45
TWR	TOWNSVILLE TOWER	118.3 243.0 257.8 276 (5)
VOLMET	AUSTRALIA	6676 (1) 11387 (1)
(1)	H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.	
(2)	FIS AVBL in Class G within 36NM TL during ATS HR.	
(3)	ATIS available on phone 07 4752 1216.	
(4)	Arriving VFR ACFT shall CTC ACD to pass FLT details and obtain SSR code.	
(5)	Transmits voice to ACFT with COM failure.	
1.	FREQ 243.0 - Guarded EMERG FREQ. Test transmissions every MON FM 2300-2315	
2.	Automatic retransmit FAC exists BTN FLW FREQ: 126.8/307.8; 134.1/335.8; 118.3/257.8; 121.8/264.6; 128.1/236.1	

RADIO NAVIGATION AND LANDING AIDS

DME	ITL	109.3/ 30X	191518.6S	1464552.3E	(6)(7)
		(RWY01)			)
GP	ITL	332 (RWY01)	191518.7S	1464552.6E	(5)(8)
					)
ILS	ITL	109.3 (RWY01)	191406.8S	1464632.2E	
LOC	ITL	109.3 (RWY01)	191406.8S	1464632.2E	(5)
DME	TL	114.1/ 88X	191439.1S	1464529.6E	(2)
VOR	TL	114.1	191439.1S	1464529.1E	(1)
NDB	TVL	276	191449.0S	1464544.3E	Range 70 (HN 75) OW 170 (3)
				(OW HN110)	
TAC	TVL	112.5/ 72X	191644.5S	1464433.4E	(4)(9)
					)
(1)	133/0.6				
(2)	134/0.6 - Antenna ELEV 35 FT AMSL.				
(3)	145/0.4 - ATIS, voice AVBL for EMERG - POSS BRG FLUC BTN 070 and 270 MAG BLW 11,000FT AMSL - Pilot MNT DRG CTAF HR.				
(4)	032/2.0 - Terrain shielding BTN 140 radial - 160 radial beyond 25NM at MSA. TACAN TVL is not paired with or co-located with TL VOR/DME, and therefore is not to be used with:SID, ILS/DME, LOC/DME or VOR/DME approaches. Pilot MNT outside ATS HR.				
(5)	Pilot MNT outside ATS HR.				
(6)	Antenna ELEV 30FT AMSL.				
(7)	Poor coverage below 5500FT AMSL LTD by terrain shielding beyond 12DEG N and beyond 22DEG S of RWY CL.				
(8)	ILS GP critical area infringed by IWL.				
(9)	TACAN guidance unusable in sector area BTN 139 radial and 149 radial.				

LOCAL TRAFFIC REGULATIONS

1. Code D ACFT or larger LDG RWY 01 require roll through and conduct 180 DEG turn on THR and backtrack to TWY A1 or D2. Code D ACFT or larger restricted to:
 - a. TWY A1, A2, A3;
 - b. TWY D2 and
 - c. TWY K.
2. **LOCAL TRAFFIC**
- 2.1 **Booking Procedure**
 - a. ACFT conducting AWK within TVL CTR and CTA including SVY, IAT, or circuit training must contact ATC for approval and slot time.

- b. For SVY, OPR are to email AWK maps to tvl.atc@defence.gov.au 7 working days before the planned activity, and prior to contacting ATC. For IAT and CTR OPS (including circuit area), OPR are to book using the online book AWK website: www.qld.bookawk.com.
 - c. OPR are to contact the following telephone numbers for SVY AWK confirmation, or if unable to book IAT or CTR AWK online:
 - (i) CTA AWK (APP): 07 4752 1207.
 - (ii) CTA AWK (TWR): 07 4752 1205.
 - d. For OPS within R751, R752, R736 and R739, OPR are to submit an air activity request to the range control by email to: dotam.rangecontrol.tfta@defence.gov.au in addition to ATC approval.
- 2.2 **Training Airspace**
- a. **Circuit Area.** All ACFT REQ circuit CLR shall CTC TL SMC to obtain SSR Code and airways CLR. TL Circuit Area defined as 5NM radius of TL ARP. Preferred circuit direction is as follows:
 - (i) **RWY 01** - Left hand CCTS, avoiding Cape Pallarenda built up areas;
 - (ii) **RWY 07** - Left hand CCTS;
 - (iii) **RWY 19** - Right hand CCTS, avoiding Cape Pallarenda built up areas; and
 - (iv) **RWY 25** - Right hand CCTS
- 2.3 **TL North Eastern Training Area (NETA).** The TL NETA is an IFR training area, defined as TL 025-080 VOR radials, 10-30DME. Entry and exit gates are RWY dependant.
- a. When RWY 01 is in use:
 - (i) Entry gate via KAGES.
 - (ii) Exit gate via REGIN.
 - b. When RWY 19 is in use:
 - (i) Entry gate via REGIN.
 - (ii) Exit gate via KAGES.
- 2.4 **Townsville Field Training Area (TFTA).** MIL HEL regularly OPR WI the lateral boundaries of R736, R739, R751, R752 and D745 whilst the relevant airspace is not ACT. Suggest ACFT OPR in Class G airspace WI the boundaries of this airspace MNT FREQ 126.05 to ensure appropriate situational awareness is maintained with respect to MIL Class G OPS.
- 2.5 **Town Common.** The Town Common is defined as the area bounded by a line from the Radar Site (RDRS), to the Western airfield boundary fence, through the HF transmitter site to the Bohle River, along the Bohle River and the Coastline back to the RDRS. Town Common has the following sectors that may be used by ATC:
- a. **Many Peaks.** The portion of the Town Common North of the Southern slopes of Many Peaks (MYP).
 - b. **Town Common East.** The portion of Town Common East of the line running South from the Southern point of MYP and south of the southern slopes of MYP.
 - c. **Town Common West.** The portion of Town Common West of the line running South from the Southern point of MYP and south of the southern slopes of MYP.
- 2.6 **Helo West.** Helo West is defined as an area within the following lateral limits: in a clockwise direction from the southern slopes of Many Peaks Range to the western edge of the Northern Ordinance Loading Areas (requirement to remain one mile west of the coast) to the NDB (remaining north west of the Navaid) to the HF TX site (remaining east of the facility) to the southern tip of Many Peaks Range (requirement to remain one mile east of the Bohle River). ACFT can expect clearance of Helo West, not ABV 1,000FT AMSL or requested level.
- 2.7 **D779 (Cape Cleveland).** Suggest ACFT OPR in D779 MNT FREQ 126.05 to ensure appropriate situational awareness is MNTN with respect to OPS in Class G Airspace WI the confines of the Danger Area. Tracking to/from D779 is RWY dependant.
- a. When RWY 01 is in use:
 - (i) Outbound: via Coastal Southbound
 - (ii) Inbound: Townsville via Sunzinc, expect a clearance limit of 'The Lakes'
 - b. When RWY 19 is in use:
 - (i) Outbound: via Sunzinc
 - (ii) Inbound: Townsville via the Coast, expect a clearance limit of Kissing Point.

- 2.8 **Nil Transponder Aircraft.** Nil transponder aircraft should expect clearance via a published VFR route not above 1,500FT AMSL. Prior ATC approval is required from ATC on 07 4752 1207.
- 2.9 **Parking**
- a. **Civil Terminal**
All charter/itinerant ACFT with MTOW greater than 5,700KG PRKG requests must be made via Townsville Airport Website> Regulatory> Aircraft Parking or by contacting the Townsville Airport ARO on 0418 771 999 with MNM 48HR PN.
 - b. **Visual Docking System**
Visual Docking System - Bay 1, 2, 3 and 4 - Combined azimuth and stopping nose in guidance system.
 - c. **General Aviation**
 - (i) Rotary wing ACFT must park in designated helicopter parking area unless approved by ARO. Air taxi east of AVGAS bowser prohibited. CTC ARO for approval if required.
 - (ii) No ACFT movement permitted east of designated wash bay aircraft parking area.
 - (iii) PRKG for itinerant ACFT with MTOW less than 5,700KG not permitted on leased PRKG positions. Leased PRKG positions identified by green borders painted inside PRKG clearance lines.

FLIGHT PROCEDURES

1. **ATC TRAFFIC MANAGEMENT SPEED**
When not on a SID or STAR (including vectoring) - non-fighter ACFT ARR or DEP TL must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required. ARR Fighter ACFT must not exceed 350KT IAS when within 36NM of TL, unless otherwise directed by ATC.
2. No ATS provided to CIV ACFT WI R736, R739, R751 and R752 when ACT.
3. **DEPARTURES**
 - a. **General**
 - (i) Departures from the TL 138 to 195 VOR radial conflict with R768A and R768B. Expect requirement to either reach A020 (R768A) or A030 (R768A and R768B) by 6 DME, or lateral tracking that is plotted procedurally clear.
4. **ARRIVALS**
 - a. **General**
 - (i) Visual approaches from the TL 138 to 195 VOR radial conflict with R768A and R768B. Expect requirement to either maintain A020 (R768A) or A030 (R768A and R768B) until 6 DME, track via the LOC, or remain north or west of the Ross River from WPT RRDM.
 - b. **Military**
 - (i) **Jet aircraft.** MNM ALT 2,500FT AMSL at initial, descend 1,500FT AMSL for pitch, unless directed by ATC. MAX speed on initial 350KT, unless higher speed operationally required.
 - (ii) **Non-jet aircraft.** MNM ALT 1,500FT AMSL at initial, descend 1,000FT AMSL for pitch, unless directed by ATC.
5. **PALM ISLAND TRAFFIC**
 - a. In VMC, ACFT BLW 5,000KG MTOW can expect a coded 'CORDELIA' or 'RATTLESNAKE' clearance. The tracking requirements are:
 - (i) CORDELIA clearance outbound: YBTL - east of the Radar Site (RDRS) - east of Cordelia Rocks - YPAM.
 - (ii) CORDELIA clearance inbound: YPAM - east of Cordelia Rocks - east of RDRS - YBTL.
 - (iii) RATTLESNAKE clearance outbound: YBTL - mouth of the Bohle River (MBHR) - west of Rattlesnake Island (RKI) - YPAM.
 - (iv) RATTLESNAKE clearance inbound: YPAM - west of RKI - MBHR - YBTL.
 - b. Expect coded clearances dependent on duty RWY:
 - (i) RWY 01 and RWY 07 departure: CORDELIA coded clearance.
 - (ii) RWY 01 and RWY 07 arrival: RATTLESNAKE coded clearance.
 - (iii) RWY 19 and/or RWY 25 departure: RATTLESNAKE coded clearance.
 - (iv) RWY 19 and/or RWY 25 arrival: CORDELIA coded clearance.

- c. In IMC, expect tracking as per flight plan with a suitable standard instrument departure and level.
- d. When R747 is active, expect amended tracking.
- 6. TRACKING INSTRUCTIONS FOR VFR ACFT TO AND FM TOWNSVILLE**
 - a. CLR via STUART VFR ROUTE. RQ to remain E of Townsville-Charters rail line FM/TIL (inbound/outbound) 'Cluden Racecourse' (191919.72S 1464918.58E) while in CTA.
 - b. CLR via UPPER ROSS VFR ROUTE. RQ to remain 1NM W of Ross River and Ross River dam wall FM/TIL (inbound/outbound) ROUND MT (RMT) while in CTA.
- 7. TRACKING INSTRUCTIONS FOR VFR ACFT TO AND FM TOWNSVILLE WHEN R736, R739, R751 and R752 ACT**
 - a. ATC have additional separation RQMNTS with restricted airspace when ACFT are inside CTA. The visual TR listed below only separate ACFT with restricted airspace when they are OCTA. A clearance to enter CTA will not be AVBL until ATC required separation standards with restricted airspace are achieved.
 - b. R736 and R739 only - TR S of Greenvale to YBU railway line.
 - c. R751 and/or R752 - TR N of Herveys Range Developmental Road.
 - d. R736, R739, R751 and R752 ACT SIMUL - TR S of Greenvale to YBU railway and N of Herveys Range Developmental Road BTN Paynes Lagoon and TNP.
 - e. Visual NAV LGT LCA at Paynes Lagoon (192730S 1460318E) and Speed Creek (192824S 1462030E).
- 8. TRACKING INSTRUCTIONS FOR ACFT OPR D764**
- 8.1** A BLUEWATER clearance allows an aircraft to operate within the lateral confines of D764 not ABV cleared LVL. Aircraft should expect a BLUEWATER clearance via the applicable runway dependant tracking. When tracking via the coast to and from D764, aircraft must remain over land.
 - a. When RWY 01 is in use:
 - (i) Outbound: BLUEWATER via the coast, not ABV 1,500FT AMSL.
 - (ii) Inbound: YBTL via Yabulu.
 - b. When RWY 19 is in use:
 - (i) Outbound: Yabulu DCT, not ABV 1,500FT AMSL.
 - (ii) Inbound: YBTL via the coast.
- 8.2** ACFT OPR D764 WI Class C Airspace must MNT FREQ 126.8 and when transiting BTN Class C and Class G Airspace should also MNT FREQ 126.7 to ensure appropriate situational awareness is MNTN with respect to OPS in Class G Airspace WI the confines of the Danger Area.
- 9. AIRSPACE RECLASSIFICATION OUTSIDE TWR HR**
 - a. Class C Airspace/CTA steps WI 36 DME TL BLW 8,500FT AMSL reclassified Class G.
 - b. TL TWR may recall the CTR/CTA steps at short notice. Check NOTAM and ATIS.
- 10. LOW VISIBILITY OPERATIONS**
 - a. RWY 01/19 is capable of supporting LDG with a RWY VIS of not less than 800M.
 - b. Manual RV readings are provided to the control TWR. Transmissometers are not installed.
- 11. REMOTELY PILOTED AIRCRAFT SYSTEM (RPAS)**
 - a. All RPAS requests are to be sent to: 452sqntvflit.rpas@defence.gov.au.
 - b. A minimum of 3 business days PN is required. Approval is subject to timings, ATC workload and area of operations.
 - c. After approval, ATC reserve the right to restrict or cancel RPAS operations due to higher priorities.
 - d. Requests are to include:
 - (i) Operator details and contact instructions (primary and secondary phone, plus email).
 - (ii) Date and time (with alternate if applicable).
 - (iii) RPAS type, weight and brief description.
 - (iv) Area of operations, including LAT/LONG and/or street address including radius. Include a map screenshot if AVBL.
 - (v) Operating height (FT AGL) and elevation of AO.
 - (vi) Any specific operating conditions.

(vii) Procedures for abnormal operations (lost link, escaped RPAS, communication failure).


12. MIL ACFT may conduct OPS within 50NM of Townsville using Light Enhancement Devices and may not display external lighting. SFC-1,000FT AGL. Within the CTAF, when active, ACFT are to display external lighting on receipt of a CTAF broadcast from other ACFT.
13. Flight plans to/from YBTL must not be submitted more than 20 hours prior to EOBT to allow ATC system data processing.

CTAF - AFRU 118.3

CTAF procedures apply outside TWR HR.

NOISE ABATEMENT PROCEDURES

1. ACFT DEP RWY 01 or RWY 07 on a visual DEP (including VFR) shall remain at least 600M CLR of Pallarenda built up areas when BLW A020 unless directed by ATC for OPR reasons.
2. This may be achieved as follows:
 - a. YBCS/YPAM DEP maintain upwind until over water then remain over water at least 600M CLR of Pallarenda.
 - b. W DEP conduct left turn remaining at least 600M S of Pallarenda or maintain upwind until over water then remain over water at least 600M CLR of Pallarenda and conduct left turn N of VFR WPT RDRS (radar site) or when ABV A020.
3. Practice ENG failures are not permitted on left crosswind RWY 01.



ADDITIONAL INFORMATION

1. Bird and animal hazards at AD up to 3,000FT, with HIGH risk during DEC-MAY seasonal period at dawn and dusk (+/- 1 HR). Increased numbers of the following species are expected during the specified periods:
 - a. Magpie geese and various duck species pose a hazard in proximity to the RWY strip following rain events especially FM DEC-MAR.
 - b. Black kites are present year round but can be found in higher numbers FM FEB-MAY when they may be attracted to the airfield during mowing OPS.
 - c. Bush-stone curlews pose a bird strike risk on the airfield during the night.
 - d. Flying foxes are a seasonal risk at dawn and dusk on the approaches to the RWY (on and off airfield). Peak risk period is AUG-DEC although potential risk exists year round.
 - e. Nankeen kestrels are present in higher numbers for DEC-MAY.For current information refer to NOTAMs and TAPL Bird Watch Reports.
2. RAAF Townsville Demolition Range 191454.2S 1464508.0E (261/0.74 NM FM Townsville ARP). Vertical Limit 1,600FT AGL WI 370M radius laterally. Check NOTAM for activation.
3. New ATC TWR construction 310M N of current TWR. New ATC TWR not CMSD, observe old TWR for light signals.

CHARTS RELATED TO THE AERODROME

1. WAC 3219.
2. MIL AD Obstruction Chart Type A: RWY 01/19 and RWY 07/25 - FEB 2024.
3. Also refer to AIP Departure and Approach Procedures.

WILLIAMTOWN**ELEV 31****AVFAX CODE 2012**

NSW

UTC +10

YWLM

324742S

1515004E

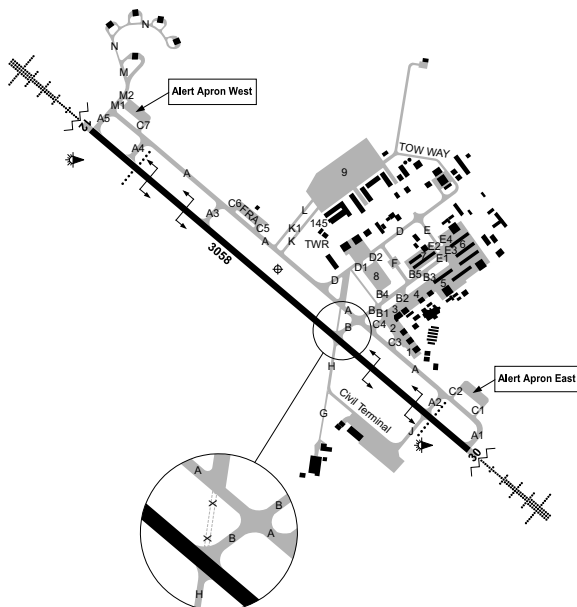
VAR 13 DEG E

MIL

AD OPR RAAF, Airbase Operations Centre - RAAF Base, Williamtown, NSW, 2314.

Email: wlm.aboc@defence.gov.au. PH 02 4034 5888. Fax 4034 7881.

Website: Civil www.newcastleairport.com.au.

**REMARKS**

1. CIV terminal OPR: Newcastle Airport Ltd (NAPL), Private Bag 1, Williamtown NSW 2318. Terminal Operations Coordinator 02 4928 9810, 0417 281 866, fax 02 4965 1556, email: operations2@newcastleairport.com.au or website.
2. AD not AVBL for planning as an ALTN or ENR ALTN without prior approval.
3. AD not AVBL for general use – MIL CONTROL. PPR for all CIV OPS and visiting MIL ACFT:
 - a. For all MIL ACFT and CIV ACFT parking on MIL aprons, contact WLM ABOC.
 - b. For CIV ACFT, contact NAPL. Online approval AVBL. ARR/DEP times may be SKED to meet RAAF/CIV RQMNTS.
 - c. Curfew applies to CIV OPS outside normal airfield operating hours (2000-1200 UTC, 1HR earlier HDS). AH must be approved by RAAF, regardless of previous NAPL approval. Contact NAPL.
 - d. All CIV and visiting MIL aircraft to submit FPL and quote approval number. ATS HR 2000-1200 UTC DLY (1HR earlier HDS). May be extended in support of MIL OPS (check CTR NOTAM).
4. NAPL charges - refer to website.
5. Customs, immigration and health AVBL 24HR PN.
6. This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

AMS (MIL) AVBL email: wlm.26sqnamsops@defence.gov.au or PH: 02 4034 7214.

OPR HR MON-FRI 2200-0600 UTC (1HR earlier HDS) except public holidays.

AIR BP – NTL Ground Handling DLY 2000-0800 UTC, 1HR PN AH, AH call out fee \$150, PH: 0404 484 053, email: shane@austs.com. Nil AVGAS AVBL.

Limited lavatory and potable water SER not AVBL to transiting MIL ACFT.

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6 2000-1200 UTC DLY (1HR earlier HDS). CAT 4 OT.
2. When ATS not active, RFFS CS "WILLY FIRE" AVBL on CTAF FREQ.
3. RFFS vehicles carry water, foam and dry chemical powder firefighting agents as recommended by ICAO.
4. 4 x 50KG dry chemical extinguishers AVBL on CIV APN.
5. FREQ 131.0 AVBL HO. REQ via ATC.

APRONS AND TAXIWAYS

1. **STRENGTH/PCR:**
 - a. Civil apron Bays 1 - 14 unrated.
 - b. TWY A, A1, A2, A5, B BTN RWY 12/30 and TWY A, J - PCR 730/C.
 - c. TWY D BTN TWY A and D1, compass swing - PCR 640/C.
 - d. TWY A3, A4, B, B1, B2, B3, B4, B5, C3, C4, C5, C6, D BTN compass swing and TWY E, D1, D2, E, E1, E2, E3, E4, F, FRA, MA2, MA3, MA4, MA6, MA7, MA8 - PCR 450/C.
 - e. TWY D BTN TWY E and Hangar 11, M, N, OLA 20, 21, 22, 23, 24, AEW C Hangar Apron, MA5 - PCR 370/C.
 - f. TWY C1, C2, C7, K, K1, L, M1, M2, Tow Way, Alert Apron East, Alert Apron West, MA9 - PCR 280/C.
 - g. TWY G, engine run up bay - PCR 150/C.
2. **CAUTION:**
 - a. Uncontrolled vehicle crossings on TWY B, C1, C2, D, H, J, M.
 - b. MIL TWY and APN not visible to ATC. Vehicles and pedestrians may operate N of TWY A without ATC clearance. ATC will advise taxiing ACFT about other taxiing ACFT and ACFT under tow.

SURFACE MOVEMENT GUIDANCE

1. RWY 12/30 DIST to run marker installed.
2. INS marker boards coincident with TACAN check points on TWY A and lit.
3. TWY L/K are one way. Guidance signs installed facing TWY A.

AERODROME OBSTACLES

1. Mast 170FT AMSL 198/0.59NM FM ARP
2. Lit water tower 171FT AGL 088/0.7NM FM ARP
3. M34B arrestor barrier anchor points at end of both CWY 5FT AGL 28M (92FT) outside extended RWY CL. See RDS for STODA.
4. Arrestor huts 9FT AGL located 85M either side of RWY CL associated with recessed bi-directional BAK 12/14 hookcables (*see ARRESTING GEAR*).
5. Lit ATC tower 145FT AMSL, PSN 324738.40S 1515020.04E, 075/380M FM ARP
6. Trees:
 - a. 62FT AMSL 115/0.97NM FM ARP
 - b. 60FT AMSL 114/1.14NM FM ARP
 - c. 72FT AMSL 119/1.15NM FM ARP
 - d. 146FT AMSL 305/1.57NM FM ARP
7. Lit TACAN 52FT AGL 205/295M FM ARP. Infringes OLS.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 issues hourly AVBL during MO HRS (2100-0700 UTC MON-THU, 2100-0400 UTC FRI, EXC PH, OT by TAF RMK/NOTAM), AD WRNG, WS WRNG.
2. AWIS PH 02 9353 6460 - Report faults to AD OPR.
3. AWIS FREQ 316.1, 365 AVBL outside TWR HR - Report faults to AD OPR.
4. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing AVBL FM Defence MO 02 4034 6500 when staffed. AH AVBL FM MWO 02 9296 1526.

PHYSICAL CHARACTERISTICS

12/30 118 100a/ PCR 730/F/B/1.93 MPa/U Grooved WID 45 RWS 280
b

No RWY shoulders.

ARRESTING GEAR

- | | | | | |
|-------|---------------------------------|-------|---------------------------------|-------|
| RWY12 | BAK 12/14 (R)(B)
450 (1,476) | ----- | BAK 12/14 (R)(B)
450 (1,476) | RWY30 |
|-------|---------------------------------|-------|---------------------------------|-------|
1. Recessed bi-directional BAK 12/14 hookcables INSTL 450M (1,476FT) SE of THR RWY 12 and 450M (1,476FT) NW of THR RWY 30. Marked by yellow circles painted on RWY and adjacent to DIST to run marker.
 - 1.1. Infrastructure exists for inner east and inner west BAK 12/14, however hookcables not INSTL. Location of inner west infrastructure is 951M (3,120FT) SE THR RWY 12. Location of inner east infrastructure is 910M (2,985FT) NW THR RWY 30. Marked by yellow circles painted on RWY and adjacent to DIST to run marker.
 - 1.2. Normal OPR PSN on LDG:
 - a. Dry RWY - arrestable ACFT DEP end down.
 - b. Wet RWY - arrestable ACFT DEP end up.
 - 1.3. Normal OPR PSN on DEP:
 - a. Wet/dry RWY - arrestable ACFT DEP end up.
 - 1.4. DEP end up on pilot request at anytime.
 - 1.5. Non-arrestable ACFT both ends down. No crossing RESTR in down PSN.
- Notes:*
- a. *In the event of PWR failure, cables will rise to a HGT of 10CM until PWR is restored (up to 30 MINS).*
 - b. *CONC absorber housing 1FT high ADJ RWY edge.*
2. M34B(R) barriers located in OVRN 62M (203FT) NW of THR RWY 12 and 62M (203FT) SE of THR RWY 30. NML OPR PSN for barriers is down (1M AGL). Barriers equipped with FLG red lights. If lights are visible on final, LDG is being attempted over a raised barrier (6M AGL).
 3. BAK 12/14 locked down and not AVBL MON-FRI outside of published HR of locally based MIL fast jet ACFT OPS, including weekends and public holidays. ATC cannot override. Contact WLM ABOC to check or arrange availability.
 4. M34B and BAK 12/14 not available during CTAF HR except with PN.
 5. Arresting system status will not be provided by ATC when in normal operating position.
 6. M34B Net Arrestor Systems top wire design height not guaranteed when the RWY condition is wet due to Net sagging.

AERODROME AND APPROACH LIGHTING

- | | | | | |
|-----------|------------|----------------|-------------|---------------|
| RWY 12/30 | HIAL-CAT I | AFRU+PAL 118.3 | | SDBY PWR AVBL |
| RWY 12/30 | HIRL(1) | AFRU+PAL 118.3 | | SDBY PWR AVBL |
| RWY 12/30 | PAPI | AFRU+PAL 118.3 | 3.0 DEG50FT | SDBY PWR AVBL |
| RWY 12/30 | PTBL(2) | | | |
| RWY 12/30 | SFL | AFRU+PAL 118.3 | | SDBY PWR AVBL |
- (1) NIL STWL.
 - (2) PTBL LGT AVBL H24. Laid by RFFS. 2HR PN RQ.
 1. **ALS type and length**
 - a. RWY 12 - distance coded CL: 900M.
 - b. RWY 30 - distance coded CL: 930M.
 2. AFRU+PAL AVBL during CTAF HR.
 3. Fixed LGT INTST settings when PAL in use. Fixed LGT INTST settings may RQ increased ILS LDG VIS minima.
 - a. PAL day mode LGT INTST – PAPI stage 6, HIRL/HIAL/SFL/TWY OFF
 - b. PAL evening mode LGT INTST – PAPI/HIRL/HIAL stage 4, SFL/TWY stage 2
 - c. PAL night mode LGT INTST – HIRL/HIAL/PAPI stage 2, SFL/TWY stage 1
 4. For manual activation of AD LGT in event of PAL failure CTC “WILLY FIRE” FREQ 118.3 and REQ “PAL OVERRIDE”.
 5. RWY 12/30 – no RWY CL LGT INSTL.
 6. RWY 12/30 edge lighting spacing: 56M.

OTHER LIGHTING

Secondary PWR switchover time: 15 SEC. Does not support TKOF BLW 800M VIS.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	125.7
ACD	WILLY DELIVERY	130.35 (3)
APP H	WILLY APPROACH HIGH (1)	133.3 261.4
APP L	WILLY APPROACH LOW (1)	135.7 293.4
ATIS	WILLY ATIS	134.45 316.1 365
SMC	WILLY GROUND (2)	121.8
SMCV	WILLY GROUND	127.25
TWR	WILLY TOWER (2)	118.3 243.0 280.9

- (1) APP H is the primary frequency. During busy periods, APP L is also active to provide ATS. Both frequencies are monitored and ACFT will be directed to the appropriate frequency as required.
- (2) ACFT will not be advised of SMC or TWR frequencies. Departing ACFT shall CTC SMC after receiving AWY CLR and CTC TWR approaching holding point. Arriving ACFT shall CTC SMC after vacating RWY.
- (3) ATS frequencies have reduced range APRX 25NM to N and NW BLW 3000FT due terrain shielding. Relay AVBL through BRISBANE CENTRE 120.55.
1. EMERG FREQ 243.0 guarded, APP and TWR.
2. Automatic retransmit FAC exists BTN 118.3/280.9, 133.3/261.4, 135.7/293.4, 121.8/127.25.

RADIO NAVIGATION AND LANDING AIDS

DME	IWM	110.5/ 42X	324723.7S	1514926.4E	(5)
		(RWY12)			
GP	IWM	329.6 (RWY12)	324723.7S	1514926.4E	(3)
ILS	IWM	110.5 (RWY12)	324823.1S	1515058.3E	(4)
LOC	IWM	110.5 (RWY12)	324823.1S	1515058.3E	(3)
NDB	WLM	365	324812.1S	1514943.6E	Range 115 (1)
TAC	WLM	112.8/ 75X	324749.7S	1514959.2E	(2)
(1)	Voice AVBL to ACFT with COM failure. Pilot MNT. Excessive needle oscillations on BRG 230 beyond 21NM.				
(2)	CAUTION: Bearing unlock may occur on final APCH inside FAF both RWY. Pilot MNT.				
(3)	Pilot MNT during CTAF HR.				
(4)	ILS Critical Area not protected during CTAF HR. Pilot MNT during CTAF HR.				
(5)	Antenna ELEV 53FT.				

LOCAL TRAFFIC REGULATIONS

1. Civil VFR ACFT must contact Willy Delivery 130.35 to advise FLT details and obtain SSR code before entering WLM restricted areas. VFR ACFT should submit FPL to reduce delays in ACFT processing. Exceptions apply to some VFR routes, see Flight Procedures.
2. ACFT operating at weights of 25,000KG or less are permitted to conduct 180 DEG turns on the RWY. All other ACFT must execute 180 DEG turns on concrete THR. All ACFT must use MAX radius turns on RWY.
3. New (taller, eastern) ATC tower not yet commissioned. If ATC light signals are required, look to old (shorter, western) tower.
4. All taxiways and aprons NE of TWY A restricted to MIL and RAAF-approved CIV ACFT only.
5. During CHASE OPS, all taxiing aircraft can expect a clearance to intermediate holding points located on TWY A, B, H, J. Aircraft are not to proceed beyond the intermediate holding point until cleared by ATC. Standard readback RQMNTS apply.
6. All civil ACFT require 30MIN holding fuel during ATS hours. Non-standard priorities apply during ATS hours.
7. **PRIORITIES**

- a. DRG ATS HR, priorities are applied IAW *AIP ENR 1.4*, except military activities may be given priority over other traffic.
- b. Priorities between conflicting military activities will be managed as per *FIHA AD2 SUP WLM*. Locally-based Air Combat Group ACFT will typically receive priority over other MIL ACFT.

- c. Priorities may be amended by AIP SUP or NOTAM during periods of increased operational tempo.
8. **INSTRUMENT APPROACH TRAINING**
- a. CIV and MIL INSTR APCH training permitted DRG ATS HR with ATC approval. CTC ATC for approval and slot time, phone 02 4034 6807. See Priorities.
- b. During CTAF HR, full stop LDG and touch and go not AVBL. All aircraft are to comply with published missed approach procedures unless specific approval granted by WLM ABOC.
9. **SURVEY AND AWK FLIGHTS**
- a. Survey and AWK within 25NM of YWLM PPR, subject to ATC workload and MIL traffic. See Priorities.
- b. Details of proposed flight, including maps, must be provided to ATC 24 hours prior to intended operation, email: wlm.atc@defence.gov.au. Submission of details does not assure flight will be approved.
- c. CTC ATC for approval and slot time prior to take off, phone 02 4034 6807.
Note approval may be withdrawn at any time to afford MIL priority.
- d. AC approval of survey flight does not constitute approval for photography of RAAF Base Williamtown. CTC Airbase Operations Centre 02 4034 5888 for photography approval.
10. **MILITARY L-BAND RADAR** is in operation at PSN 324801S 1514956E.
- a. Possible avionics interruptions/errors WI 150M BLW 500FT AMSL.
ACFT transporting MIL ordnance are to observe the FLW separation FM the radar site unless ordnance manufacturers specify shorter distance.
- b. Hero Susceptible 1.3KM/1,500FT AMSL.
All ACFT planning to carry Hero Susceptible ordnance into Williamtown are required to obtain permission 24HR prior to arrival. Contact as listed at the start of the Williamtown entry.

FLIGHT PROCEDURES

1. **TRAFFIC MANAGEMENT PROCEDURES**
- a. In order to comply with the WLM TMP, suitably equip aircraft will be issued a corresponding SID/STAR for the duty RWY IAW *GEN-FPR* for WLM.
- b. During Military flying windows, nominally 0900-2200 Local MON-FRI, the RNP AR approaches and corresponding STAR are not available. WLM ATC may offer these approaches when traffic/workload permits.
- c. During CTAF operations WLM SID and STAR may be available subject BN CEN workload and traffic management
2. **SPEED RESTRICTIONS**
- a. When not on a SID or STAR CIV ACFT must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.
- b. Refer *FIHA AD2 SUP WLM* for MIL speed restrictions.
3. **CIRCUITS**
- a. Right hand circuits required when OPR on RWY12.
- b. Circuit Area defined as 5NM radius, over land, SFC to 2,500FT AMSL.
- c. Circuit heights: Non-jet FW ACFT with MTOW more than 7,000kg and all jet FW ACFT – 1,500FT AMSL; Non-jet FW ACFT with MTOW of 7,000kg or less – 1,000FT AMSL; rotary wing ACFT – 500FT AMSL.
- d. VFR ACFT OPR in the circuit area will not receive directed traffic information regarding VFR ACFT OPR in the ADJ Coastal Route.
- e. VFR ACFT OPS in the circuit area will not be separated from IFR local MIL operations.
- f. CIV circuit training is only AVBL to authorised ACFT – see Remarks. PPR. CTC ATC for approval and slot time, phone 02 4034 6912.
4. **R596 SALT ASH AIR WEAPONS RANGE**
- a. When Salt Ash Air Weapons Range is in use, R596 ACTIVE will be broadcast on ATIS during ATS HR. Range activity height may vary from R596 NOTAM levels.
- b. When R596 SALT ASH ACTIVE, FLW restrictions apply:
- UBSON ONE ALPHA RWY 12 SID not AVBL.
 - LAXUM TWO ROMEO RWY 30 STAR, LAXUM TWO VICTOR RWY 30 STAR and RNP X RWY 30 not AVBL.

- (iii) NDB RWY 30 APCH and DME/GNSS Arrival not AVBL.
- (iv) ARR and DEP ACFT expect tracking RESTR around R596.
- c. Coastal VFR Route traffic will not be provided with traffic information on ACFT operating within R596.

Note: additional PROC and some exceptions apply to MIL ACFT – refer FIHA AD2 SUP WLM.

5. **D537 SALT ASH MILITARY FIRING**

- a. Caution: D537 infringes the WLM circuit area and circling area. Vertical limits SFC to A013. Hours of activation vary, check NOTAM.

6. **COASTAL VFR ROUTE**

NOBBYS HEAD (NBB) – ANNA BAY (ANA) – PORT STEPHENS LIGHTHOUSE (PSS) – BRIGHTON ISLAND (BRI) – SUGARLOAF POINT (SUG) AND REVERSE

- a. Caution: Non-compliance with procedures may result in penetration of active MIL restricted areas/R596 air weapons range.
- b. Caution: Unauthorised drone flying hotspot BTW NBB and BRI.
- c. Caution: High speed MIL jets operate in the coastal VFR route and adjacent MIL airspace. Wake turbulence may be encountered. Operate transponder and anti-collision lighting at all times if equipped. ACFT within the coastal VFR route will not receive:
 - (i) traffic information regarding MIL ACFT operating within adjacent MIL airspace, including Williamtown circuit area, R596 and R585A.
 - (ii) separation from IFR MIL ACFT operating adjacent to the coastal VFR route.
 - (iii) wake turbulence separation or caution.
- d. Caution: VFR ACFT OPR on the Coastal Route will not be separated from VFR ACFT OPR in ADJ ship transfer airspace reservation. Directed traffic information will be provided when relevant. Ship transfer airspace reservation vertical limits
 - (i) Ship transfer airspace reservation lateral limits: 325453S 1514851E - 325842S 1515411E - 325920S 1515404E - 330921S 1515537E then along the clockwise arc of a circle radius 22NM centre 324749S 1514959E (SALUS/WPT) - 330856S 1514235E - 325919S 1514600E - 325453S 1514851E.
 - (ii) Ship transfer airspace reservation vertical limits: upper limit 2,500FT AMSL, lower limit conforms to the WLM CTR A/B and CTA C2 of which the lateral limits overlie.
- e. Flight only permitted VFR
- f. Track via the coastline, over water, within 2NM of the coast; ACFT may track up to 2NM west of SUG to enter/leave the route; point-to-point tracking not permitted without ATC approval
- g. Due to poor radar and radio coverage, no control service is provided to VFR ACFT BTW BRI and SUG
- h. **NORTHBOUND NBB-ANA-PSS-BRI-SUG:**
 - (i) Remain BLW WLM CTA C3/C4. 5NM S of NBB contact WILLY DELIVERY 130.35 with flight details. Expect clearance at 500FT.
 - (ii) **DO NOT PROCEED N OF NBB WITHOUT CLEARANCE.** Do not hold at NBB over water – hold over land, S of Hunter River, BLW 2,500FT, outside WLM CTR A until cleared. Intense hang gliding, paragliding and drone flying over beaches S of NBB.
 - (iii) ACFT cleared via Coastal VFR Route are to track via the coastline over water within 0.5NM of the coast while tracking between NBB and abeam Stockton Bridge and remain clear of ship transfer airspace reservation.
 - (iv) Follow the coastline at all times, over water, within 2NM of coast. Report at ANA at 500FT. Expect climb not above 2,000FT.
 - (v) Report ABM BRI. Expect control services and identification to terminate and ATC to instruct return to civil FREQ. Remain tracking via coast not above 2,000FT until SUG. If unable to CTC WILLY APP N of BRI, relay message through BN CEN 120.55.
- i. **SOUTHBOUND SUG-BRI-PSS-ANA-NBB**
 - (i) Track from SUG not above 2,000FT. Follow the coastline at all times, over water, within 2NM of the coast. ATC clearance not required until BRI.

- (ii) 5NM N of BRI contact WILLY DELIVERY 130.35 with flight details. Expect clearance not above 2,000FT with a clearance limit of ANA. If unable to CTC WILLY DELIVERY N of BRI, relay message through BN CEN 120.55.
 - (iii) **DO NOT PROCEED S OF BRI WITHOUT CLEARANCE.** Do not hold at BRI over land – hold over water within 2NM of the coast.
 - (iv) Report at ANA at 500FT. Expect onwards clearance at 500FT.
 - (v) **DO NOT PROCEED S OF ANA WITHOUT ONWARDS CLEARANCE.** Do not hold at ANA over land – hold over water within 2NM of the coast.
 - (vi) Report at NBB.
7. **INLAND VFR ROUTE (D589)**
DUNGOG TOWNSHIP – STROUD ROAD (SRO) – GLOUCESTER (GCR) – WIRRADGURIE (WDU) AND REVERSE
- a. AVBL when D589 active – check NOTAM or confirm STS with BN CEN.
 - b. When entering or exiting ACFT are to remain clear of WLM CTR B and remain below WLM CTA C2.
 - c. **Caution: Non-compliance with procedures may result in penetration of active MIL restricted areas.**
 - d. VFR ACFT may transit without ATC contact or clearance.
 - e. ATC service not provided within D589.
 - f. **D589**
 - (i) 1NM either side of the railway line BTN a position 2NM NE of DUNGOG TOWNSHIP and SRO.
 - (ii) 1.5NM either side of the RAILWAY LINE BTN SRO, GCR and WDU.
 - (iii) Vertical limit 2,500FT.
 - (iv) Caution: surrounding high terrain. If it is anticipated that VMC cannot be maintained, IMMEDIATELY contact ATC on 135.7 or 120.55 and squawk 7700.
8. **REMOTELY-PILOTED AIRCRAFT SYSTEM (RPAS)**
- a. All RPAS requests are to be sent via email: wlm.uas@defence.gov.au.
 - b. A minimum of 7 days notice is required. Approval subject to nature and location of flight, ATC workload and MIL traffic. See Priorities.
 - c. ATC approval of operation does not constitute approval for photography of RAAF Base Williamtown. CTC Airbase Operations Centre 02 4034 5888 for photography approval.
 - d. Unauthorised RPAS operations are a known risk in VCY of:
 - (i) Newcastle, Merewether, Fern Bay, Stockton Beach, Tomago, Campvale, Bobs Farm, Tanilba Bay, Corlette, Beresfield and Raymond Terrace up to 400FT. ATC will issue hazard alert on any known unauthorised RPAS operations. Pilots may request alternate tracking or holding to avoid hazard. SFC to 400FT AGL.
 - (ii) Stockton Beach and Raymond Terrace in the APCH and DEP paths of RWY 12/30 and along the coastal VFR route. ATC will issue a hazard alert on any known unauthorised RPAS OPS. Pilots may request alternate tracking or holding to avoid the hazard.

CTAF - AFRU 118.3

- 1. Outside ATS HR.
- 2. WAE may be OPR on or near RWY and other ACFT MOV areas.
- 3. In event of EMERG, declare the EMERG to Brisbane Centre FREQ 125.7. Additionally when within 10NM of WLM, advise details to WILLY FIRE on CTAF FREQ 118.3.

NOISE ABATEMENT PROCEDURES

1. DEPARTURES

- a. Departing ACFT will be issued a SID.
- b. ACFT issued a radar SID will be assigned noise abatement heading BTN 080R and 330R.
- c. All jet ACFT are to apply ICAO Noise Abatement Procedures 1 or 2.

2. EXCEPTIONS


- a. Rotary wing ACFT.
- b. Fixed wing ACFT with a MTOW of 7,000KG or less.
- c. *FIHA AD2 SUPP WLM Part A* compliant aircraft.
- d. Priority ACFT as detailed in *AIP ENR 1.4*.

ADDITIONAL INFORMATION

1. AD WIP (sweeping) BTN 1200-2000 UTC (1HR earlier during HDS). WAE will vacate with 15MIN PN when ATC not active. CTC Airfield Works Safety Officer CS 'Sweeper 1' or 'Sweeper 2' on CTAF 118.3 or phone: 0456 456 013.
2. RAAF Williamtown Demolition Range 1, 324747.2S 1514934.0E (245DEG/800M FM ARP). Vertical limit 1,700FT AGL WI 200M radius laterally. Check NOTAM for activation periods, short notice extensions advised by ATIS. Blasts conducted under ATC approval.
3. Windshear hazard exists on RWY12 when wind velocity 030-090DEG ABV 10KTS, and on RWY30 when wind velocity 270-330DEG ABV 15KTS, due jet blast wall.
4. TWY A may be visually dominant in certain wet weather conditions and may be mistaken for the RWY.
5. 25M ground firing range, APRX position 040DEG/0.50NM FM ARP. Limits 400FT in all directions. Active on display of red flags.
6. Weather balloon launch FM PSN 323748S 1513510E APRX BRG 297 DEG MAG 16.2NM FM ARP. 2300-2330 daily. SFC to UNL. Single balloon will be released daily as per daily field timings.
7. Caution: Model ACFT OPR at:
 - a. Hexham Bridge SFC-400FT AGL 234DEG/7.1NM FM ARP.
 - b. Oyster Cove 057DEG/7.2NM FM ARP
8. Caution: Gas flare located at 324841.82S 1514351.98E 247DEG/5.3NM FM ARP (Tomago Smelter).
9. Flying foxes are a seasonal risk at dawn and dusk on APCH to the RWY (on and off the airfield), particularly in the area along Tilligerry Creek, BRG 070 MAG APRX 4-8NM FM ARP. Peak risk period is DEC-FEB although potential risk exists all year round.
10. Bird hazard exists in VCY RWY 12/30 strip at TWY B.

CHARTS RELATED TO THE AERODROME

1. WAC 3456.
 2. MIL Aerodrome Obstruction Chart Type A: AUG 2017
Note - does not include recent NW RWY extension.
 3. Also refer to AIP Departure and Approach Procedures.
-

WINTON**ELEV 638****AVFAX CODE 4311**

QLD
222149S 1430508E UTC +10 YWTN
VAR 7 DEG E CERT
AD OPR Winton Shire Council, PO Box 288, Winton, QLD, 4735. PH 07 4657
2666: Caretaker 07 4657 1195. ARO 0448 002 338 (H24): 0428 349 159:
0487 280 909 (H24): 0417 428 682.

REMARKS

1. AD Charges: Nil
2. This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

IOR Aviation: JET A1 and AVGAS AVBL via bowser. Phone 07 4657 1195, 0427 966 516. Payment through IOR pay tab or Fuelcharge APP.

PASSENGER FACILITIES

1. PT/LG/WC/AC - Phone 07 4657 1466 or 0427 571 106.
2. Telstra mobile network coverage only at AD.

AERODROME OBSTACLES

Unlit secondary WDI 110M NE of RWY 14/32 infringes TNS by 10FT based on a 150M ungraded RWS at the NW end.

METEOROLOGICAL INFORMATION PROVIDED

TAF CAT D, METAR/SPECI.

PHYSICAL CHARACTERISTICS

05/23	052 29c	Unrated. Black silt clay	WID 18	RWS 60
14/32	142 46a	Unrated. Sealed.	WID 30	RWS 150

AERODROME AND APPROACH LIGHTING

RWY 14/32	LIRL	AFRU+PAL 126.7	SDBY PWR AVBL
RWY 14/32	PAPI(2)	AFRU+PAL 126.7	
RWY 14/32	PTBL(1)	3.0 DEG50.4FT	
			BY PRIOR ARRANGEMENT

- (1) EMERG only.
- (2) Left side.

OTHER LIGHTING

Secondary PWR switchover time: 15 SEC.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE 122.1 6500FT

CTAF - AFRU 126.7

ADDITIONAL INFORMATION

1. Perimeter security fencing.
2. Bird hazard may exist.

CHARTS RELATED TO THE AERODROME

1. WAC 3233.
2. Also refer to AIP Departure and Approach Procedures.