




**Part Number :** [734152063](#)  
**Product Description :** MMCX Jack, Straight, PCB  
Receptacle, Surface Mount, Brass Body, Gold (Au)  
Plating, Tape and Reel, 50 Ohms  
**Series Number :** 73414  
**Status :** Active  
**Product Category :** RF / Coaxial Connectors

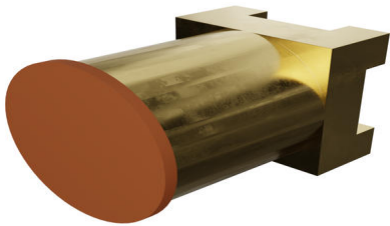

## Documents and Resources

### Drawings

[734152063 sd.pdf](#)

### 3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)


[Symbol and Footprint \(Multi-Format\)](#)

### Specifications

[PS-89675-1920-001.pdf](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead per D(2025)4165-DC (25 June 2025)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

### [Compliance Statements](#)

- EU RoHS

- REACH SVHC
- Low-Halogen

#### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### Substances of Interest

- PFAS

#### EU RoHS Certificate of Compliance

#### Additional Product Compliance Information

---

## Part Details

### General

Status	Active
Category	RF / Coaxial Connectors
Series	73414
Description	MMCX Jack, Straight, PCB Receptacle, Surface Mount, Brass Body, Gold (Au) Plating, Tape and Reel, 50 Ohms
Application	RF
Product Name	MMCX
Style	PCB
Type	Microminiature
UPC	756054636367

### Electrical

Frequency	6 GHz
Impedance	50Ω
Power / Voltage	VOLTAGE: 170 Vrms@Sea Level

### Physical

Cable Attachment	N/A
Gender	Jack
Keying to Mating Part	N/A

Net Weight	0.230/g
Orientation	Straight
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Panel Mount Method	N/A
PCB Mounting	Surface Mount
PCB Thickness - Recommended	N/A
Reverse Polar	No
Wire/Cable Type	N/A

### Solder Process Data

Max-Duration	10
Lead-Free Process Capability	REFLOW
Max-Cycle	2
Max-Temp	260