


# Kernel

# User Space

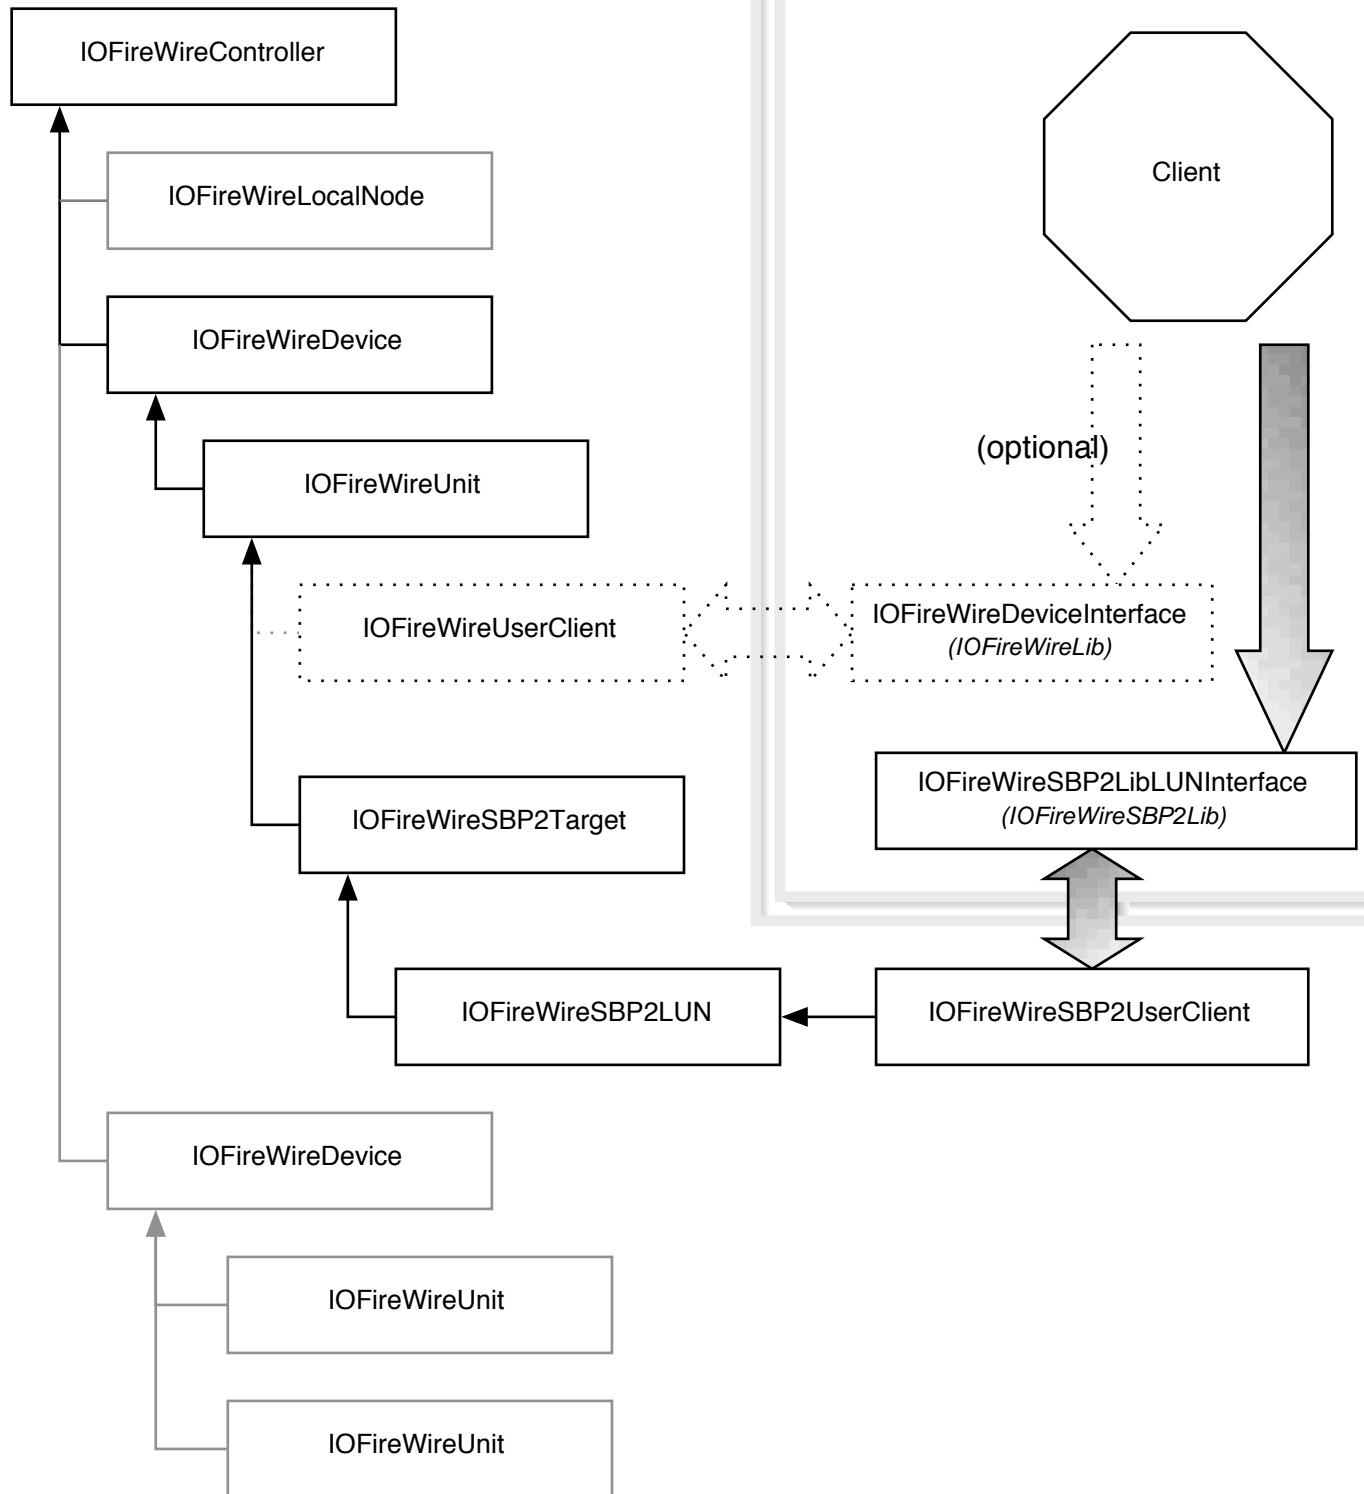

**A client (application or driver plugin) using the SBP2 user client.** The client is driving a LUN inside a unit of a device on the bus. Communication passes through the **IOFireWireSBP2LibLUNInterface** to the in-kernel **IOFireWireSBP2LUN** object instance. The **IOFireWireSBP2LibLUNInterface** object controls the **IOFireWireSBP2LUN** as shown. The greyed out classes are not participating. The standard FireWire user client can be optionally used in cooperation with the SBP2 user client as shown.