
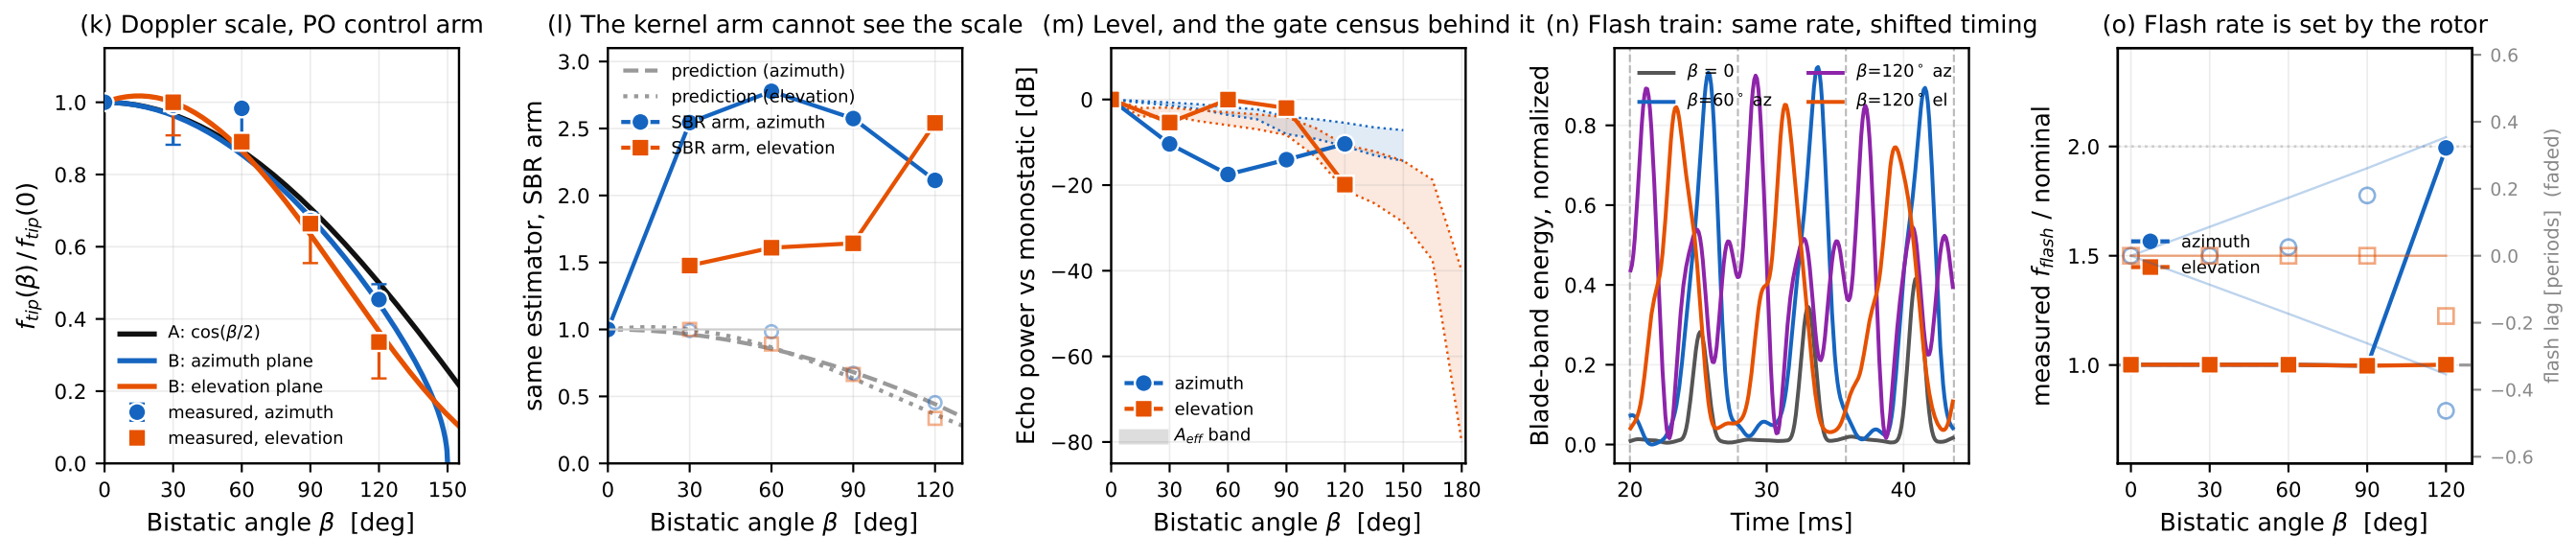


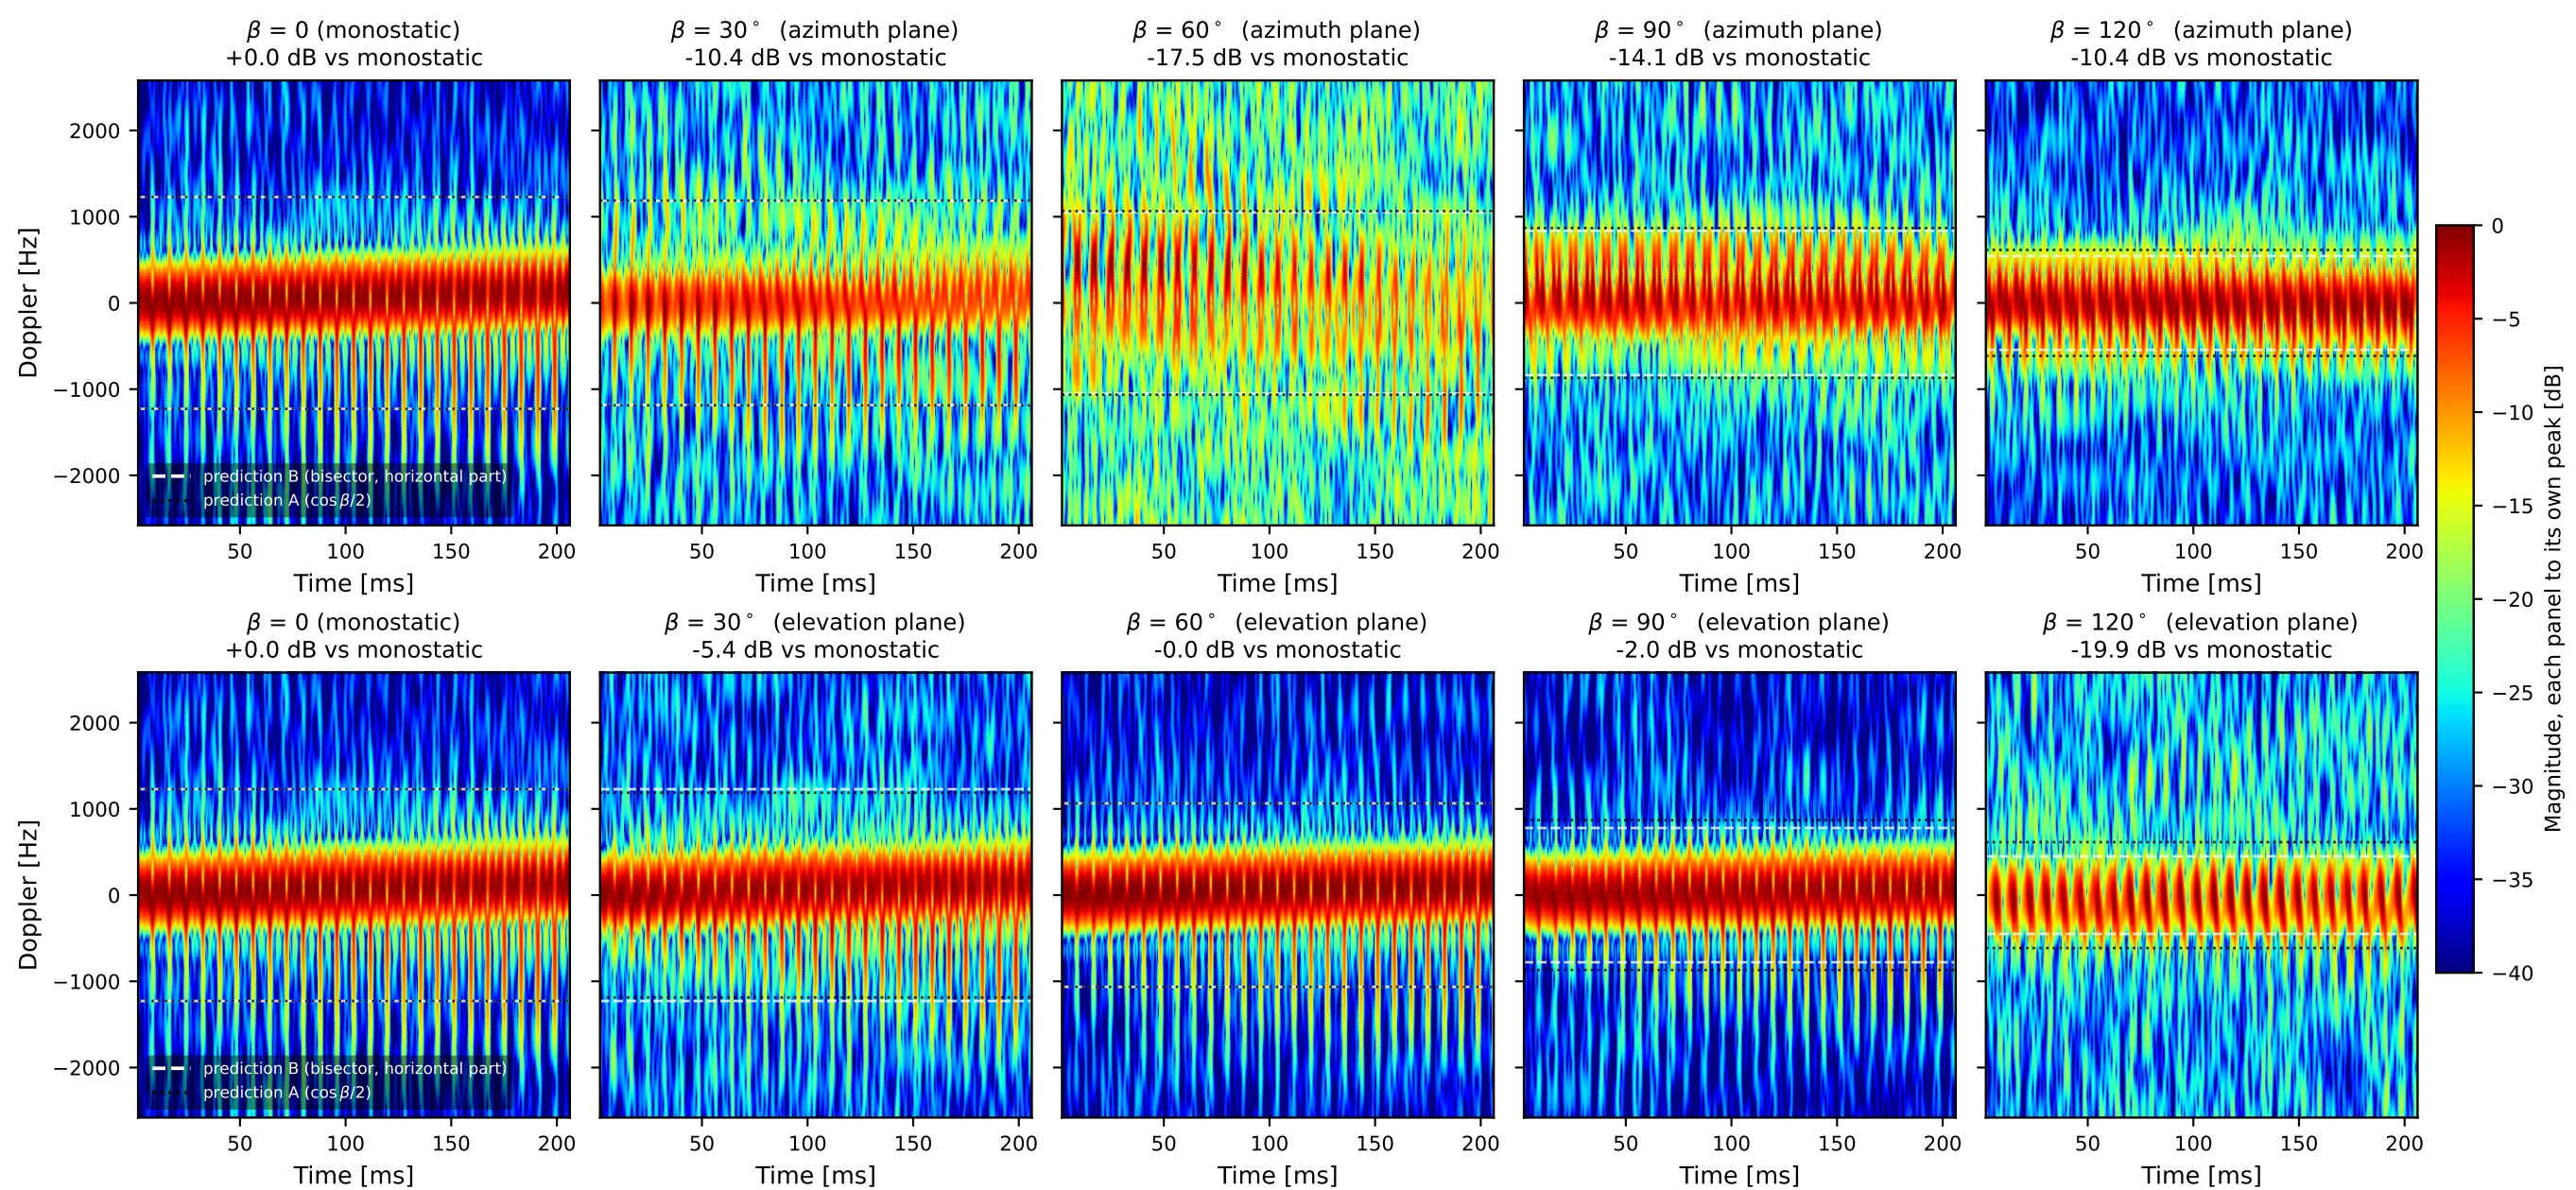

Bistatic sweep of the report-7 micro-Doppler scene: the target, attitude, carrier, rotor speeds and slow-time grid are inherited unchanged from the monostatic ledger and only the receive direction is opened. Top row keeps both ground stations at the same depression angle and separates them in azimuth, which is the geometry a passive bistatic link actually has. Middle row lifts the receiver inside the vertical plane instead, which tilts the bisector out of the rotor plane much faster and is included as a control. Panels are each normalized to their own peak so the pattern stays readable; the level drop is the number in every title and the curve in (m). In (m) the shaded band is the projected area that survives both the illumination and the reception gate, drawn between its incoherent and fully coherent power laws. In (n) the vertical guides are spaced by one nominal flash period, and the faded right-hand axis of (o) carries the flash timing shift against its two predictions, one per rotor handedness. Panels (k) and (l) apply the same yardstick, the time-resolved maximum Doppler, to two arms: the pure physical-optics control, which has a clean blade cut-off, and the ray-traced kernel that produced the maps. Against the control the relative scatter is 0.061 for prediction B and 0.126 for prediction A. On the kernel arm the same estimator runs away from both predictions, because that arm carries a broadband slow-time floor about 34 dB below its peak that reaches past the blade tip.

70-sample Hann segments = 0.45 blade periods (281 Hz resolution), hop 2 (0.10 ms) = 2014 time slots, 8x zero-padded. Zero Doppler is the body.