


DJI Matrice 4E hovering, belly view (az 0, el -15), 3.5 GHz — one row per range. Only the Sionna column is re-resolved per range (true monostatic, rays scaled $(R/3)^2$).

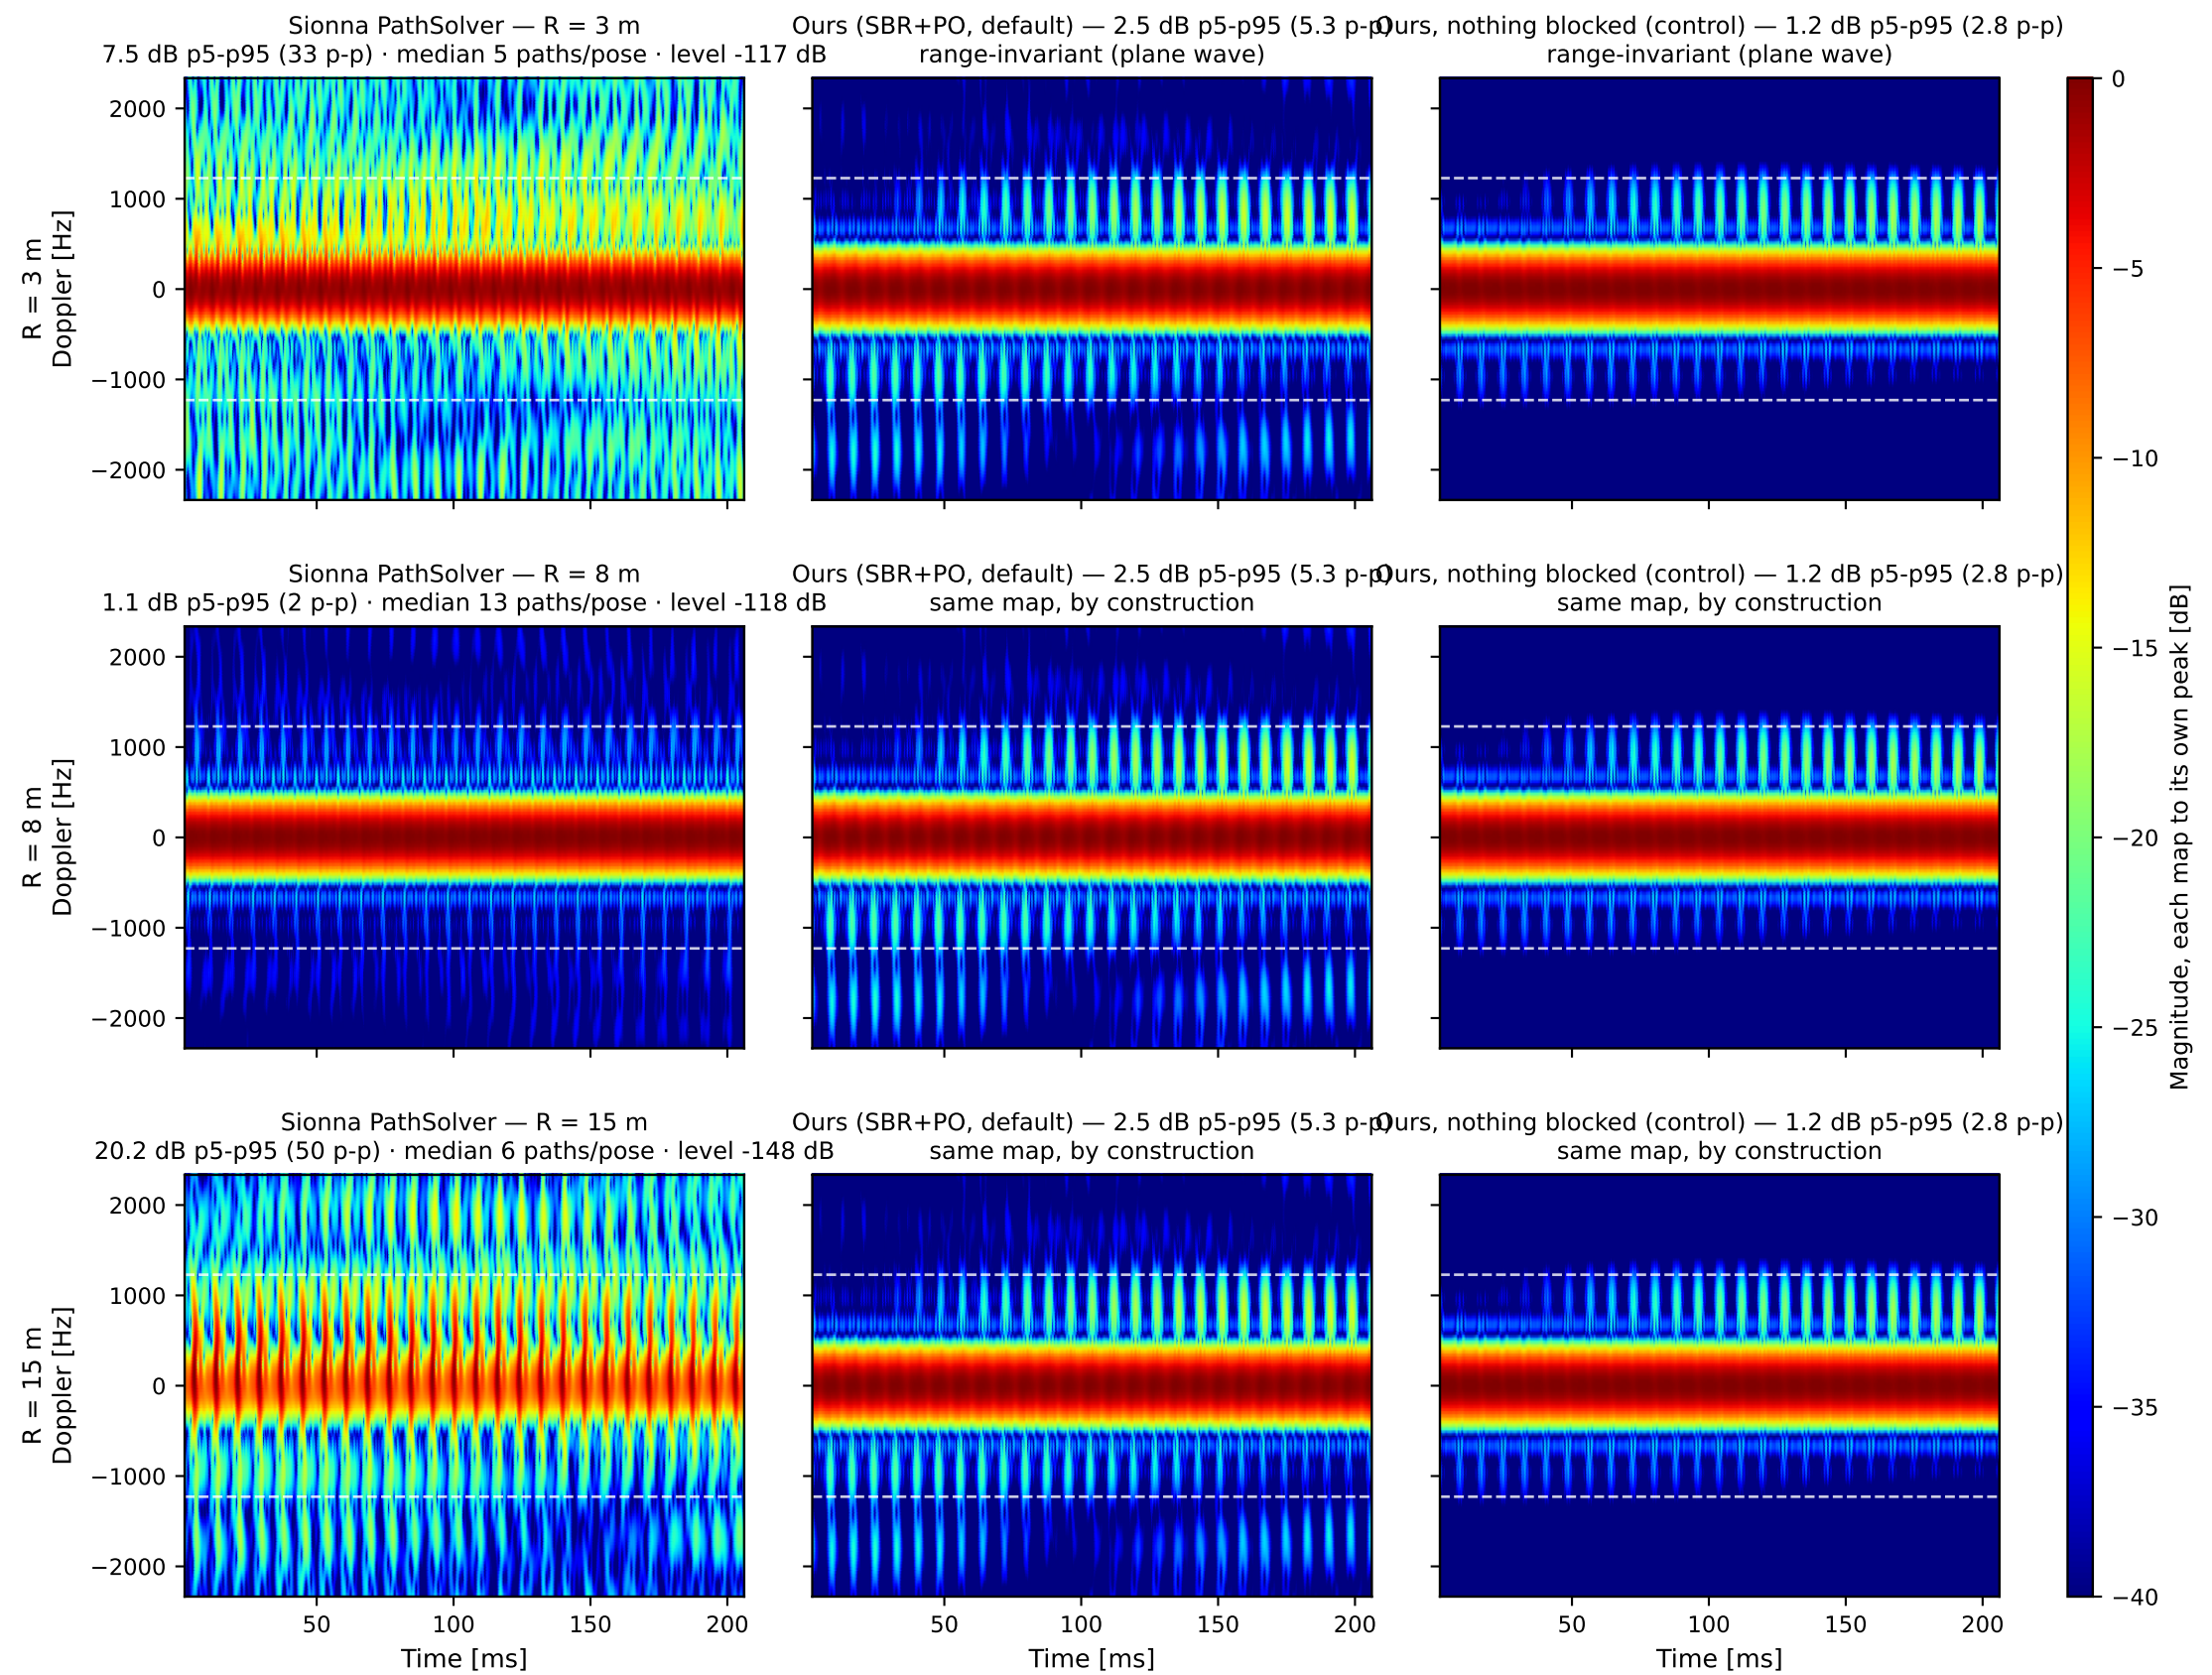

70-sample Hann segments = 0.45 blade periods (281 Hz resolution), hop 2 (0.10 ms) = 2014 time slots, 8x zero-padded. Zero Doppler is the body. Middle and right columns are computed once on a target-anchored plane-wave grid, so they do not depend on range by construction — the repetition down each column is the point. Far-field boundary $2D^2/\lambda \approx 8.0$ m: the 3 m row is near-field for the Sionna column, 8 and 15 m are far-field. Sionna maps use ray budgets 1M / 7.1M / 25M (per-range level in each title; maps normalized to their own peak). Depth is quoted as the 5-95 percentile spread because a single ray-starved pose can set the full peak-to-peak on its own — the gap between the two numbers is itself a stability measure. Individual blade flashes are resolved here but crowd together over 200 ms, so figure 6 zooms one 60 ms window.