


(a) The boundary at one carrier (n78, 3.5 GHz): who chooses PRF_{ref}



- passive: fixed point (network's choice)
- other legal SSB periodicities
- monostatic: design range, capped at 500 Hz
- ▲ data-symbol lane (transmitter only)

(b) Can either lane escape by changing band?

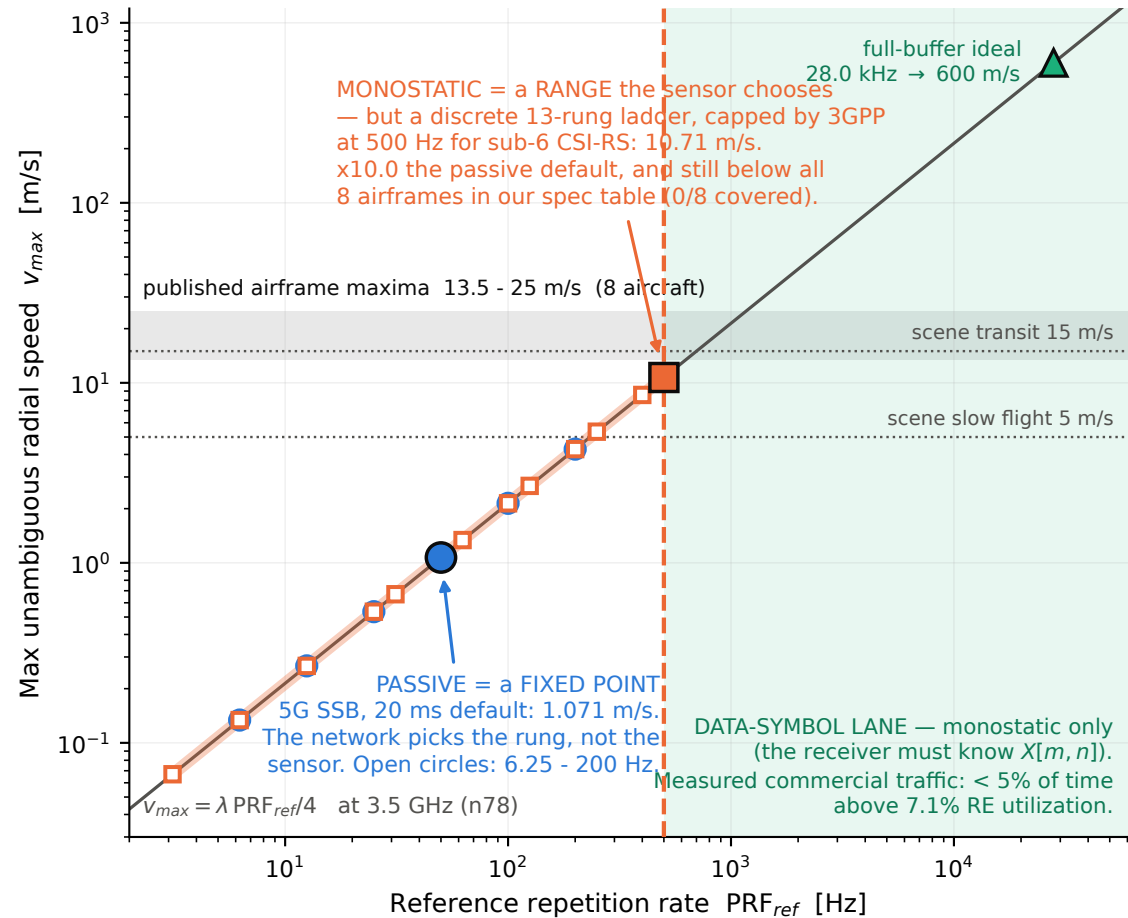