


Same 2 s hover channel — DJI Matrice 4E, 3.5 GHz, belly view (az 0, el -15). Only the waveform / repetition rate changes.

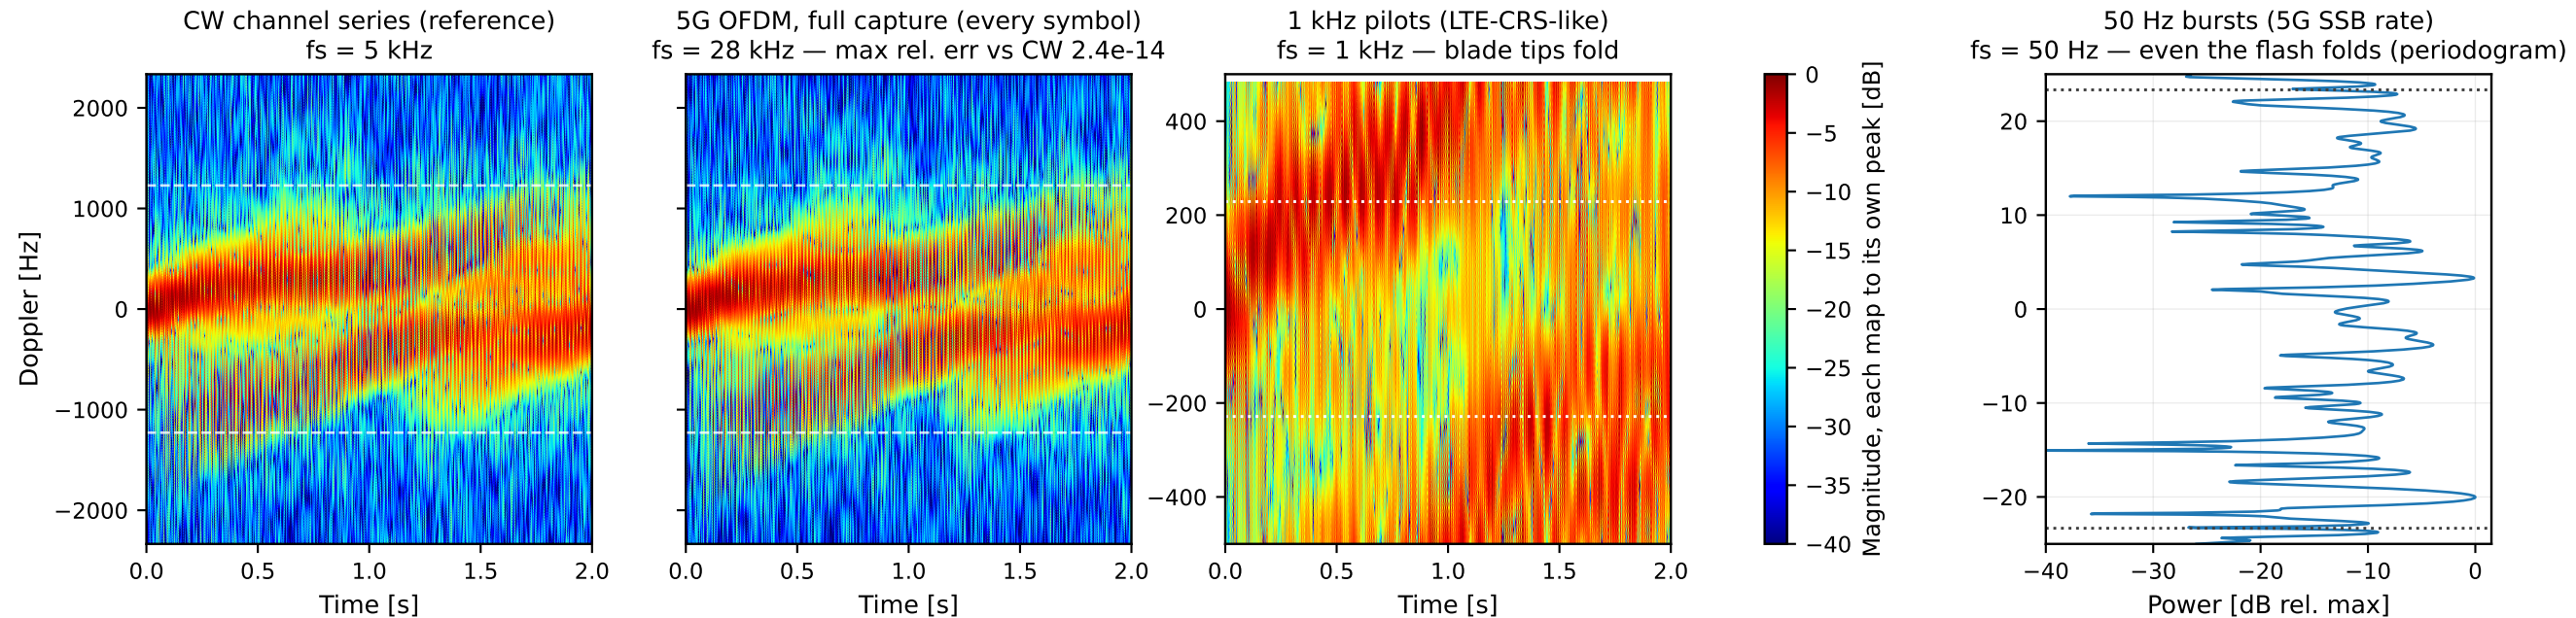

CW arm: 24-sample Hann segments = 0.61 blade periods (208 Hz resolution), hop 2 (0.40 ms) = 4989 time slots, 8x zero-padded. Zero Doppler is the body.  
 OFDM arms use the same display convention at each arm's own rate (the 1 kHz arm clamps to the 8-sample segment minimum — hence coarse). Maps normalized to their own peak; time axis thinned for display only.  
 Dashed white: blade-tip Doppler. Dotted: where the blade-tip (1 kHz arm) / blade-flash (50 Hz arm) lines land after aliasing. The 50 Hz arm has 100 samples — a periodogram replaces the (meaningless) spectrogram.