
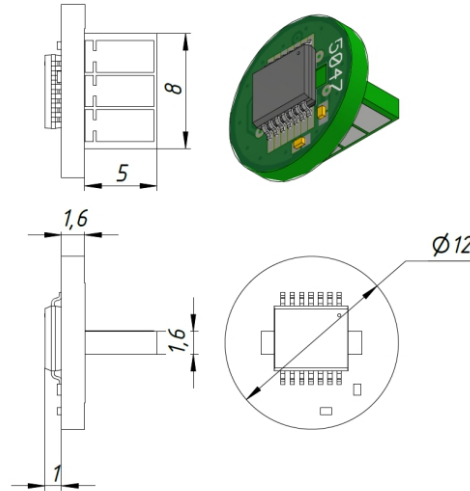
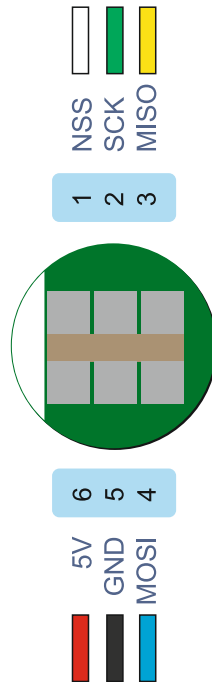




AS5047P T-Encoder for HUB-WHEEL PINOUT

14-Bit On-Axis Magnetic Rotary Position Sensors with 12-Bit Decimal and Binary Incremental Pulse Count for 28krpm High Speed Capability



Wiring to VBCores drivers

VBCore BLDC Driver 30A

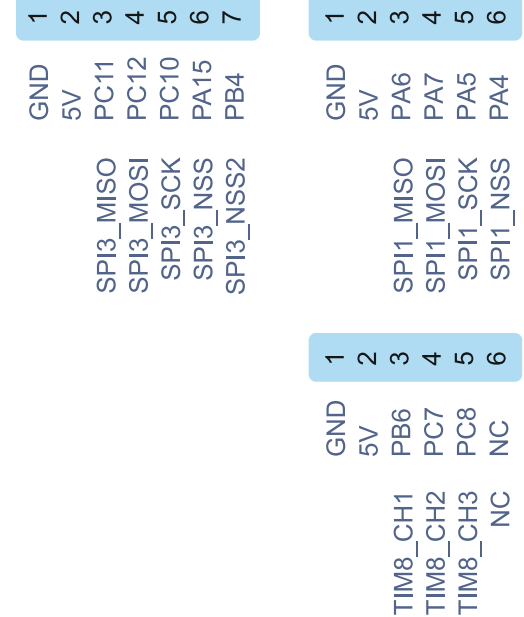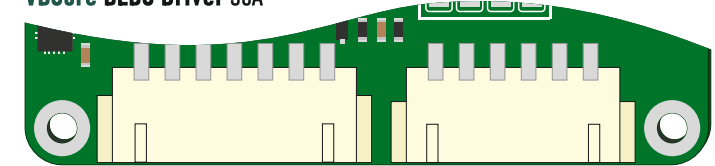

VBCores

www.vbcores.com

Electronics for robotics
research and development