



POWER

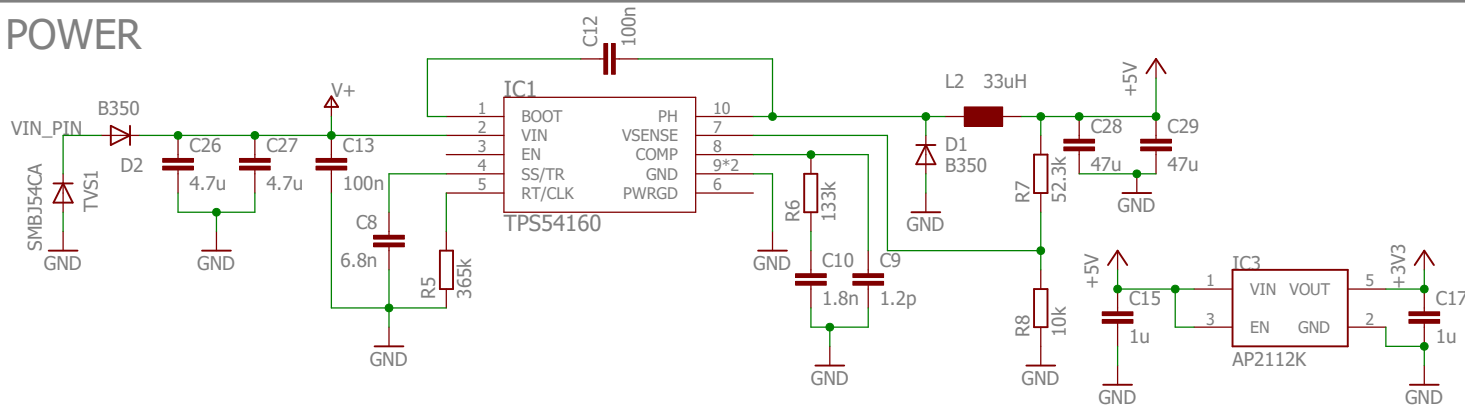

CAN

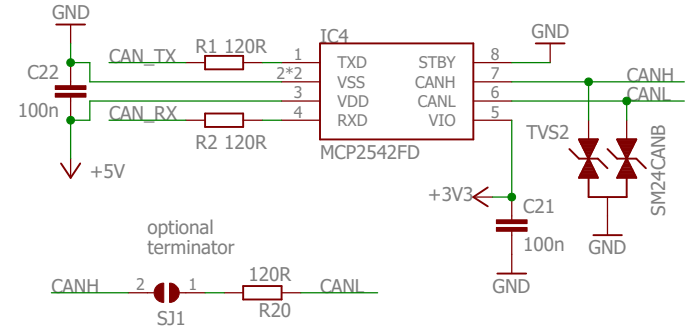

SPECS

vbcores.com

VIN: 6-60V
IOUT (5V & 3V3): 1.5A
IOUT (3V3): 0.6A

STM32 HS crystal: 8.0 MHz
STM32 LS crystal: 32.768 kHz

VDD = VDDA = VREF = 3.3V

LD1: PD2 pin
LD2: PA5 pin
USR: PB10 pin

MCU

