


MUDGUARD REMOVAL/INSTALLATION


id091600467600

1. Remove screw A and bolt B then, partially peel back the front under cover No.1.
2. Remove the front over fender. (See FRONT OVER FENDER REMOVAL/INSTALLATION.)
3. Remove screw C and D.

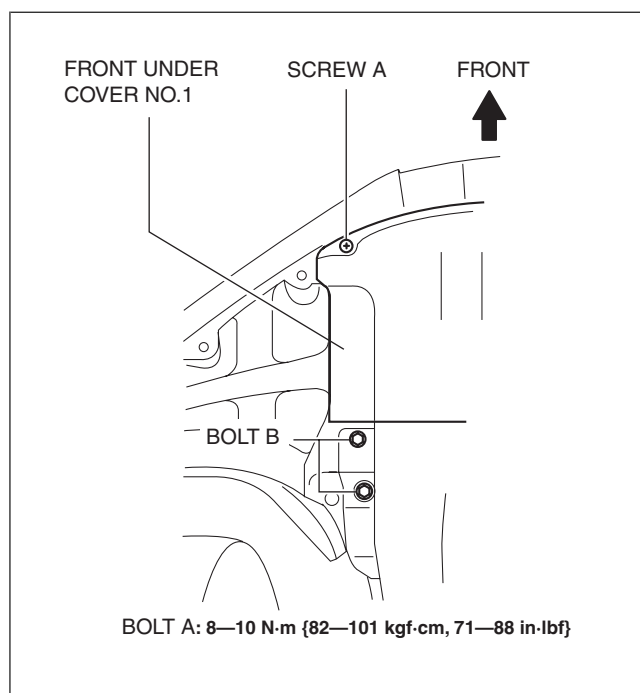


ac5wzw00001292

4. Remove fasteners E.

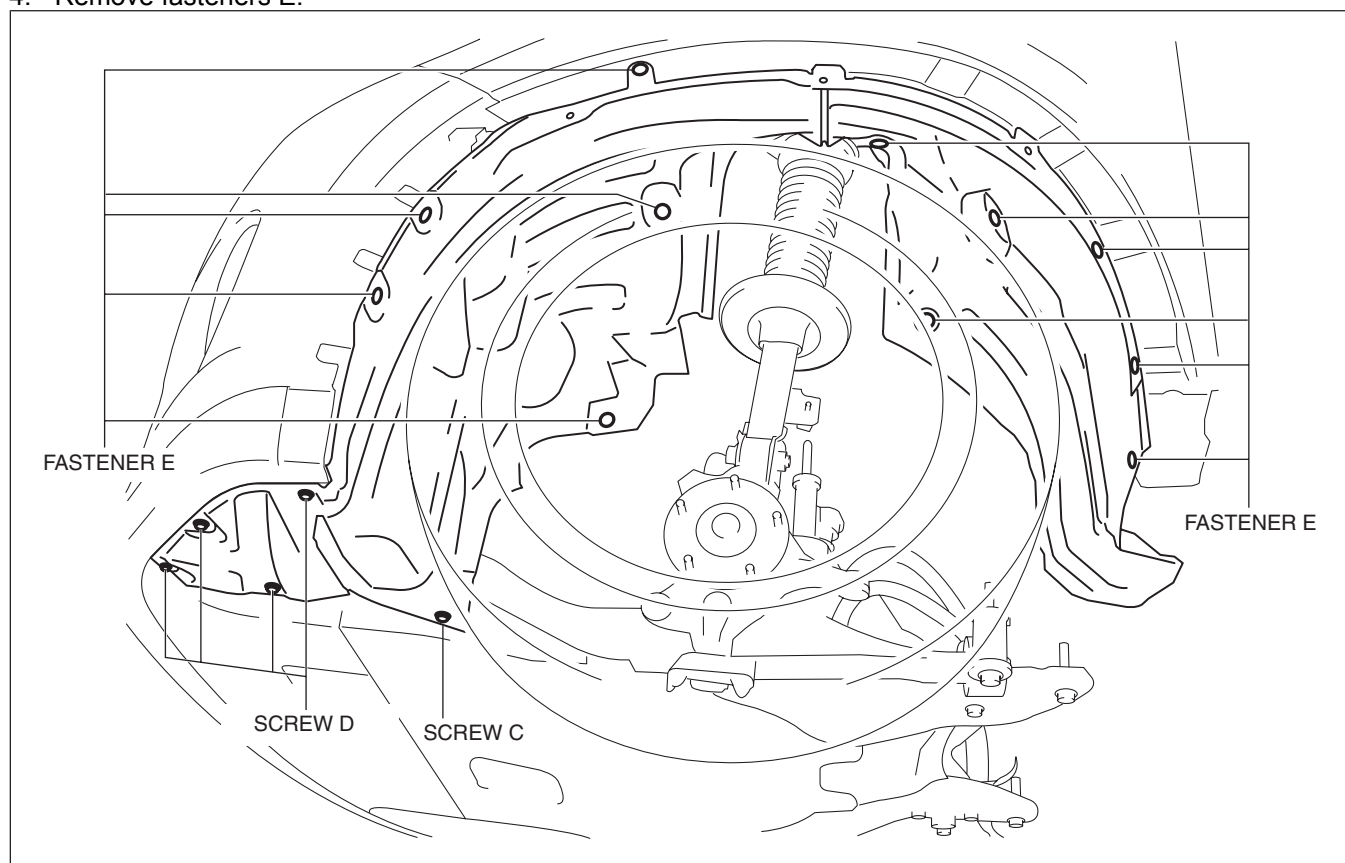

ac5wzw00006033

5. Pull the mudguard in the direction of the arrow shown in the figure.

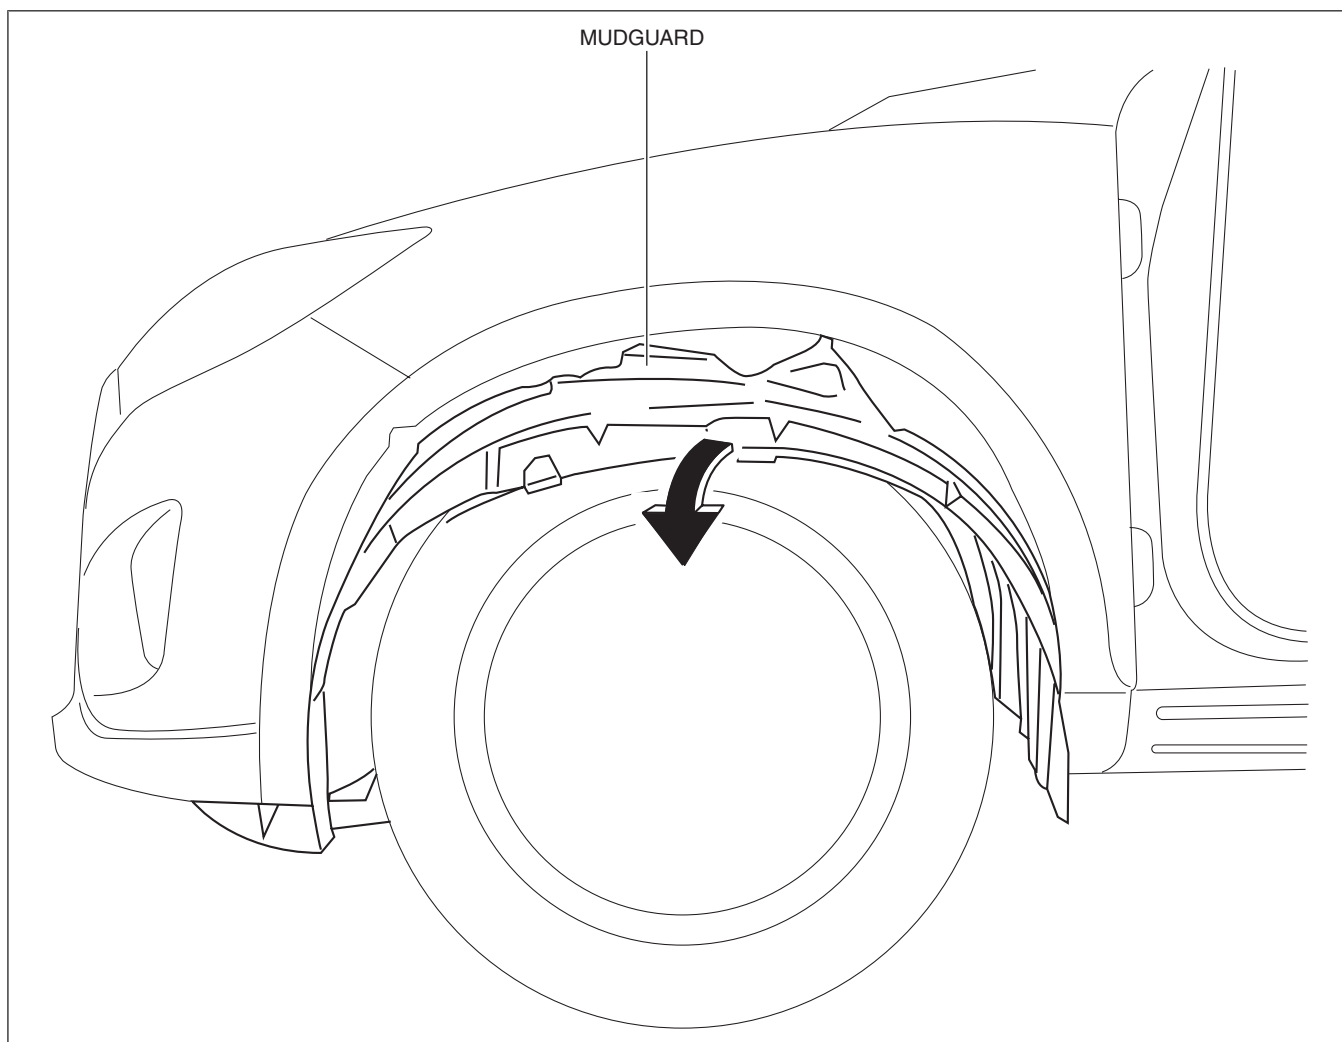

ac5wzw00001271

6. Install in the reverse order of removal.