

## CLUTCH FLUID INSPECTION [D66M-R, D66MX-R]

id0510mf156400


### Note

- A common reserve tank is used for the clutch system and brake system.

1. Verify that the clutch fluid is between the MIN mark and the MAX mark.
  - If fluid level is lower than MIN mark, perform the following procedure:
    1. Verify that there is no fluid leakage. (See CLUTCH FLUID LEAKAGE INSPECTION [D66M-R, D66MX-R].)
    2. Add fluid to the level between MIN mark and the MAX mark.

### Clutch fluid

SAE J1703 or FMVSS116 DOT-3 or DOT-4

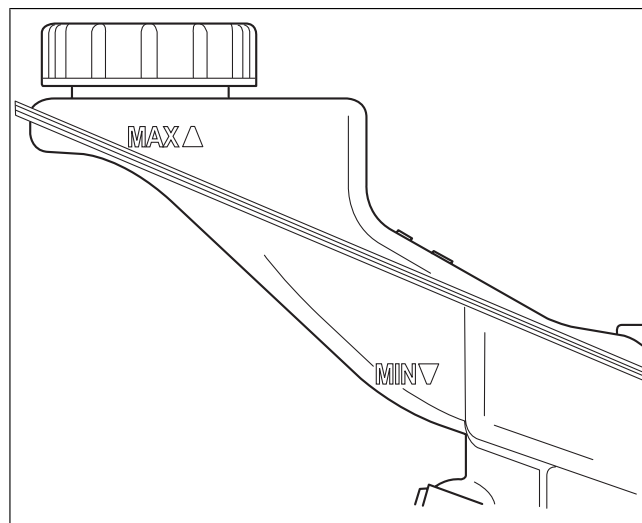

am3uuw00008240