


POWER WINDOW SUBSWITCH REMOVAL/INSTALLATION


id091200002200

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (WITHOUT i-stop)].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-D 2.2].)
2. Remove the cover A.

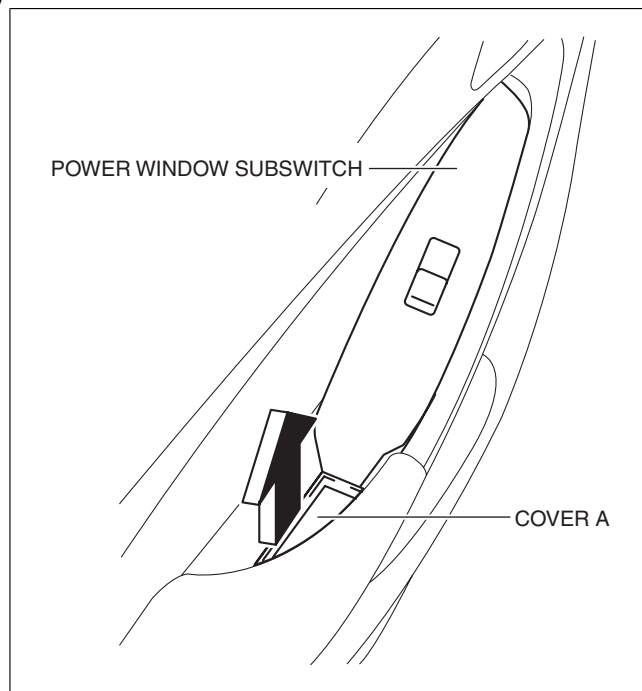


ac5wzw00001241

3. Insert a tape-wrapped flathead screwdriver shown in the figure and remove the tab B in the direction of arrow (1).

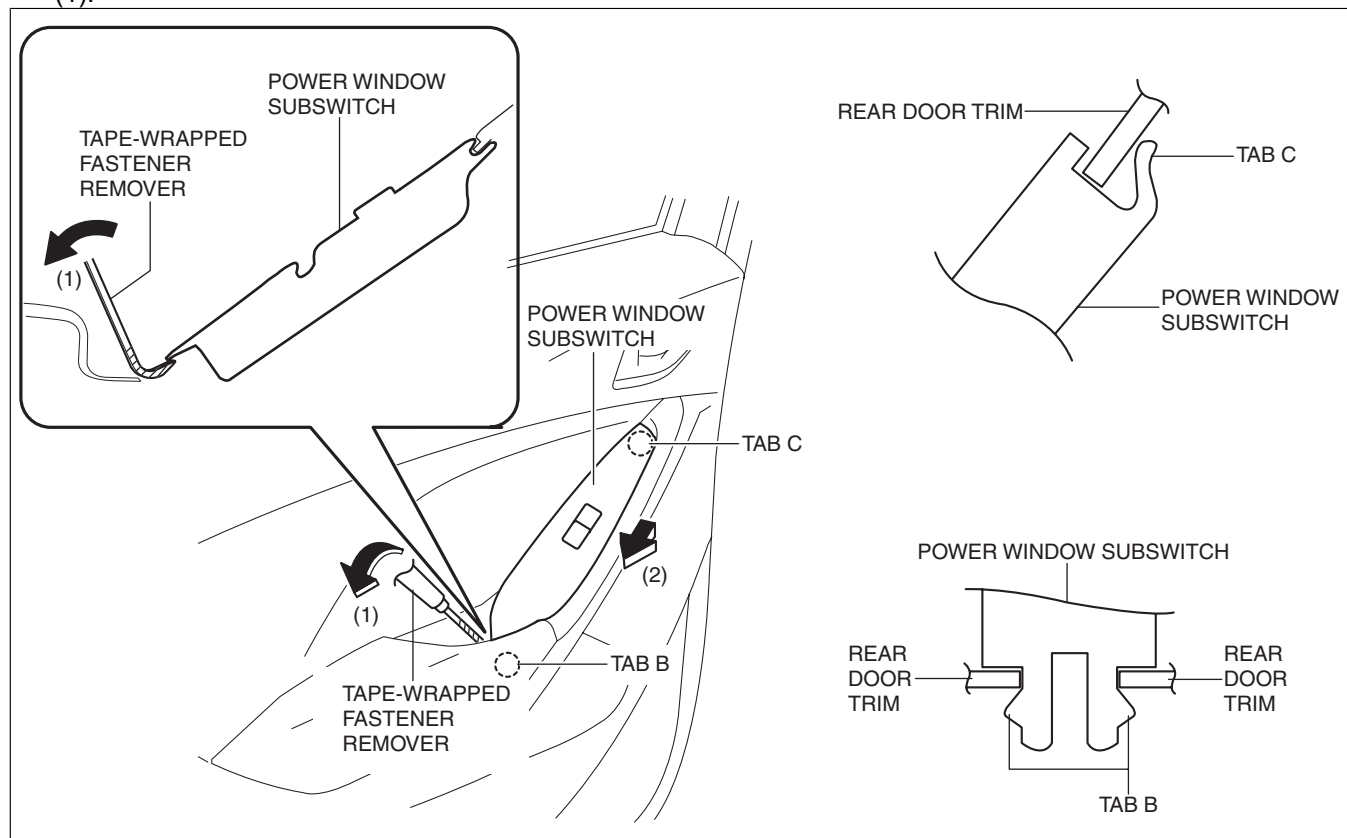

ac5wzw00003272

4. Slide the power window subswitch in the direction of the arrow (2) shown in the figure and remove the tab C.
5. Disconnect the power window subswitch connector.
6. Pull the edge of power window subswitch cover in the direction of arrow (3) and detach the tab D.

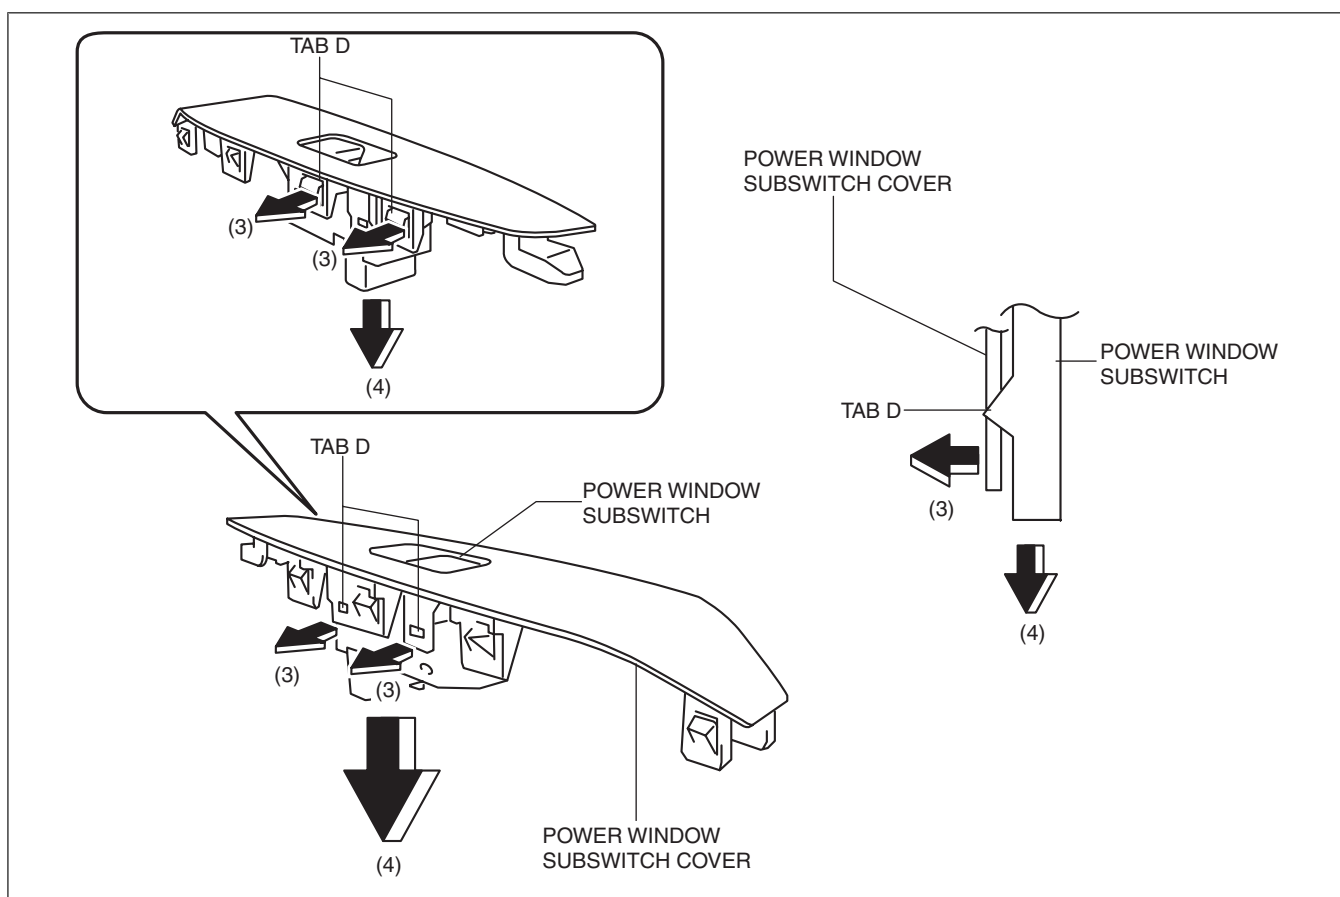

ac5wzw00001243

7. Remove the power window subswitch in the direction of arrow (4) shown in the figure.
8. Install in the reverse order of removal.