

FRONT SASH MOLDING REMOVAL

id091600805000


Warning

- Using a utility knife with bare hands can cause injury. Always wear gloves when using a utility knife.

1. Using a utility knife, carefully remove the double-sided adhesive tape in the locations shown below.


Caution

- When removing the double-sided adhesive tape, be careful not to damage clip A.

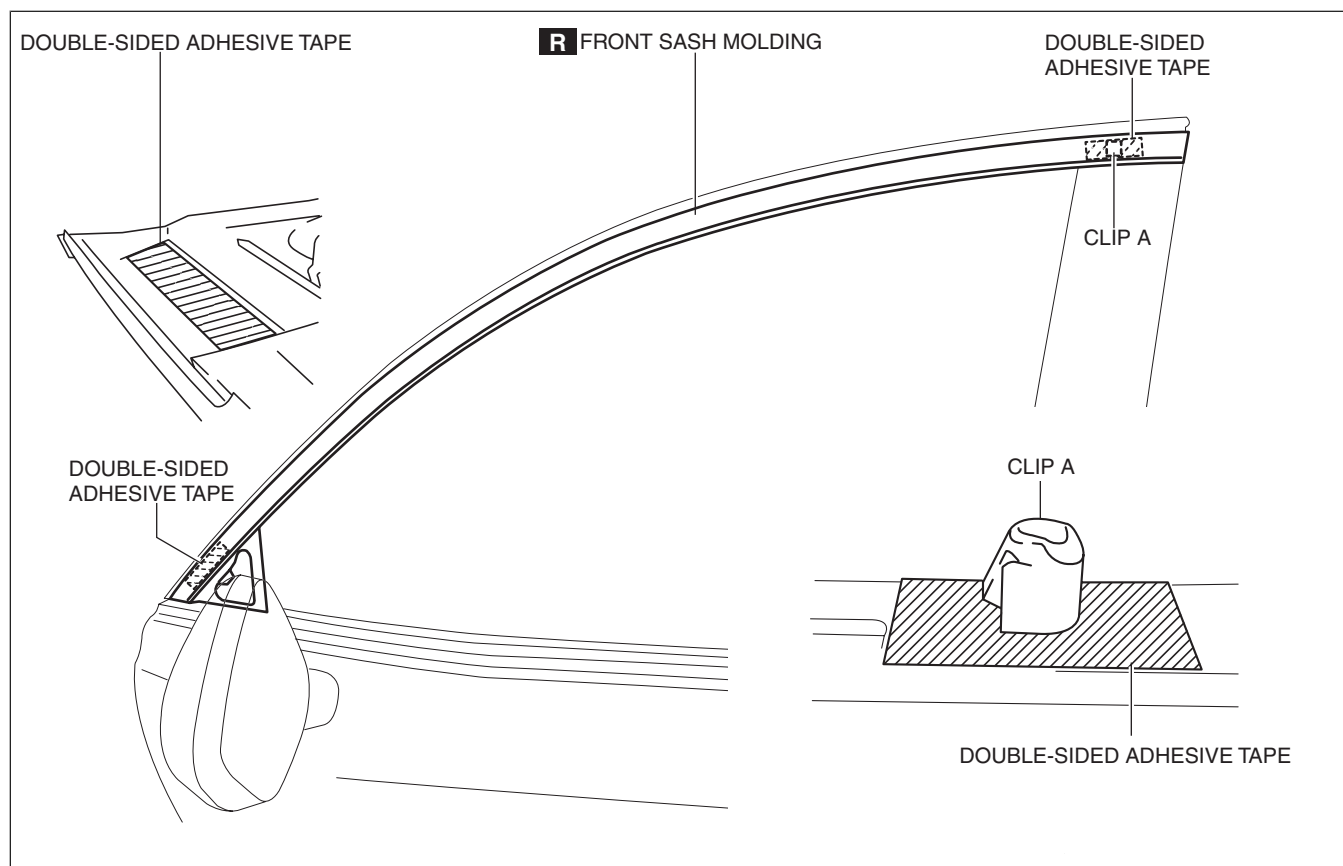


ac5wzw00002089

2. Insert a tape-wrapped flathead screwdriver shown in the figure and remove the protector in the direction of arrow (1).

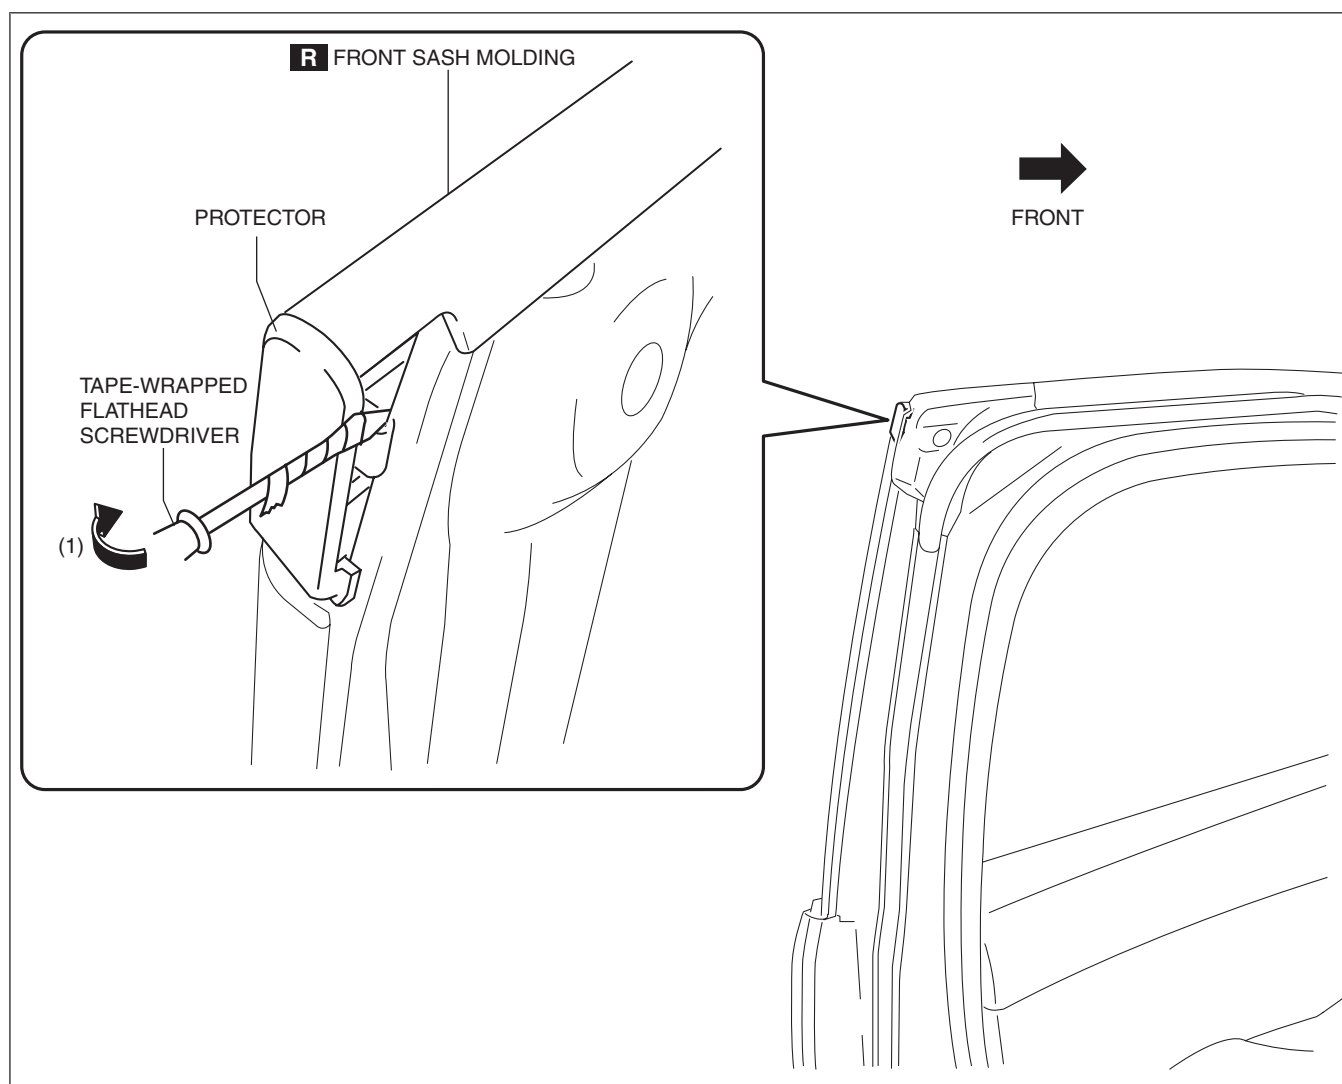

ac5uuw00001979

3. Insert a tape-wrapped flathead screwdriver shown in the figure and remove clip A in the direction of arrow (2).

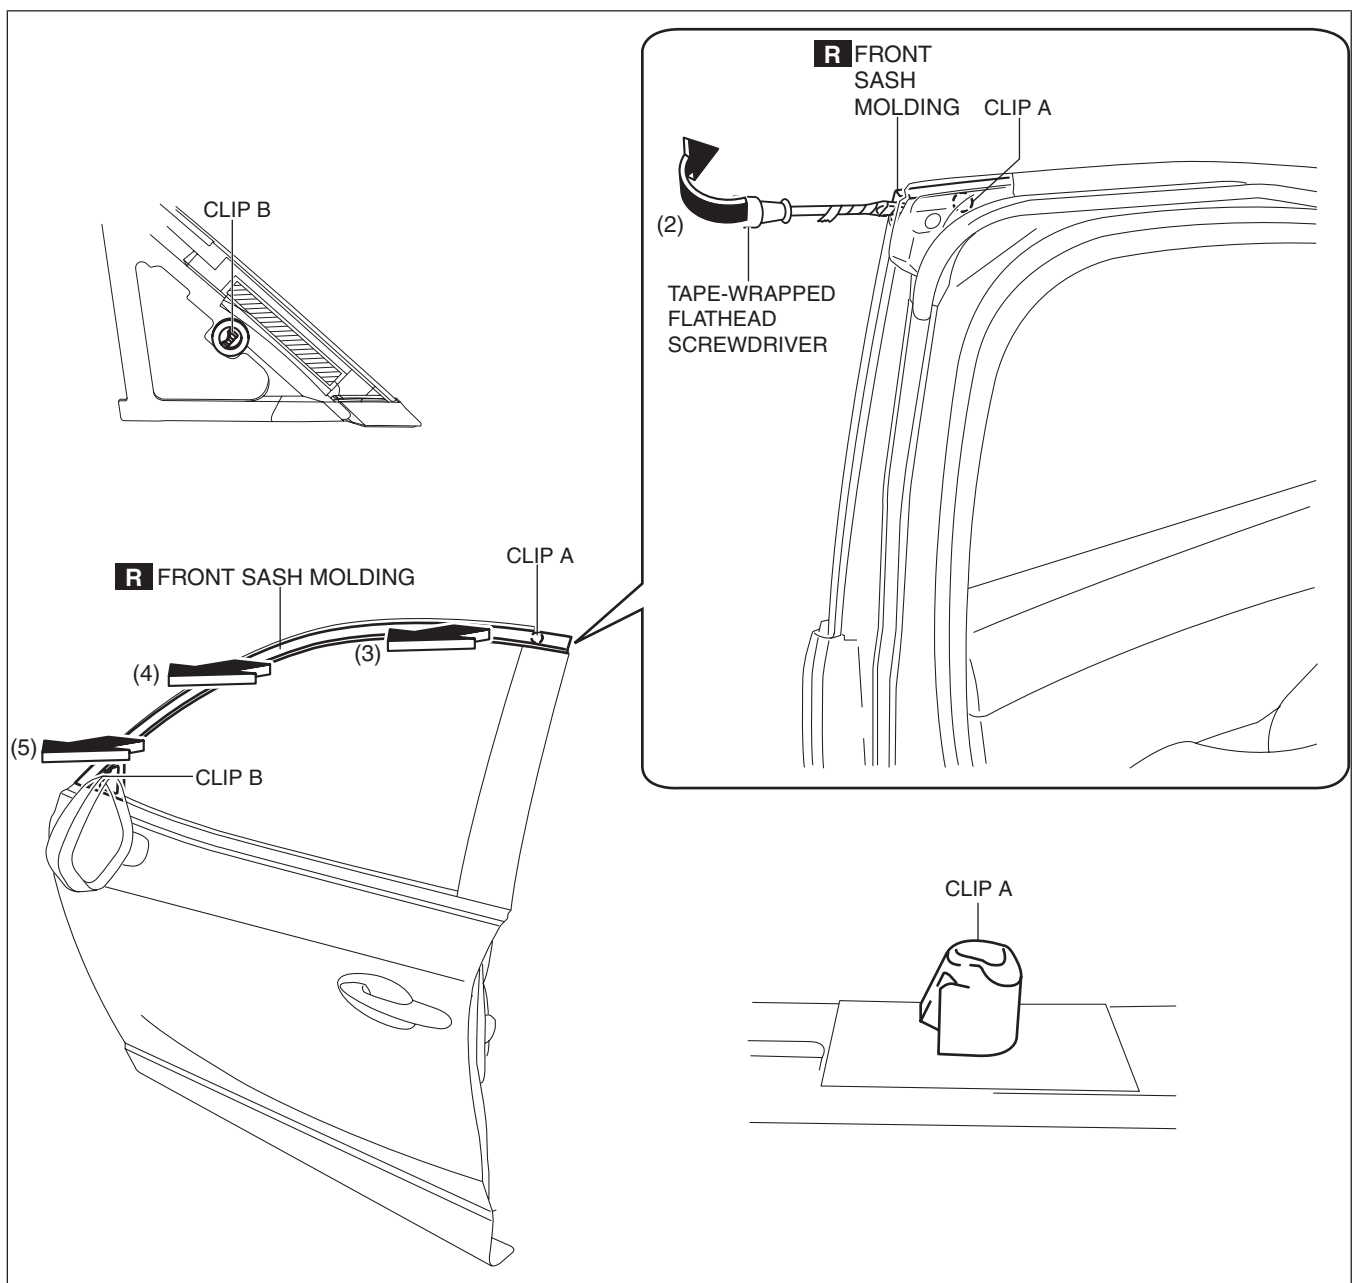

ac5uuw00001980

4. Remove the front sash molding in the direction of arrow in the order of (3), (4), (5) while detaching clip B.
5. Install in the reverse order of removal.