


REAR OVER FENDER REMOVAL/INSTALLATION


id091000878800

1. Remove fasteners A.

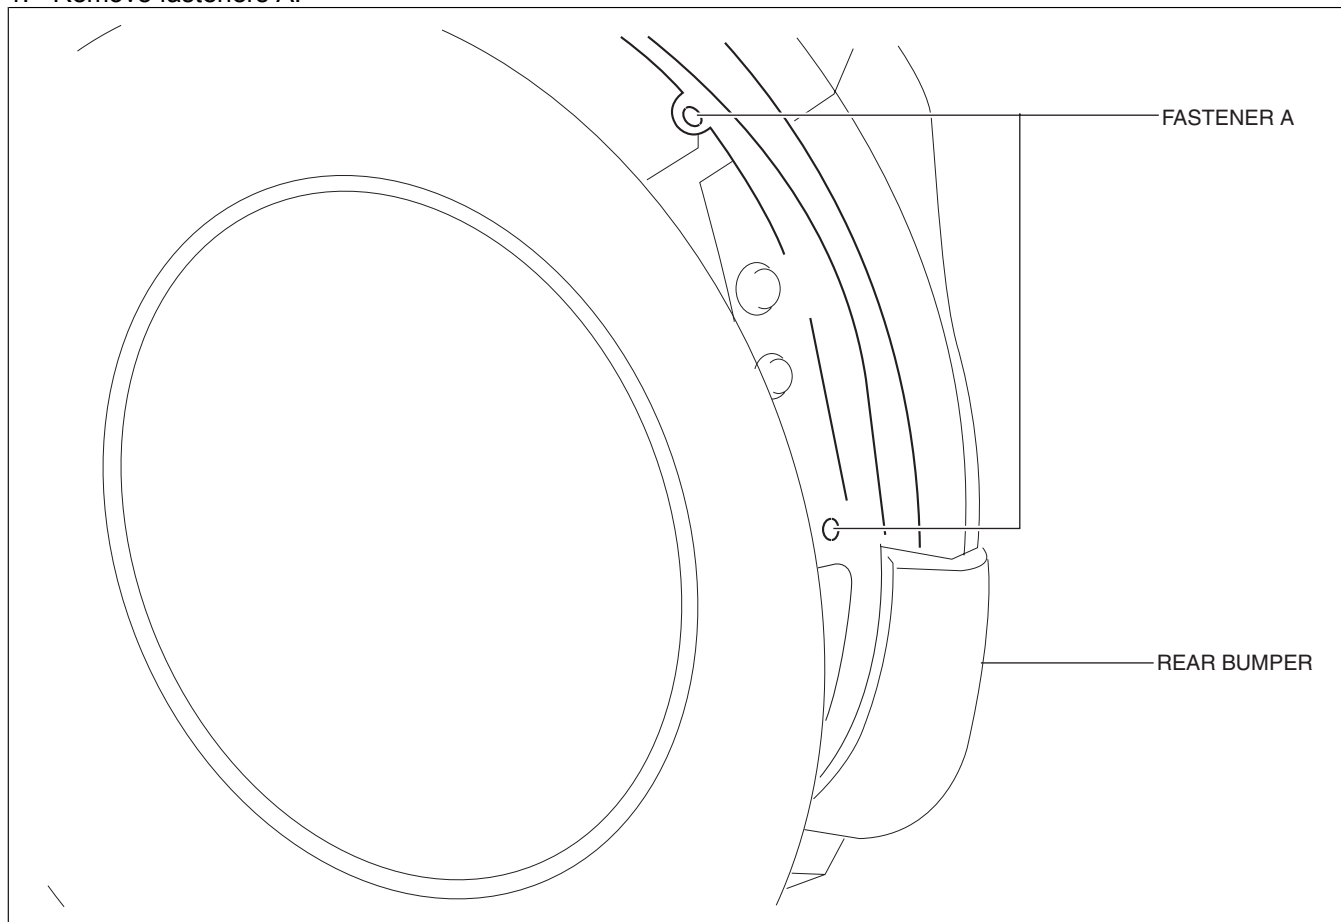

ac5wzw00001174

2. Pull the rear over fender in the direction of the arrow (2) while removing clips B, C and D.

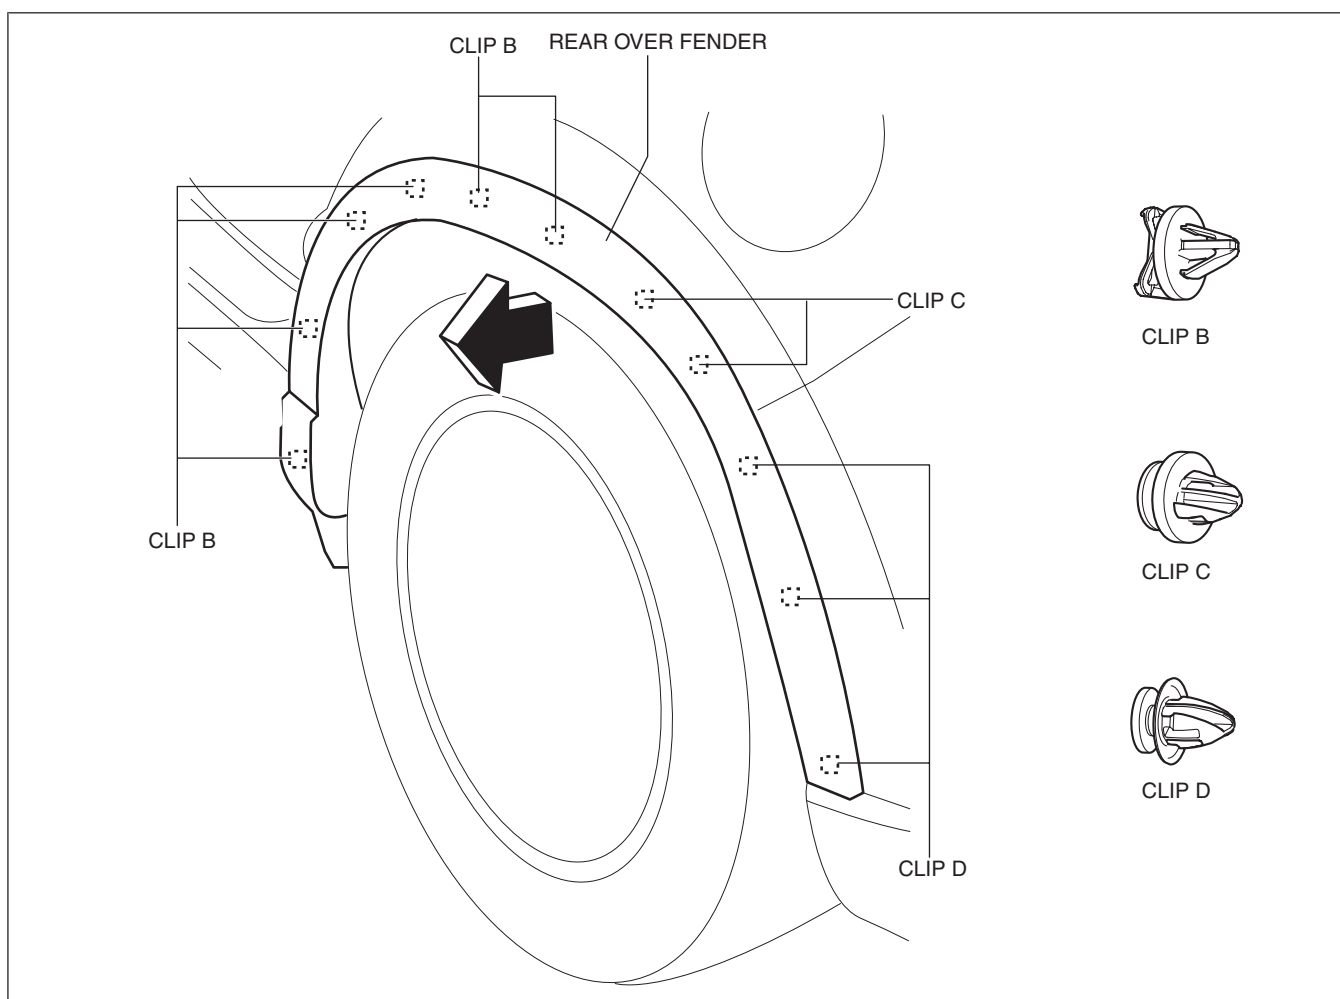

ac5wzw00003179

3. Install in the reverse order of removal.

Warning

- When installing the rear over fender, verify that clips B, C, D are not damaged, if they are damaged, replace them with new ones. Otherwise, the rear over fender may fall off while the vehicle is being driven, leading to a serious accident.