

FLOOR SIDE PANEL REMOVAL [PANEL REPLACEMENT]

id098008618700


Symbol Mark

SYMBOL MARK	MEANING
●	SPOT WELDING

ac5wzb00000088


Removal Procedure

1. Drill the 35 locations indicated by (A) shown in the figure, then remove the floor side panel No.1.

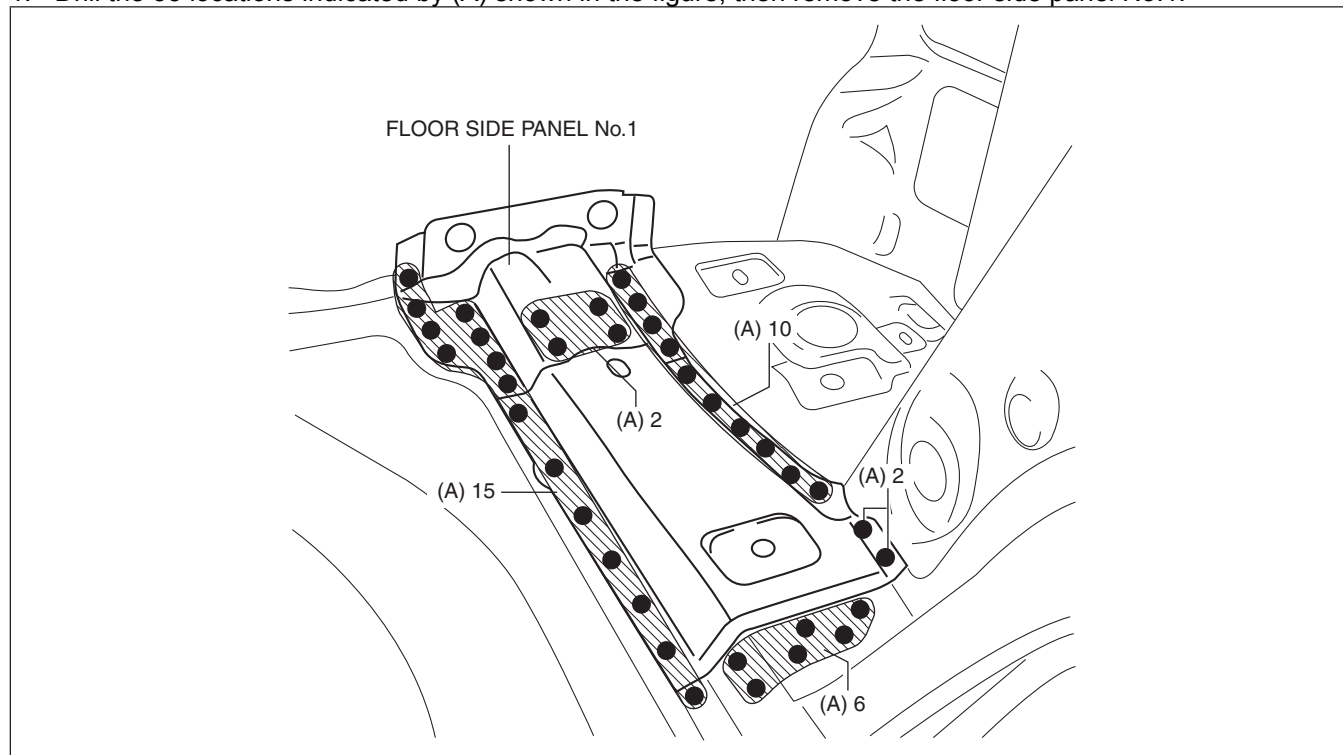

ac5wzb000000144

2. Drill the 5 locations indicated by (B) shown in the figure.
3. Drill the 4 locations indicated by (C) from rear wheel housing shown in the figure.

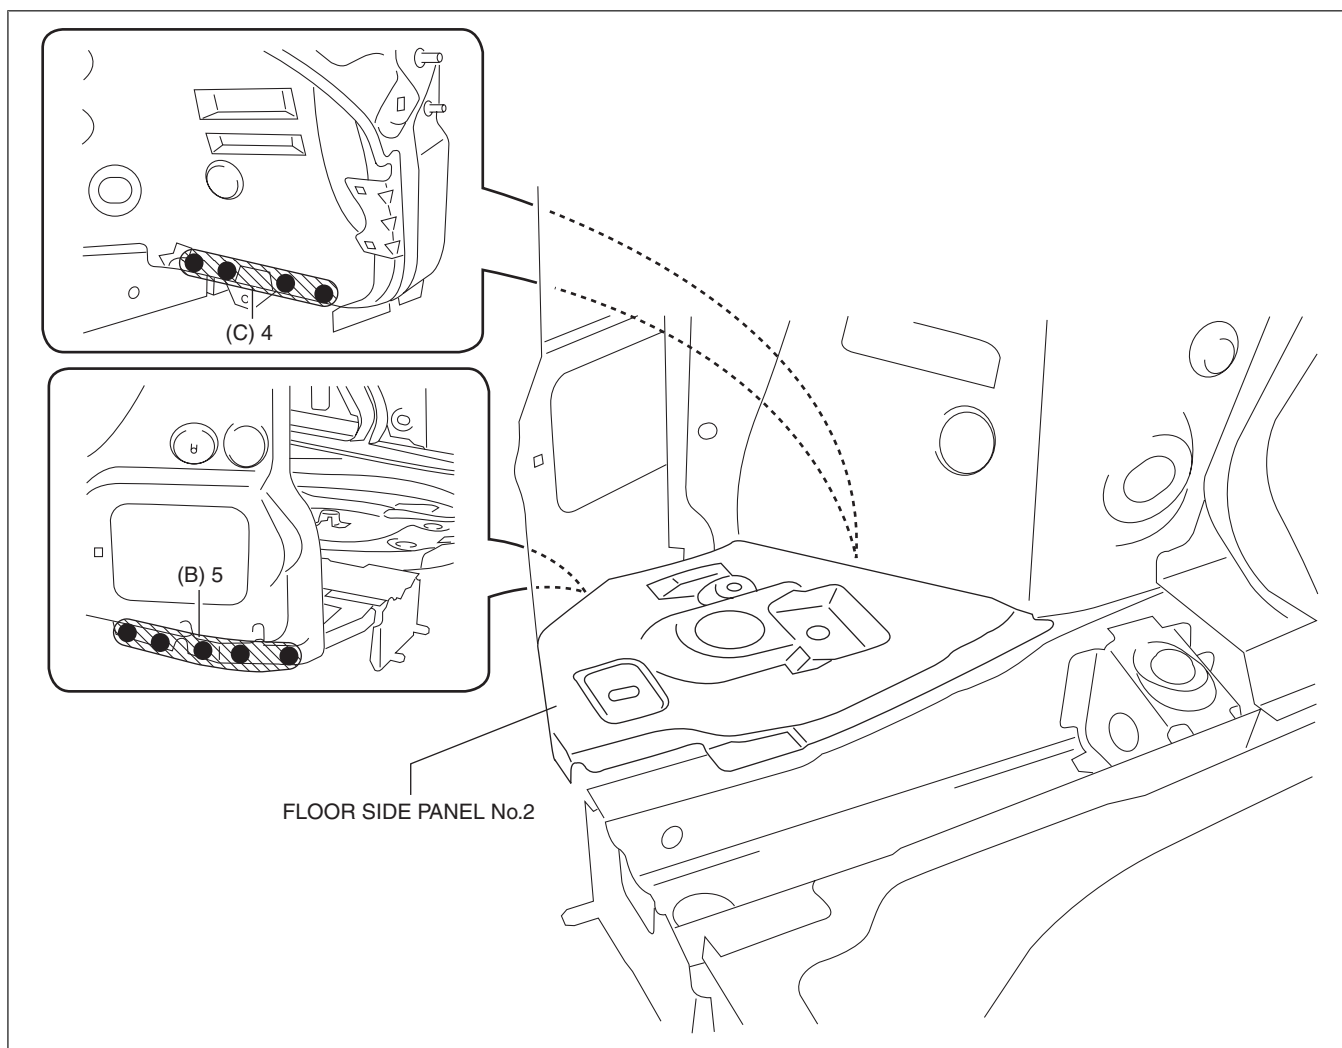

ac5wzb00000145

4. Remove the floor side panel No.2.