

## CLUTCH FLUID INSPECTION [C66M-R, C66MX-R]

id0510mc156400

### Note


- A common reserve tank is used for the clutch system and brake system.

1. Verify that the clutch fluid is between the MIN mark and the MAX mark.
  - If fluid level is lower than MIN mark, perform the following procedure:
    1. Verify that there is no fluid leakage. (See CLUTCH FLUID LEAKAGE INSPECTION [C66M-R, C66MX-R].)
    2. Add fluid to the level between MIN mark and the MAX mark.

### Clutch fluid

European (L.H.D. U.K.) specs.: SAE J1703 or FMVSS116 DOT-3 or DOT-4

Australian and General (L.H.D. R.H.D.) specs.: SAE J1703 or FMVSS116 DOT-3

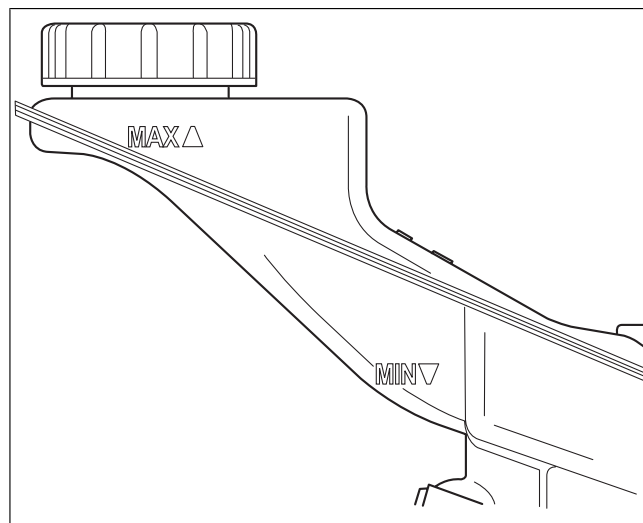

am3uuw00008240