

REAR PILLAR (OUTER) REMOVAL [PANEL REPLACEMENT]

id098008747200


Symbol Mark

SYMBOL MARK	MEANING
●	SPOT WELDING
~~~~~	ROUGH CUT LOCATION

ac5wzb00000260

### Removal Procedure

1. Rough cut area location indicated by (A) shown in the figure.
2. Drill the 10 locations indicated by (B) shown in the figure.

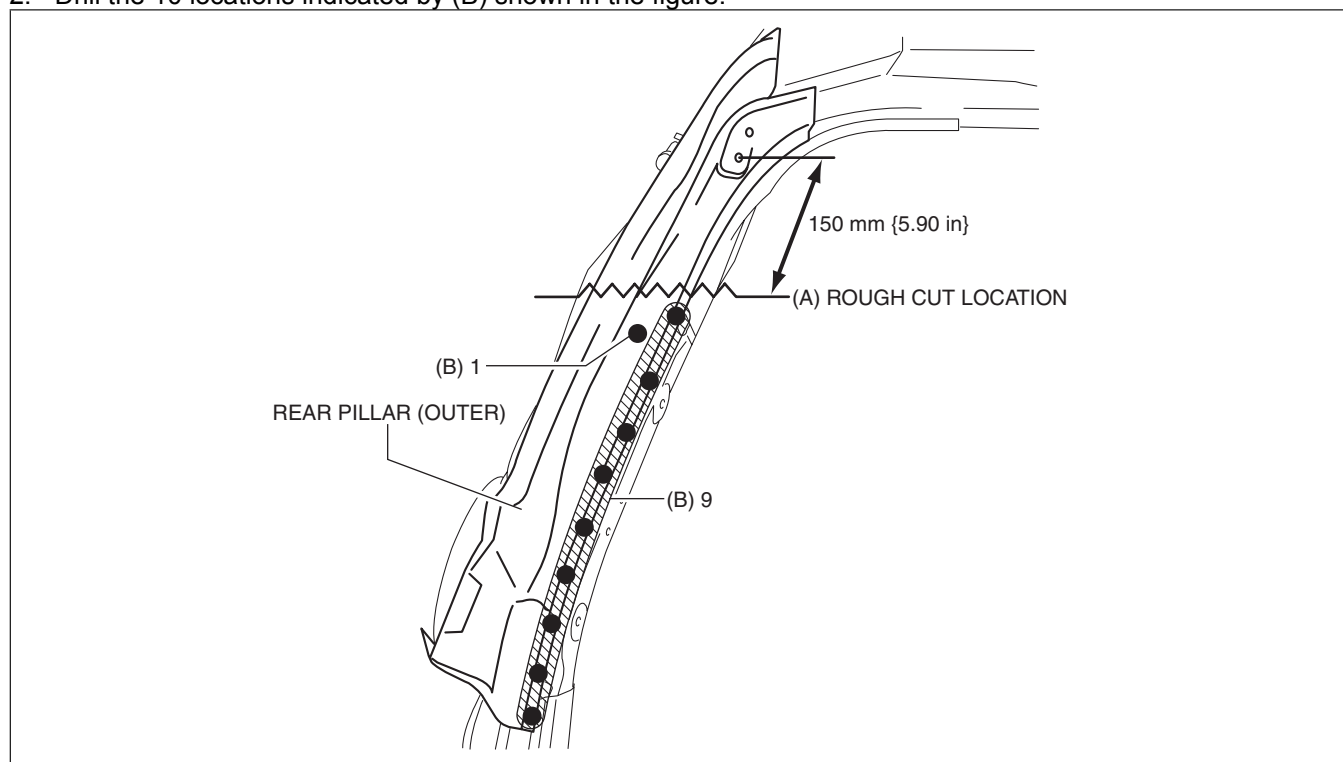

ac5wzb00000293

3. Remove the rear pillar (outer).