

COWL UPPER PLATE REMOVAL [PANEL REPLACEMENT]

id098008957100


Symbol Mark

SYMBOL MARK	MEANING
	SPOT WELDING

ac5wzb00000050

Removal Procedure

1. Drill the 9 locations indicated by (A) shown in the figure.
2. Drill the 2 locations by (B) from the front wheel housing side shown in the figure.
3. Drill the 2 locations indicated by (C) from the inside shown in the figure.

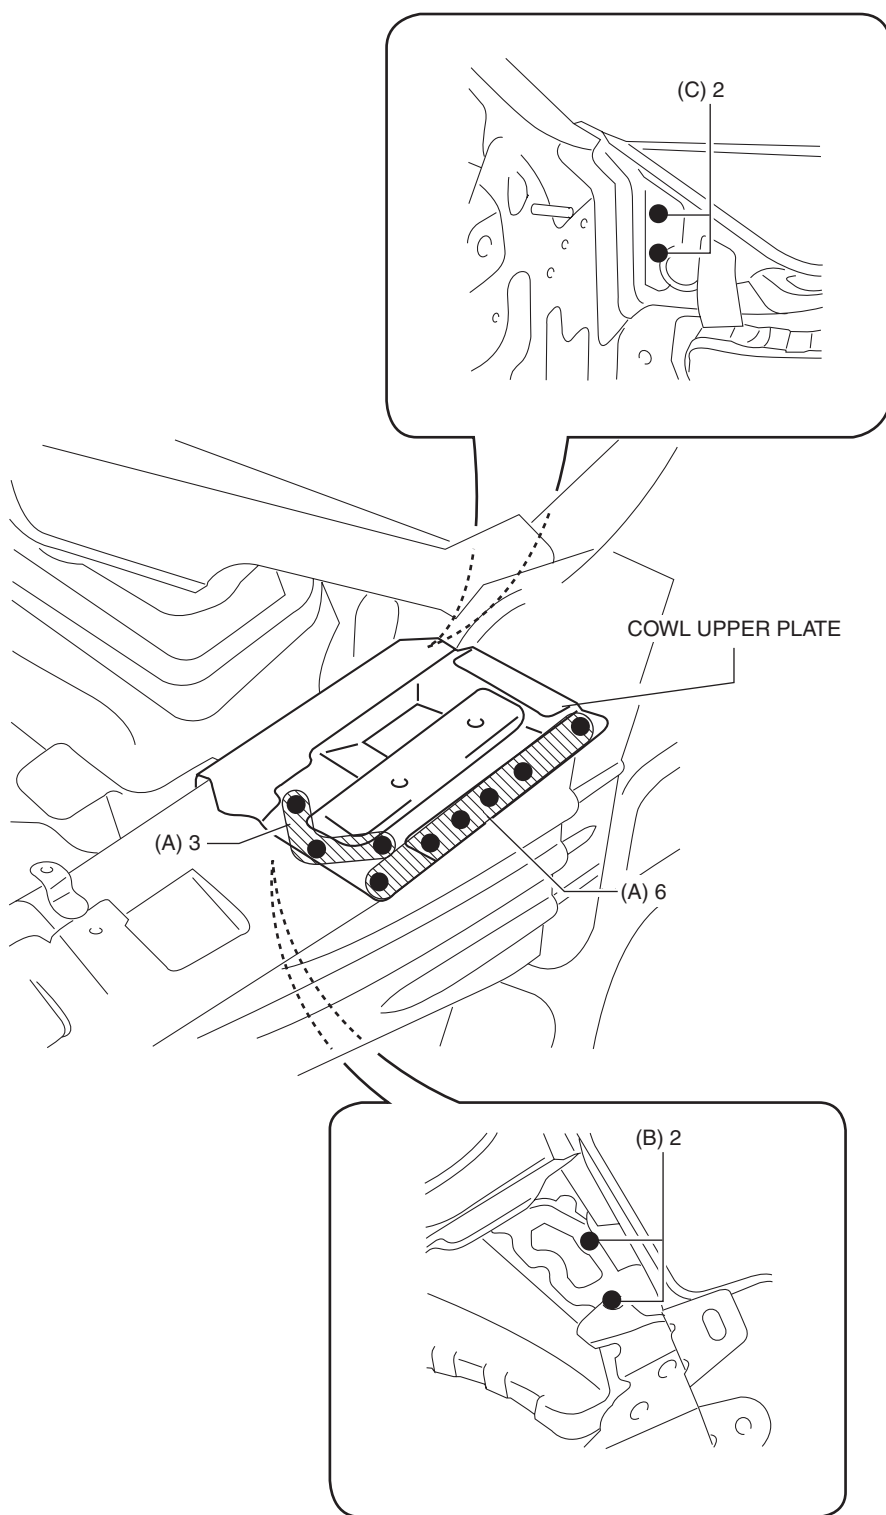

4. Remove the cowl upper plate.