


SAIL GARNISH REMOVAL/INSTALLATION

id091600451200

1. Open the front door.
2. Affix protective tape to the position shown in the figure.

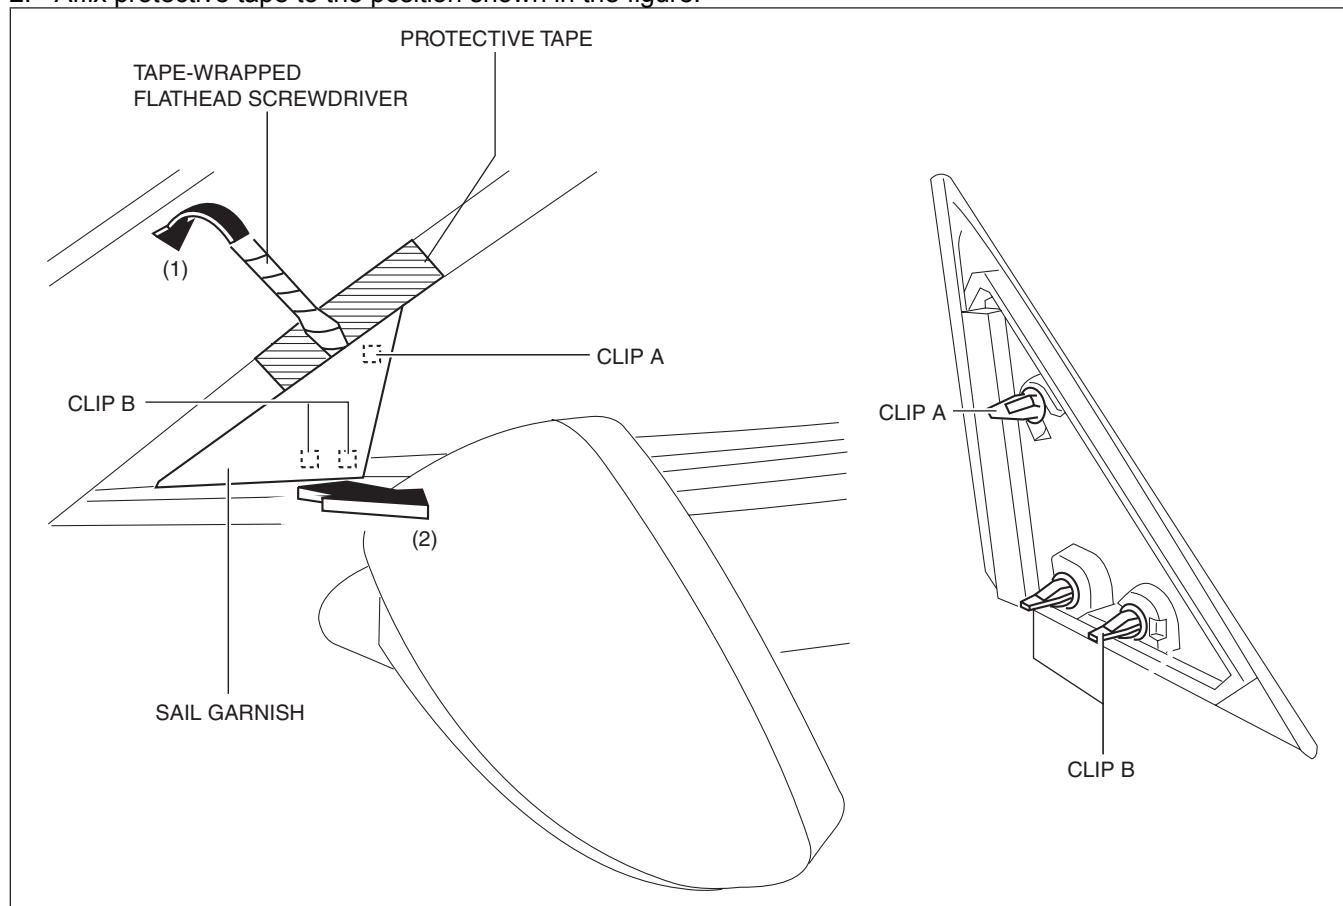

3. Insert a tape-wrapped flathead screwdriver into the shown in the figure and remove the clip A in the direction of arrow (1).
4. Pull the sail garnish in the direction of the arrow (2) and remove it while detaching clips B.
5. Install in the reverse order of removal.

ac5wzw00003412