

Caution

- The audio unit communicates with the car-navigation unit and records the presence/non-presence of the car-navigation unit when the ignition is switched to ACC or ON (engine off or on) after connecting the negative battery cable.
- If the commander switch is installed with the negative battery cable connected when the audio unit records that there is no car-navigation unit, the car-navigation unit does not operate.
- For the car-navigation unit installation/removal, disconnect the negative battery cable, switch the ignition to ACC or ON (engine off or on) after the servicing is completed, and the audio unit records the presence/non-presence of the car-navigation unit.


Note

- If the car-navigation unit is replaced with a new one, the information set by the customer is erased because the SD card is also replaced simultaneously. If the same service as before replacing the car-navigation unit is used, the SD update procedure is required.
 - If the car-navigation unit is replaced with a new one, explain to the customer and gain their understanding that there is a charge for updating the SD card because payment for downloading paid content is required.
1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (WITHOUT i-stop)].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-D 2.2].)
 2. Affix protective tape to the gaps between the car-navigation and lower panel as shown in the figure.


Caution

- Before inserting a flathead screwdriver into the gap between the car-navigation and lower panel, affix protective tape to prevent damage. Otherwise, the lower panel could be damaged by the flathead screwdriver.

3. Insert your hand from the lower side of the lower panel and press the car-navigation unit so that there is a gap on the upper side of the car-navigation unit.

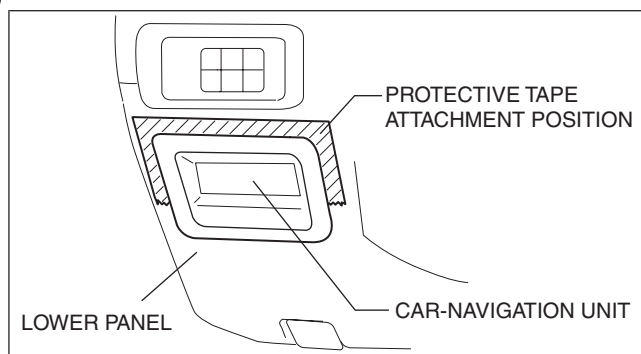


ac5wzw00003413

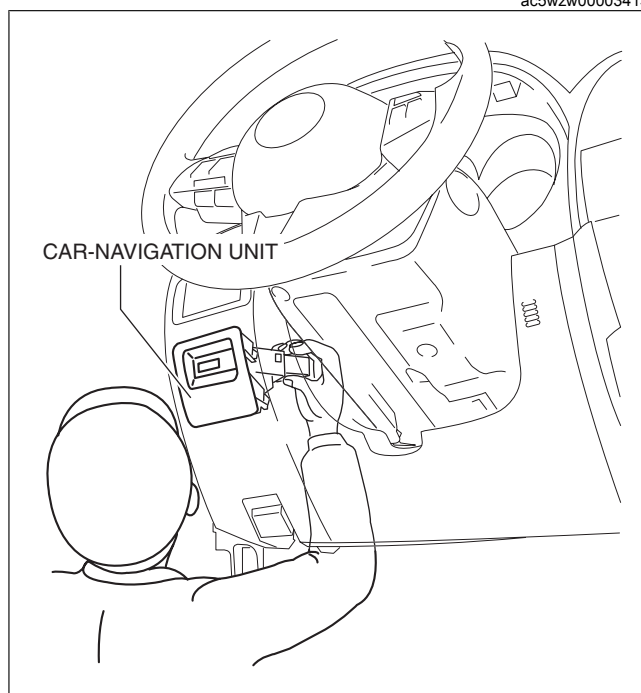


ac5jjw00000721

4. Insert a tape-wrapped fastener remover into the gap between the lower panel and car-navigation unit.
5. Move the fastener remover to the position of the arrow shown in the figure and detach the car-navigation unit clip from the lower panel.

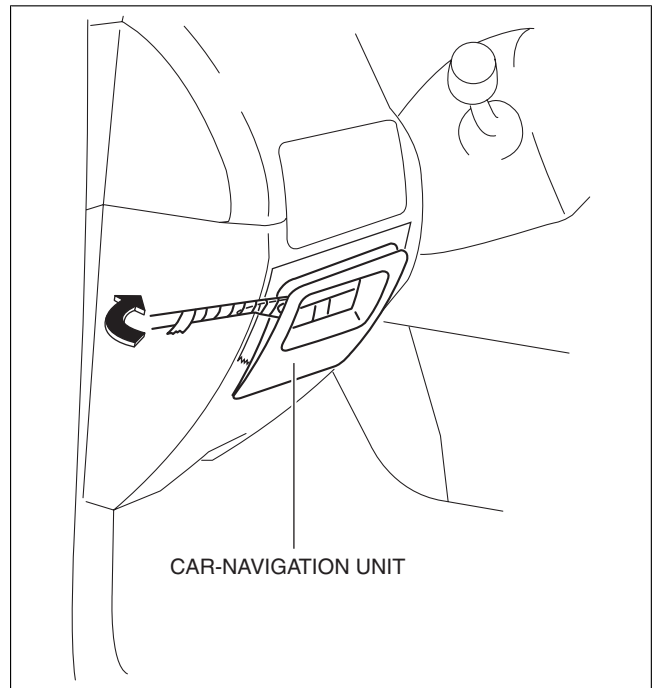

ac5jjw00000119

6. Pull out the car-navigation unit and disconnect the connectors.
7. While pressing the tabs of the clip in the direction of arrows (1) shown in the figure, press the clip in the direction of arrow (2) to detach it from the car-navigation unit.
8. Remove the clip.
9. Remove the car-navigation unit.
10. Install in the reverse order of removal. (See Installation Note.)
11. If required, perform updating of the SD card. (See SD CARD UPDATING PROCEDURE.)

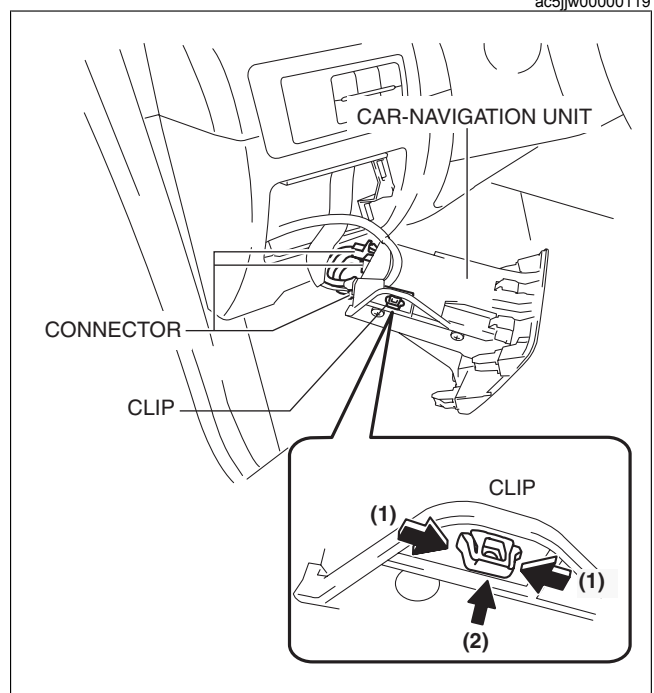

ac5jjw00002214

Installation Note

- Pressing the car-navigation unit when installing it could result in a malfunction. Therefore, press the panel area to install the car-navigation unit.