


FRONT UNDER COVER No.1 REMOVAL/INSTALLATION


id091600888800

1. Remove bolts A.

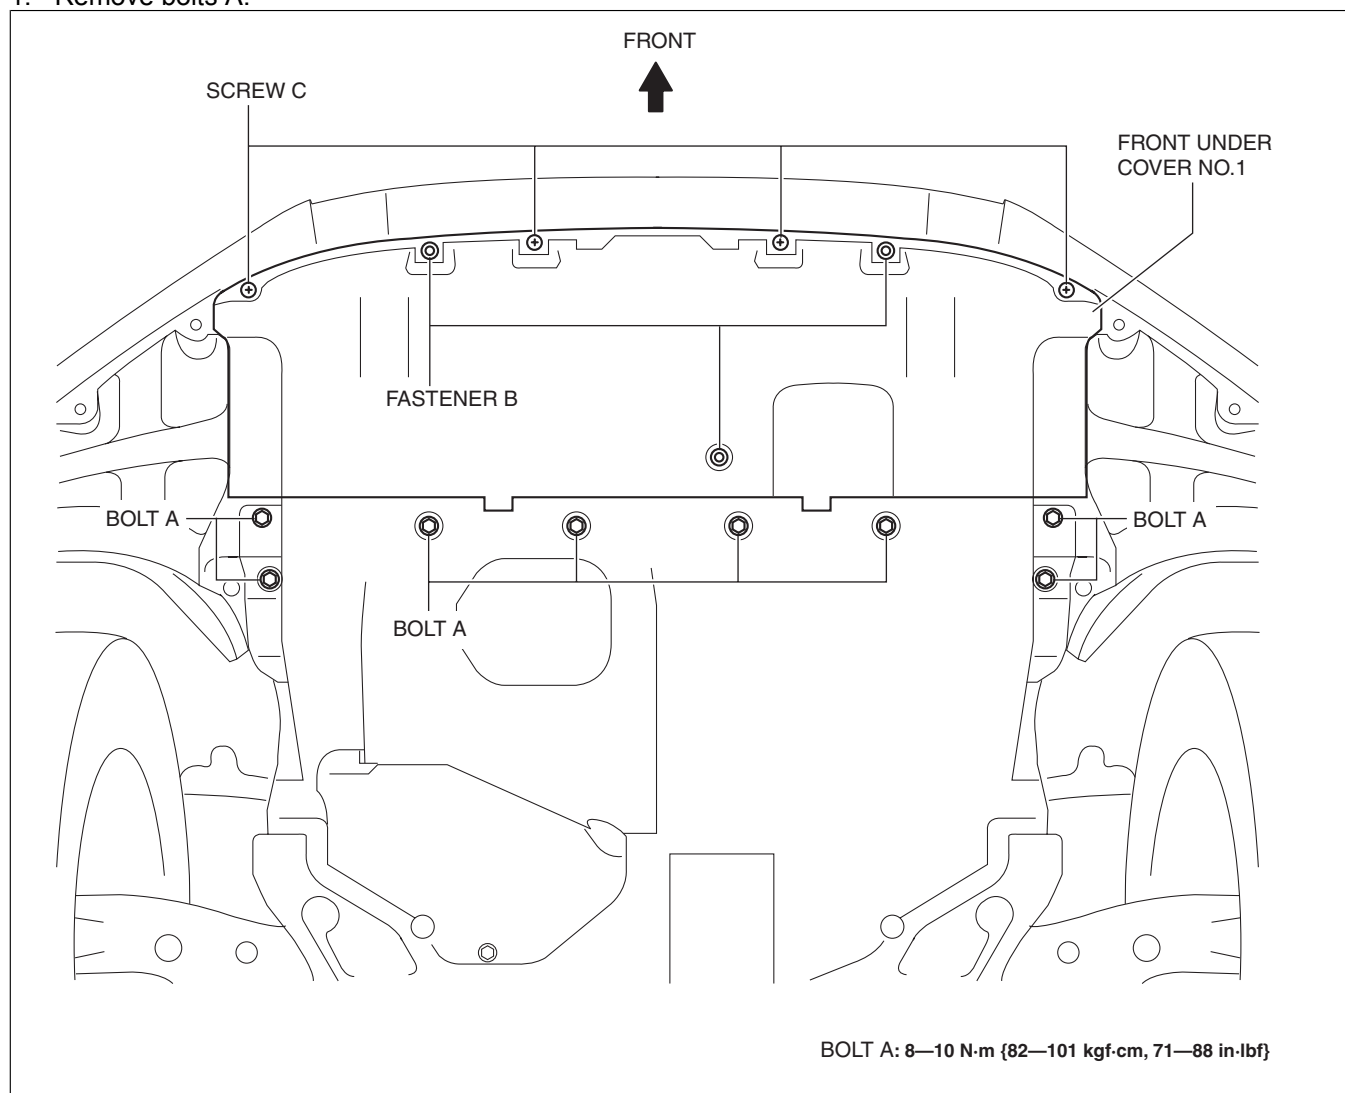

ac5wzw00001291

2. Remove fasteners B.
3. Remove screws C.
4. Remove the front under cover No.1 in the direction of the arrow in the order of (1), (2) shown in the figure while detaching the guide D.

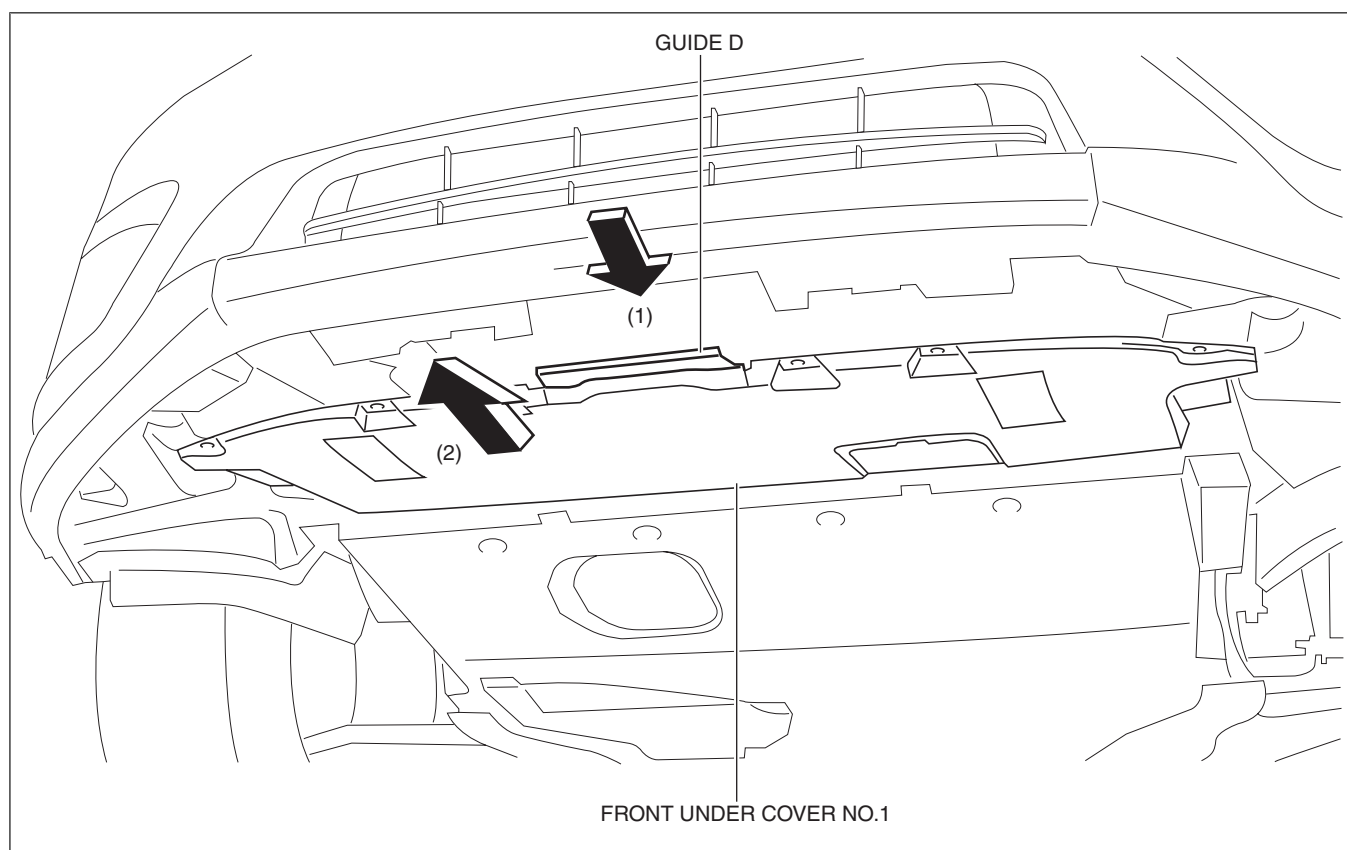

ac5uuw00001738

5. Install in the reverse order of removal.