


DECORATION PANEL REMOVAL/INSTALLATION

id091700806600

Caution

- Affix protective tape to the position shown in the figure.

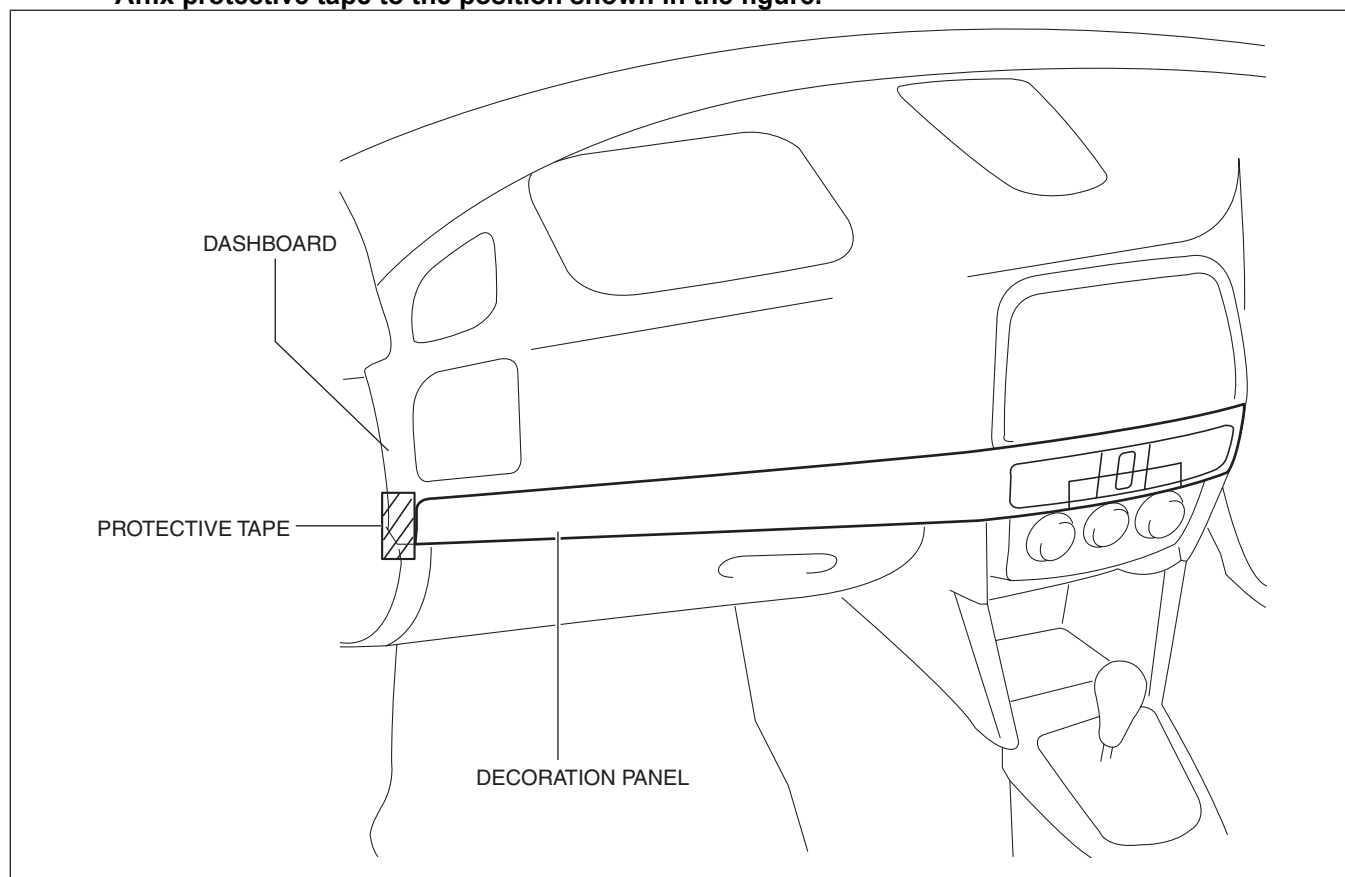

ac5uuw00002064

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (WITHOUT i-stop)].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-D 2.2].)
2. Open the glove compartment.
3. Insert a tape-wrapped flathead screwdriver in the position indicated by the arrow (1) in the figure and detach clip A.

TAPE-WRAPPED
FLATHEAD
SCREWDRIVER

CLIP A

CLIP B

CLIP C

CLIP C

(1)

(2)

(3)

(4)

DECORATION PANEL

CLIP C

CLIP A

CLIP B

CLIP C

ac5wzw00003002

4. Take the shaded area shown in the figure, and remove the decoration panel in the direction of the arrow in the order of (2), (3), (4) while detaching clips B, clips C.
5. Disconnect the hazard switch connector.
6. Install in the reverse order of removal.