

WHEEL APRON COMPONENT REMOVAL [PANEL REPLACEMENT]

id098008746000

Symbol Mark

SYMBOL MARK	MEANING
●	SPOT WELDING

ac5wzb00000037


Removal Procedure

1. Drill the 14 locations indicated by (A) from the front wheel housing side shown in the figure.
2. Drill the 11 locations indicated by (B) shown in the figure.
3. Drill the 4 locations indicated by (C) shown in the figure.

Note


- When drilling the 14 locations indicated by (A) and 4 locations indicated by (C) shown in the figure, do not drill a hole all the way through or there could be a problem when installing the new part.

4. Drill the 9 locations indicated by (D) shown in the figure.

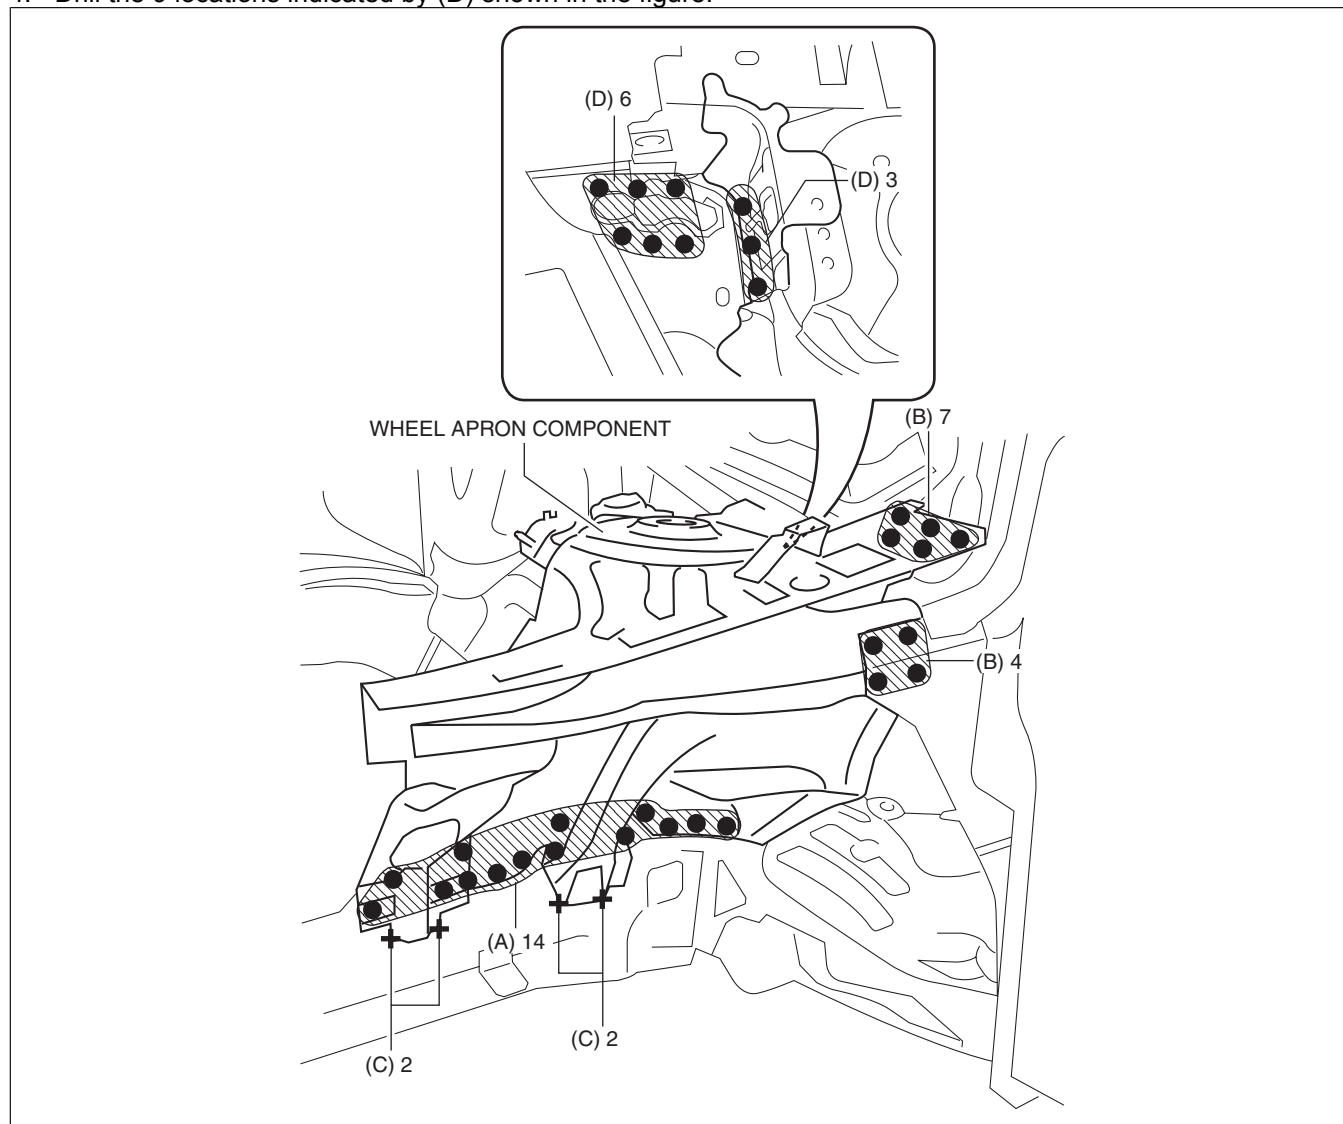

ac5wzb000000331

5. Drill the 12 locations indicated by (E) from the inside shown in the figure.

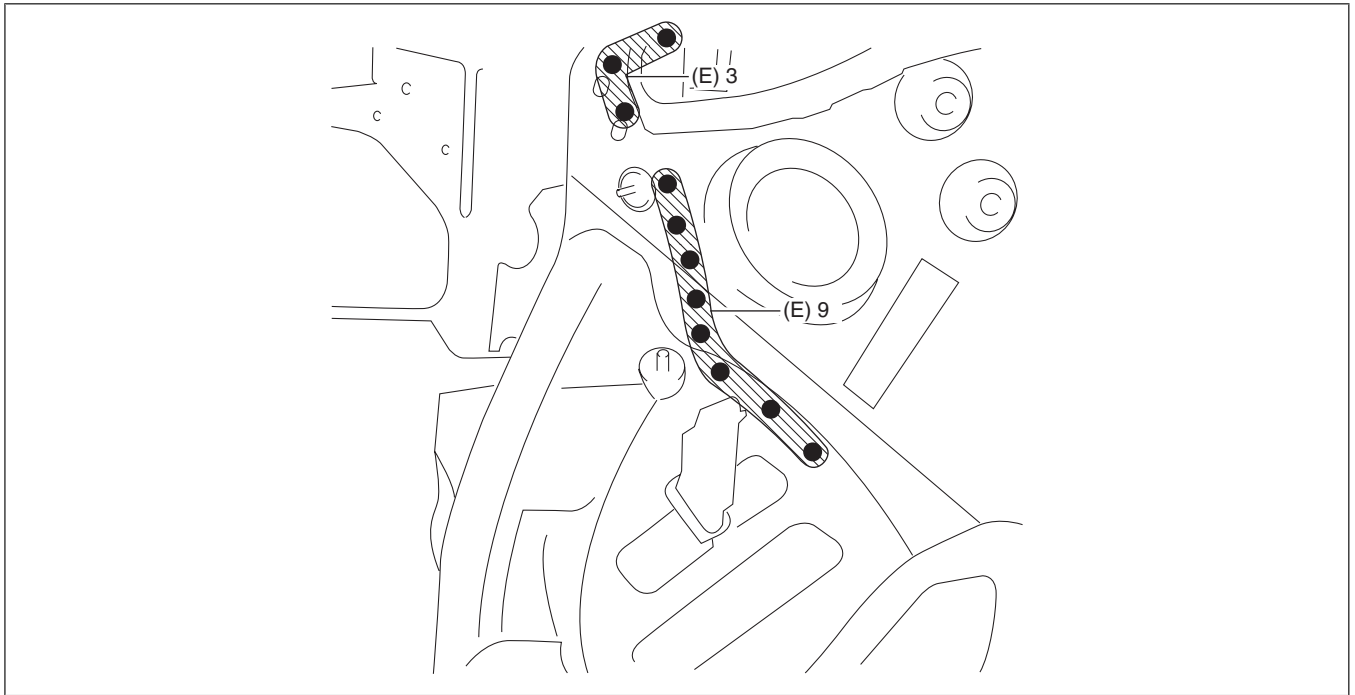

ac5wzb00000309

6. Remove the wheel apron component.