


## VANITY MIRROR ILLUMINATION BULB REMOVAL/INSTALLATION


id091800808200

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (WITHOUT i-stop)].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-D 2.2].)
2. Insert a tape-wrapped flathead screwdriver into the service hole in the position shown in the figure.

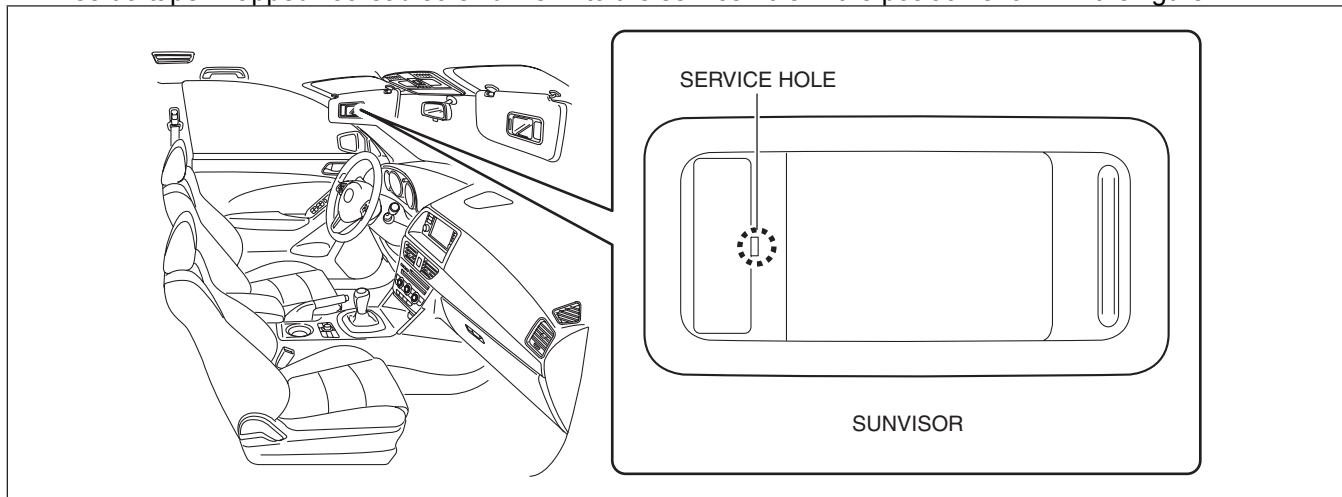


ac5wzw00000124

3. Move a flathead screwdriver in the direction of the arrow (1) shown in the figure and detach the lens tab and sunvisor.

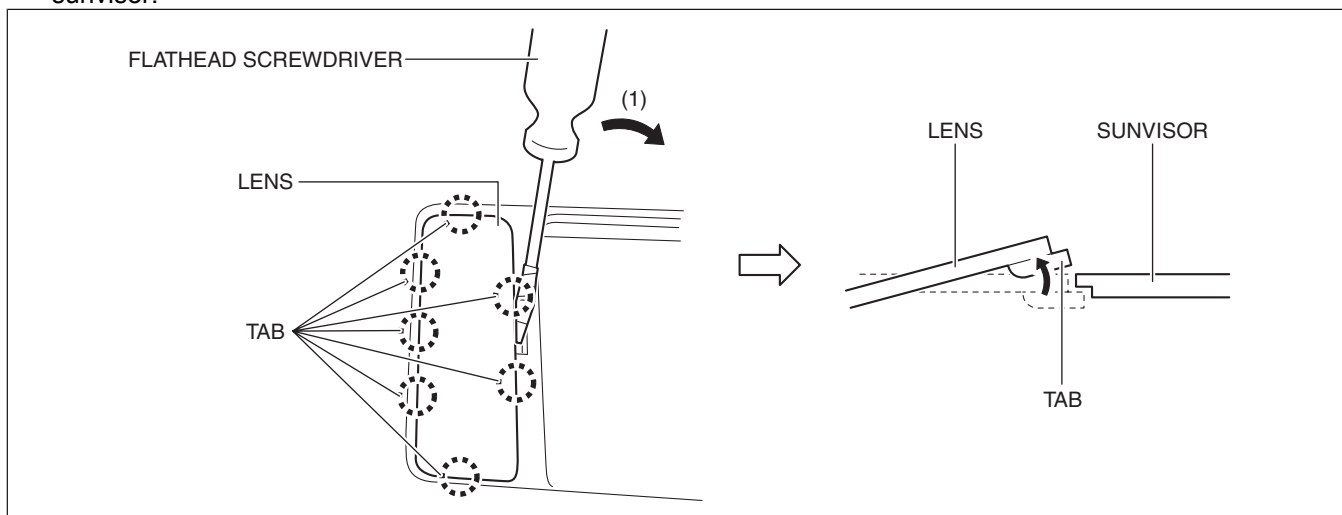


ac5wzw00000125

4. Detach all the lens tab and sunvisor and remove the lens from the sunvisor.

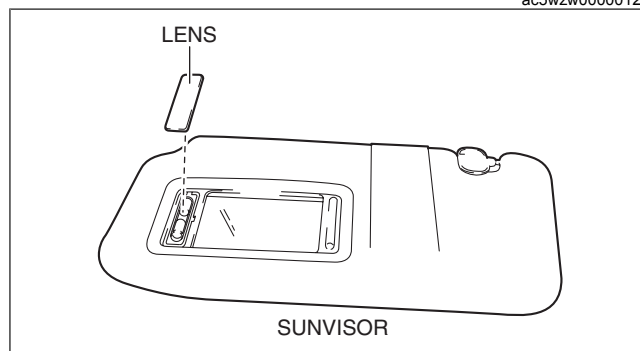

ac5wzw00000466

- 
5. Remove the vanity mirror illumination bulb.
  6. Install in the reverse order of removal.

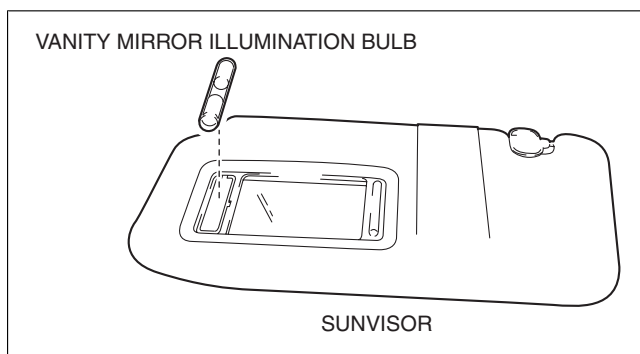

ac5wzw00000126