


CIGARETTE LIGHTER INSPECTION

id092000803200

1. Switch the ignition to ACC.
2. Press the cigarette lighter into the socket and verify that it returns to its original position in **10—20 s**.

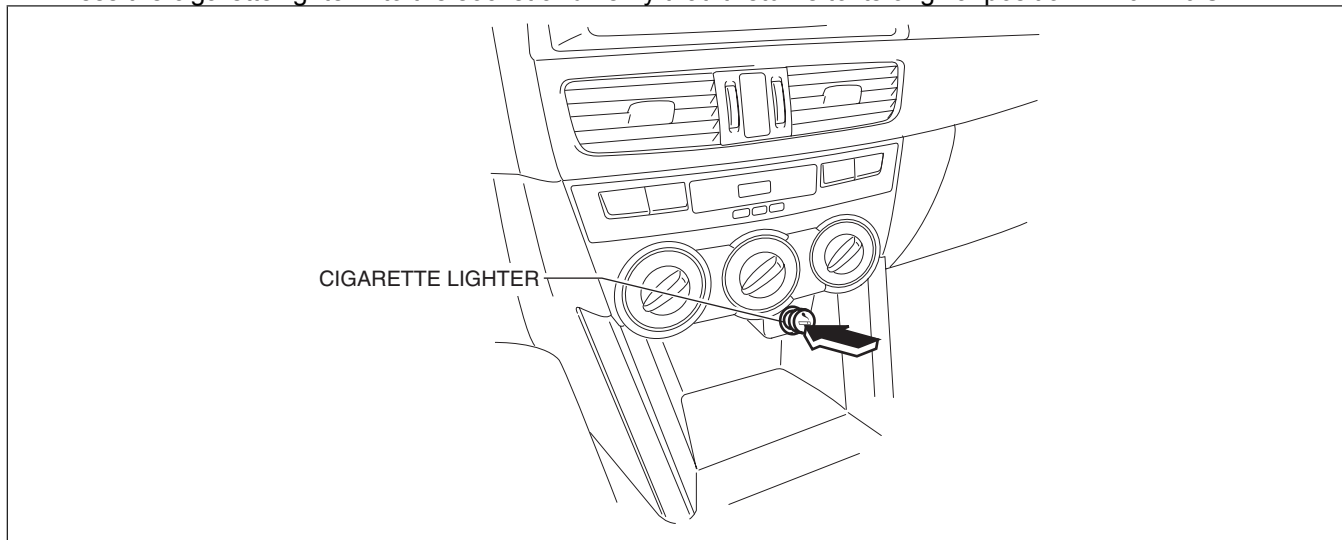

ac5wzw00004639

- If the cigarette lighter does not operate normally, replace the cigarette lighter and the socket.