


## CENTER ACCESSORY SOCKET INSPECTION

id092100900900

1. Remove the center accessory socket. (See CENTER ACCESSORY SOCKET REMOVAL/INSTALLATION.)
2. Connect the tester probe to the position shown in the figure and verify that there is continuity.
  - If it cannot be verified, replace the center accessory socket. (See CENTER ACCESSORY SOCKET REMOVAL/INSTALLATION.)

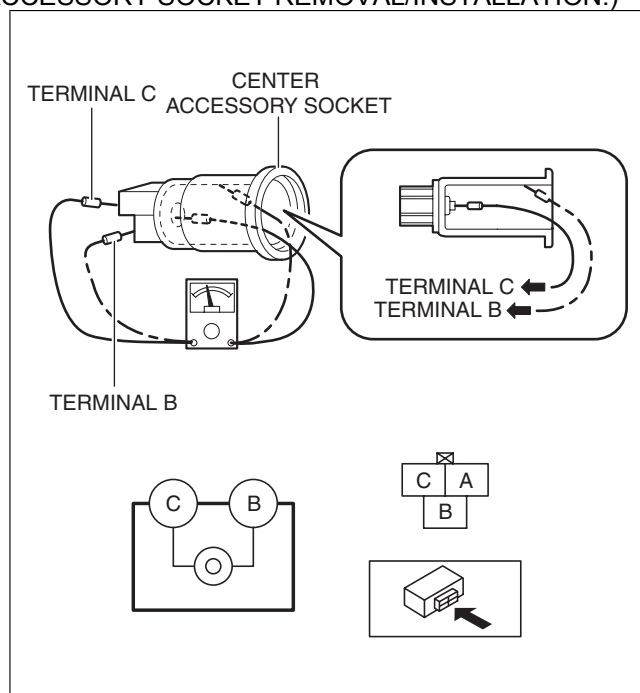

ac5wzw00001123