


## FRONT UNDER COVER No.2 REMOVAL/INSTALLATION

id091600888900

1. Lift up the vehicle.
2. Remove the front under cover No.1. (See FRONT UNDER COVER No.1 REMOVAL/INSTALLATION.)
3. Remove fasteners A.

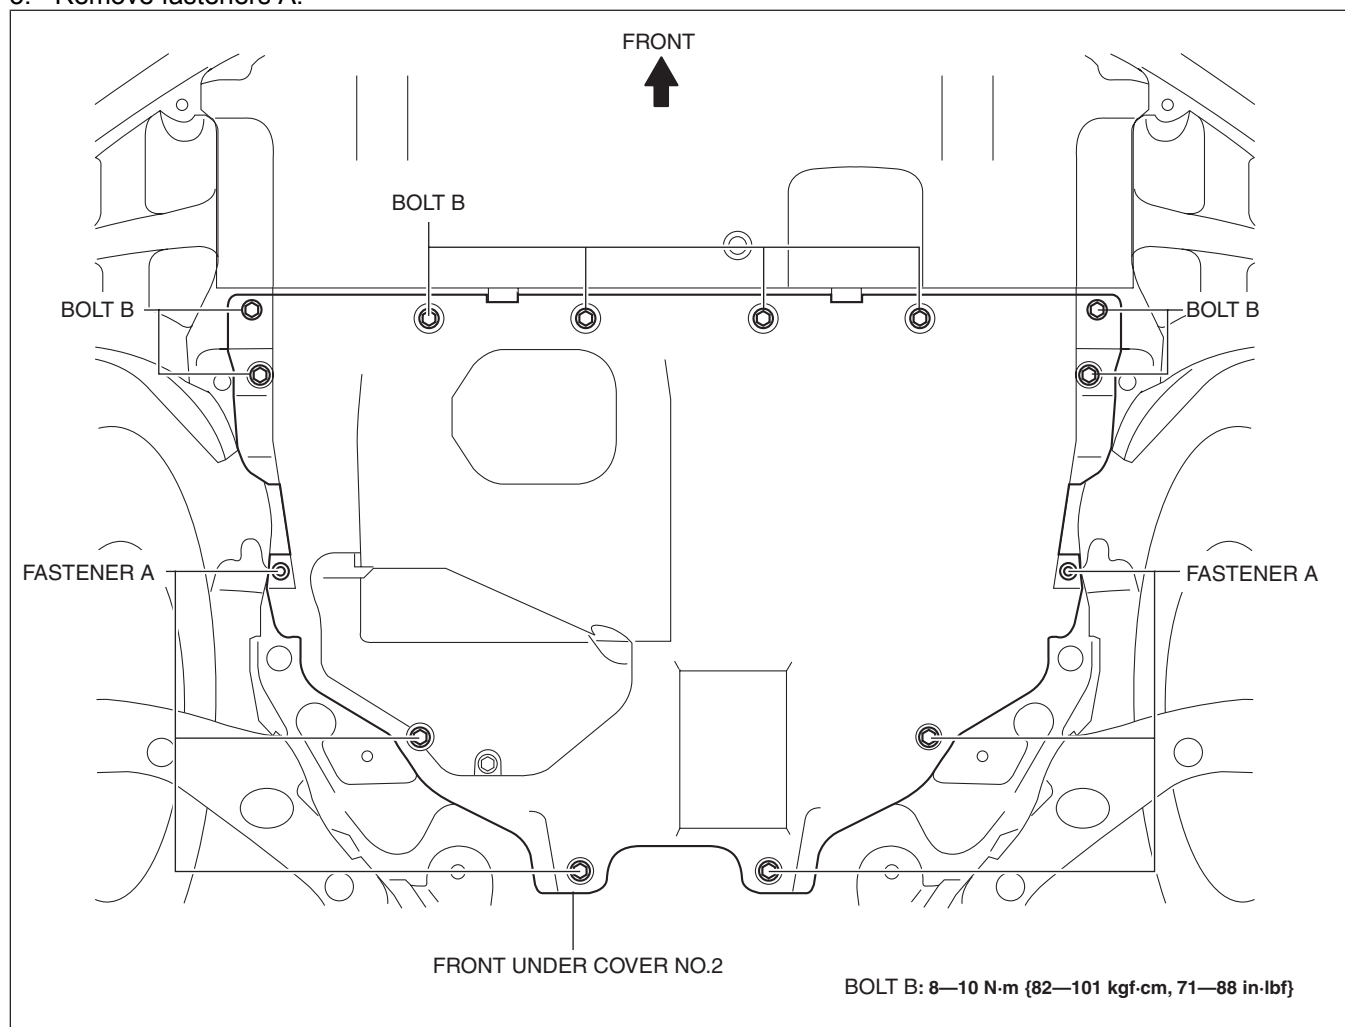

ac5wzw00003030

4. Remove bolts B.
5. Remove the front under cover No.2.
6. Install in the reverse order of removal.