


SWITCH PANEL REMOVAL/INSTALLATION


id091700460400

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (WITHOUT i-stop)].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-D 2.2].)
2. Remove the car-navigation unit. (with car-navigation system) (See CAR-NAVIGATION UNIT REMOVAL/INSTALLATION.)
3. Insert your hand from the lower side of the lower panel (without car-navigation system) or the area where the car-navigation unit was installed (with car-navigation system), press the switch panel in the direction of the arrow (1) shown in the figure and remove it while detaching hook A and B and hook C.

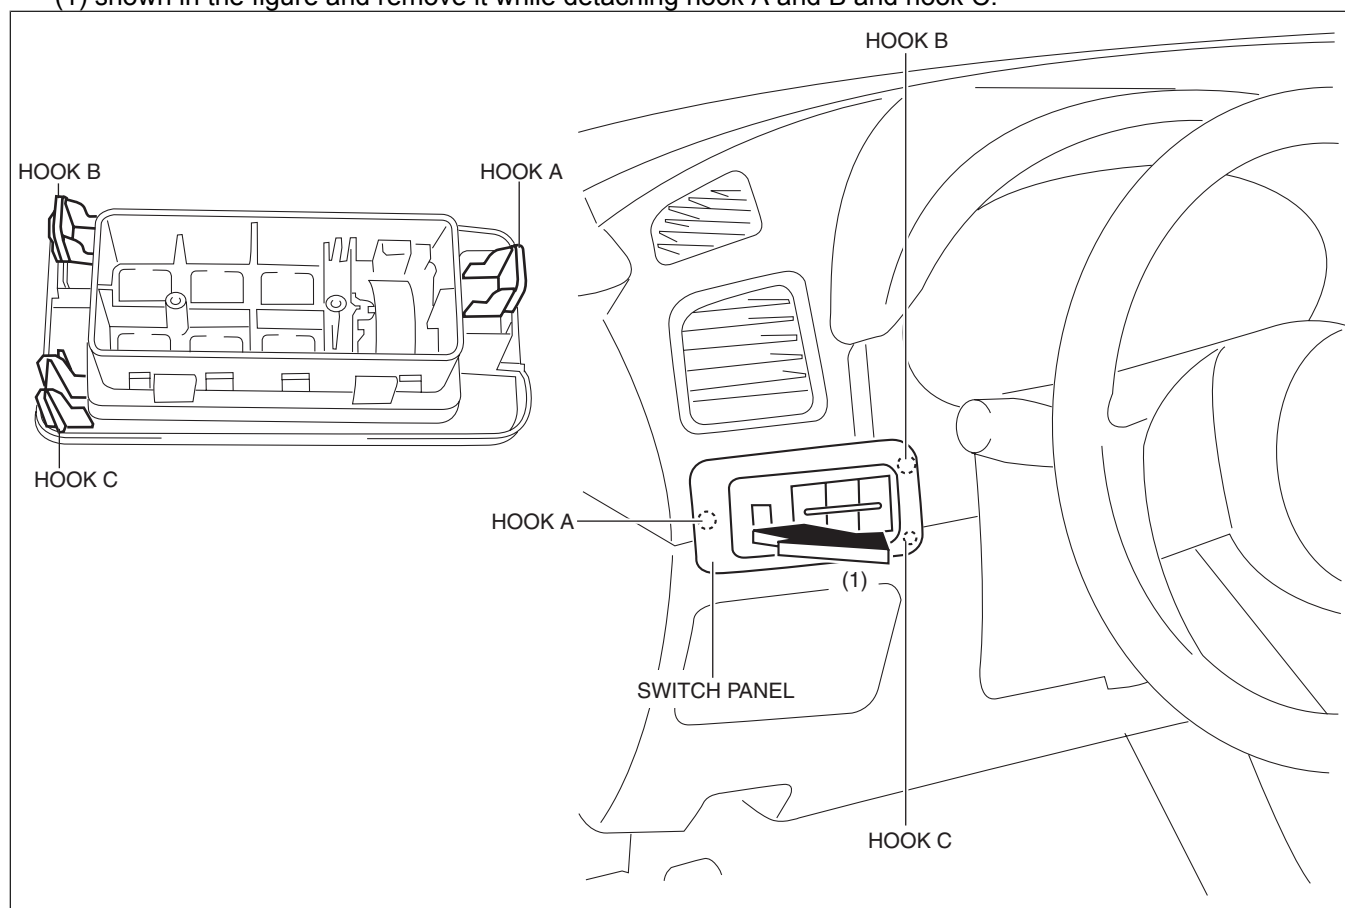

ac5wzw00002998

4. Disconnect the cluster switch connector.
5. Remove the cluster switch in the direction of the arrow (3) while detaching hooks D in the direction of the arrow (2).

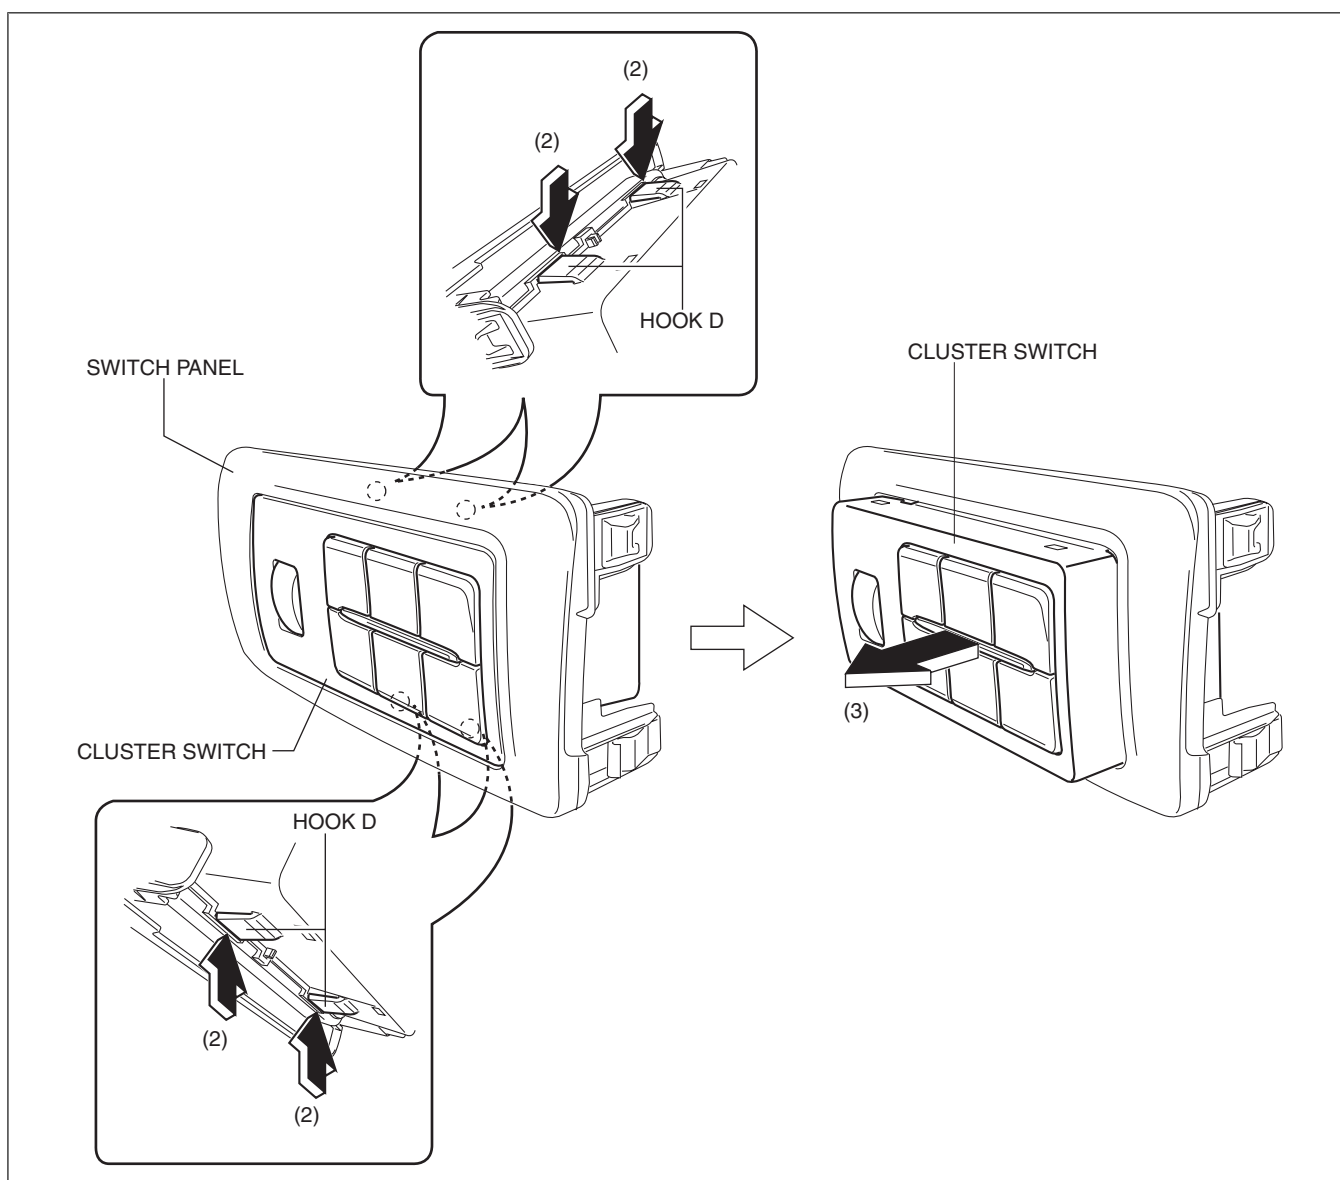

6. Install in the reverse order of removal.

ac5wzw00006451