


LIFTGATE RECESS REMOVAL/INSTALLATION


id091700467500

1. Insert a tape-wrapped flathead screwdriver in the position indicated by the arrow in the figure and detach hooks A.

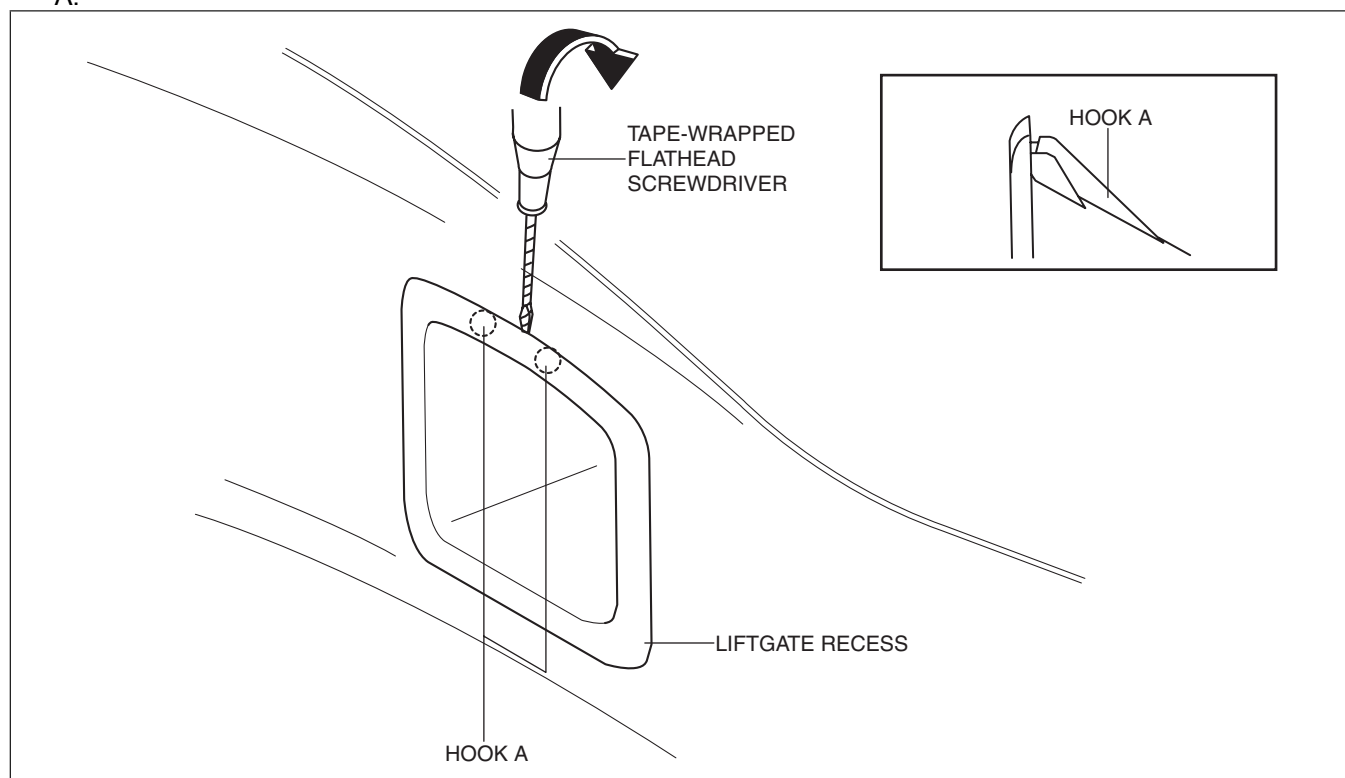

ac5wzw00001411

2. Remove the liftgate recess in the direction of the arrow shown in the figure avoiding hooks B.

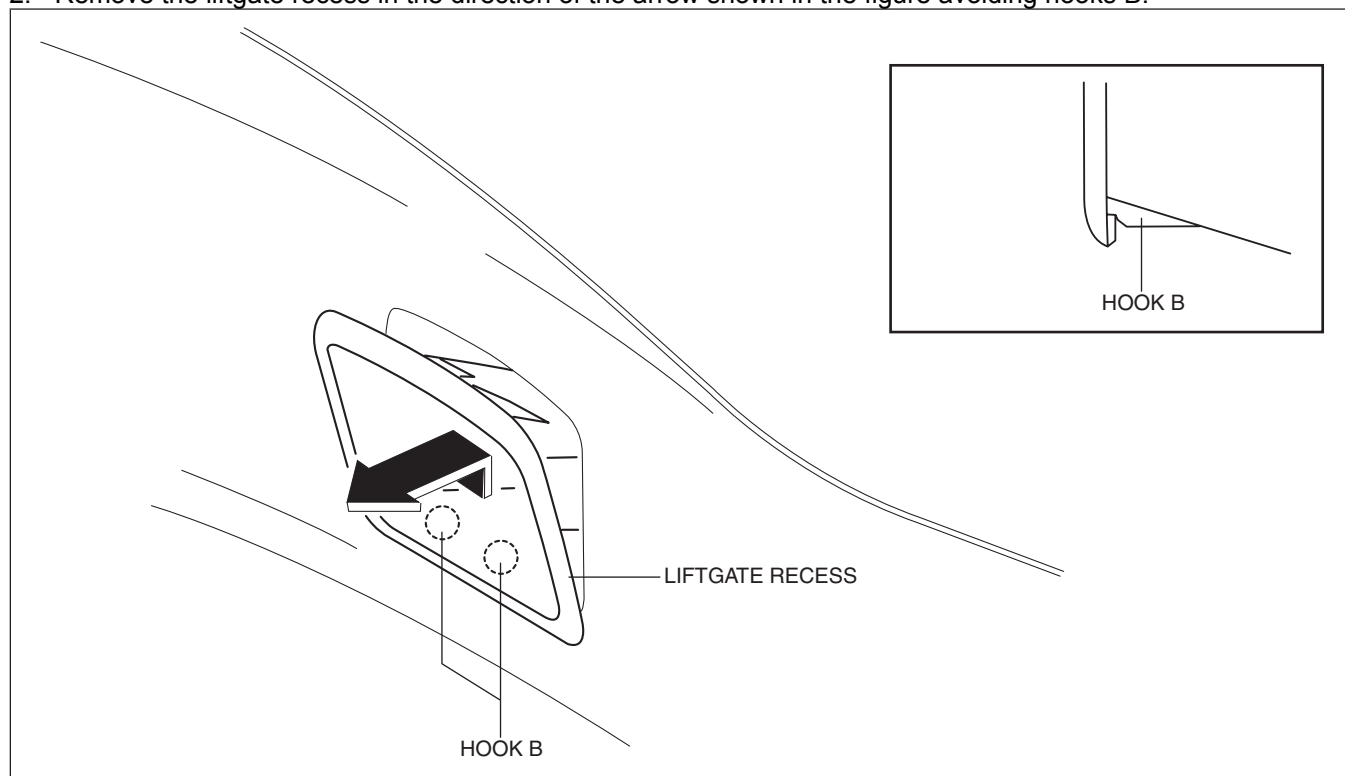

ac5wzw00001412

3. Install in the reverse order of removal.